

**LTC1517 Micropower
Regulated Charge Pump
DC/DC Converter**

DESCRIPTION

Demonstration Circuit 174A is a micropower step-up DC/DC converter that produces a regulated output from a 2V to 5V input. Two fixed output voltages are available: 3.3V and 5V. The LTC®1517-X can supply up to 20mA of output current. The circuit requires only small surface

mount components and thus consumes minimal board space. This power supply circuit is particularly useful in battery-powered systems that require extremely low quiescent current and extremely small size.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.



PERFORMANCE SUMMARY

Operating Temperature Range 0°C to 70°C.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN} Operating Voltage	LTC1517-3.3 LTC1517-5	2.0 2.7		4.4 5	V
V _{OUT} (LTC1517-3.3)	2V ≤ V _{IN} ≤ 4.4V, I _{OUT} ≤ 8mA 2.5V ≤ V _{IN} ≤ 4.4V, I _{OUT} ≤ 15mA	3.17 3.17	3.3 3.3	3.43 3.43	V
V _{OUT} (LTC1517-5)	2.7V ≤ V _{IN} ≤ 5V, I _{OUT} ≤ 10mA 3V ≤ V _{IN} ≤ 5V, I _{OUT} ≤ 20mA	4.8 4.8	5.0 5.0	5.2 5.2	V
I _{CC}	I _{OUT} = 0		6	15	µA
V _{OUT} Ripple (LTC1517-3.3)	V _{IN} = 2.5V, I _{OUT} = 15mA		50		mV
V _{OUT} Ripple (LTC1517-5)	V _{IN} = 3V, I _{OUT} = 20mA		75		mV
Efficiency	V _{IN} = 3V, V _{OUT} = 5V, I _{OUT} = 20mA		81		%

TYPICAL PERFORMANCE CHARACTERISTICS AND BOARD PHOTO



Typical 5V Output Voltage vs Output Current

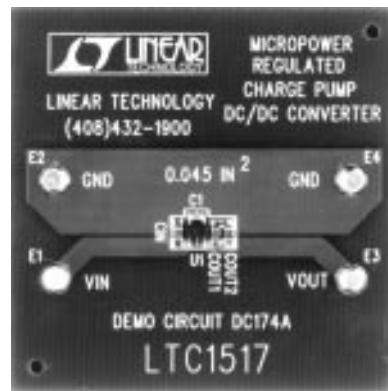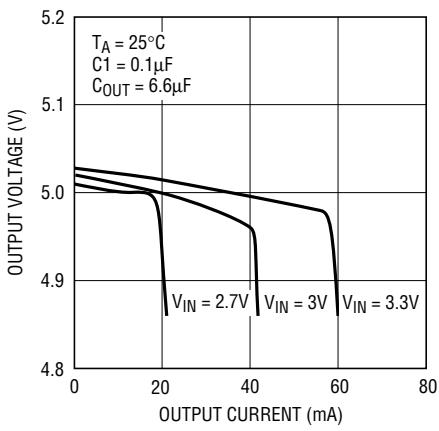

DEMO MANUAL DC174

PACKAGE AND SCHEMATIC DIAGRAMS

Micropower, Regulated Charge Pump DC/DC Converter

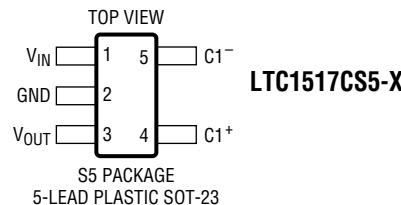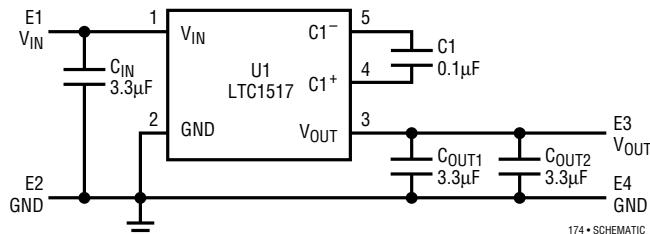

PARTS LIST

REFERENCE DESIGNATOR	QUANTITY	PART NUMBER	DESCRIPTION	VENDOR	TELEPHONE
C1	1	0603YC104KAT1A	0.1µF 16V 10% Chip Capacitor X7R	AVX	(803) 946-0362
C _{IN} , C _{OUT1} , C _{OUT2}	3	0805ZG335ZT1A	3.3µF 10V 80% –20% Chip Capacitor Y5V	AVX	(803) 946-0362
E1, E2, E3, E4	4	2502-2	Turret Terminal	MILL-MAX	(516) 922-6000
U1	1	LTC1517-3.3	3.3V Charge Pump IC	LTC	(408) 432-1900
U1	1	LTC1517-5	5V Charge Pump IC	LTC	(408) 432-1900

OPERATION

The LTC1517 series of ICs uses a switched capacitor charge pump to boost V_{IN} to a $\pm 4\%$ regulated output (refer to Figure 1). Each part achieves regulation by sensing the output voltage through an internal resistor divider and enabling the charge pump when the divided output drops below the comparator's lower trip point (set by V_{REF}). When the charge pump is enabled, a 2-phase, nonoverlapping clock controls the internal charge pump switches. Flying capacitor C1 is charged to V_{IN} on phase one of the clock. On phase two of the clock, C1 is stacked in series with V_{IN} and connected to V_{OUT} through an internal switch. This sequence of charging and discharging the flying capacitor occurs at a free-running frequency

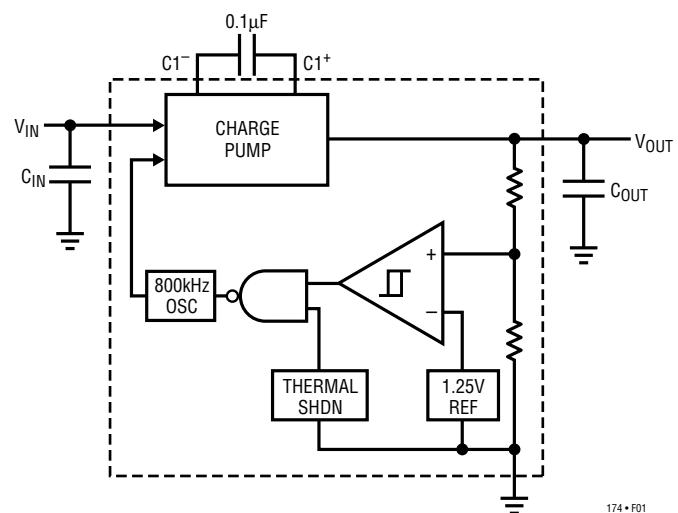


Figure 1. LTC1517-X Block Diagram

OPERATION


of 800kHz (typ) and continues until the divided output voltage reaches the upper trip point of the comparator. Once the output is back in regulation, the charge pump is disabled. This method of bursting the charge pump on and off enables the LTC1517-X to achieve high efficiency at extremely low output loads.

Capacitor Selection


The capacitors used with the LTC1517 series will affect the circuit's performance. For proper operation, the LTC1517

series requires low ESR input and output capacitors placed as close as possible to the device. Using capacitors with $ESR \geq 0.05\Omega$ will result in reduced efficiency and higher output voltage ripple. The capacitors used in this demo board were chosen based on performance and size. The flying capacitor C1 is a $0.1\mu F$ ceramic. C_{IN} is a $3.3\mu F$ ceramic and C_{OUT} consists of two $3.3\mu F$ ceramics in parallel. Ceramic capacitors provide the lowest ESR and smallest size, but tend to be more expensive than tantalum capacitors of the same value. Larger values for C_{OUT} ($10\mu F$ to $22\mu F$) will further reduce output ripple.


PC LAYOUT AND FILM

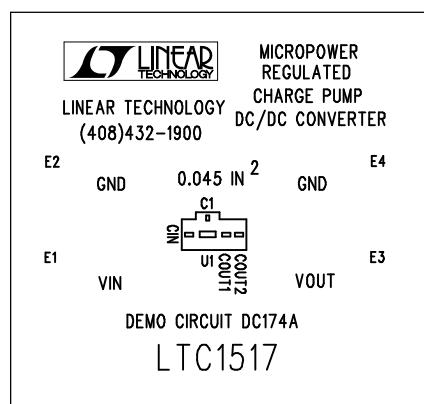


Component Side Silkscreen

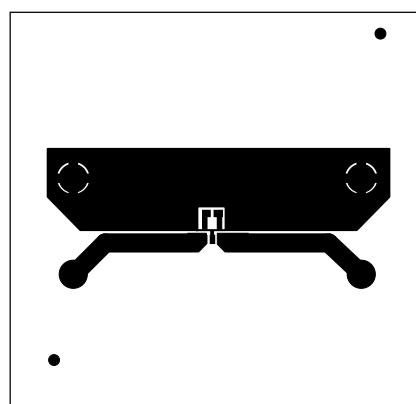


Component Side

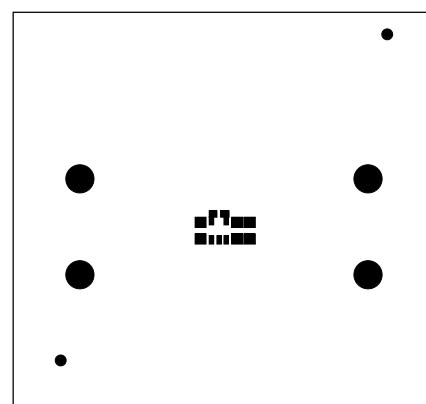

Component Side Mask

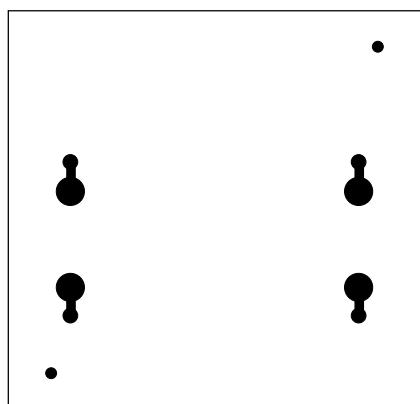


Solder Side

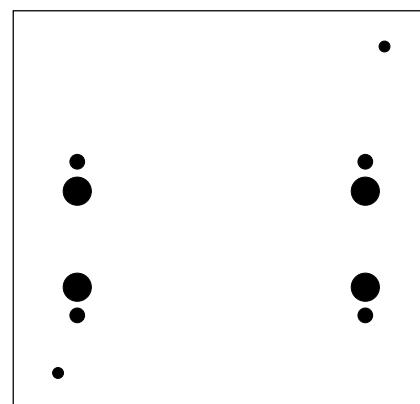

Solder Side Mask

DEMO MANUAL DC174

PC FAB DRAWING

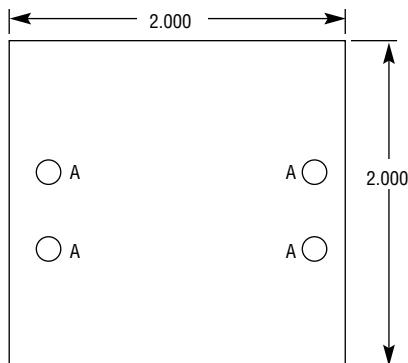

NOTES:

1. MATERIAL IS FR4, 0.062" THICK WITH 2 OZ COPPER
2. PCB WILL BE TWO LAYER WITH PLATED THROUGH HOLES
3. PLATED THROUGH HOLE - WALL THICKNESS MIN 0.0014" (1 OZ)
4. USE SOLDER MASK OVER BARE COPPER PROCESS
5. SOLDER MASK BOTH SIDES WITH LPI GREEN USING FILM PROVIDED
6. SILKSCREEN COMPONENT SIDE USING FILM
PROVIDED USE WHITE NONCONDUCTIVE INK
7. ALL DIMENSIONS ARE IN INCHES ± 0.005
8. ALL PANELS IN ORDER MUST BE THE SAME DIMENSIONS ± 0.030 "
9. ALL HOLE SIZES AFTER PLATING 0.003/-0

SYMBOL	DIAMETER	NUMBER OF HOLES
A	0.094	4

174 • FAB DWG



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.