

# LTC3612

## 3A, 4MHz, MONOLITHIC SYNCHRONOUS STEP-DOWN REGULATOR

### DESCRIPTION

Demo Circuit 1310 is a high efficiency, high frequency step-down converter, incorporating the LTC3612 monolithic synchronous regulator. The DC1310A has an input voltage range of 2.25V to 5.5V, and is capable of delivering up to 3A of output current. The output voltage of the DC1310A can be set as low as 0.6V, the reference voltage of the LTC3612. The operating frequency range of the DC1310A is either set to a fixed 2.25 MHz by connecting the frequency pin to S<sub>VIN</sub>, set by an external resistor, or synchronized to an external clock, with a range up to 4 MHz. At low load currents, the DC1310A can operate in either noise sensitive applications, due to the capability of the LTC3612 to operate in pulse-skipping mode, or in high efficiency applications, because the LTC3612 also has Burst-Mode capability. The Burst Mode clamp can be set externally. Of course, in (forced) continuous mode, or large load current applications, the

DC1310A is a very efficient circuit - over 90%. The DC1310A consumes less than 200 uA of quiescent current during sleep operation, and during shut-down, it consumes less than 1 uA. The DC1310A can track another voltage, due to the LTC3612 track function, for easy power supply sequencing. Extra features include frequency and current fold-back, and an adjustable 0.3V-to-0.6V external reference. Because of the high switching frequency of the LTC3612, which is programmable up to 4 MHz, the DC1310A uses low profile surface mount components. All these features make the DC1310A perfectly suited for portable computer and distributed power applications.

Design files for this circuit board are available. Call the LTC factory.

#### As Shipped Performance Summary

| PARAMETER                     | CONDITIONS                                                                       | VALUE                      |
|-------------------------------|----------------------------------------------------------------------------------|----------------------------|
| Minimum Input Voltage         |                                                                                  | 2.25V                      |
| Maximum Input Voltage         |                                                                                  | 5.5V                       |
| Run/Shutdown                  |                                                                                  | GND = Shutdown             |
|                               |                                                                                  | V <sub>IN</sub> = Run      |
| Output Voltage Regulation     | V <sub>IN</sub> = 2.25V to 5.5V, I <sub>OUT</sub> = 0A to 3A                     | 1.2V ±4% (1.152V – 1.248V) |
|                               | V <sub>IN</sub> = 2.25V to 5.5V, I <sub>OUT</sub> = 0A to 3A                     | 1.8V ±4% (1.728V – 1.872V) |
|                               | V <sub>IN</sub> = 3.1V to 5.5V, I <sub>OUT</sub> = 0A to 3A                      | 2.5V ±4% (2.4V – 2.6V)     |
|                               | V <sub>IN</sub> = 3.9V to 5.5V, I <sub>OUT</sub> = 0A to 3A                      | 3.3V ±4% (3.168V – 3.432V) |
| Typical Output Ripple Voltage | V <sub>IN</sub> = 5V, V <sub>OUT</sub> = 1.8V, I <sub>OUT</sub> = 3A (20 MHz BW) | <30mV <sub>P-P</sub>       |
| Burst Mode                    | V <sub>IN</sub> = 5V, V <sub>OUT</sub> = 1.8V                                    | <600 mA                    |
| Pulse-Skip Mode               | V <sub>IN</sub> = 5V, V <sub>OUT</sub> = 1.8V                                    | <500 mA                    |
| Nominal Switching Frequency   | R <sub>T</sub> = 165k                                                            | 2 MHz ± 20%                |

Table 1. Jumper Description

| JUMPER | FUNCTION                                                                                                | RANGE/SETTING (DEFAULT)     |
|--------|---------------------------------------------------------------------------------------------------------|-----------------------------|
| JP1    | Output Voltage Setting.                                                                                 | 1.2V                        |
| J1     | Mode: Forced Continuous Mode (FCM), Burst Mode (BM or BMEC), or Pulse-Skip Mode(SYNC)                   | (FCM) – BMEC – BM – PSM     |
| J2     | Run                                                                                                     | (ON) – OFF                  |
| J3     | Tracking (TRACK), Internal Soft-Start (INT SS), or External Soft-Start (EXT SS)                         | (EXT SS) – (INT SS) – TRACK |
| J4     | DDR Memory Termination                                                                                  | (OFF) – ON                  |
| J5     | External or Internal ITH Compensation                                                                   | (EXT) – INT                 |
| J6     | Frequency Setting: Timing Resistor (RT), Internally Synchronized (2.25 MHz), or Externally Synchronized | (Rt) – INT SYNC – EXT SYNC  |
| J9     | External Burst Mode Clamp Voltage                                                                       | (SET) – EXT                 |

## QUICK START PROCEDURE

Demonstration Circuit 1310 is easy to set up to evaluate the performance of the LTC3612. For proper measurement equipment configuration, set up the circuit according to the diagram in **Figure 1**. Before proceeding to test, insert shunts into the 1.2V position of the output voltage header JP1, into the FCM (Forced Continuous Mode) position of MODE header J1, into the OFF position of RUN header J2, into the EXT SS (external soft-start) position of Track/SS header J3, into the OFF position of DDR header J4, into the EXT (external) position of COMP header J5, into the Rt position of Rt/SYNC header J6, and into the SET position of VBMCV header J9.

When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See **Figure 2** for proper scope probe measurement technique.

With the DC1310 set up according to the proper measurement configuration and equipment in **Figure 1**, apply 6.3V at Vin (Do not hot-plug Vin or increase Vin over the rated maximum supply voltage of 5.5V, or the part may be damaged.). Measure Vout; it should read 0V. Turn on the circuit by inserting the shunt in header J2 into the ON position. The output voltage should be regulating. Measure Vout - it should measure 1.2V +/- 2% (1.176V to 1.224V).

Vary the input voltage from 2.25V to 5.5V and adjust the load current from 0 to 3A. Vout should regulate around 1.2V. Measure the output ripple voltage; it should measure less than 30 mVAC.

Observe the voltage waveform at the switch pins (the other side of the inductor from the output). Verify the switching frequency is between 1.6 MHz and 2.4 MHz (T = 625 ns and 416 ns), and that the switch node waveform is rectangular in shape.

Change the J1 shunt from forced continuous mode to Burst Mode or pulse-skip mode. Set the input voltage to 5V and the output current to any current less than 600 mA. Observe the discontinuous mode of operation at the switch node, and measure the output ripple voltage. It should measure less than 100 mV.

Insert the J2 shunt into the OFF position and move the shunt in the 1.2V output JP1 header into any of the two remaining output voltage option headers: 1.8V (JP2), 2.5V (JP3), or 3.3V (JP4). Just as in the 1.2V Vout test, the output voltage should read Vout +/- 2% tolerance under static line and load conditions and +/- 1% tolerance under dynamic line and load conditions (+/- 2% total). Also, the circuit operation in discontinuous mode will be the same. When finished, turn off the circuit by inserting the shunt in header J2 into the OFF position.

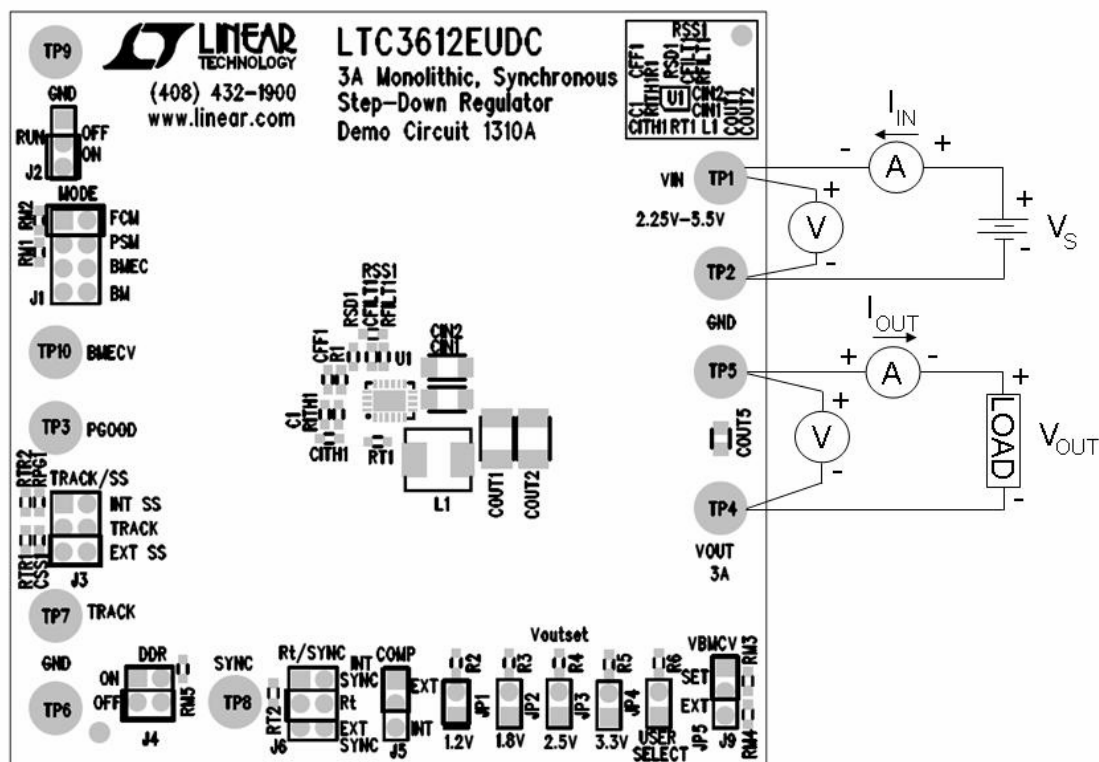


Figure 1. Proper Equipment Measurement Set-Up




Figure 2. Measuring Input or Output Ripple

## Normal Switching Frequency & Output Ripple Voltage Waveforms

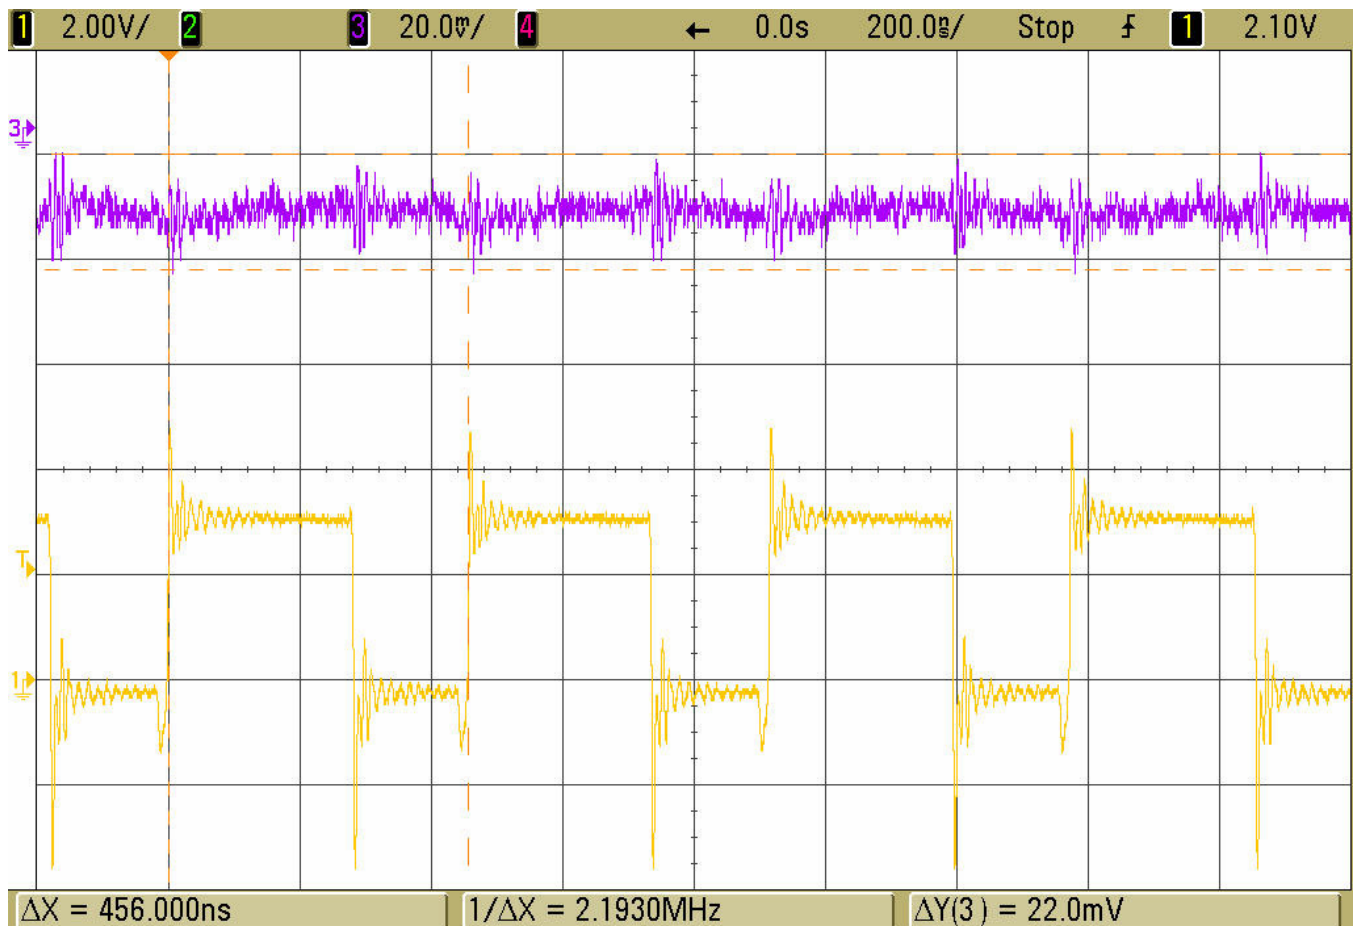


Figure 3. Switch Node & Output Ripple Voltage Waveforms

$V_{IN} = 3.3\text{V}$ ,  $V_{OUT} = 1.8\text{V}$ ,  $I_{OUT} = 3\text{A}$

$F_{SW} = 2.25\text{ MHz}$  (Internally Synchronized:  $V_{IN} = R_T/\text{SYNC}$ )

Trace 1: Switch Voltage (2 V/div)

Trace 3: Output Ripple Voltage (20 mV/div AC)

## Load Step Response Waveform


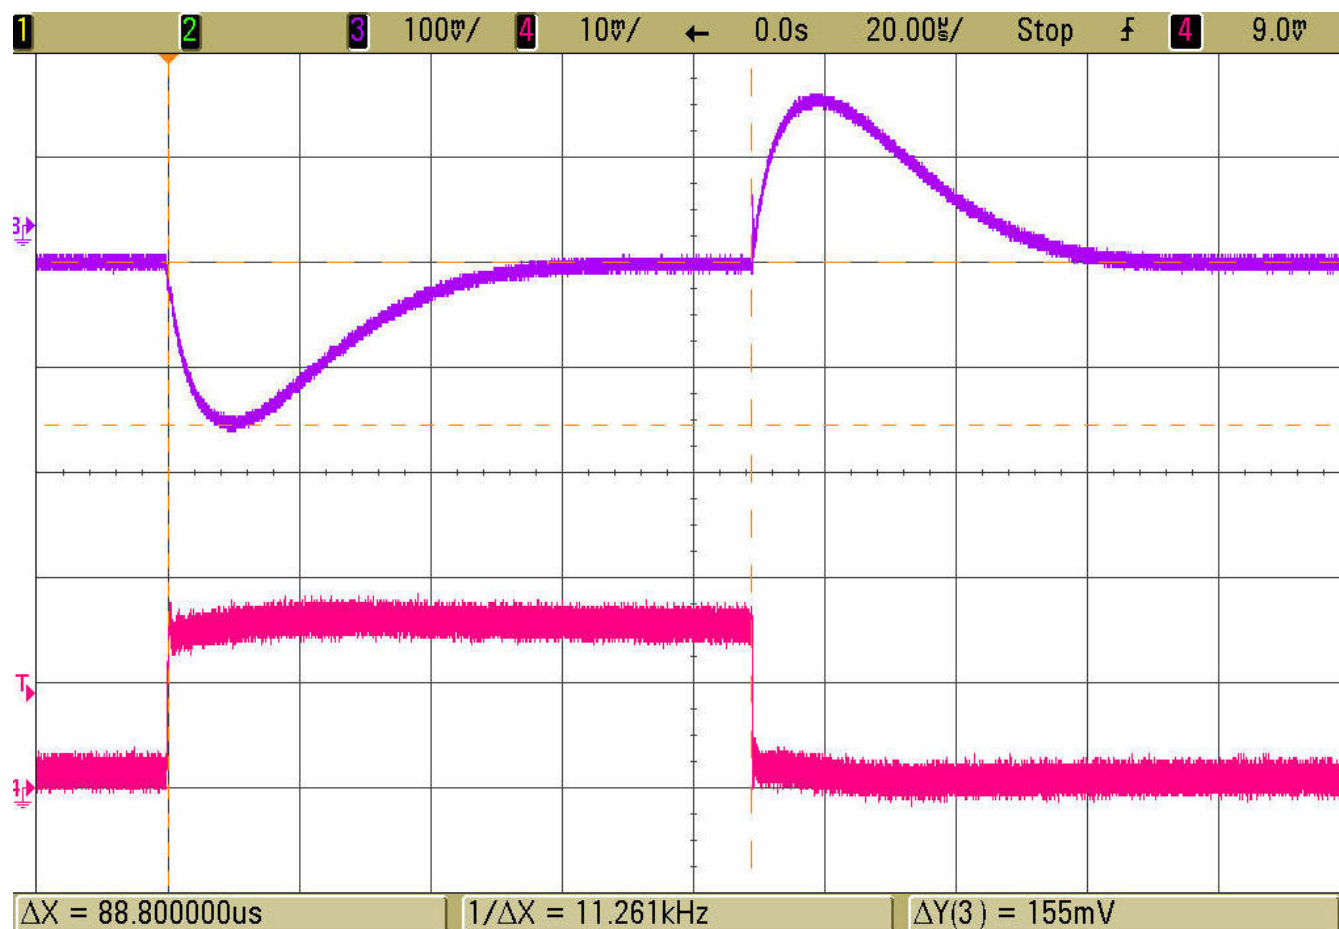


Figure 4. Load Step Response  
 $V_{IN} = 3.3V$ ,  $V_{OUT} = 1.8V$ , 2.5A Load Step (0.5A  $\leftrightarrow$  3A)  
 Forced Continuous Mode  $F_{sw} = 2\text{ MHz}$   
 Trace 3: Output Voltage (100mV/div AC)  
 Trace 4: Output Current (2A/div)



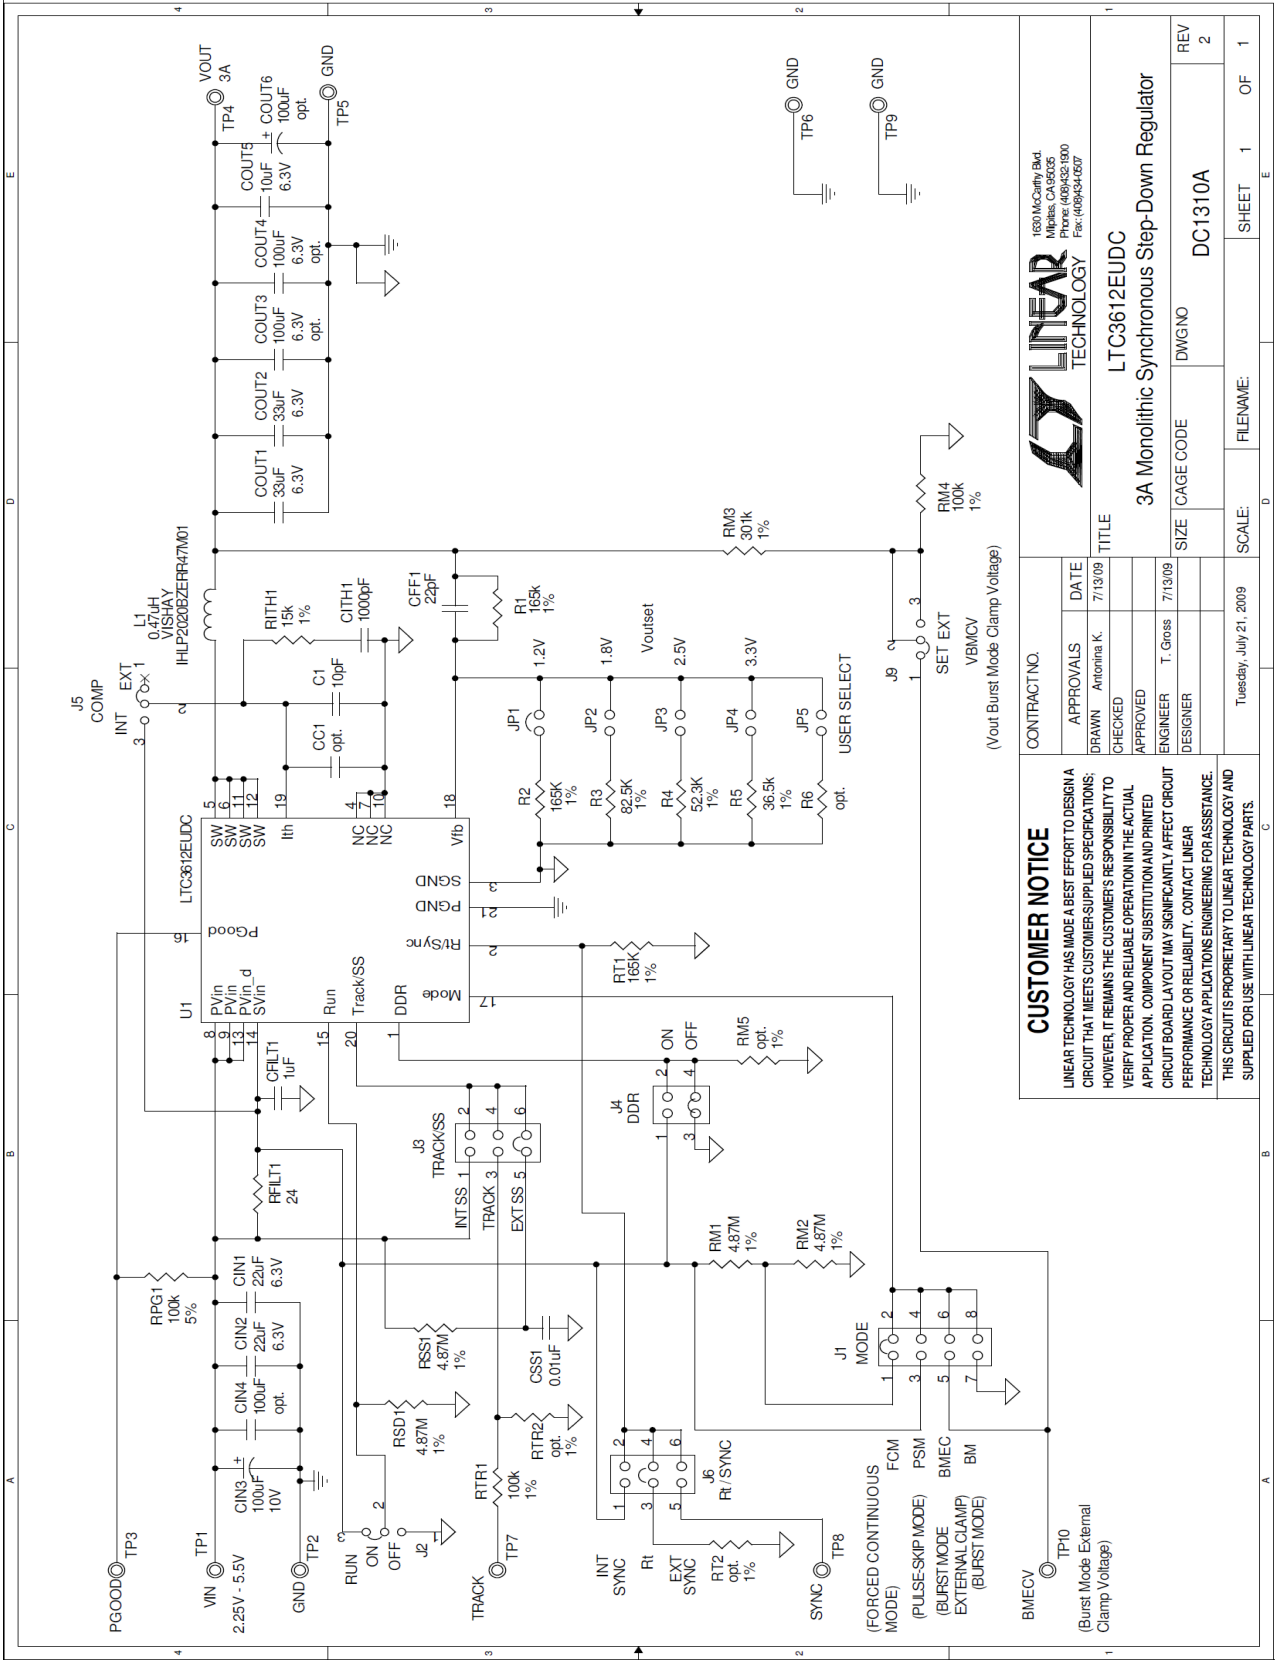

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.