

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 474

4A, 500KHZ STEP DOWN SWITCHING REGULATOR

LT1374CFE

DESCRIPTION

Demonstration circuit 474 is a step-down buck regulator using the LT1374CFE 500kHz-switching regulator. The high switching frequency allows the use of small inductors and filter components, making this circuit ideal for space conscious systems.

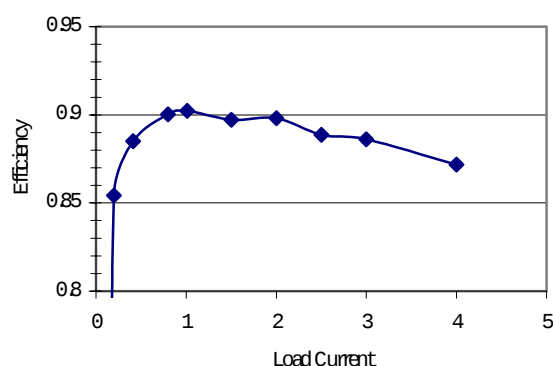


Figure 1. Efficiency, 10V V_{IN} , 5V V_{OUT}

Figure 1 shows efficiency versus load for a typical application. The best efficiency is realized with a load

current between 700mA and 2 amps. Full load efficiency is 87%. The maximum allowed die temperature is 125°C. Figure 2 shows die temperature vs. output load current with V_{IN} of 12V. At full load the die temperature rise is 70°C indicating that the demo is suitable for ambient temperatures of up to 125°C - 70°C = 55°C.

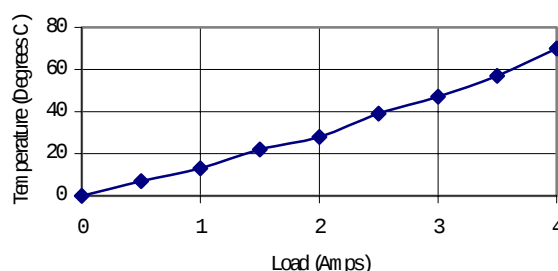


Figure 2. Die Temperature vs Output Current, $V_{IN} = 12V$

QUICK START PROCEDURE

Refer to Figure 3 for proper measurement equipment setup and follow the procedure below:

1. Connect input power to the V_{in} and GND terminals. V_{IN} should be between 5V and 25V. The power source should be capable of delivering 25W.

NOTE: 5V output operation requires a minimum V_{IN} of 6V

2. Connect the output load to the V_{out} and GND terminals.

3. Select desired output voltage using the voltage selecting jumper

NOTE: Choose 3.3V operation by moving the voltage selection jumper to the 3.3V position. Demonstration circuit 474 is optimized for 5V operation, and when operating at 3.3V out, high V_{IN} and light load some instability may arise. Increasing the output capacitance removes this instability. Use a 330 μ F, 4V, low ESR cap such as the "Poscap" or "Oscon".

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 474

4A, 500KHZ STEP DOWN SWITCHING REGULATOR

4. To turn the circuit off, ground the terminal labeled SHDN
5. To test the synchronization feature of the demo board apply a sync signal to the sync terminal and note the shift in the operating frequency. The Sync signal should have an amplitude greater than 2.2V, duty cycle of between 10% and 90% and a frequency of 580kHz-1000kHz

MEASUREMENT NOTES

Voltage measurements

The correct way to measure voltage is at the terminal of the demo board. Attempts to measure output voltage at the load will result in a too low output voltage due to wiring loss.

This is especially true at high current. Needless to say any efficiency calculation should be made using demo circuit terminal voltages as opposed to load or power source terminal voltages.

Ripple Voltage Measurements

The ceramic capacitors used in this demo board have almost no ESR and are extremely effective filters. In order to correctly measure output ripple voltage correct technique is important. The scope ground lead and sheath should be removed and the output ripple measured by placing the scope probe directly across the output Vout and GND pins as illustrated in Figure 4.

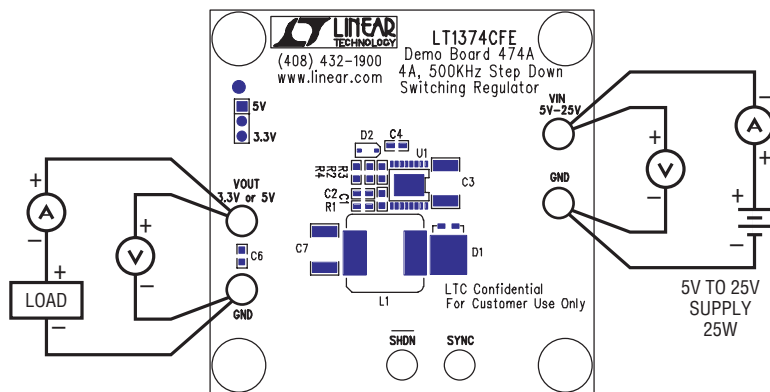


Figure 3. Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 474

4A, 500KHZ STEP DOWN SWITCHING REGULATOR




Figure 4. Scope Probe Placement for Measuring Output Ripple



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.