


# FAST AND COMPACT

# conga-TC97




- 5<sup>th</sup> Gen. Intel® Core™ i7 dual core processor
- 15W nominal TDP
- 3x DisplayPort 1.2, up to 4k resolution
- Intel® AVX 2.0 Vector extension for improved floating point computing
- COM Express Compact Type 6 module

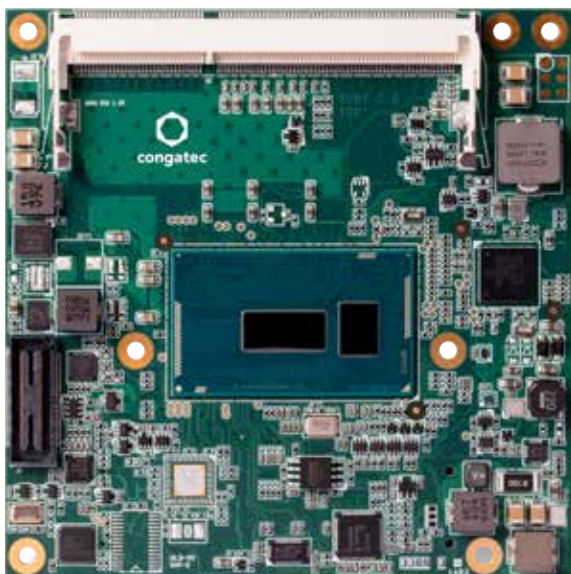

Formfactor	COM Express® Compact, (95 x 95 mm), Type 6 Connector Layout					
CPU	Intel® Core™ i7-5650U	2.2 GHz Dual Core	Turbo Boost 3.1 GHz	4 MB Cache	15W nominal TDP	GT3 HD 6000
	Intel® Core™ i5-5350U	1.8 GHz Dual Core	Turbo Boost 2.9 GHz	3 MB Cache	15W nominal TDP	GT3 HD 6000
	Intel® Core™ i3-5010U	2.1 GHz Dual Core		3 MB Cache	15W nominal TDP	GT2 HD 5500
	Intel® Celeron® 3765U	1.9 GHz Dual Core		2 MB Cache	15W nominal TDP	GT1 HD
	Intel® Turbo Boost 2.0 Technology   Intel® Hyper-Threading Technology (Intel® HT Technology)   Intel® Advanced Vector Extensions 2.0 (Intel® AVX2) Intel® Advanced Encryption Standard New Instructions (Intel® AES-NI)   Integrated dual channel memory controller   up to 25.6 GByte/sec. memory bandwidth   Integrated Intel® HD Graphics 6000 series with dynamic frequency up to 1.0 GHz, Intel® Clear Video HD Technology Intel® Virtualization Technology (Intel® VT)   Intel® Trusted Execution Technology (Intel® TXT)   Intel® Streaming SIMD Extensions 4.2 (Intel® SSE4.2)   PCLMULQDQ Instruction   Intel® Secure Key, Intel® Transactional Synchronization Extensions (Intel® TSX)					
DRAM	2 Sockets, SO-DIMM DDR3L@1.35V up to 1600MT/s and 32GByte					
Chipset	Integrated PCH-LP					
Ethernet	Intel® I218-LM GbE LAN Controller with AMT 10 support					
I/O Interfaces	4x PCI Express™ Gen. 2.0 lanes   4x Serial ATA® RAID 0/1/5/10 support 2x ExpressCard®   2x USB 3.0 (XHCI)   8x USB 2.0 (EHCI)   LPC bus   I²C bus (fast mode, 400 kHz, multi-master)					
Sound	Digital High Definition Audio Interface with support for multiple audio codecs					
Graphics	Next Generation Intel® HD Graphics with OpenCL 2.0, OpenGL 4.3 and DirectX11.2 support   up to three independent displays: HDMI 1.4, DVI, DisplayPort 1.2   High performance hardware MPEG-2 decoding, WMV9 (VC-1) and H.264 (AVC) support Blu-ray support @ 40 MBit/s					
LVDS (eDP optional)	Dual channel LVDS transmitter   Supports flat panels 2x24 Bit interface   VESA and OpenLDI color mapping   resolutions up to 1920x1200, Automatic Panel Detection via EDID/EPI					
Digital Display Interface (DDI)	2x TMDS (HDMI) / DisplayPort 1.2a with support for Multi-Stream Transport (MST), resolutions up to 4k					
congatec Board Controller	Multi Stage Watchdog   non-volatile User Data Storage   Manufacturing and Board Information   Board Statistics   LVDS backlight control I²C bus (fast mode, 400 kHz, multi-master)   Power Loss Control					
Embedded BIOS Features	AMI Aptio® UEFI 2.x firmware   8/16 MByte serial SPI firmware flash					
Security	The conga-TC97 can be optionally equipped with a discrete "Trusted Platform Module" (TPM 1.2 / 2.0). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e-commerce will benefit also with improved authentication, integrity and confidence levels.					
Power Management	ACPI 4.0 with battery support					
Operating Systems	Microsoft® Windows 8   Microsoft® Windows 7   Linux   Microsoft® Windows embedded Standard					
Power Consumption	See User's Guide for full details   CMOS Battery Backup Ultra low standby power, support for CPU power states up to C10					
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C					
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.					
Size	95 x 95 mm (3.74" x 3.74")					

# conga-TC97 | Block diagram

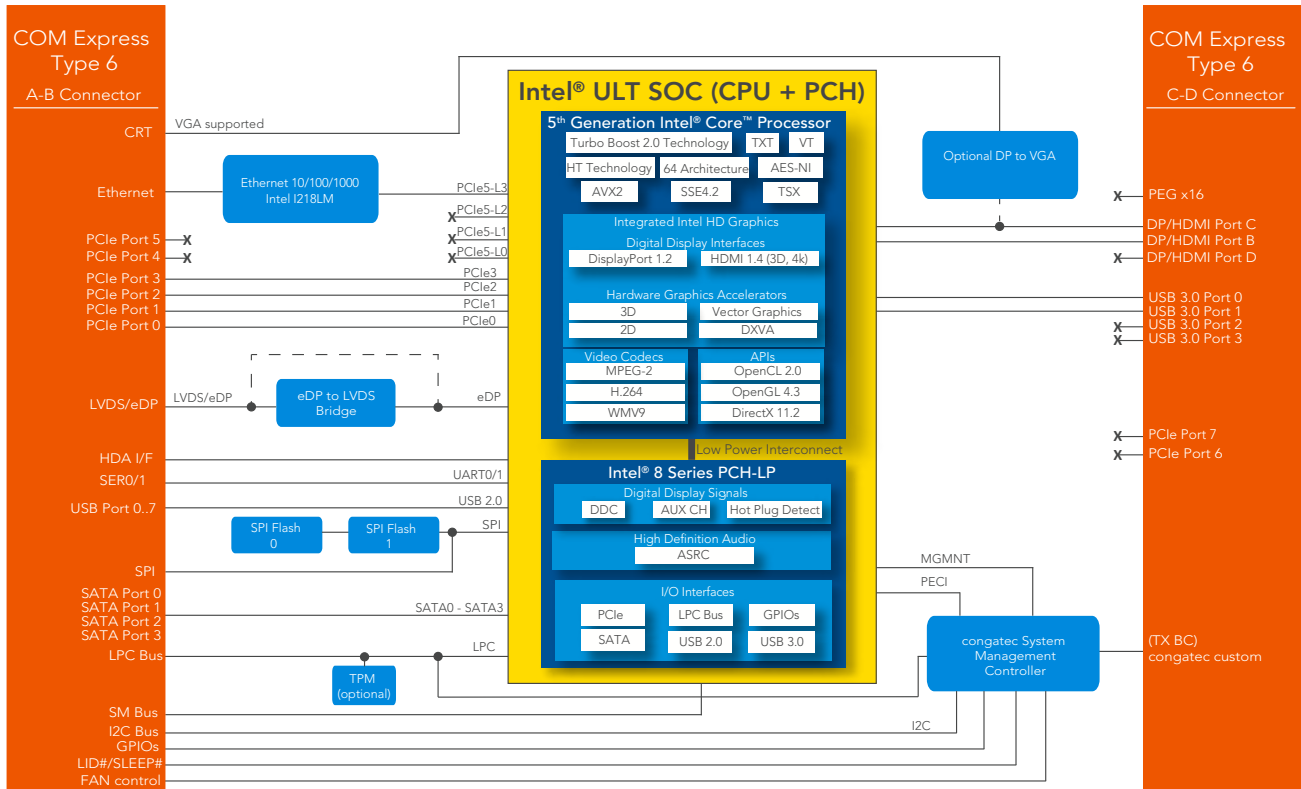

# conga-TC97 | Order Information

Article	PN	Description
conga-TC97/i7-5650U	045103	COM Express Type 6 Compact module with Intel® Core™ i7-5650U dual core processor with 2.2GHz, 4MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC97/i5-5350U	045104	COM Express Type 6 Compact module with Intel® Core™ i5-5350U dual core processor with 1.8GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC97/i3-5010U	045105	COM Express Type 6 Compact module with Intel® Core™ i3-5010U dual core processor with 2.1GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC97/3765U	045106	COM Express Type 6 Compact module with Intel® Celeron® 3765U dual core processor with 1.9GHz, 2MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC87/HSP-B	046953	Standard heatspreader for COM Express module conga-TC97. All standoffs are with 2.7mm bore hole.
conga-TC87/HSP-T	046954	Standard heatspreader for COM Express module conga-TC97. All standoffs are M 2.5 threaded.
conga-TC87/CSP-B	046951	Standard passive cooling solution for COM Express module conga-TC97. All standoffs are with 2.7mm bore hole.
conga-TC87/CSP-T	046952	Standard passive cooling solution for COM Express module conga-TC97. All standoffs are M 2.5 threaded
DDR3L-SODIMM-1600 (2GB)	068755	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 2GB RAM
DDR3L-SODIMM-1600 (4GB)	068756	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 4GB RAM
DDR3L-SODIMM-1600 (8GB)	068757	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 8GB RAM

Accessories	PN	Description
conga-TEVAL	065800	Evaluation carrier board for Type 6 COM-Express-modules
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
COM-Express-carrier-board-Socket-5	400007	Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces
COM-Express-carrier-board-Socket-8	400004	Connector for COM-Express carrier boards, height 8mm, packing unit 4 pieces

© 2015 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. Juli 2, 2015 KS



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.