


NPN 3.0A 50V Middle Power Transistor

Parameter	Value		
V _{CEO}	50V		
IC	3A		


Outline



Features

- 1)Suitable for Middle Power Transistor
- 2) Complementary PNP Types:2SAR543R
- 3) Low saturation voltage, typically $V_{CE(sat)}$ =350mV(Max.) $(I_C/I_B$ =2A/100mA)

•Inner circuit



- (1) Base
- (2) Emitter
- (3) Collector

Application

LOW FREQUENCY AMPLIFIER, HIGH SPEED SWITCHING

Packaging specifications

Part No.	Package	Package size	Taping code	Reel size (mm)	Tape width (mm)	Basic ordering unit.(pcs)	Marking
2SCR543R	SOT-346T (TSMT3)	2928	TL	180	8	3000	NR

● Absolute maximum ratings (T_a = 25°C)

Parameter	Symbol	Values	Unit
Collector-base voltage	V_{CBO}	50	V
Collector-emitter voltage	V_{CEO}	50	V
Emitter-base voltage	V _{EBO}	6	V
Callegtor gurrent	I _C	3	Α
Collector current	I _{CP} *1	6	Α
Davis a discinction	P _D *2	0.5	W
Power dissipation	P _D *3	1.0	W
Junction temperature	T _j	150	°C
Range of storage temperature	T _{stg}	-55 to +150	°C

● Electrical characteristics (T_a = 25°C)

Parameter	Symbol	Conditions	Values			Unit	
Parameter	Parameter Symbol Conditions		Min.	Тур.	Max.	Offic	
Collector-base breakdown voltage	BV _{CBO}	I _C = 100μA	50	-	-	V	
Collector-emitter breakdown voltage	BV _{CEO}	I _C = 1mA	50	-	-	V	
Emitter-base breakdown voltage	BV_{EBO}	I _E = 100μA	6	-	-	V	
Collector cut-off current	I _{CBO}	V _{CB} = 50V	-	-	1.0	μA	
Emitter cut-off current	I _{EBO}	V _{EB} = 4V	-	-	1.0	μA	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C = 2A, I _B = 100mA	-	130	350	mV	
DC current gain	h _{FE}	V _{CE} = 3V, I _C = 100mA	180	-	450	-	
Transition frequency	f _T	$V_{CE} = 10V, I_{E} = -500 \text{mA},$ f = 100MHz	-	300	-	MHz	
Output capacitance	C _{ob}	$V_{CB} = 10V$, $I_E = 0A$, $f = 1MHz$	-	20	-	pF	
Turn-On time	t _{on}	I _C = 2A, I _{B1} = 200mA,	-	50	1	ns	
Storage time	t _{stg}	$I_{B2} = -200 \text{mA},$ $V_{CC} \approx 10 \text{V},$	-	450	-	ns	
Fall time	t _f	$R_L = 4.7\Omega$ See test circuit	-	85	-	ns	

^{*1} P_W=10ms, Single pulse

^{*2} Each terminal mounted on a reference land.

^{*3} Mounted on a 40×40×0.7mm ceramic board.

● Electrical characteristic curves(T_a = 25°C)

Fig.1 Ground Emitter Propagation Characteristics


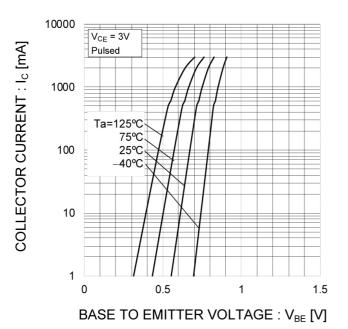


Fig.2 Typical Output Characteristics

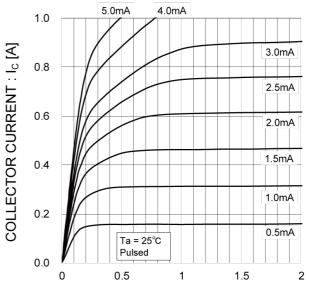

COLLECTOR TO EMITTER VOLTAGE: V_{CE} [V]

Fig.3 DC Current Gain vs. Collector Current (I)


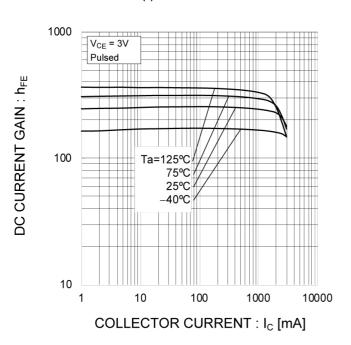


Fig.4 DC Current Gain vs. Collector Current (II)

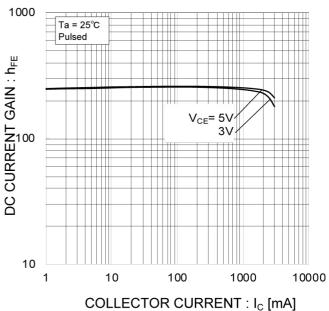

● Electrical characteristic curves(T_a = 25°C)

Fig.5 Collector-Emitter Saturation Voltage vs. Collector Current (I)

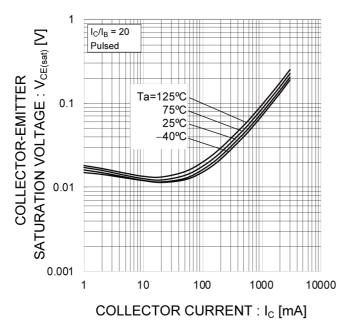


Fig.6 Collector-Emitter Saturation Voltage vs. Collector Current (II)

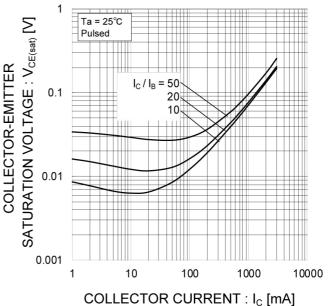


Fig.7 Base-Emitter Saturation Voltage vs. Collector Current


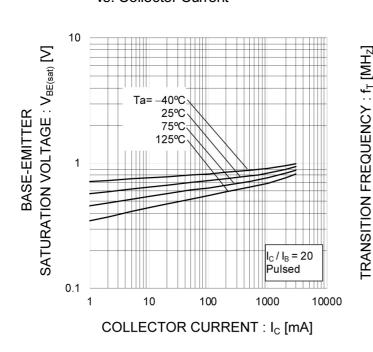



Fig.8 Gain Bandwidth Product vs. Emitter Current

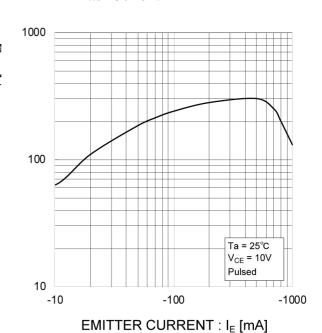


● Electrical characteristic curves(T_a = 25°C)


Fig.9 Emitter Input Capacitance vs.
Emitter-Base Voltage
Collector Output Capacitance vs.
Collector-Base Voltage


Fig.10 Safe Operating Area

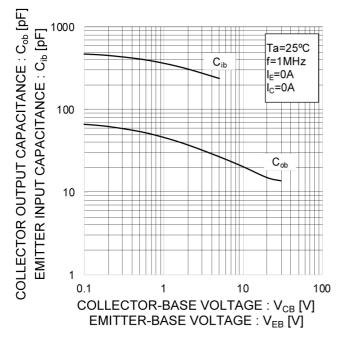

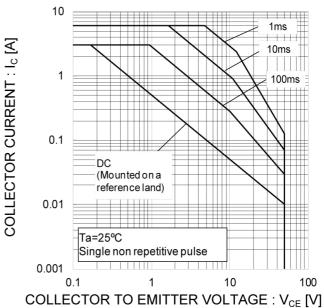


SWITCHING TIME TEST CIRCUIT

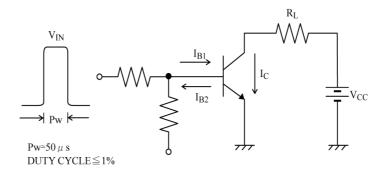

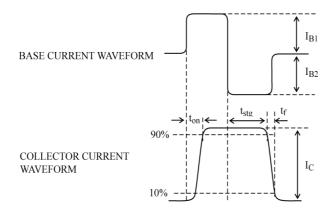

Dimensions

TSMT3

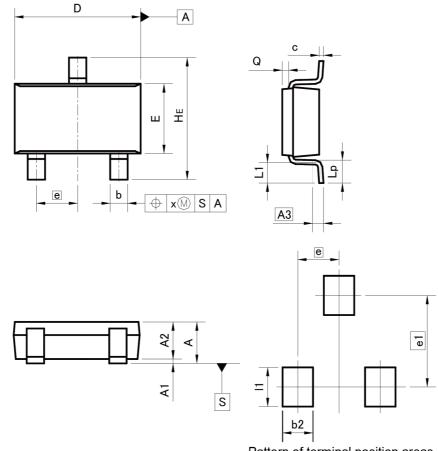

Pattern of terminal position areas [Not a recommended pattern of soldering pads]

DIM	MILIM	ETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
Α	I	1.00	-	0.039
A1	0.00	0.10	0.000	0.004
A2	0.75 0.95 0.030		0.030	0.037
A3	0.:	25	0.0	10
b	0.35	0.50	0.014	0.020
С	0.10	0.26	0.004	0.010
D	2.80	3.00	0.110	0.118
E	1.50	1.80	0.059	0.071
е	0.9	0.95		37
HE	2.60	3.00	0.102	0.118
L1	0.30	0.60	0.012	0.024
Lp	0.40	0.70	0.016	0.028
Q	0.05	0.25	0.002	0.010
х	_	0.20	_	0.008

DIM	MILIMETERS		INCHES		
	DIM	MIN	MAX	MIN	MAX
	b2		0.70	-	0.028
	e1	2.	10	0.0	83
	11	ı	0.90	ı	0.035

Dimension in mm/inches



Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifica-
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.

 Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative: transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов:
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001:
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина,

дом 2, корпус 4, литера А.