

Timer

NE/SA/SE555/SE555C

**DESCRIPTION**


The 555 monolithic timing circuit is a highly stable controller capable of producing accurate time delays, or oscillation. In the time delay mode of operation, the time is precisely controlled by one external resistor and capacitor. For a stable operation as an oscillator, the free running frequency and the duty cycle are both accurately controlled with two external resistors and one capacitor. The circuit may be triggered and reset on falling waveforms, and the output structure can source or sink up to 200mA.

- FEATURES**
- Turn-off time less than 2μs
  - Max. operating frequency greater than 500kHz
  - Timing from microseconds to hours
  - Operates in both astable and monostable modes
  - High output current
  - Adjustable duty cycle
  - TTL compatible
  - Temperature stability of 0.005% per °C

- APPLICATIONS**
- Precision timing
  - Pulse generation
  - Sequential timing
  - Time delay generation
  - Pulse width modulation

ORDERING INFORMATION


| DESCRIPTION                                          | TEMPERATURE RANGE | ORDER CODE | DWG # |
|------------------------------------------------------|-------------------|------------|-------|
| 8-Pin Plastic Small Outline (SO) Package             | 0 to +70°C        | NE555D     | 0174C |
| 8-Pin Plastic Dual In-Line Package (DIP)             | 0 to +70°C        | NE555N     | 0404B |
| 8-Pin Plastic Dual In-Line Package (DIP)             | -40°C to +85°C    | SA555N     | 0404B |
| 8-Pin Plastic Small Outline (SO) Package             | -40°C to +85°C    | SA555D     | 0174C |
| 8-Pin Hermetic Ceramic Dual In-Line Package (CERDIP) | -55°C to +125°C   | SE555CFE   |       |
| 8-Pin Plastic Dual In-Line Package (DIP)             | -55°C to +125°C   | SE555CN    | 0404B |
| 14-Pin Plastic Dual In-Line Package (DIP)            | -55°C to +125°C   | SE555N     | 0405B |
| 8-Pin Hermetic Cerdip                                | -55°C to +125°C   | SE555FE    |       |
| 14-Pin Ceramic Dual In-Line Package (CERDIP)         | 0 to +70°C        | NE555F     | 0581B |
| 14-Pin Ceramic Dual In-Line Package (CERDIP)         | -55°C to +125°C   | SE555F     | 0581B |
| 14-Pin Ceramic Dual In-Line Package (CERDIP)         | -55°C to +125°C   | SE555CF    | 0581B |

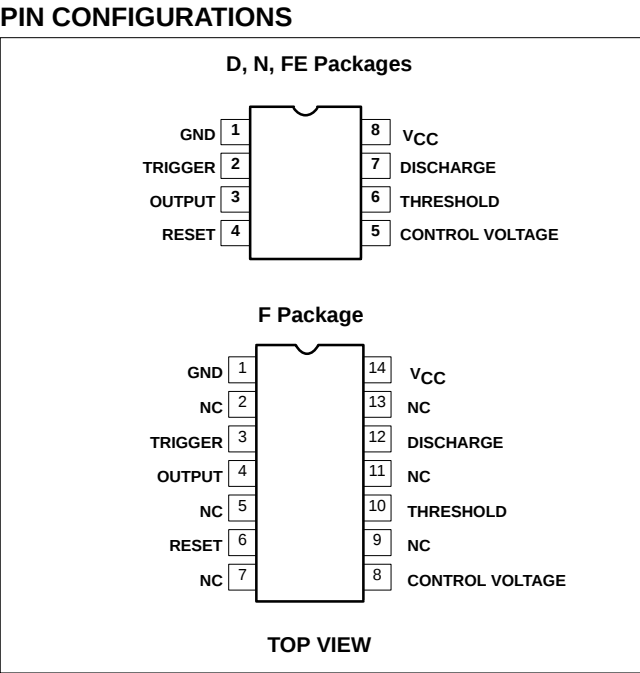


Timer

NE/SA/SE555/SE555C

BLOCK DIAGRAM

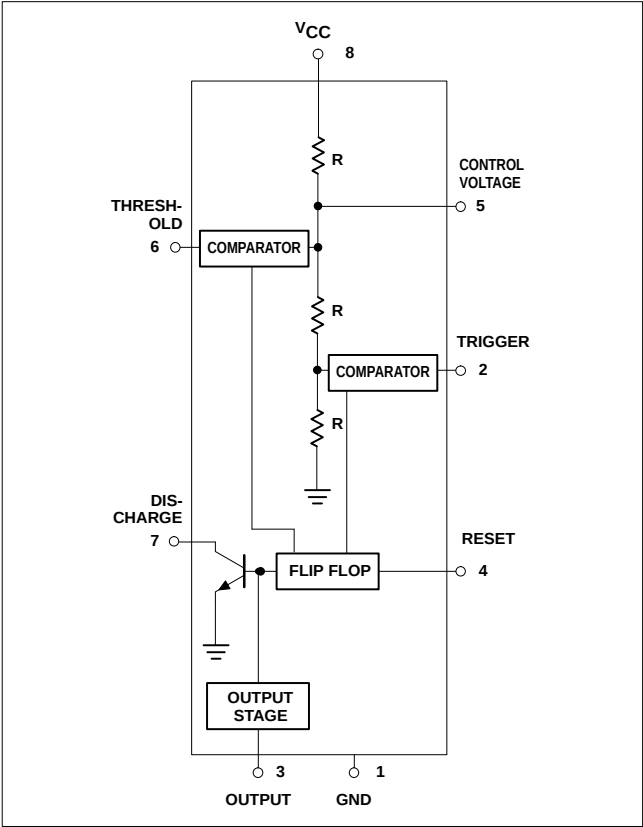

EQUIVALENT SCHEMATIC

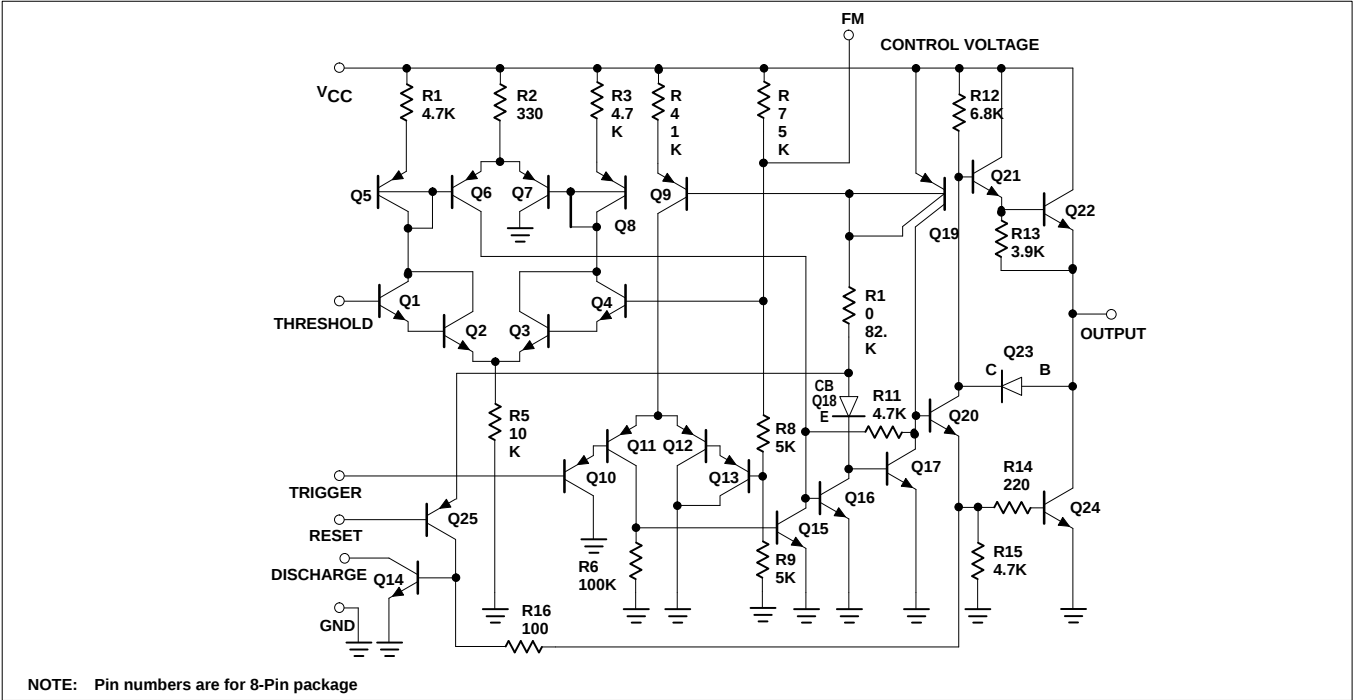

## Timer

## NE/SA/SE555/SE555C

**ABSOLUTE MAXIMUM RATINGS**

| SYMBOL            | PARAMETER                                        | RATING      | UNIT |
|-------------------|--------------------------------------------------|-------------|------|
| V <sub>CC</sub>   | Supply voltage                                   |             |      |
|                   | SE555                                            | +18         | V    |
|                   | NE555, SE555C, SA555                             | +16         | V    |
| P <sub>D</sub>    | Maximum allowable power dissipation <sup>1</sup> | 600         | mW   |
| T <sub>A</sub>    | Operating ambient temperature range              |             |      |
|                   | NE555                                            | 0 to +70    | °C   |
|                   | SA555                                            | -40 to +85  | °C   |
|                   | SE555, SE555C                                    | -55 to +125 | °C   |
| T <sub>STG</sub>  | Storage temperature range                        | -65 to +150 | °C   |
| T <sub>SOLD</sub> | Lead soldering temperature (10sec max)           | +300        | °C   |

**NOTES:**

1. The junction temperature must be kept below 125°C for the D package and below 150°C for the FE, N and F packages. At ambient temperatures above 25°C, where this limit would be derated by the following factors:

D package 160°C/W  
 FE package 150°C/W  
 N package 100°C/W  
 F package 105°C/W

## Timer

## NE/SA/SE555/SE555C

## DC AND AC ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_{CC} = +5\text{V}$  to  $+15$  unless otherwise specified.

| SYMBOL                                                    | PARAMETER                                                                                                         | TEST CONDITIONS                                                                                                                                                                                       | SE555       |                                         |                                          | NE555/SE555C  |                                         |                                           | UNIT                              |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------|------------------------------------------|---------------|-----------------------------------------|-------------------------------------------|-----------------------------------|
|                                                           |                                                                                                                   |                                                                                                                                                                                                       | Min         | Typ                                     | Max                                      | Min           | Typ                                     | Max                                       |                                   |
| $V_{CC}$                                                  | Supply voltage                                                                                                    |                                                                                                                                                                                                       | 4.5         |                                         | 18                                       | 4.5           |                                         | 16                                        | V                                 |
| $I_{CC}$                                                  | Supply current (low state) <sup>1</sup>                                                                           | $V_{CC}=5\text{V}$ , $R_L=\infty$<br>$V_{CC}=15\text{V}$ , $R_L=\infty$                                                                                                                               |             | 3<br>10                                 | 5<br>12                                  |               | 3<br>10                                 | 6<br>15                                   | mA<br>mA                          |
| $t_M$<br>$\Delta t_M/\Delta T$<br>$\Delta t_M/\Delta V_S$ | Timing error (monostable)<br>Initial accuracy <sup>2</sup><br>Drift with temperature<br>Drift with supply voltage | $R_A=2\text{k}\Omega$ to $100\text{k}\Omega$<br>$C=0.1\mu\text{F}$                                                                                                                                    |             | 0.5<br>30<br>0.05                       | 2.0<br>100<br>0.2                        |               | 1.0<br>50<br>0.1                        | 3.0<br>150<br>0.5                         | %<br>ppm/ $^\circ\text{C}$<br>%/V |
| $t_A$<br>$\Delta t_A/\Delta T$<br>$\Delta t_A/\Delta V_S$ | Timing error (astable)<br>Initial accuracy <sup>2</sup><br>Drift with temperature<br>Drift with supply voltage    | $R_A, R_B=1\text{k}\Omega$ to $100\text{k}\Omega$<br>$C=0.1\mu\text{F}$<br>$V_{CC}=15\text{V}$                                                                                                        |             | 4<br>0.15                               | 6<br>500<br>0.6                          |               | 5<br>0.3                                | 13<br>500<br>1                            | %<br>ppm/ $^\circ\text{C}$<br>%/V |
| $V_C$                                                     | Control voltage level                                                                                             | $V_{CC}=15\text{V}$<br>$V_{CC}=5\text{V}$                                                                                                                                                             | 9.6<br>2.9  | 10.0<br>3.33                            | 10.4<br>3.8                              | 9.0<br>2.6    | 10.0<br>3.33                            | 11.0<br>4.0                               | V<br>V                            |
| $V_{TH}$                                                  | Threshold voltage                                                                                                 | $V_{CC}=15\text{V}$<br>$V_{CC}=5\text{V}$                                                                                                                                                             | 9.4<br>2.7  | 10.0<br>3.33                            | 10.6<br>4.0                              | 8.8<br>2.4    | 10.0<br>3.33                            | 11.2<br>4.2                               | V<br>V                            |
| $I_{TH}$                                                  | Threshold current <sup>3</sup>                                                                                    |                                                                                                                                                                                                       |             | 0.1                                     | 0.25                                     |               | 0.1                                     | 0.25                                      | $\mu\text{A}$                     |
| $V_{TRIG}$                                                | Trigger voltage                                                                                                   | $V_{CC}=15\text{V}$<br>$V_{CC}=5\text{V}$                                                                                                                                                             | 4.8<br>1.45 | 5.0<br>1.67                             | 5.2<br>1.9                               | 4.5<br>1.1    | 5.0<br>1.67                             | 5.6<br>2.2                                | V<br>V                            |
| $I_{TRIG}$                                                | Trigger current                                                                                                   | $V_{TRIG}=0\text{V}$                                                                                                                                                                                  |             | 0.5                                     | 0.9                                      |               | 0.5                                     | 2.0                                       | $\mu\text{A}$                     |
| $V_{RESET}$                                               | Reset voltage <sup>4</sup>                                                                                        | $V_{CC}=15\text{V}$ , $V_{TH}=10.5\text{V}$                                                                                                                                                           | 0.3         |                                         | 1.0                                      | 0.3           |                                         | 1.0                                       | V                                 |
| $I_{RESET}$                                               | Reset current<br>Reset current                                                                                    | $V_{RESET}=0.4\text{V}$<br>$V_{RESET}=0\text{V}$                                                                                                                                                      |             | 0.1<br>0.4                              | 0.4<br>1.0                               |               | 0.1<br>0.4                              | 0.4<br>1.5                                | mA<br>mA                          |
| $V_{OL}$                                                  | Output voltage (low)                                                                                              | $V_{CC}=15\text{V}$<br>$I_{SINK}=10\text{mA}$<br>$I_{SINK}=50\text{mA}$<br>$I_{SINK}=100\text{mA}$<br>$I_{SINK}=200\text{mA}$<br>$V_{CC}=5\text{V}$<br>$I_{SINK}=8\text{mA}$<br>$I_{SINK}=5\text{mA}$ |             | 0.1<br>0.4<br>2.0<br>2.5<br>0.1<br>0.05 | 0.15<br>0.5<br>2.2<br>2.5<br>0.25<br>0.2 |               | 0.1<br>0.4<br>2.0<br>2.5<br>0.3<br>0.25 | 0.25<br>0.75<br>2.5<br>2.5<br>0.4<br>0.35 | V<br>V<br>V<br>V<br>V<br>V        |
| $V_{OH}$                                                  | Output voltage (high)                                                                                             | $V_{CC}=15\text{V}$<br>$I_{SOURCE}=200\text{mA}$<br>$I_{SOURCE}=100\text{mA}$<br>$V_{CC}=5\text{V}$<br>$I_{SOURCE}=100\text{mA}$                                                                      | 13.0<br>3.0 | 12.5<br>13.3<br>3.3                     |                                          | 12.75<br>2.75 | 12.5<br>13.3<br>3.3                     |                                           | V<br>V<br>V                       |
| $t_{OFF}$                                                 | Turn-off time <sup>5</sup>                                                                                        | $V_{RESET}=V_{CC}$                                                                                                                                                                                    |             | 0.5                                     | 2.0                                      |               | 0.5                                     | 2.0                                       | $\mu\text{s}$                     |
| $t_R$                                                     | Rise time of output                                                                                               |                                                                                                                                                                                                       |             | 100                                     | 200                                      |               | 100                                     | 300                                       | ns                                |
| $t_F$                                                     | Fall time of output                                                                                               |                                                                                                                                                                                                       |             | 100                                     | 200                                      |               | 100                                     | 300                                       | ns                                |
|                                                           | Discharge leakage current                                                                                         |                                                                                                                                                                                                       |             | 20                                      | 100                                      |               | 20                                      | 100                                       | nA                                |


## NOTES:

1. Supply current when output high typically 1mA less.
2. Tested at  $V_{CC}=5\text{V}$  and  $V_{CC}=15\text{V}$ .
3. This will determine the max value of  $R_A+R_B$ , for 15V operation, the max total  $R=10\text{M}\Omega$ , and for 5V operation, the max. total  $R=3.4\text{M}\Omega$ .
4. Specified with trigger input high.
5. Time measured from a positive going input pulse from 0 to  $0.8 \times V_{CC}$  into the threshold to the drop from high to low of the output. Trigger is tied to threshold.

Timer

NE/SA/SE555/SE555C


TYPICAL PERFORMANCE CHARACTERISTICS

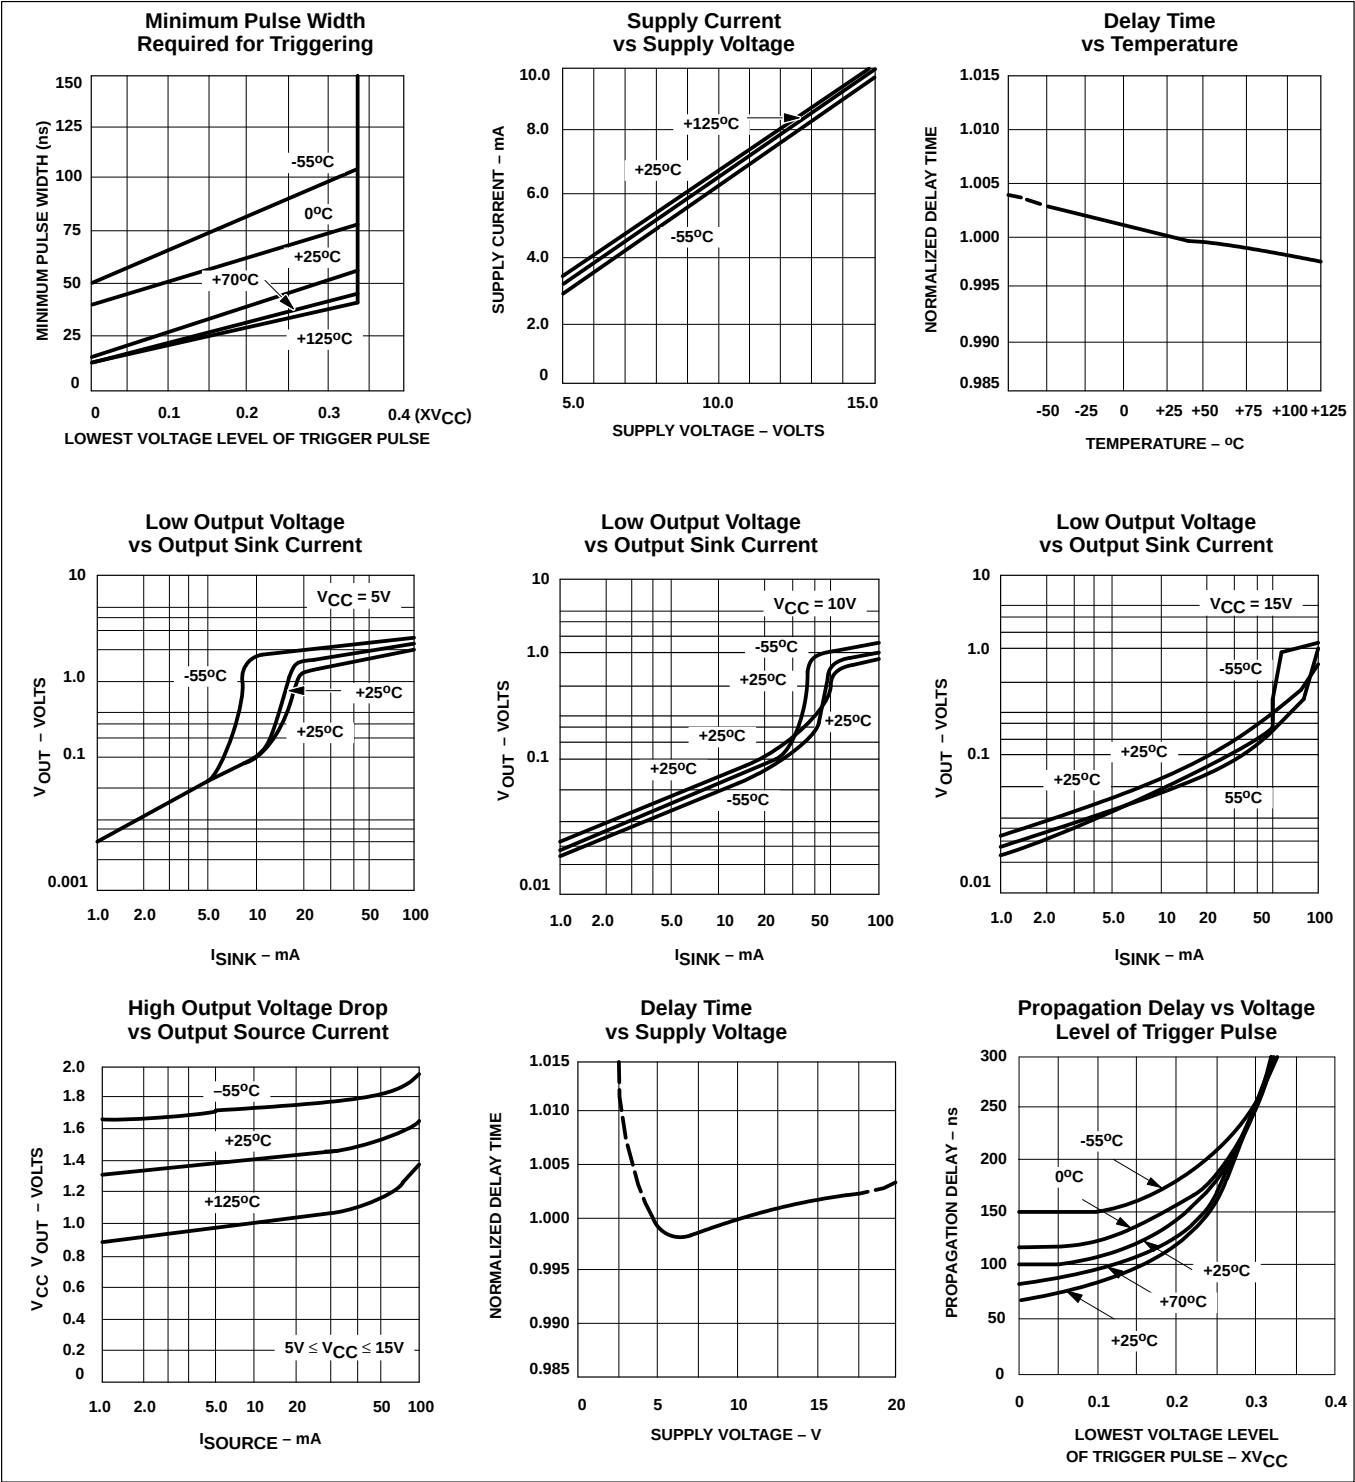

Timer

NE/SA/SE555/SE555C


TYPICAL APPLICATIONS

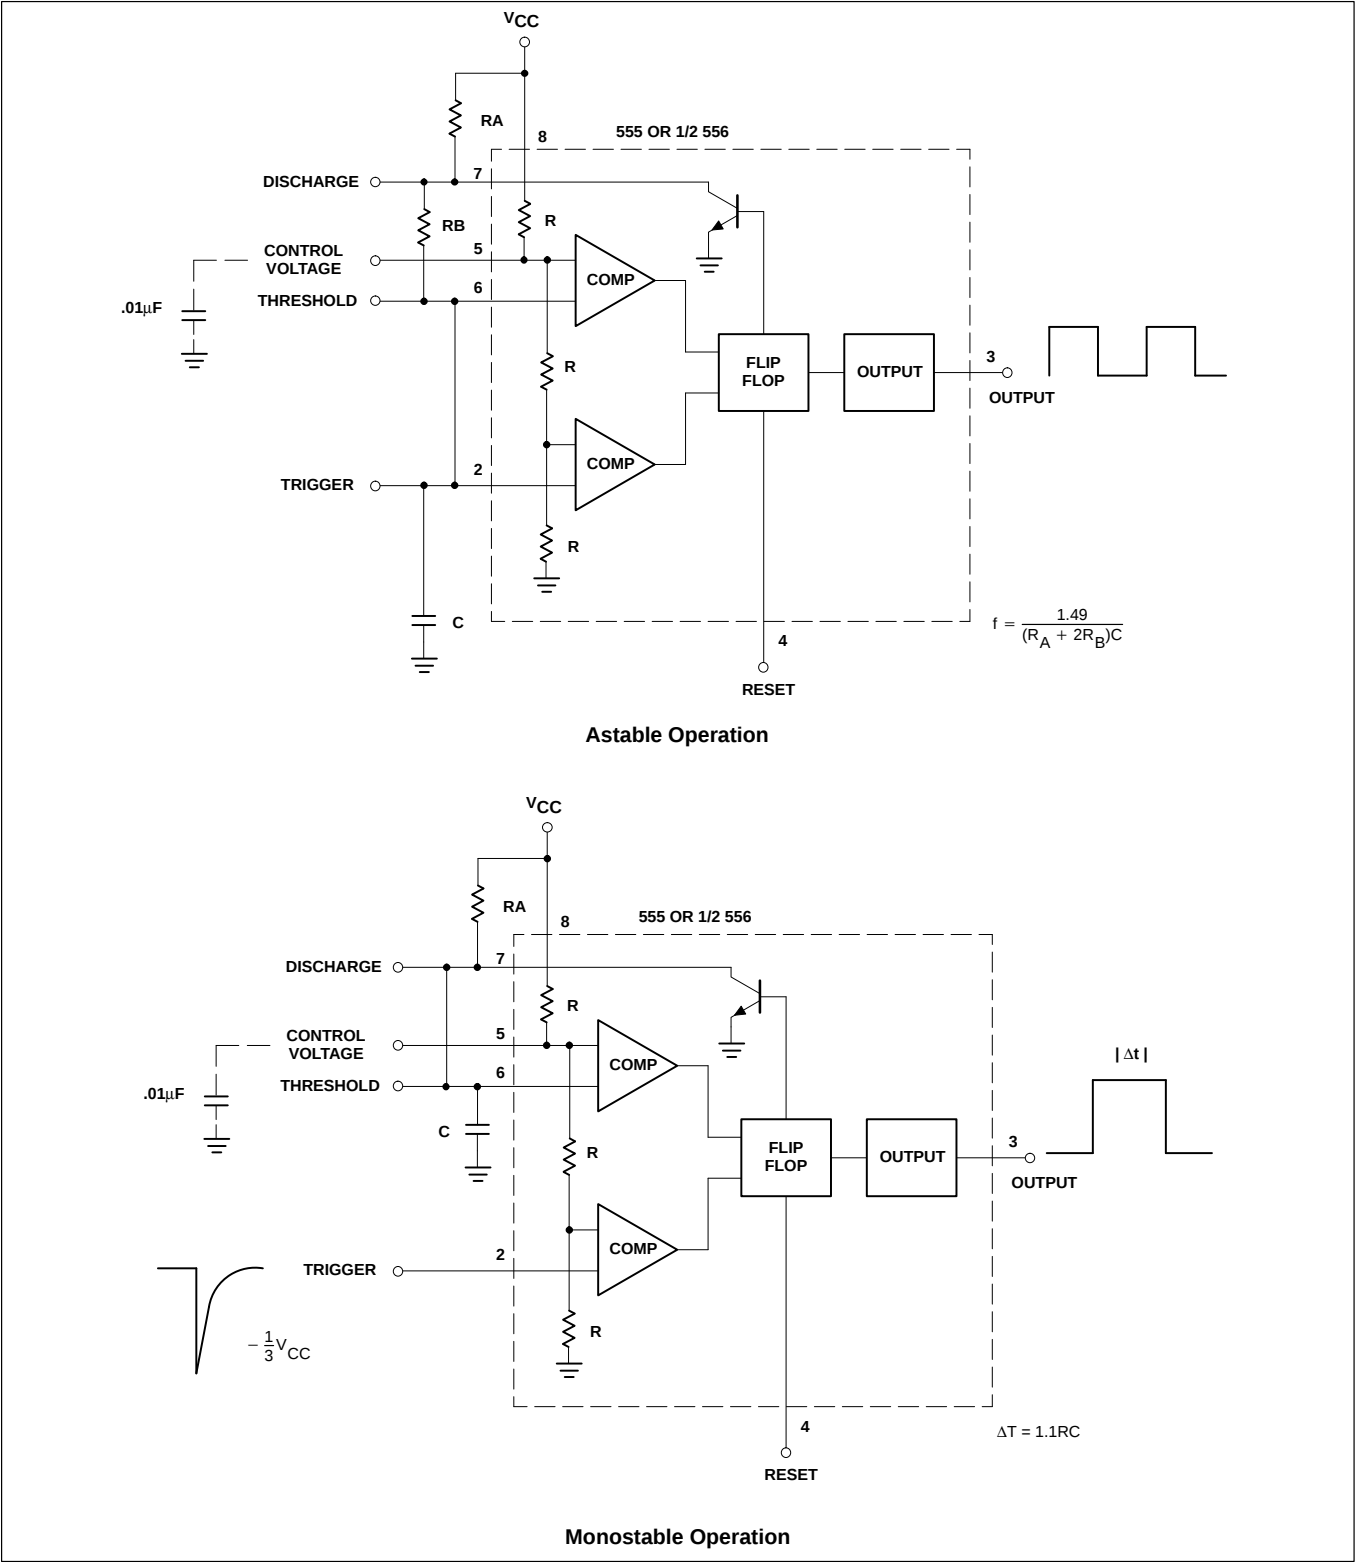

## Timer

## NE/SA/SE555/SE555C

## TYPICAL APPLICATIONS

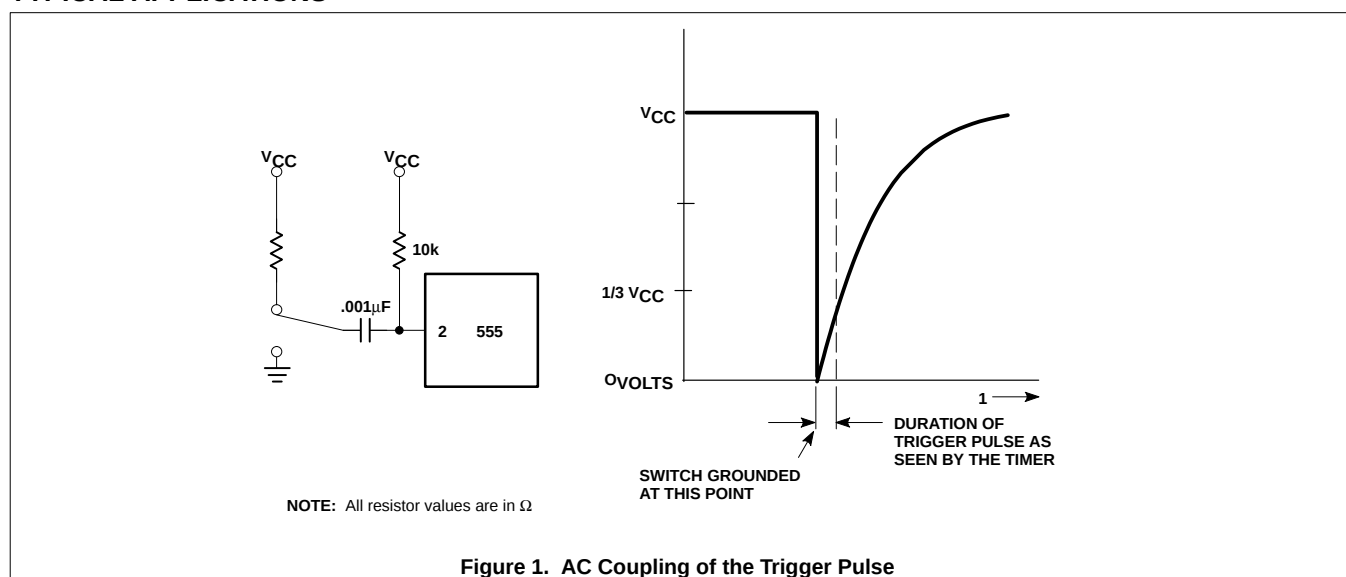

### Trigger Pulse Width Requirements and Time Delays

Due to the nature of the trigger circuitry, the timer will trigger on the negative going edge of the input pulse. For the device to time out properly, it is necessary that the trigger voltage level be returned to some voltage greater than one third of the supply before the time out period. This can be achieved by making either the trigger pulse sufficiently short or by AC coupling into the trigger. By AC coupling the trigger, see Figure 1, a short negative going pulse is achieved when the trigger signal goes to ground. AC coupling is most frequently used in conjunction with a switch or a signal that goes to ground which initiates the timing cycle. Should the trigger be held low, without AC coupling, for a longer duration than the timing cycle the output will remain in a high state for the duration of the low trigger signal, without regard to the threshold comparator state. This is due to the predominance of  $Q_{15}$  on the base of  $Q_{16}$ , controlling the state of the bi-stable flip-flop. When the trigger signal then returns to a high level, the output will fall immediately. Thus, the output signal will follow the trigger signal in this case.

Another consideration is the "turn-off time". This is the measurement of the amount of time required after the threshold reaches  $2/3 V_{CC}$  to turn the output low. To explain further,  $Q_1$  at the threshold input turns on after reaching  $2/3 V_{CC}$ , which then turns on  $Q_5$ , which turns on  $Q_6$ . Current from  $Q_6$  turns on  $Q_{16}$  which turns  $Q_{17}$  off. This allows current from  $Q_{19}$  to turn on  $Q_{20}$  and  $Q_{24}$  to given an output low. These steps cause the  $2\mu s$  max. delay as stated in the data sheet.

Also, a delay comparable to the turn-off time is the trigger release time. When the trigger is low,  $Q_{10}$  is on and turns on  $Q_{11}$  which turns on  $Q_{15}$ .  $Q_{15}$  turns off  $Q_{16}$  and allows  $Q_{17}$  to turn on. This turns off current to  $Q_{20}$  and  $Q_{24}$ , which results in output high. When the trigger is released,  $Q_{10}$  and  $Q_{11}$  shut off,  $Q_{15}$  turns off,  $Q_{16}$  turns on and the circuit then follows the same path and time delay explained as "turn off time". This trigger release time is very important in designing the trigger pulse width so as not to interfere with the output signal as explained previously.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.