


## General Purpose Photoelectric Sensor

## E3S-B

Miniature DC Sensor with Built-in Amplifier Offers Vertical or Horizontal Single-Screw Mounting

- Visible red beam
- High-speed sensing, 0.5 ms response time
- NEMA 4X, 6 and IP67
- Single-screw mounting
- Pre-wired, Light-ON/Dark-ON wire selectable

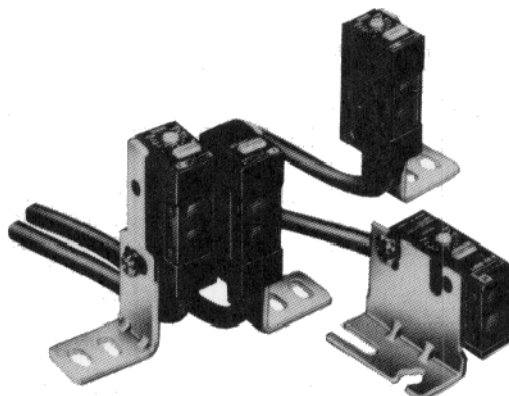

## Ordering Information

### ■ SENSORS

Through-beam sensors include both emitter and receiver. The polarized retroreflective sensors include E39-R1 reflector. All sensors include mounting hardware.

| Method of detection                                                                               |        | Through-beam  | Polarized retroreflective | Diffuse reflective |
|---------------------------------------------------------------------------------------------------|--------|---------------|---------------------------|--------------------|
| Sensing distance                                                                                  |        | 2 m (6.56 ft) | 1 m (3.28 ft)             | 20 cm (7.87 in)    |
| Mounting                                                                                          | Output | Part number   |                           |                    |
| Horizontal<br> | NPN    | E3S-BT11      | E3S-BR11                  | E3S-BD11           |
|                                                                                                   | PNP    | E3S-BT31      | E3S-BR31                  | E3S-BD31           |
| Vertical<br>   | NPN    | E3S-BT61      | E3S-BR61                  | E3S-BD61           |
|                                                                                                   | PNP    | E3S-BT81      | E3S-BR81                  | E3S-BD81           |

### ■ ACCESSORIES

| Description                                                                                                     |                                | Part number |
|-----------------------------------------------------------------------------------------------------------------|--------------------------------|-------------|
| Slits for E3S-BT□□ sensors (3 pairs of adhesive slits: 2 mm, 1 mm and 0.5 mm wide)                              |                                | E39-S47     |
| Aperture kit for E3S-BT□□ sensors (3 pairs of adhesive apertures: 2 mm, 1 mm and 0.5 mm dia.)                   |                                | E39-S48     |
| Mutual interference filters for E3S-BT□□ sensors (2 pairs: horizontal and vertical, includes mounting hardware) |                                | E39-E8      |
| Small corner cube reflector                                                                                     | 10 to 60 cm (3.94 to 23.62 in) | E39-R3      |
|                                                                                                                 | 7 to 35 cm (2.76 to 13.78 in)  | E39-R4      |
| Adhesive back reflector                                                                                         | 10 to 20 cm (3.94 to 7.87 in)  | E39-RSA     |
|                                                                                                                 | 10 to 30 cm (3.94 to 11.81 in) | E39-RSB     |
| Stainless steel mounting bracket for E39-R1 reflector                                                           |                                | E39-L7      |
| Stainless steel mounting bracket for E39-R3 reflector                                                           |                                | E39-L54     |

### ■ ACCESSORIES

| Description                                                                         | Part number |
|-------------------------------------------------------------------------------------|-------------|
| Corner cube reflector (supplied with E3S-BR□□)                                      | E39-R1      |
| Stainless steel mounting bracket for horizontal sensors (supplied with each sensor) | E39-L71     |
| Stainless steel mounting bracket for vertical sensors (supplied with each sensor)   | E39-L72     |
| Mounting adapter plate                                                              | E39-L61     |


# Specifications

|                                                  |                            |                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                  |                                                  |
|--------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Part number                                      |                            | E3S-BT□□                                                                                                                                                                                                                                                                   | E3S-BT□□                                                                                                                                                                                         | E3S-BD□□                                         |
| Method of detection                              |                            | Through-beam                                                                                                                                                                                                                                                               | Polarized retroreflective                                                                                                                                                                        | Diffuse reflective                               |
| Supply voltage                                   |                            | 10 to 30 VDC, ± 10%                                                                                                                                                                                                                                                        |                                                                                                                                                                                                  |                                                  |
| Current consumption                              |                            | 35 mA max. (emitter and receiver)                                                                                                                                                                                                                                          | 25 mA max.                                                                                                                                                                                       |                                                  |
| Sensing distance                                 | White mat paper            | 0 to 2 m<br>(0 to 6.56 ft)                                                                                                                                                                                                                                                 | 0.1 to 1 m with E39-R1<br>(0.33 to 3.28 ft)                                                                                                                                                      | 0.1 to 20 cm<br>(0.04 to 7.87 in)                |
|                                                  | Black mat paper            |                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                  | 0.2 to 6 cm<br>(0.08 to 2.36 in)                 |
|                                                  | With accessories           | 60 cm (1.97 ft) with E39-E8 filter<br>1 m (3.28 ft) with 2 mm slit<br>50 cm (1.64 ft) with 1 mm slit<br>25 cm (9.84 in) with 0.5 mm slit<br>60 cm (1.97 ft) with 2 mm dia. aperture<br>17 cm (6.69 in) with 1 mm dia. aperture<br>4 cm (1.57 in) with 0.5 mm dia. aperture | 10 to 60 cm with E39-R3<br>(3.94 to 23.62 in)<br>7 to 35 cm with E39-R4<br>(2.76 to 13.78 in)<br>10 to 20 cm with E39-RSA<br>(3.94 to 7.87 in)<br>10 to 30 cm with E39-RSB<br>(3.94 to 11.81 in) | —                                                |
| Light source                                     |                            | Pulse modulated red LED (700 nm)                                                                                                                                                                                                                                           |                                                                                                                                                                                                  |                                                  |
| Standard object                                  | Type                       | Opaque materials                                                                                                                                                                                                                                                           | Opaque materials                                                                                                                                                                                 | Opaque and transparent objects                   |
|                                                  | Size                       | 5.5 mm (0.22 in) dia. minimum                                                                                                                                                                                                                                              | 30 mm (1.18 in) dia. minimum                                                                                                                                                                     | 10 x 10 cm<br>(3.94x 3.94 in)<br>white mat paper |
| Operation mode                                   |                            | Light-ON/Dark-ON operation, wire selectable                                                                                                                                                                                                                                |                                                                                                                                                                                                  |                                                  |
| Variation in sensing distance                    |                            | —                                                                                                                                                                                                                                                                          | —                                                                                                                                                                                                | +30% max., -0% max.                              |
| Hysteresis                                       |                            | —                                                                                                                                                                                                                                                                          | —                                                                                                                                                                                                | 20% max.                                         |
| Variation in optical axis and mounting direction |                            | ± 2° max.                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                  |                                                  |
| Sensitivity                                      |                            | Adjustable, 3/4-turn potentiometer                                                                                                                                                                                                                                         |                                                                                                                                                                                                  |                                                  |
| Mutual interference protection                   |                            | Not provided                                                                                                                                                                                                                                                               | Provided                                                                                                                                                                                         | Provided                                         |
| Control output                                   | Type                       | NPN transistor, open collector (E3S-B□11, E3SB□61)<br>PNP transistor, open collector (E3S-B□31, E3SB□81)                                                                                                                                                                   |                                                                                                                                                                                                  |                                                  |
|                                                  | Max. load                  | 100 mA max. at 30 VDC                                                                                                                                                                                                                                                      |                                                                                                                                                                                                  |                                                  |
|                                                  | Max. ON-state voltage drop | 1 VDC max. at 100 mA load current                                                                                                                                                                                                                                          |                                                                                                                                                                                                  |                                                  |
| Response time                                    |                            | 0.5 ms max. for both ON and OFF operation                                                                                                                                                                                                                                  |                                                                                                                                                                                                  |                                                  |
| Circuit protection                               |                            | Load short-circuit protection, reverse polarity protection                                                                                                                                                                                                                 |                                                                                                                                                                                                  |                                                  |
| Indicators                                       |                            | Emitter:<br>Operation (red)<br>Receiver:<br>Operation (red)<br>Stability (green)                                                                                                                                                                                           | Operation (red), Stability (green)                                                                                                                                                               |                                                  |
| Materials                                        | Lens                       | Denatured polyarylate                                                                                                                                                                                                                                                      |                                                                                                                                                                                                  |                                                  |
|                                                  | Case                       | Polybutylene terephthalate (PBT)                                                                                                                                                                                                                                           |                                                                                                                                                                                                  |                                                  |
|                                                  | Bracket                    | Stainless steel                                                                                                                                                                                                                                                            |                                                                                                                                                                                                  |                                                  |
| Mounting                                         |                            | Either side surface with one stud and one threaded hole. Bracket E39-L71 for horizontal or E39-L72 for vertical sensors and hardware included.                                                                                                                             |                                                                                                                                                                                                  |                                                  |
| Connections                                      | Prewired                   | 2 m (6.56 ft) long cable                                                                                                                                                                                                                                                   |                                                                                                                                                                                                  |                                                  |
| Weight                                           | Emitter                    | 56 g (1.96 oz)                                                                                                                                                                                                                                                             | 56 g (1.96 oz)                                                                                                                                                                                   | 65 g (2.28 oz)                                   |
|                                                  | Receive                    | 66 g (2.31 oz)                                                                                                                                                                                                                                                             | —                                                                                                                                                                                                | —                                                |
| Enclosure rating                                 | IEC 144                    | IP67                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                  |                                                  |
|                                                  | NEMA                       | 4X, 6                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                  |                                                  |
| Ambient temperature                              | Operating                  | -25° to 55°C (-13° to 131°F) with no icing                                                                                                                                                                                                                                 |                                                                                                                                                                                                  |                                                  |
|                                                  | Storage                    | -40° to 70°C (-40° to 158°F)                                                                                                                                                                                                                                               |                                                                                                                                                                                                  |                                                  |


## OUTPUT CIRCUIT DIAGRAMS

### NPN Output

#### Through-beam Emitter

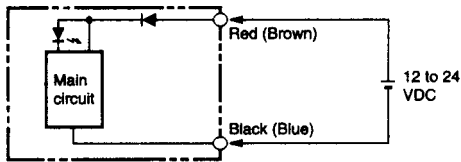


#### Through-beam Receiver, Retroreflective, Diffuse Reflective

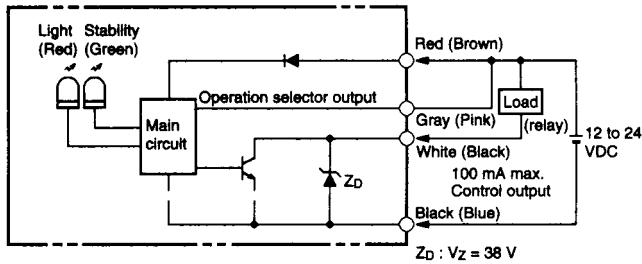


### PNP Output

#### Through-beam Emitter

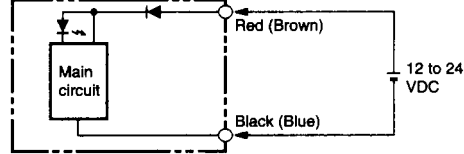

#### Through-beam Receiver, Retroreflective, Diffuse Reflective

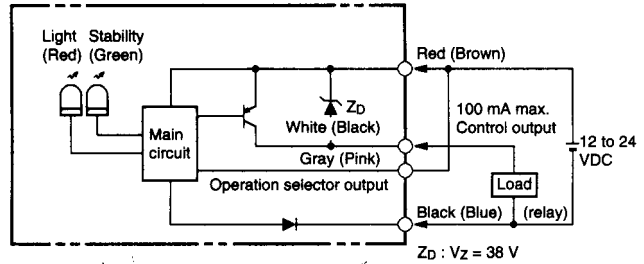


Note: Circuits shown are for Light-ON operation. For Dark-ON operation, the gray wire is connected to the black wire (0 VDC).  
IEC colors are shown in parentheses.

## Engineering Data


### EXCESS GAIN RATIO

#### Excess Gain vs. Set Distance (Typical)


E3S-BT□1

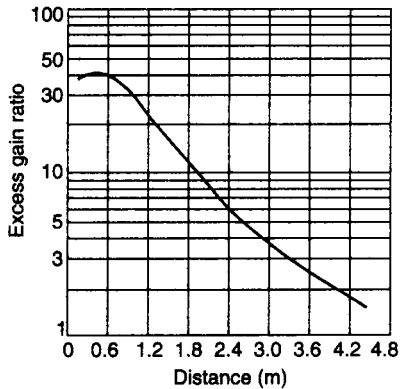


E3S-BR□1 (with E39-R1 Reflector)

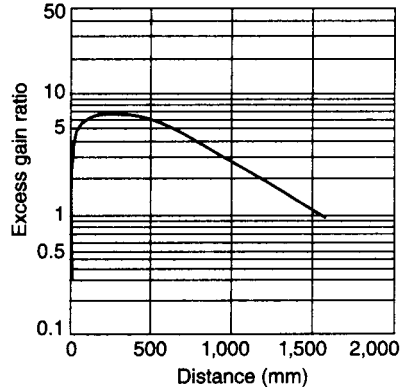

E3S-BD□1 (Detection of White Paper)

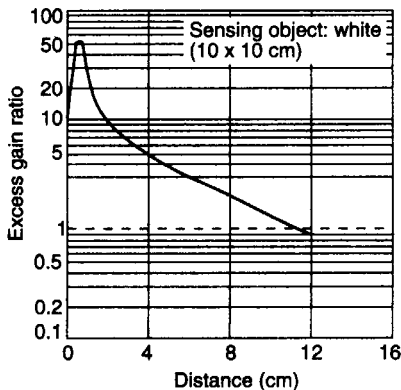


E3S-BD□1 (Detection of Black Paper)

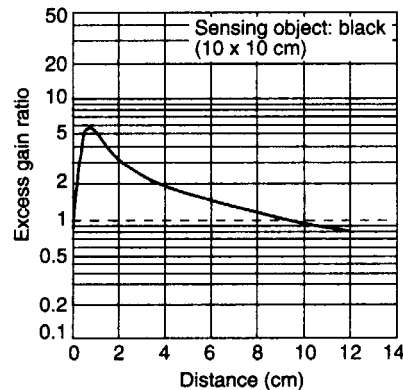


## OPERATING RANGE


Parallel Operating Range (Typical)  
E3S-BT□1 (Left and Right)

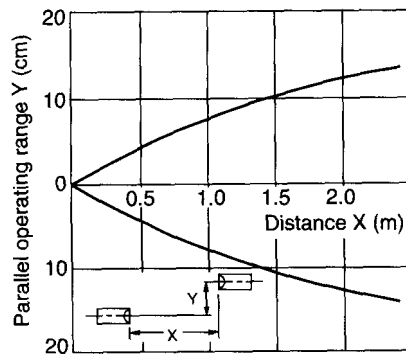


E3S-BT□1 (Up and down)

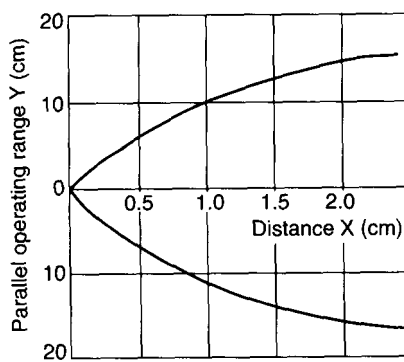


Sensing Distance vs. Set Distance  
E3S-BT□11

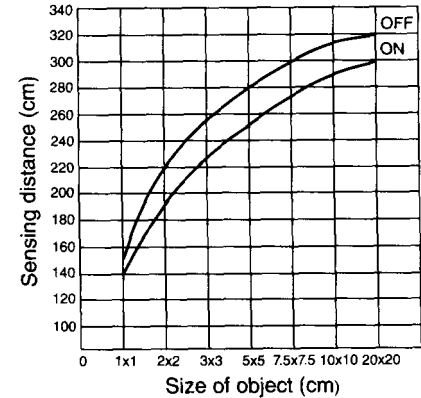

E3S-BD□1 (Left and Right)

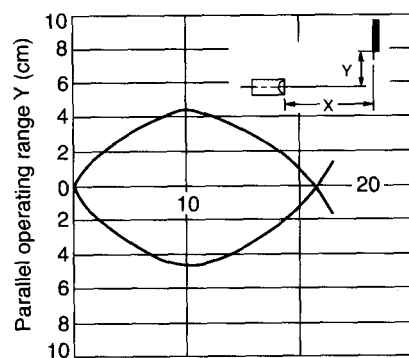

E3S-BD□1 (Up and down)

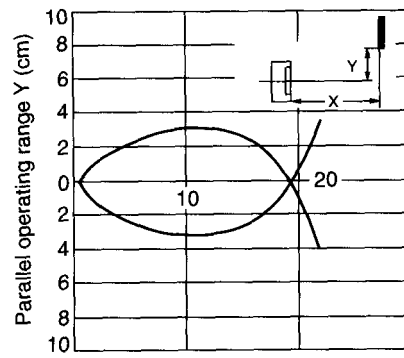


## Dimensions

Unit: mm (inch)


## SENSORS

E3S-BT11  
E3S-BT31

Emitter

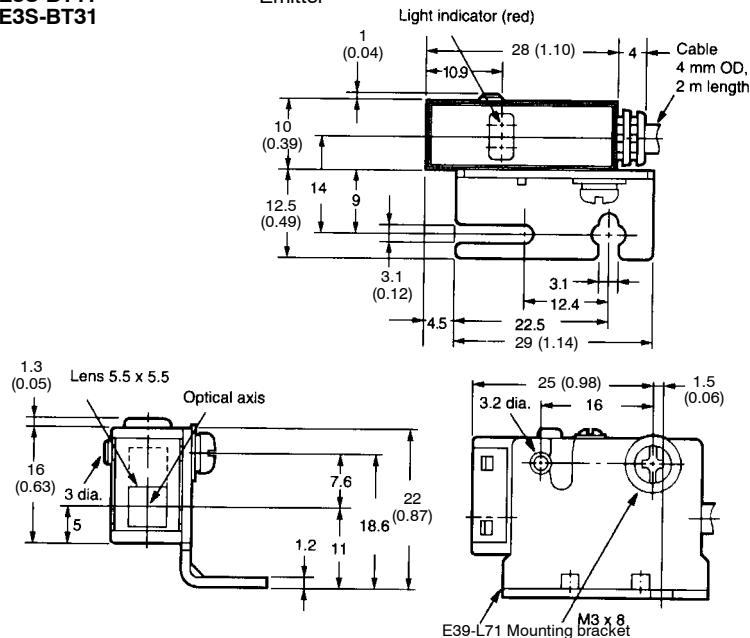


Receiver

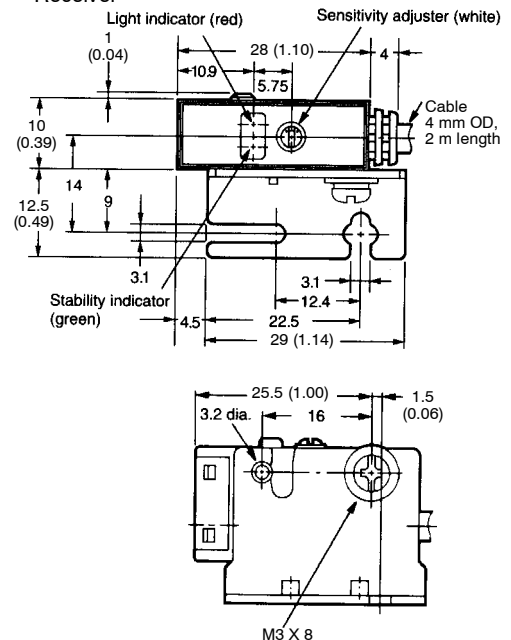








Unit: mm (inch)

**E3S-BT61****E3S-BT81**


Emitter

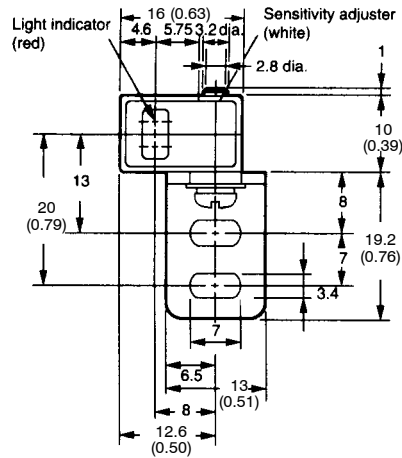


Receiver

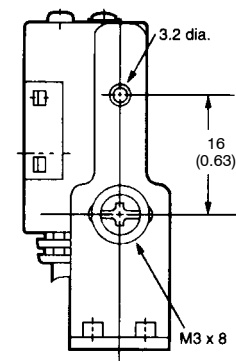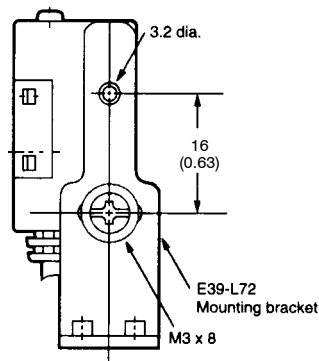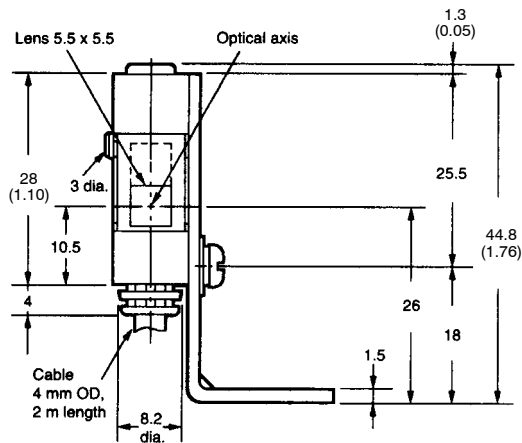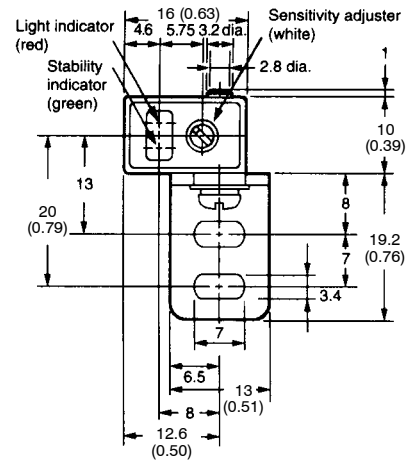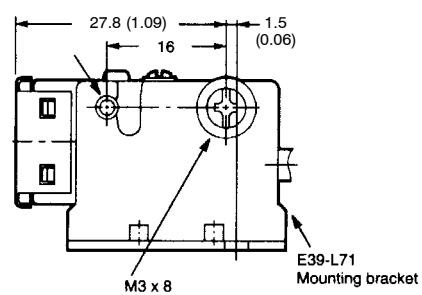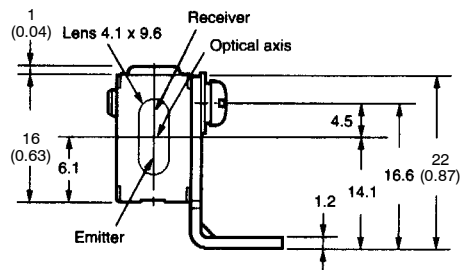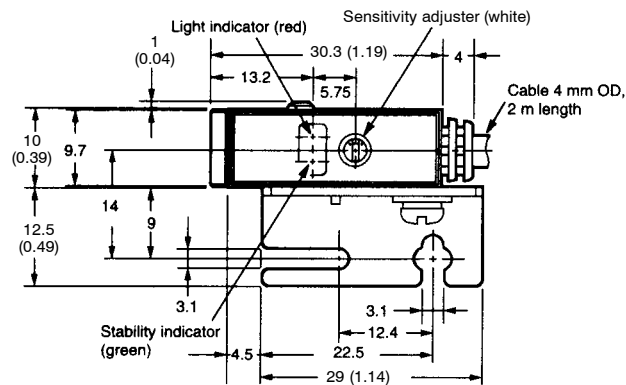**E3S-BR11****E3S-BR31**

E3S-BR61  
E3S-BR81

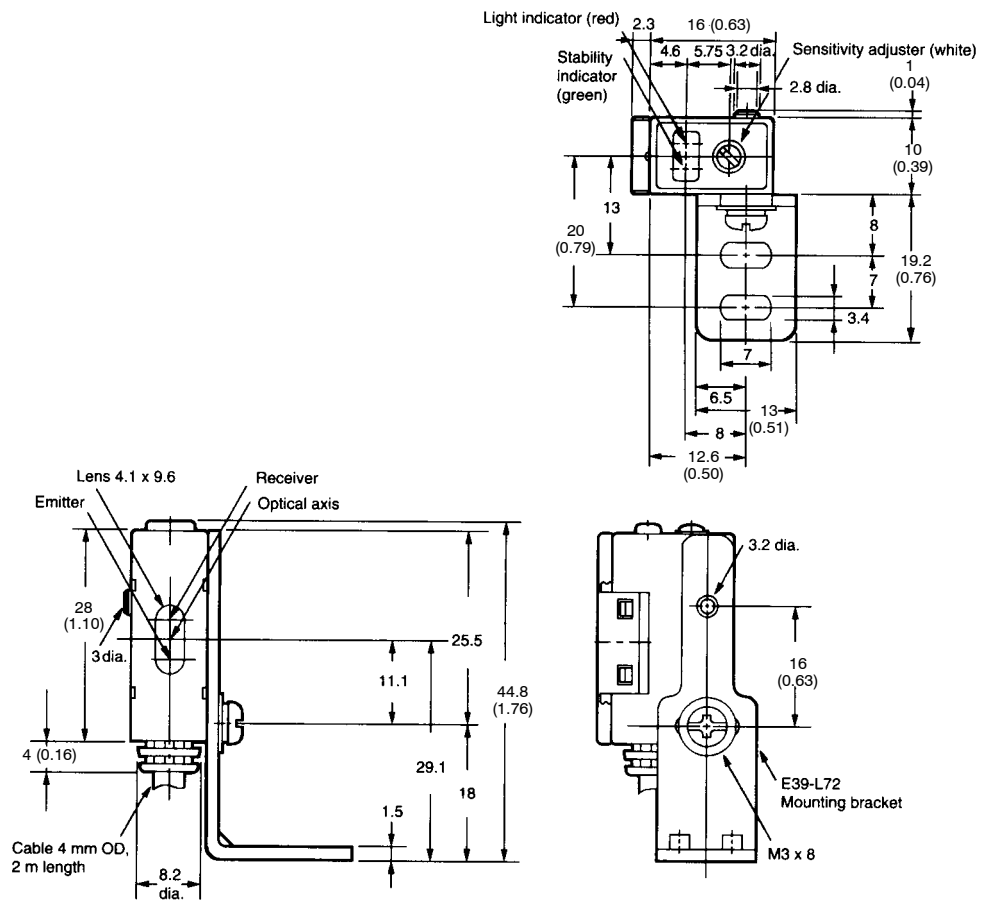


E3S-BD11  
E3S-BD31

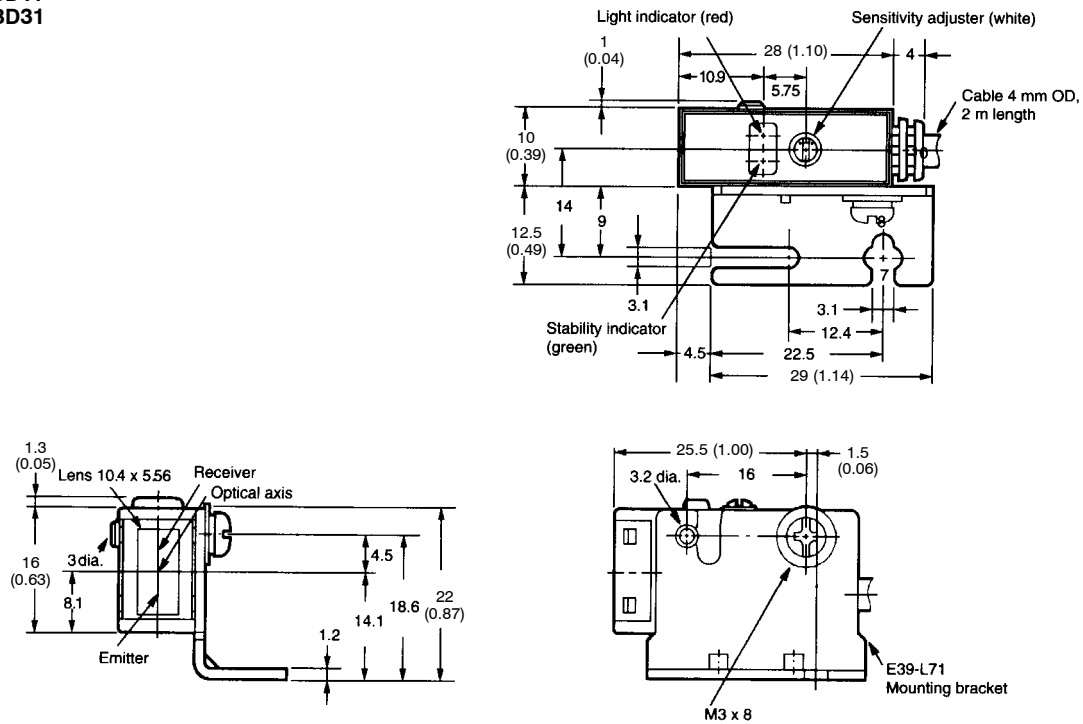

Unit: mm (inch)



E3S-BD61

E3S-BD81

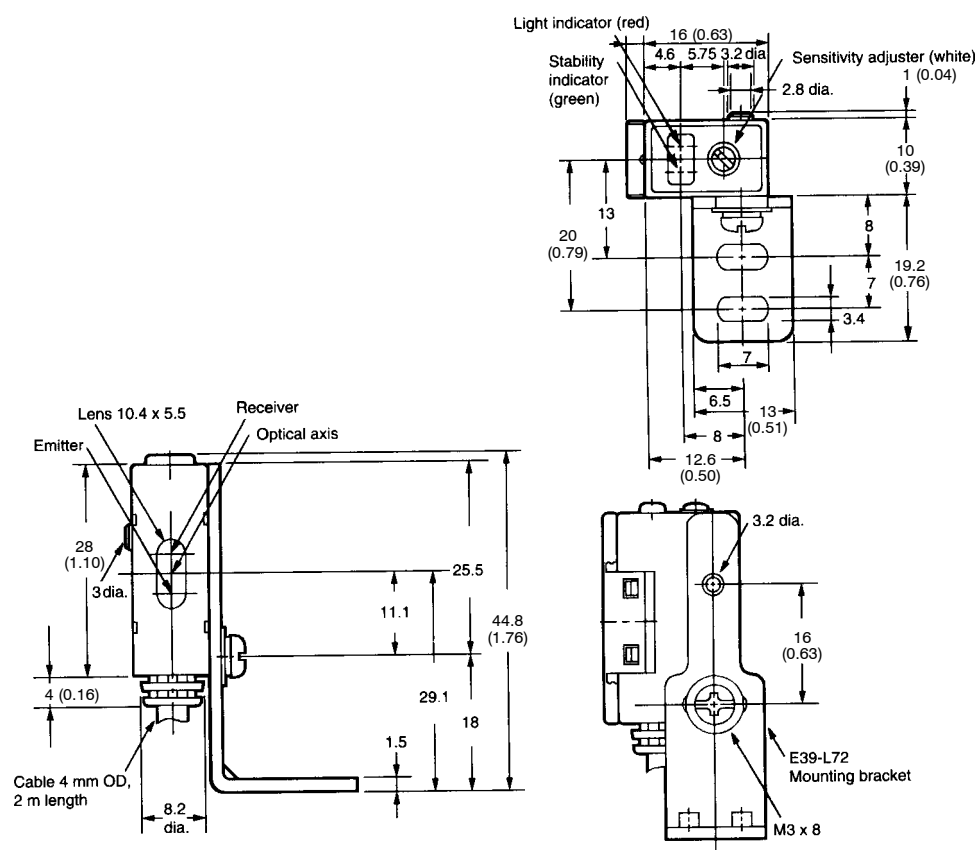






## CORNER CUBE REFLECTORS

**E39-R1 Reflector**  
(Included with E3S-AR□)

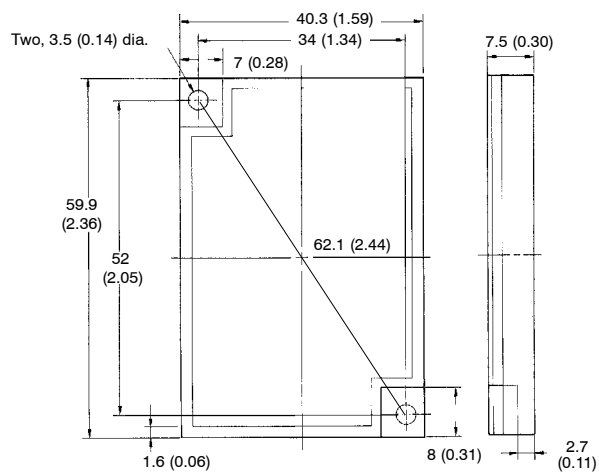


**E39-L7 R1 Reflector Adapter**  
for E39-R1 Reflector  
(Order Separately)

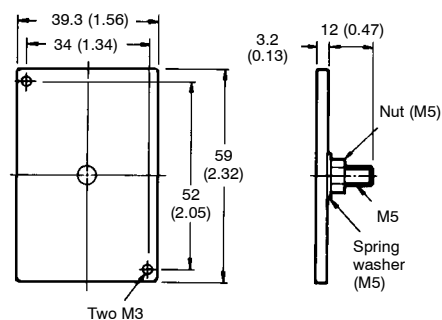


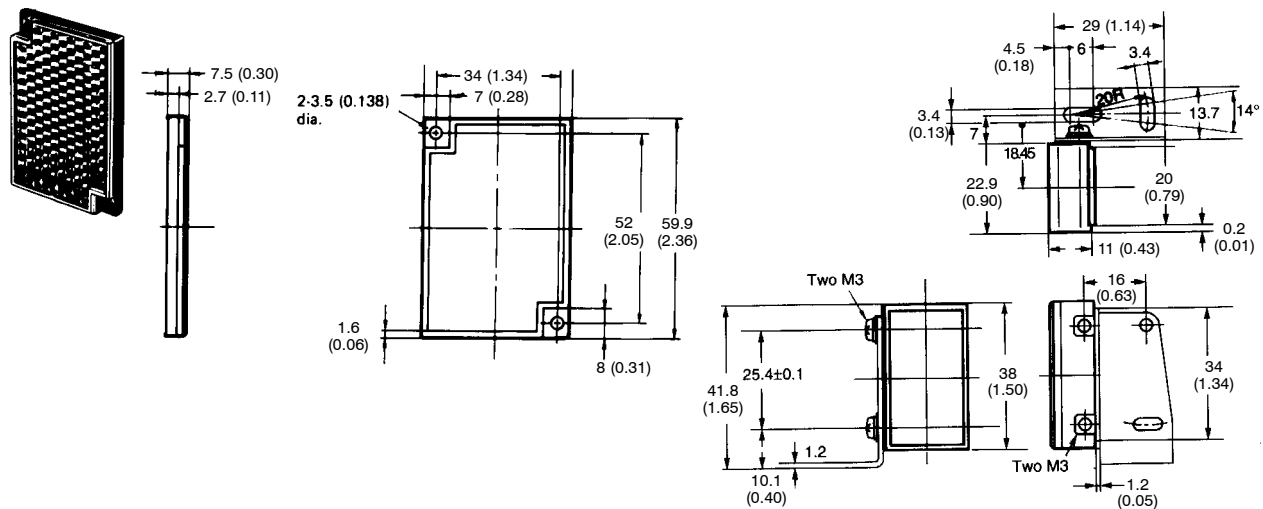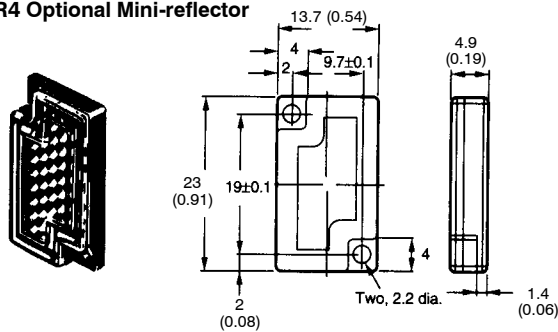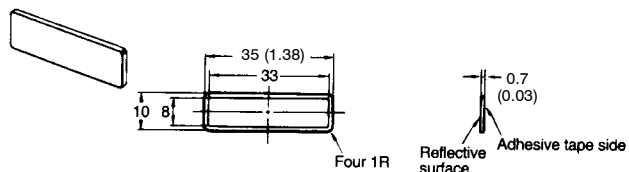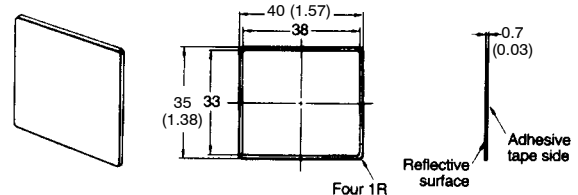**E39-R1 Reflector  
(Optional)****Dimensions with E39-L54 Mounting Bracket (included)****E39-R4 Optional Mini-reflector****E39-RSA Optional Adhesive-backed Reflector****E39-RSB Optional Adhesive-backed Reflector****■ SLITS AND APERTURES FOR THROUGH-BEAM SENSORS****E39-S47 Slit Set**

The kit includes two sets each of 0.5 mm, 1 mm and 2 mm slits. Mount the adhesive-backed slit to the lens of both emitter and receiver. Use the same slit size on both emitter and receiver for best results.


**E39-S48 Aperture Set**

The kit includes two sets each of 0.5 mm, 1 mm and 2 mm diameter apertures. Mount the adhesive-backed aperture to the lens of both the emitter and receiver. Use the same aperture size on both emitter and receiver for best results.

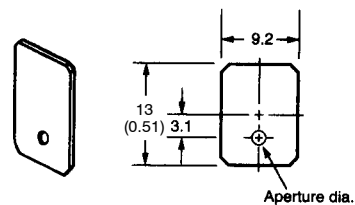


MUTUAL INTERFERENCE FILTER

E39-E8

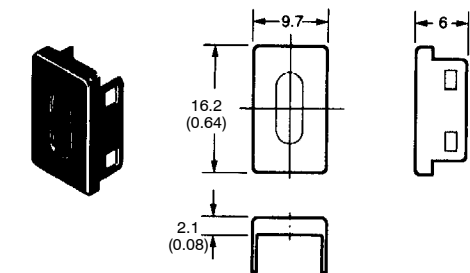

MOUNTING ADAPTER PLATE

E39-L61

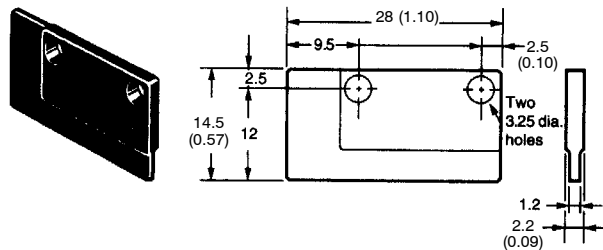

Operation

SENSITIVITY ADJUSTMENT

Unlike conventional photoelectric sensors, the variation in the sensitivity of E3S photoelectric sensors is minimal. This means the sensitivity can be adjusted on only a single photoelectric sensor, and then the adjusters on the other photoelectric sensors can be set to the same scale position. There is no need to adjust the sensitivity of each photoelectric sensor individually.

| Steps                | Step 1                                                                                                                                                                                                                                                                                                       | Step 2                                                                                                                                                                                                                                                                 | Step 3                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function             | Determine Position A                                                                                                                                                                                                                                                                                         | Determine Position B                                                                                                                                                                                                                                                   | Adjust to optimum setting                                                                                                                                                                                                                                                                                                                                                                  |
| Sensing condition    |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                            |
| Sensitivity adjuster |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                            |
| Indicators           | <div>OFF</div> <div> STABILITY (green)</div> <div>ON</div> <div> LIGHT (red)</div>                                                                                                                                                                                                                           | <div>OFF</div> <div> STABILITY (green)</div> <div>OFF</div> <div> LIGHT (red)</div>                                                                                                                                                                                    | <div>ON</div> <div> STABILITY (green)</div> <div>OFF</div> <div> LIGHT (red)</div>                                                                                                                                                                                                                                                                                                         |
|                      | Place target at the desired sensing distance. Set sensitivity adjuster to the minimum scale position and gradually increase sensitivity by turning the sensitivity adjuster clockwise until the Light Incident indicator (red LED) turns ON. Position A designates the point at which the LED has turned ON. | Remove the target. Starting from the maximum scale position, gradually decrease sensitivity by turning the sensitivity adjuster counterclockwise until the Light Incident indicator (red LED) is OFF. Position B designates the point at which the LED has turned OFF. | Set the sensitivity indicator to the position between Positions A and B (in some cases, Positions A and B are opposite of the above example). The photoelectric sensor will then work normally if the stability indicator (green) is lit with and without the target. If it is not lit, stable operation cannot be expected, in which case a different detection method should be applied. |

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

**OMRON**<sup>®</sup>  
**OMRON ELECTRONICS LLC**  
One East Commerce Drive  
Schaumburg, IL 60173  
**1-800-55-OMRON**

**OMRON ON-LINE**  
Global - <http://www.omron.com>  
USA - <http://www.omron.com/oei>  
Canada - <http://www.omron.com/oci>

**OMRON CANADA, INC.**  
885 Milner Avenue  
Scarborough, Ontario M1B 5V8  
**416-286-6465**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.