

## FEATURES

### MitySOM-5CSX Embedded Vision Development Kit for Basler dart


#### MitySOM-5CSX Module

##### Additional Hardware Included:

- Micro B USB Cable
- Ethernet Cable
- AC to DC 12V 3A Adapter
- Option A
  - 1 Basler dart Color Camera
- Option B
  - 2 Basler dart Mono Cameras

##### Digital Interfaces:

- 10/100/1000 MBit Ethernet Interface
- Debug UART to USB
- USB OTG Interface
- HDMI Interface
- Dual Basler dart BCON Camera Interfaces
- SD/MMC Card Socket
- M.2 Quad PCIe Connector
  - Supports NVME SSDs
- GPIO connector

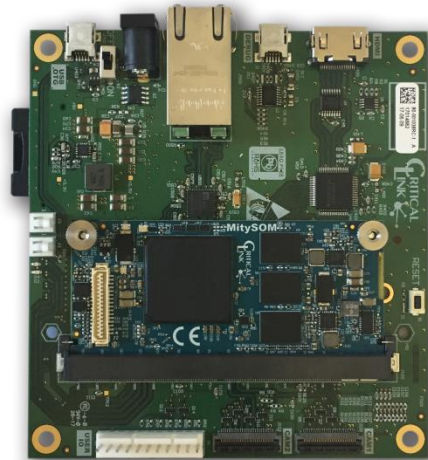

##### Software and Documentation:

- Linux Kernel
- uBoot
- Development Environment - Virtual Machine
- Development Board Schematics
- Development Board Gerber Files
- Development Board BOM

##### APPLICATIONS

- Basler dart BCON Camera Evaluation
- Intelligent Imaging
- Factory Automation
- Industrial Automation
- Embedded Instrumentation
- Test and Measurement


## DESCRIPTION

The MitySOM-5CSX Embedded Vision Development Kit (VDK) for Basler dart provides all the hardware and software support for system designers and developers to implement an embedded vision system utilizing the dart series cameras from Basler. The kit comes complete with the MitySOM-5CSX module, camera(s), and necessary cabling to start working on your project.

The MitySOM-5CSX Embedded VDK for Basler dart includes on-board Debug UART to USB converter, 10/100/1000 Ethernet, Universal Serial Bus (USB 2.0) USB-On-The-Go (OTG) communication interfaces.

The device, including attached Basler dart BCON cameras, is powered from a single +5VDC input (adapter included).

A block diagram of the MitySOM-5CSX Embedded VDK Baseboard is illustrated in Figure 1.

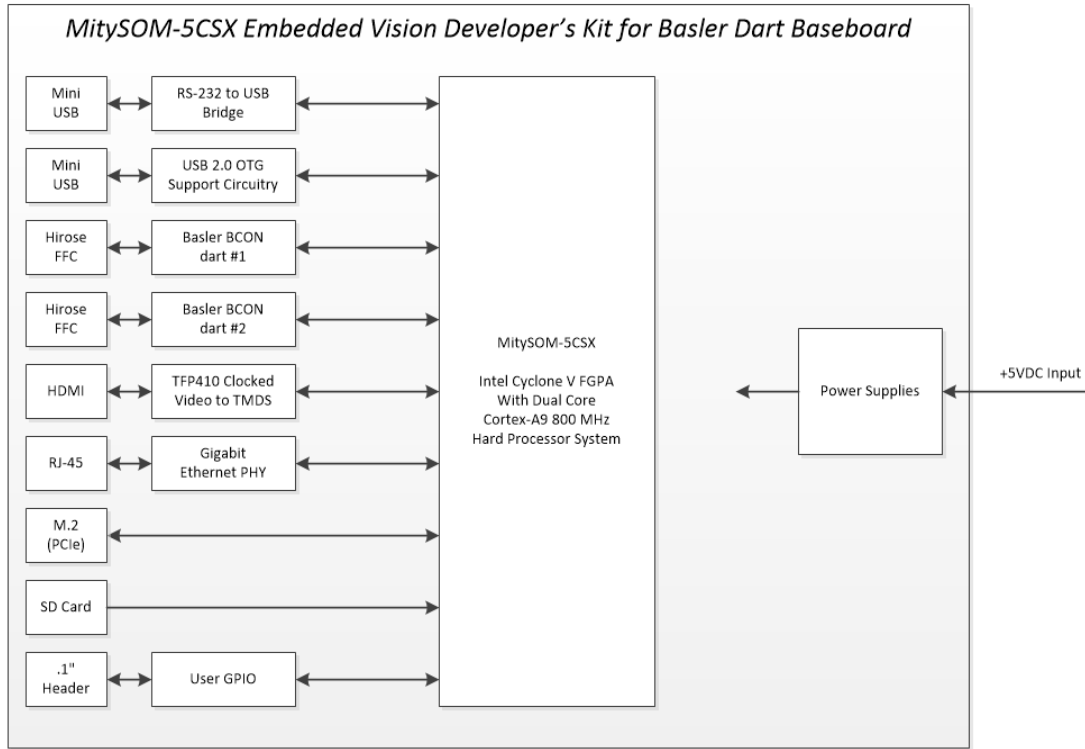

**Figure 1: MitySOM-5CSX Embedded VDK for Basler dart Block Diagram**

Additional details about the Cyclone V SoC, available peripherals, their features and FPGA IO details are provided in the data sheet at the Intel website (<http://www.altera.com/devices/processor/soc-fpga/cyclone-v-soc/cyclone-v-soc.html>).

## Feature Descriptions

|  |   |
|--|---|
| Debug UART to USB Interface Description .....    | 4 |
| USB 2.0 Interface Description .....              | 4 |
| MultiMedia Card (SD) Interface Description ..... | 4 |
| Gigabit Ethernet Interface Description .....     | 4 |
| M.2 PCIe Interface Description .....             | 4 |
| Dual Basler dart Interface Description .....     | 4 |
| GPIO Connector Description .....                 | 4 |
| Dual +5V Fan Interface Description .....         | 5 |
| Reset Switch Description .....                   | 5 |
| Boot Configuration Description .....             | 5 |

## Electrical Interface Descriptions

|  |   |
|--|---|
| Input Power – J601 .....                     | 5 |
| Main Power Switch – S2 .....                 | 5 |
| MultiMedia Card (SD) Interface – J403 .....  | 6 |
| Debug/Boot UART – USB Interface – J1 .....   | 6 |
| USB 2.0 Interface (OTG) – J401 .....         | 6 |
| M.2 PCIe Interface – CN400 .....             | 6 |
| BCON LVDS Camera Interface J101 & J102 ..... | 7 |
| 10/100/1000 Ethernet Interface – J500 .....  | 8 |
| User GPIO Interface – P1 .....               | 9 |

#### **Debug UART to USB Interface Description**

The on-board UART to USB Bridge, FTDI FT230X, provides a serial interface at data rates up to 115,200 baud using a mini USB type B connector. The USB serial interface, J1, is routed to the MitySOM serial boot loading port, UART0. It allows for general module debug, remote code download and flash upgrades on an attached MitySOM from this connector when interfaced with a PC.

When connected to a Windows XP, Vista, 7 or 8 PC no drivers are required as Windows Update is used to obtain the drivers.

#### **USB 2.0 Interface Description**

The on-board USB OTG interface utilizes a mini B type connector J401 and interfaces with the USB PHY on the MitySOM-5CSX module. This PHY is connected to the USB0 controller within the Cyclone V SoC HPS. Linux drivers are available. This interface allows for a connection to either a PC or a USB device using an USB OTG to USB A type adapter, not included.

#### **MultiMedia Card (SD) Interface Description**

The on-board MultiMedia Card (MMC) slot uses a Secure Digital connector J403 which supports standard (3.3V) cards. U-Boot configuration information and Linux drivers are available.

#### **Gigabit Ethernet Interface Description**

The on-board Ethernet interface features a Micrel KSZ9031 Ethernet PHY capable of running at 10/100/1000Mbit, including link auto-negotiation and RGMII/MDIO capability. An industry standard RJ-45 connector is provided for external connection. This Ethernet interface may be used to perform remote code download via U-Boot and flash upgrades on an attached MitySOM-5CSX module in addition to standard network interfacing.

#### **M.2 PCIe Interface Description**

The on-board M.2 standard connector allows for connection to the MitySOM-5CSX module gigabit transceivers configured in PCIe x4 (Gen 1) mode. This allows interfacing to M.2 NVME SSD cards for data recording and playback.

#### **Dual Basler dart Interface Description**

Two Basler dart BCON camera flat flex cable (FFC) interfaces, J101 and J102, are provided to allow capturing video data from 1 or 2 Basler dart BCON camera systems.

#### **GPIO Connector Description**

Connector P1 includes 6 pins connected, via a 1 K series resistor, to spare FPGA pins on Bank 4A of the MitySOM-5CSX. These pins can be programmed as inputs or outputs for end application use. The connector also includes +5V, +2.5V and ground reference pins for powering of external circuitry.

### Dual +5V Fan Interface Description

Two connectors, J2 and J3, are included that provide +5V power. The intent for these connectors is to power simple +5V fans (not included) in the situation that the system must be cooled.

### Reset Switch Description

S41 is for the Cold Reset which causes the MitySOM input power supply to be toggled.

### Boot Configuration Description

The baseboard is designed to configure the MitySOM-5CSX module to boot from the MMC/SD card.

## ELECTRICAL CHARACTERISTICS

| Symbol                             | Parameter  | Conditions | Typical | Limit | Units (Limits) |
|------------------------------------|--|------------|---------|-------|----------------|
| <b>Maximum Power Supply Output</b> |  |            |         |       |                |
| $I_{Max}$                          | 5.0V Supply (AC Adapter) all components          |            |         | 3.0   | A              |
| $I_{Max}$                          | 5.0V Supply <sup>1</sup> for external components |            |         | 2.0   | A              |
| $I_{Max}$                          | 3.3V Supply <sup>1</sup> for external components |            |         | 3.3   | A              |
| <b>Power Dissipation</b>           |  |            |         |       |                |
| $V_s$                              | Supply Voltage                                   |            | 5±5%    |       | V              |
| $I_s$                              | Supply Current <sup>2</sup>                      |            | 1000    |       | mA             |

#### Notes:

- The maximum current supplied to external components should be limited to the specified maximum for all externally connected power supplies. Total power delivered to externally connected 5.0V and 3.3V supplies cannot exceed 10 Watts (5 Watts are reserved for on-board components including the MitySOM-5CSX daughter card). External power connections must comply with the maximum rated current per pin for a given connector.
- M.2 NVME cards not attached, 100% ARM utilization, RS-232 and Ethernet are enabled and active. 1 Basler dart BCON connected, HDMI monitor attached and displaying live data.

## ELECTRICAL INTERFACE DESCRIPTIONS

### Input Power – J601

The MitySOM-5CSX Embedded VDK power interface, J601, requires a single +5 Volt power supply. A recommended input supply rating of at least 3A is recommended and a 3A supply with universal AC plugs is included with each kit. The pinout for J601 is listed in Table 1.

**Table 1: J601 Input Power Interface Pin Description**

| Signal | J601 Position |
|--------|---------------|
| +5 V   | 1             |
| GND    | 2             |

### Main Power Switch – S2

An input power switch is present on the kit, S2, which controls the power input, on or off, from J601.

### MultiMedia Card (SD) Interface – J403

The MitySOM-5CSX Embedded VDK provides an MMC interface that uses a standard Secure Digital (SD) card slot for the physical interface. SD card adapters can be used to allow using MicroSD and MiniSD cards in this slot. The slot is supplied with 3.3V for use with standard SD cards.

### Debug/Boot UART – USB Interface – J1

The Debug UART – USB interface, J1, uses a standard USB Mini-B pinout as shown in Table 2.

**Table 2: J400 Mini USB Connector Pin Assignments**

| Pin | Signal | Type  | Standard | Notes               |
|-----|--------|-------|----------|---------------------|
| 1   | VBUS   | Power | -        |                     |
| 2   | D-     | I/O   | USB 2.0  | USB data minus line |
| 3   | D+     | I/O   | USB 2.0  | USB data plus line  |
| 4   | GND    | GND   | -        |                     |
| 5   | SHIELD | GND   | -        |                     |

### USB 2.0 Interface (OTG) – J401

The MitySOM-5CSX USB 2.0 On-The-Go port uses a standard USB Mini-B pinout as shown in Table 3.

**Table 3: J401 Pin Assignments**

| Pin | Signal    | Type  | Standard | Notes               |
|-----|-----------|-------|----------|---------------------|
| 1   | USB1_VBUS | POWER | -        |                     |
| 2   | USB1_D_N  | I/O   | USB 2.0  | USB data minus line |
| 3   | USB1_D_P  | I/O   | USB 2.0  | USB data plus line  |
| 4   | USB1_ID   | I/O   | -        |                     |
| 5   | GND       | POWER | -        |                     |

### M.2 PCIe Interface – CN400

Table 4 describes the pin-out of the M.2 PCIe connector on the MitySOM-5CSX Embedded VDK development board. This connector provides a x4 lane Gen 1 PCIe interface to support the use of NVME style solid state disks (SSDs).

**Table 4: J402 Pin Assignments**

| Pin | Signal       | SoM Pin | Type  | Standard  | Notes                    |
|-----|--------------|---------|-------|-----------|--------------------------|
| 1   | GND          | -       | POWER | -         |                          |
| 2   | +3.3V        | -       | POWER | -         |                          |
| 3   | GND          | -       | POWER | -         |                          |
| 4   | +3.3V        | -       | POWER | -         |                          |
| 5   | PCIE1_RX_3_N | 228     | I     | CML       |                          |
| 6   | N/C          | -       | -     | -         |                          |
| 7   | PCIE1_RX_3_P | 226     | I     | CML       |                          |
| 8   | N/C          | -       | -     | -         |                          |
| 9   | GND          | -       | -     | -         |                          |
| 10  | M2LED        | -       | O     | +3.3V max | >1V Drives D2 Green LED. |
| 11  | PCIE1_TX_3_N | 235     | O     | CML       |                          |
| 12  | +3.3V        | -       | POWER | -         |                          |
| 13  | PCIE1_TX_3_P | 233     | O     | CML       |                          |
| 14  | +3.3V        | -       | POWER | -         |                          |
| 15  | GND          | -       | POWER | -         |                          |

| Pin | Signal           | SoM Pin | Type  | Standard | Notes                            |
|-----|------------------|---------|-------|----------|----------------------------------|
| 16  | +3.3V            | -       | POWER | -        |                                  |
| 17  | PCIE1_RX_2_N     | 216     | I     | CML      |                                  |
| 18  | +3.3V            | -       | POWER | -        |                                  |
| 19  | PCIE1_RX_2_P     | 214     | I     | CML      |                                  |
| 20  | N/C              | -       | -     | -        |                                  |
| 21  | GND              | -       | POWER | -        |                                  |
| 22  | N/C              | -       | -     | -        |                                  |
| 23  | PCIE1_TX_2_N     | 223     | O     | CML      |                                  |
| 24  | N/C              | -       | -     | -        |                                  |
| 25  | PCIE1_TX_2_P     | 221     | O     | CML      |                                  |
| 26  | N/C              | -       | -     | -        |                                  |
| 27  | GND              | -       | POWER | -        |                                  |
| 28  | N/C              | -       | -     | -        |                                  |
| 29  | PCIE1_RX_1_N     | 210     | I     | CML      |                                  |
| 30  | N/C              | -       | -     | -        |                                  |
| 31  | PCIE1_RX_1_P     | 208     | I     | CML      |                                  |
| 32  | N/C              | -       | -     | -        |                                  |
| 33  | GND              | -       | POWER | -        |                                  |
| 34  | N/C              | -       | -     | -        |                                  |
| 35  | PCIE1_TX_1_N     | 217     | O     | CML      |                                  |
| 36  | N/C              | -       | -     | -        |                                  |
| 37  | PCIE1_TC_1_P     | 215     | O     | CML      |                                  |
| 38  | N/C              | -       | -     | -        |                                  |
| 39  | GND              | -       | POWER | -        |                                  |
| 40  | SMB_CLK          | 76      | IO    | 1.8V     |                                  |
| 41  | PCIE1_RX_0_N     | 204     | I     | CML      |                                  |
| 42  | SMB_DATA         | 78      | IO    | 1.8V     |                                  |
| 43  | PCIE1_RX_0_P     | 202     | I     | CML      |                                  |
| 44  | SMB_ALERTn       | 177     | I     | 1.8V     |                                  |
| 45  | GND              | -       | POWER | -        |                                  |
| 46  | N/C              | -       | -     | -        |                                  |
| 47  | PCIE1_TX_0_N     | 211     | O     | CML      |                                  |
| 48  | N/C              | -       | -     | -        |                                  |
| 49  | PCIE1_TX_0_P     | 209     | O     | CML      |                                  |
| 50  | PERSTn           | 21      | O     | +3.3V    |                                  |
| 51  | GND              | -       | POWER | -        |                                  |
| 52  | M.2_CLKREQn      | -       | O     | GND      | This signal is pulled to ground. |
| 53  | PCIE_M2_REFCLK_N | -       | O     | CML      | 100 MHz                          |
| 54  | M.2_WAKEn        | 10      | O     | +3.3V    | 1K pull down.                    |
| 55  | PCIE_M2_REFCLK_P | -       | O     | CML      |                                  |
| 56  | N/C              | -       | -     | -        |                                  |
| 57  | GND              | -       | POWER | -        |                                  |
| 58  | N/C              | -       | -     | -        |                                  |
| 59  | N/C              | -       | -     | -        |                                  |
| 60  | N/C              | -       | -     | -        |                                  |
| 61  | N/C              | -       | -     | -        |                                  |
| 62  | +3.3V            | -       | POWER | -        |                                  |
| 63  | GND              | -       | POWER | -        |                                  |
| 64  | +3.3V            | -       | POWER | -        |                                  |
| 65  | GND              | -       | POWER | -        |                                  |
| 66  | +3.3V            | -       | POWER | -        |                                  |
| 67  | GND              | -       | POWER | -        |                                  |

## BCON LVDS Camera Interface J101 & J102



Table 5 describes the pin-out of the J101 and J102 Basler BCON LVDS camera interfaces. For additional information on the interface, see the [Basler dart BCON User's Manual](#).

**Table 5: J101 and J102 Connector Pin Assignments**

| Pin | Schematic Signal | J101 SoM Pin | J102 SoM Pin | Type  | Standard | Notes                              |
|-----|------------------|--------------|--------------|-------|----------|------------------------------------|
| 1   | GND              | -            | -            | POWER | -        |                                    |
| 2   | CAM_X0_P         | 93           | 123          | I     | LVDS     |                                    |
| 3   | CAM_X0_N         | 91           | 121          | I     | LVDS     |                                    |
| 4   | GND              | -            | -            | POWER | -        |                                    |
| 5   | CAM_X1_P         | 89           | 115          | I     | LVDS     |                                    |
| 6   | CAM_X1_N         | 87           | 113          | I     | LVDS     |                                    |
| 7   | GND              | -            | -            | POWER | -        |                                    |
| 8   | CAM_X2_P         | 85           | 111          | I     | LVDS     |                                    |
| 9   | CAM_X2_N         | 83           | 109          | I     | LVDS     |                                    |
| 10  | GND              | -            | -            | POWER | -        |                                    |
| 11  | CAM_XCLK_P       | 101          | 119          | I     | LVDS     |                                    |
| 12  | CAM_XCLK_N       | 99           | 117          | I     | LVDS     |                                    |
| 13  | GND              | -            | -            | POWER | -        |                                    |
| 14  | CAM_X3_P         | 85           | 107          | I     | LVDS     |                                    |
| 15  | CAM_X3_N         | 83           | 105          | I     | LVDS     |                                    |
| 16  | GND              | -            | -            | POWER | -        |                                    |
| 17  | CAM1_CC_P        | 112          | 120          | O     | LVDS     |                                    |
| 18  | CAM1_CC_N        | 110          | 118          | O     | LVDS     |                                    |
| 19  | GND              | -            | -            | POWER | -        |                                    |
| 20  | I2C1_SCL         | 28           | 28           | IO    | +3.3V    |                                    |
| 21  | GND              | -            | -            | POWER | -        |                                    |
| 22  | I2C1_SDA         | 30           | 30           | IO    | +3.3V    |                                    |
| 23  | CAM_ID           | 32           | 34           | O     | +3.3V    | J101 1K Pull Down, J102 1K Pull Up |
| 24  | GND              | -            | -            | POWER | -        |                                    |
| 25  | +5.0V            | -            | -            | POWER | -        | Note 1                             |
| 26  | +5.0V            | -            | -            | POWER | -        | Note 1                             |
| 27  | +5.0V            | -            | -            | POWER | -        | Note 1                             |
| 28  | GND              | -            | -            | POWER | -        |                                    |
| 29  | GND              | -            | -            | POWER | -        |                                    |

**Notes:**

1. The maximum total current supplied to external components from the +5.0V supply should be limited to less than 2 A . The maximum current allowed per connector pin is 1A.

**10/100/1000 Ethernet Interface – J500**

The MitySOM-5CSX Embedded VDK provides an RJ-45 connection for a 10/100/1000 Mbps Ethernet connection. This connection follows standard TIA/EIA-568B pinout as shown in Table 6 below. The Ethernet PHY, Micrel KSZ9031, will auto negotiate the speed and duplex of the connected device.

**Table 6: J500 Ethernet RJ45 Pin Assignments**

| Pin | Signal  | Type | Notes |
|-----|---------|------|-------|
| 1   | TXRXA_P | I/O  |       |
| 2   | TXRXA_N | I/O  |       |
| 3   | TXRXB_P | I/O  |       |
| 4   | TXRXB_N | I/O  |       |
| 5   | TXRXC_P | I/O  |       |



| Pin | Signal  | Type | Notes |
|-----|---------|------|-------|
| 6   | TXRXN_N | I/O  |       |
| 7   | TXRXN_P | I/O  |       |
| 8   | TXRXN_N | I/O  |       |

### User GPIO Interface – P1

The MitySOM-5CSX Development Kit provides an 11 pin 0.1” header for use with custom design IO boards such as LED controllers or external trigger interfaces, etc. The connector provides 5.0V and 2.5V supplies for external circuitry and 6 ESD protected connections to the FPGA I/O. Note that there is a 1K series resistor in-line with the I/O signals.

**Table 7: J500 User GPIO Pin Assignments**

| Pin | Signal | SOM Pin | Type  | Standard | Notes                               |
|-----|--------|---------|-------|----------|-------------------------------------|
| 1   | +5.0V  | -       | POWER | -        | 250 mA max current                  |
| 2   | GND    | -       | POWER | -        |                                     |
| 3   | +2.5V  | -       | POWER | -        | 100 mA max current                  |
| 4   | GND    | -       | POWER | -        |                                     |
| 5   | UGPIO0 | 52      | I/O   | +2.5V    | Bank 4A. 1K series resistor to FPGA |
| 6   | UGPIO1 | 54      | I/O   | +2.5V    | Bank 4A. 1K series resistor to FPGA |
| 7   | UGPIO2 | 56      | I/O   | +2.5V    | Bank 4A. 1K series resistor to FPGA |
| 8   | UGPIO3 | 60      | I/O   | +2.5V    | Bank 4A. 1K series resistor to FPGA |
| 9   | UGPIO4 | 62      | I/O   | +2.5V    | Bank 4A. 1K series resistor to FPGA |
| 10  | UGPIO5 | 64      | I/O   | +2.5V    | Bank 4A. 1K series resistor to FPGA |
| 11  | UGPIO6 | 66      | I/O   | +2.5V    | Bank 4A. 1K series resistor to FPGA |

### Included Components

The following table lists the components that are included with the MitySOM-5CSX Embedded Vision Development Kit for Basler dart series cameras. See Table 9 for specific development kit ordering information.

**Table 8: Included Items**

| Description   | Interface Port | Qty. Included       |
|---|----------------|---------------------|
| MitySOM-5CSX Embedded Vision Development Kit Board                                | n/a            | Qty. 1              |
| MitySOM-5CSX Module   | J100           | Qty. 1              |
| Mini USB Cable for Debug Console  | J1             | Qty. 1              |
| +5.0V 3A AC to DC Supply  | J601           | Qty. 1              |
| Development Kit Schematic Files   | n/a            | accessible via wiki |
| Development Kit Gerber Drawings   | n/a            | accessible via wiki |
| Development Kit Bill Of Materials   | n/a            | Qty. 1              |
| Development Kit Quick Start Guide   | n/a            | Qty. 1              |
| Dual Monochrome Camera Option   | -              | -                   |
| Camera – Basler daA1280-54bm<br>Aptina AR0134 / 1280x960x54fps monochrome S-mount | n/a            | Qty 2               |
| Camera Lens   | n/a            | Qty 2               |
| FFC Cable, 200mm  | J101/J102      | Qty 2               |
| Single Color Camera Option  | -              | -                   |
| Camera – Basler daA2500-14bc<br>Aptina MT9P031 / 2592x1944x14fps color S-mount    | n/a            | Qty 1               |
| Camera Lens   | n/a            | Qty 1               |
| FFC Cable, 200mm  | J101/J102      | Qty 1               |

## ORDERING INFORMATION

### Development Kits

The following table lists the standard MitySOM-5CSX Embedded Vision Development Kit for Basler dart BCON configurations. For shipping status, availability, and lead time of these or other configurations please contact Critical Link via [info@criticallink.com](mailto:info@criticallink.com).

**Table 9: Standard Model Numbers**

| Development Kit Model | Basler dart BCON Camera Option                 |
|-----------------------|--|
| 80-001005             | Single Color Camera, daA2500-14bc, S-Mount     |
| 80-001002             | Dual Monochrome Cameras, daA1280-54bm, S-Mount |

## MECHANICAL INTERFACE DESCRIPTION

### Main Board Interface / Mounting

Figure 2 illustrates the location of the mounting holes and the outer dimensions of the Embedded VDK Baseboard (all dimensions are in mils).



**Figure 2: MitySOM-5CSX VDK Baseboard, Mounting Hole Locations (Top View)**

## REVISION HISTORY

| Date        | Rev | Change Description   |
|-------------|-----|--|
| 10-AUG-2017 | 1   | Initial revision.  |
| 2-APR-2018  | 2   | Corrected camera options A & B (pg 1), added electrical data. Resolved TBDs. |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.