

LT3513EUHF

2MHz, High Current 5 Output Switching Regulator for TFT-LCD Panels

DESCRIPTION

Demonstration circuit 1028 is a highly integrated, 5 output regulator for TFT LCD panels featuring LT[®]3513, which comes in the 38-pin QFN package. The DC1028A has an input voltage range from 8 to 30V, and produce a 5V logic voltage. A lower voltage logic supply can be generated from this 5V by adding an external NPN driven by a linear regulator. The other three regulators provide the three voltages required by LCDs: a higher power boost regulator to generate AVDD, a lower power boost to generate VON and an inverting converter to provide VOFF. An internal high side PNP provides delayed turn on of the VON signal. The LT3513's wide input voltage range allows it to accept a variety of power sources, including automo-

tive batteries, distributed supplies and wall transformers.

All four switchers are synchronized to the internal 2MHz clock, allowing the use of low profile inductors and ceramic capacitors. They all have soft start to limit inrush current.

The LT3513 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for demo circuit 1028A.

Design files for this circuit board are available. Call the LTC factory.

 , LTC and LT are registered trademarks of Linear Technology Corporation. ThinSOT and PowerPath are trademarks of Linear Technology Corporation.

Performance Summary ($T_A = 25^{\circ}\text{C}$)

PARAMETER FOR BUCK REGULATOR	CONDITION	VALUE
Minimum Input Voltage		8V
Maximum Input Voltage		30V
Output Voltage V_{LOGIC}	$V_{\text{IN}}=8\text{V to }30\text{V}, I_{\text{OUT}}=0 \text{ to } 500\text{mA}$	5V +/- 4%
Maximum Output Current at V_{LOGIC}	$V_{\text{IN}}=8\text{V to }30\text{V}$	500mA
Typical Switching frequency		2MHz

QUICK START PROCEDURE

Demonstration circuit 1028 is easy to set up to evaluate the performance of the LT3513. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. With Power off, connect the input power supply to Vin and GND. Insert jumper JP1 into the ON position.
2. Set the input between 8V to 30V. Turn on the power at the input.
3. Check for the proper output voltage. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.
4. Once the proper output voltages are established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

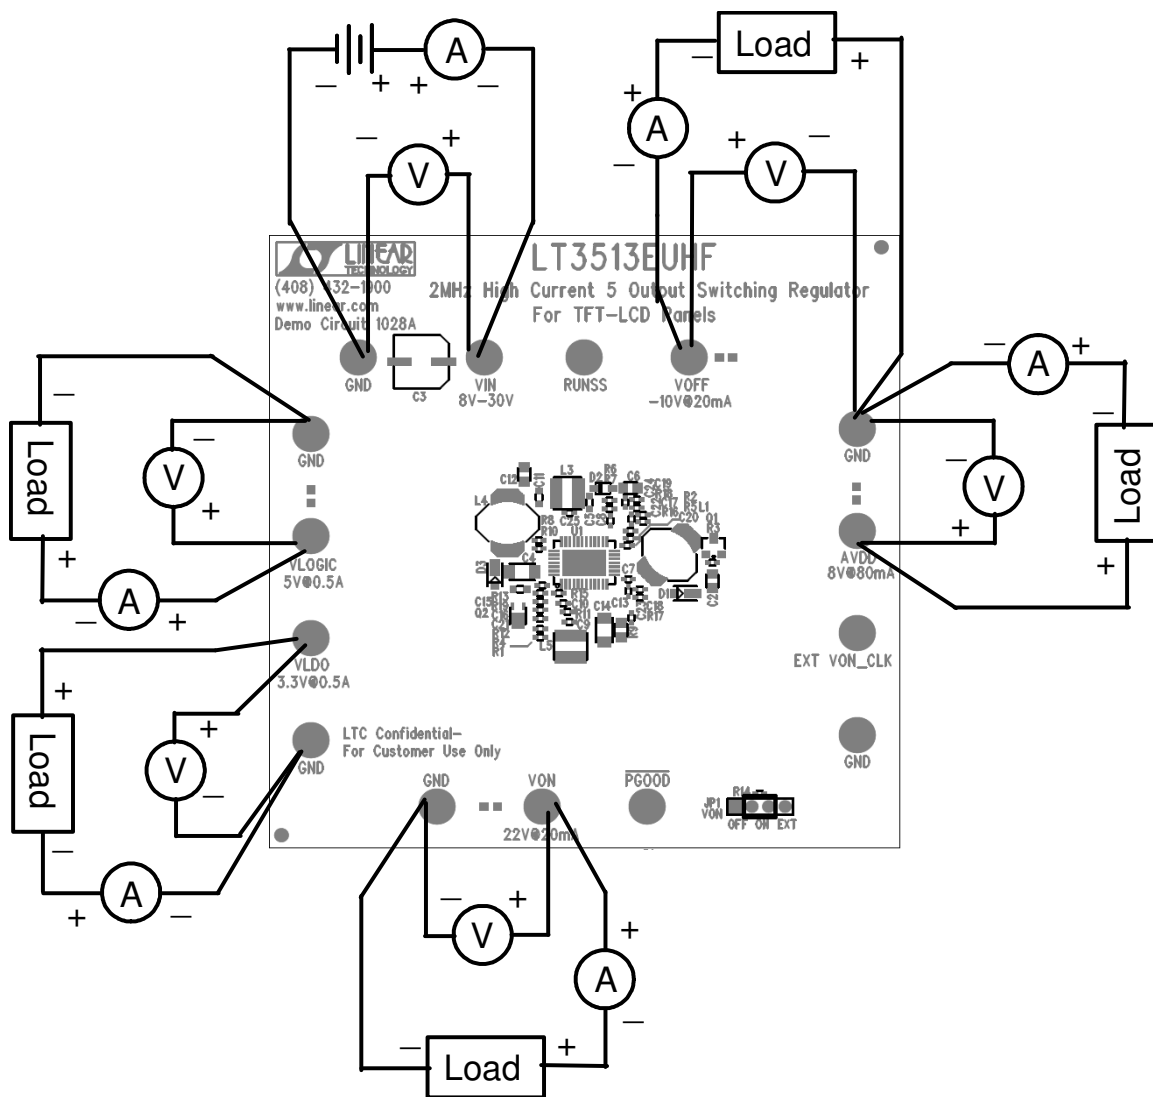


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple



CUSTOMER NOTICE			CONTRACT NO.		LINEAR TECHNOLOGY		1650 McCarthy Blvd. Milpitas, CA 95035 Tel: (408) 261-0000 Fax: (408) 261-0227			
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.			APPROVALS		DATE		TITLE LT3513EUHF, 2MHz High Current 5 Output Switching Regulator For TFT - LCD Panels	REV A		
			DRAWN		June Wu				1/23/06	
			CHECKED							
			APPROVED							
			ENGINEER		Kevin Huang				1/23/06	
DESIGNER							SIZE	CAGE CODE	DWGNO	DC1028A
							SCALE:	FILENAME:		SHEET 1 OF 1
					Thursday, August 28, 2008					

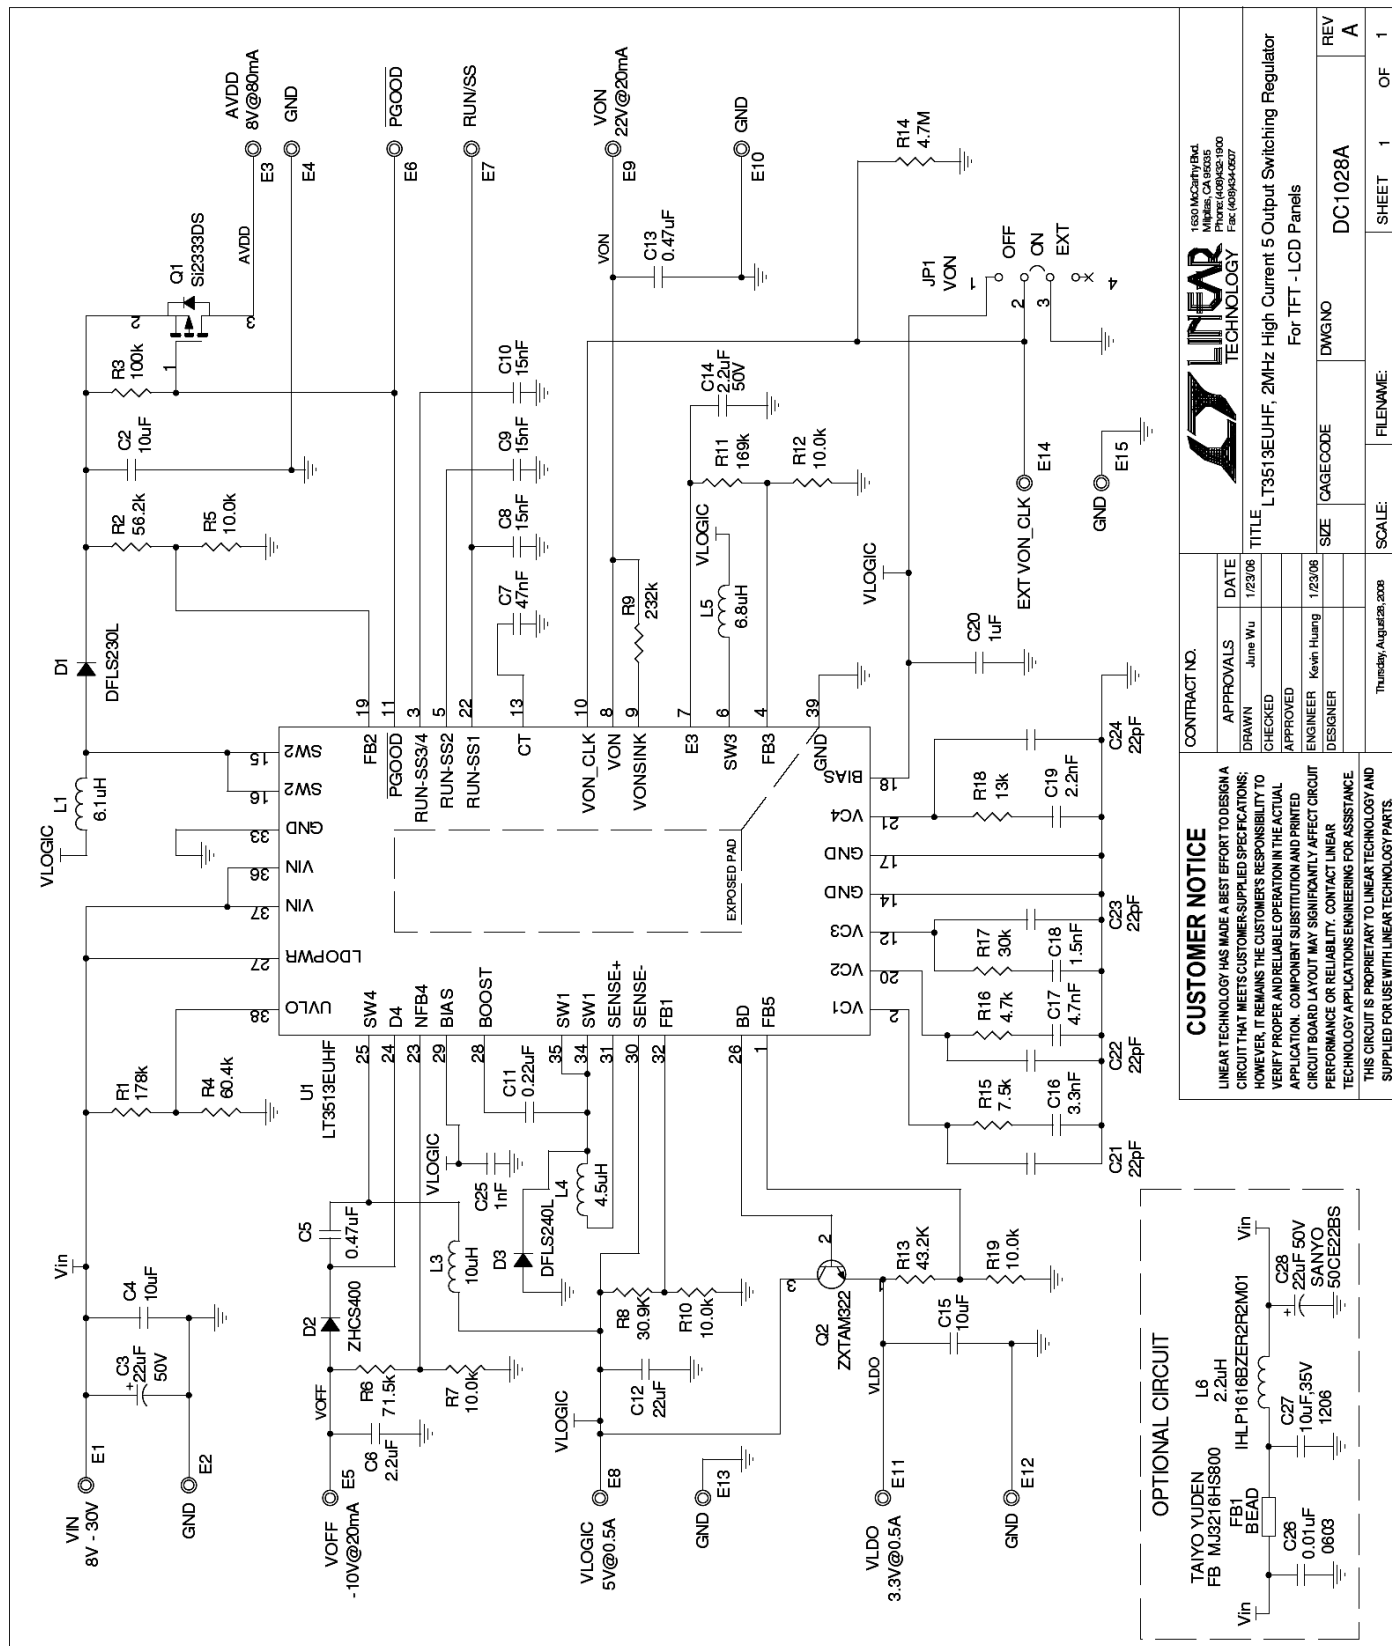

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.