

17V, Dual 1A, Synchronous Step-Down Regulator
 with Ultralow Quiescent Current

DESCRIPTION

Demonstration circuit 2003A is a synchronous step-down regulator using the power-saving [LTC3622EDE](#) monolithic buck regulator in a compact 14-pin DFN (4mm × 3mm) package. The DC2003A operates from an input voltage range of 2.7V to 17V and provides dual 1A outputs with an adjustable output voltage range from 1.2V to 5V. The LTC3622 IC quiescent current can be as low as 5µA in Burst Mode® operation with both channels enabled and less than 0.1µA in shutdown mode. The switching frequency is fixed to 1MHz or 2.25MHz with a ±50% synchronization range to an external clock. A user-selectable mode input is provided to allow the user to trade off ripple noise for

light load efficiency. Burst Mode operation provides the highest efficiency at light loads, while pulse-skipping mode provides the lowest ripple noise.

It is recommended to read the data sheet LTC3622 with this demo manual prior to working on or making any changes to DC2003A.

Design files for this circuit board are available at
<http://www.linear.com/demo>

LT, LT, LTC, LTM, Linear Technology, Burst Mode and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ\text{C}$

| PARAMETER | CONDITIONS | VALUE |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Default IC | | LTC3622EDE |
| Default Switching Frequency | | 1MHz |
| Default Operation Mode | | Burst Mode Operation |
| Input Voltage Range | | 2.7V to 17V |
| Onboard User Selectable Output Voltages | $V_{IN} = 2.7V \text{ to } 17V, I_{OUT1} = I_{OUT2} = 0A \text{ to } 1A$ $(V_{OUT} \leq V_{IN})$ | $V_{OUT1}: 1.2V, 1.8V, 2.5V, 3.3V$ $V_{OUT2}: 1.5V, 1.8V, 3.3V, 5V$ |
| Default Output Voltage | | $V_{OUT1} = 3.3V$ $V_{OUT2} = 5V$ |
| Per Channel Maximum Continuous Output Current | $V_{IN} = 2.7V \text{ to } 17V$ | $I_{OUT1} = I_{OUT2} = 1A$ |
| Efficiency, V_{OUT1} (Burst Mode Operation) | $V_{IN} = 12V, V_{OUT1} = 3.3V, I_{OUT1} = 1A$ | 88.2% (See Figure 3) |
| Efficiency, V_{OUT2} (Burst Mode Operation) | $V_{IN} = 12V, V_{OUT2} = 5V, I_{OUT2} = 1A$ | 90.8% (See Figure 4) |
| Output Voltage Ripple, V_{OUT1} | $V_{IN} = 12V, V_{OUT1} = 3.3V, I_{OUT1} = 1A$ | <5.9mV _{P-P} (See Figure 5) |
| Output Voltage Ripple, V_{OUT2} | $V_{IN} = 12V, V_{OUT2} = 5V, I_{OUT2} = 1A$ | <7.8mV _{P-P} (See Figure 6) |
| Load Transient Response, V_{OUT1} | $V_{IN} = 12V, V_{OUT1} = 3.3V, I_{OUT1} = 100mA \text{ to } 1A$ | See Figure 7 |
| Load Transient Response, V_{OUT2} | $V_{IN} = 12V, V_{OUT2} = 5V, I_{OUT2} = 100mA \text{ to } 1A$ | See Figure 8 |
| Thermal Image | $V_{IN} = 12V, V_{OUT1} = 3.3V, V_{OUT2} = 5V, I_{OUT1} = I_{OUT2} = 1A$ | See Figure 9 |

DEMO MANUAL DC2003A

QUICK START PROCEDURE

Demonstration circuit 2003A is easy to set up to evaluate the performance of the LTC3622. Please refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Place jumpers in the following positions:

Table 1. Jumper Selection

| JP1 | JP2 | JP3 | JP4 | JP5 |
|------|------|-----------|-------|------|
| RUN1 | RUN2 | MODE/SYNC | PHASE | ILIM |
| ON | ON | BURST | 180° | 1A |

2. Place V_{O1} SELECT jumper in 3.3V position (JP9) and V_{O2} SELECT jumper in 5V position (JP14).
3. With power off, connect the input power supply at V_{IN1} and GND.
4. Connect the Loads between V_{OUT1} and GND, V_{OUT2} and GND. Preset the loads to 0A.
5. Connect the DMMs to the input and output to monitor the input voltage and output voltages.
6. Turn on the power supply at the input. The RUN1 and RUN2 pin jumpers should be at ON position. Measure and make sure the input supply voltage is 12V. The output voltage V_{OUT1} should be 3.3V±1%, and V_{OUT2} should be 5V±1%.
7. Once the input and output voltages are properly established adjust the loads within the operating range (0A to 1A max) and observe the output voltage regulations, output ripple voltages, switch node wave-forms and other parameters. Refer to Figure 2 for proper input/output voltage ripple measurement.

8. To select other output voltages, use the on board user selectable output voltage jumpers. Shutting down LTC3622 by placing RUN1 and RUN2 pin jumpers to the OFF position or turn off the input power supply. Refer to the following tables (Table 2 and Table 3) for the output voltage selections and repeat step 3 to 6:

Table 2. V_{OUT1} Jumper Selection

| JP6 | JP7 | JP8 | JP9 | JP10 |
|------|------|------|------|--------------|
| 1.2V | 1.8V | 2.5V | 3.3V | *USER SELECT |

Table 3. V_{OUT2} Jumper Selection

| JP11 | JP12 | JP13 | JP14 | JP15 |
|------|------|------|------|--------------|
| 1.5V | 1.8V | 3.3V | 5V | *USER SELECT |

***Note:** If JP10 or JP15 is selected, R5 or R15 needs to be calculated and inserted to obtain the desired output voltage.

Note 1: To measure the input/output voltage ripple properly, do not use the long ground lead on the oscilloscope probe. See Figure 2 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (-) terminals of an output capacitor. The probe's ground ring needs to touch the (-) lead and the probe tip needs to touch the (+) lead.

Note 2: DC2003A can also be used to evaluate LTC3622EDE-2 (2.25MHz) by simply changing U1 to LTC3622EDE-2, L1 to 1µH (Coilcraft XFL4020-102ME) and L2 to 2.2µH (Coilcraft XFL4020-222ME).

QUICK START PROCEDURE

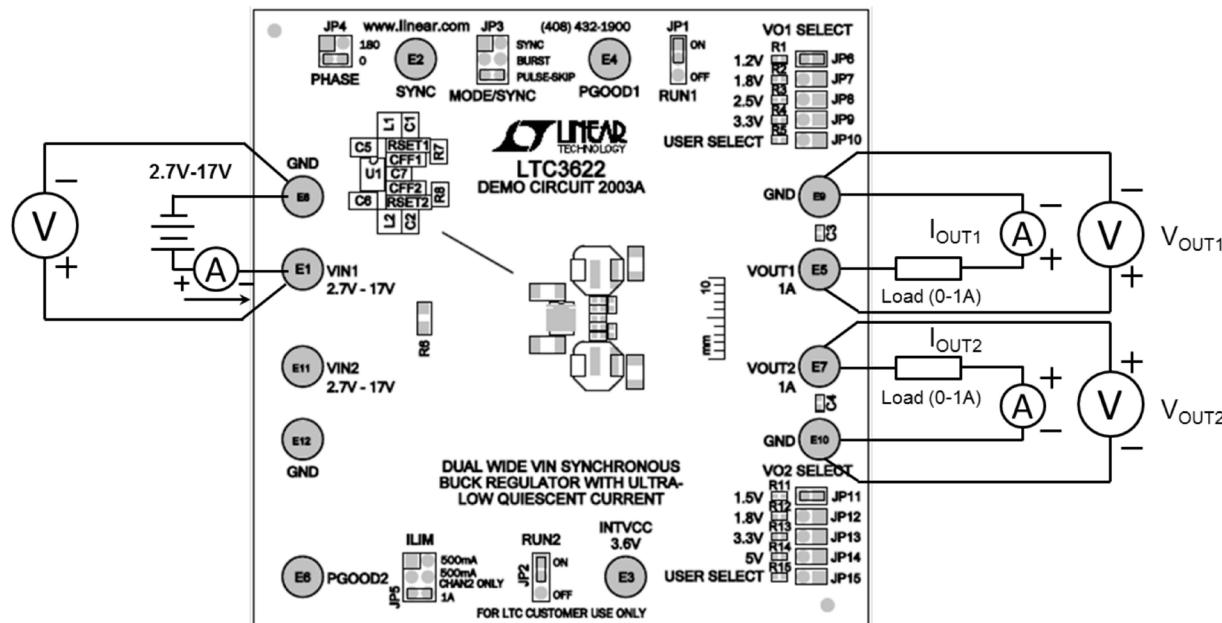


Figure 1. Proper Equipment Measurement Setup

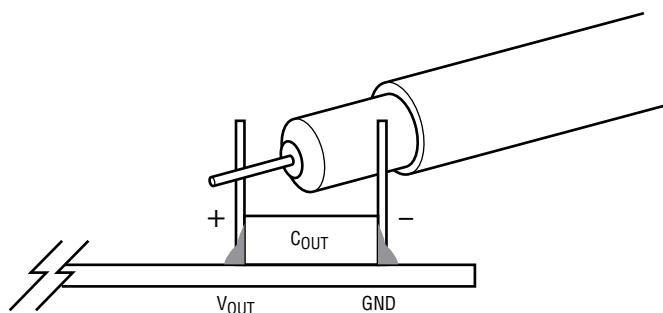


Figure 2. Scope Probe Placements for Measuring Input or Output Ripple

DEMO MANUAL DC2003A

QUICK START PROCEDURE

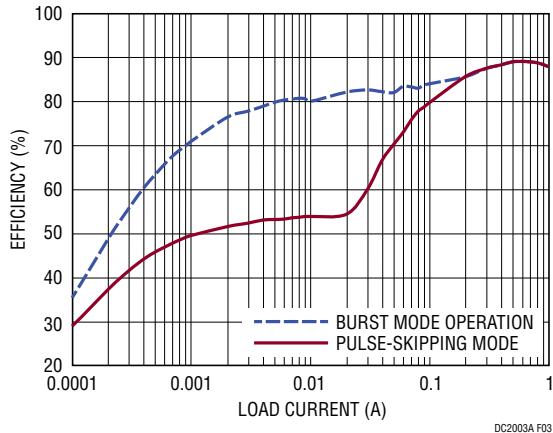


Figure 3. V_{OUT1} Measured Efficiency at $V_{IN} = 12V$, $V_{OUT1} = 3.3V$, $L1 = 3.3\mu H$, $F_{SW} = 1MHz$ (with V_{OUT2} OFF)

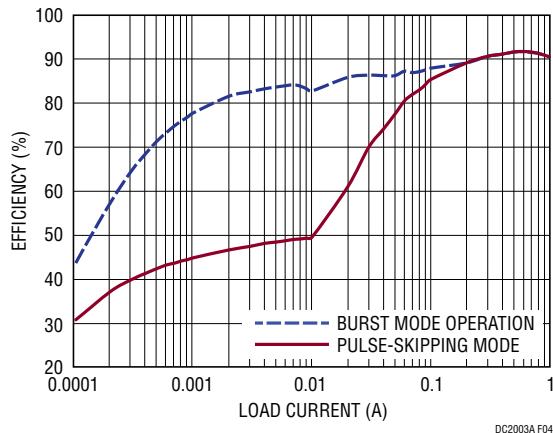


Figure 4. V_{OUT2} Measured Efficiency at $V_{IN} = 12V$, $V_{OUT2} = 5V$, $L2 = 4.7\mu H$, $F_{SW} = 1MHz$ (with V_{OUT1} OFF)

QUICK START PROCEDURE

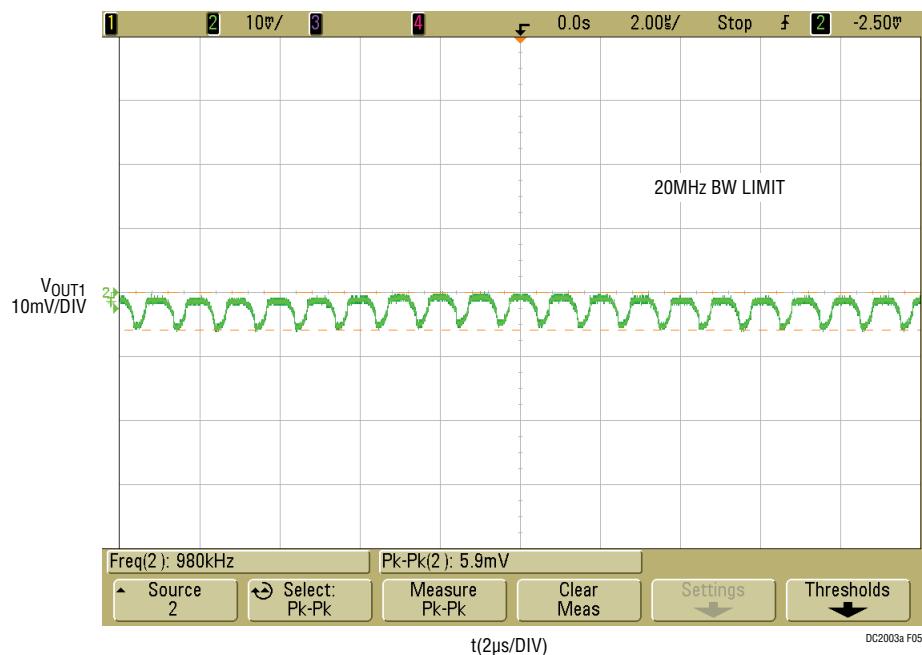


Figure 5. V_{OUT1} Measured Output Voltage Ripple at $V_{IN} = 12V$, $V_{OUT1} = 3.3V$, $I_{OUT1} = 1A$, $F_{SW} = 1MHz$

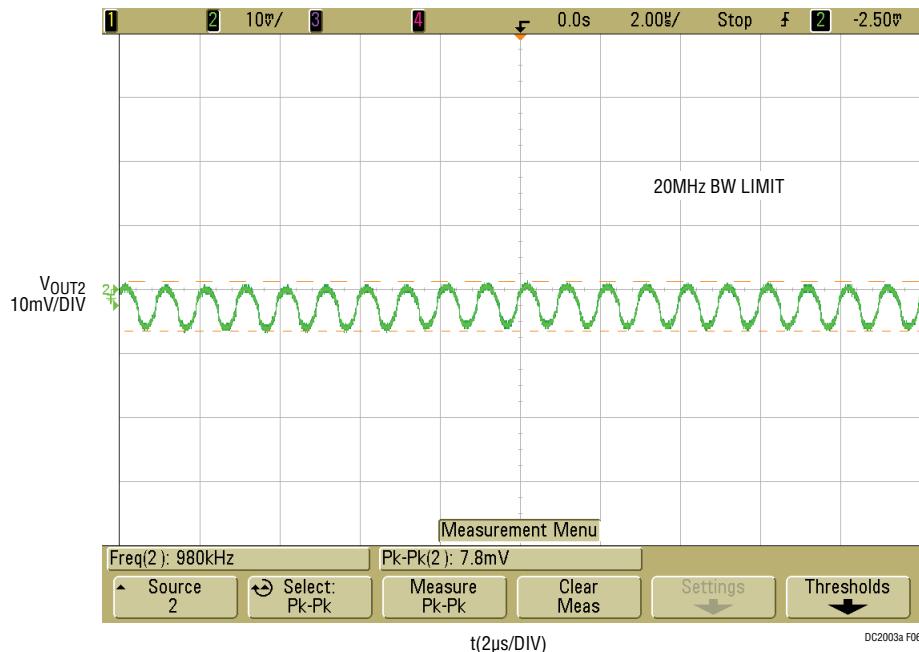


Figure 6. V_{OUT2} Measured Output Voltage Ripple at $V_{IN} = 12V$, $V_{OUT2} = 5V$, $I_{OUT2} = 1A$, $F_{SW} = 1MHz$

DEMO MANUAL DC2003A

QUICK START PROCEDURE

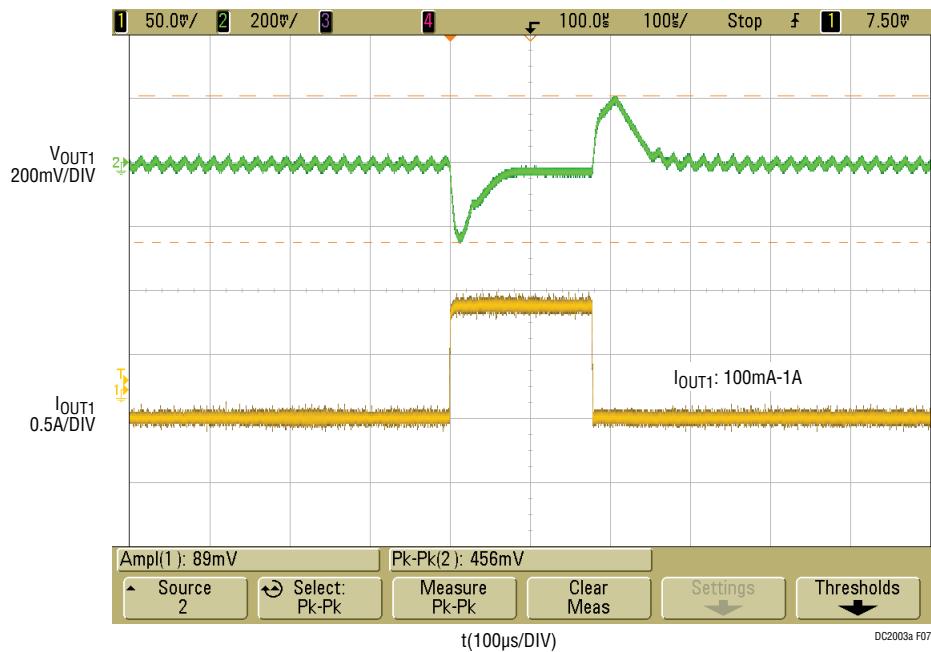


Figure 7. Load Transient Response at $V_{IN} = 12V$, $V_{OUT1} = 3.3V$, $I_{OUT1} = 100mA-1A$, $F_{SW} = 1MHz$, Burst Mode Operation

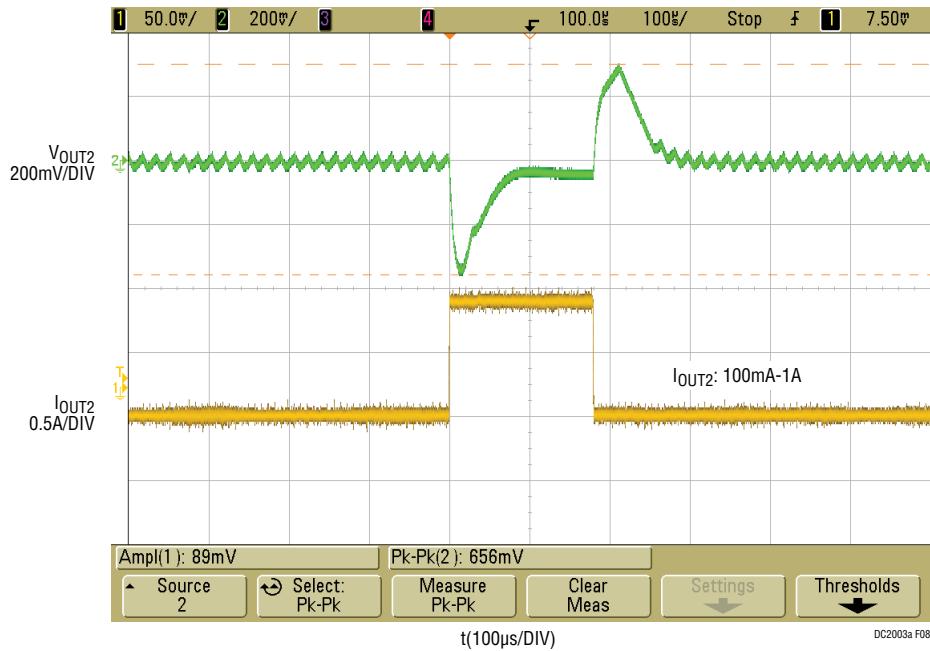


Figure 8. Load Transient Response at $V_{IN} = 12V$, $V_{OUT2} = 5V$, $I_{OUT2} = 100mA-1A$, $F_{SW} = 1MHz$, Burst Mode Operation

QUICK START PROCEDURE

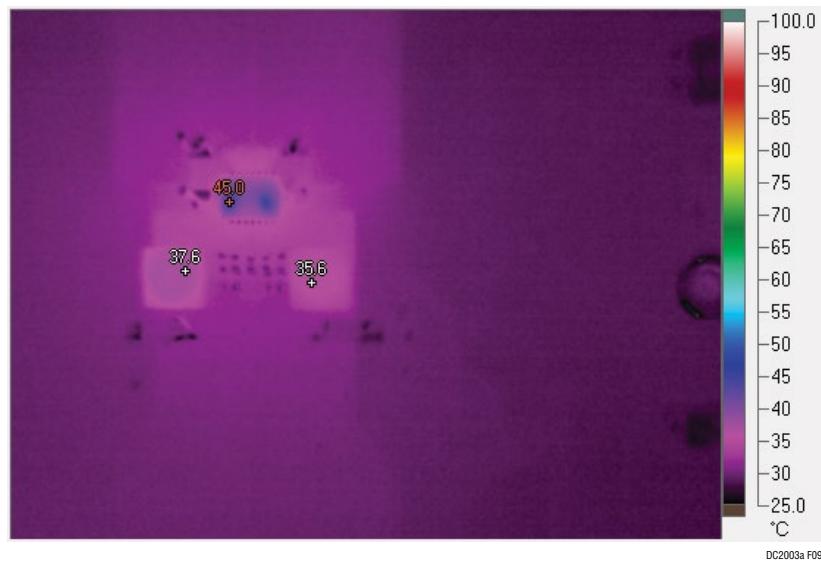


Figure 9. Thermal Performance at $V_{IN} = 12V$, $V_{OUT1} = 3.3V$, $I_{OUT1} = 1A$, $V_{OUT2} = 5V$, $I_{OUT2} = 1A$, $F_{SW} = 1MHz$, No Airflow


DEMO MANUAL DC2003A

PARTS LIST

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|-------------------------------------------------|-----|--------------------------------------------------------|------------------------------------------|----------------------------------|
| Required Circuit Components | | | | |
| 1 | 2 | CFF1, CFF2 | CAP, 0402 22pF 5% 50V NPO | AVX 04025A220JAT2A |
| 2 | 2 | CIN1, CIN2 | CAP, 7343 22µF 20% 35V TANT | AVX TPSY226M035R0200 |
| 3 | 2 | C1, C2 | CAP, 1206 47µF 20% 16V X5R | TDK C3216X5R1C476M160AB |
| 4 | 2 | C5, C6 | CAP, 1206 10µF 20% 25V X5R | TDK C3216X5R1E106M |
| 5 | 1 | C7 | CAP, 0402 1µF 20% 10V X5R | TDK C1005X5R1A105M |
| 6 | 1 | L1 | IND, 3.3µH 20% | COILCRAFT XFL4020-332MEC |
| 7 | 1 | L2 | IND, 4.7µH 20% | COILCRAFT XFL4020-472MEC |
| 8 | 2 | RPG1, RPG2 | RES, 0402 100kΩ 1% 1/16W | VISHAY CRCW0402100KFKED |
| 9 | 3 | RSET1, R1, RSET2 | RES, 0402 619kΩ 1% 1/16W | VISHAY CRCW0402619KFKED |
| 10 | 2 | R2, R12 | RES, 0402 309kΩ 1% 1/16W | VISHAY CRCW0402309KFKED |
| 11 | 1 | R3 | RES, 0402 196kΩ 1% 1/16W | VISHAY CRCW0402196KFKED |
| 12 | 2 | R4, R13 | RES, 0402 137kΩ 1% 1/16W | VISHAY CRCW0402137KFKED |
| 13 | 1 | R6 | RES, 0805 0Ω JUMPER | VISHAY CRCW08050000Z0ED |
| 14 | 2 | R7, R8 | RES, 0402 0Ω JUMPER | VISHAY CRCW04020000Z0ED |
| 15 | 1 | R11 | RES, 0402 412kΩ 1% 1/16W | VISHAY CRCW0402412KFKED |
| 16 | 1 | R14 | RES, 0402 84.5kΩ 1% 1/16W | VISHAY CRCW040284K5FKED |
| 17 | 1 | U1 | IC, DUAL SYNCHRONOUS STEP-DOWN CONVERTER | LINEAR TECHNOLOGY LTC3622EDE |
| Additional Demo Board Circuit Components | | | | |
| 1 | 0 | C3, C4 | CAP, 0402 OPTION | OPTION |
| 2 | 0 | R5, R15 | RES, 0402 OPTION | OPTION |
| Hardware: For Demo Board Only | | | | |
| 1 | 12 | E1, E2, E3, E4, E5, E6, E7, E8, E9, E10, E11, E12 | TURRET | MILL-MAX 2501-2-00-80-00-00-07-0 |
| 2 | 2 | JP1, JP2 | HEADER, 3PIN, 2mm | SULLINS NRPN031PAEN-RC |
| 3 | 2 | JP3, JP5 | HEADER, 3PIN, DBL ROW 2mm | SULLINS NRPN032PAEN-RC |
| 4 | 1 | JP4 | HEADER, 2mm DBL ROW (2X2) 4PIN | SULLINS NRPN022PAEN-RC |
| 5 | 10 | JP6, JP7, JP8, JP9, JP10, JP11, JP12, JP13, JP14, JP15 | HEADER, 2PIN, 2mm | SULLINS NRPN021PAEN-RC |
| 6 | 7 | XJP1, XJP2, XJP3, XJP4, XJP5, XJP6, XJP13 | SHUNT, 2mm | SAMTEC 2SN-BK-G |
| 7 | 4 | MH1, MH2, MH3, MH4 | STANDOFF, SNAP ON | KEYSTONE_8831 |

DEMO MANUAL DC2003A

SCHEMATIC DIAGRAM

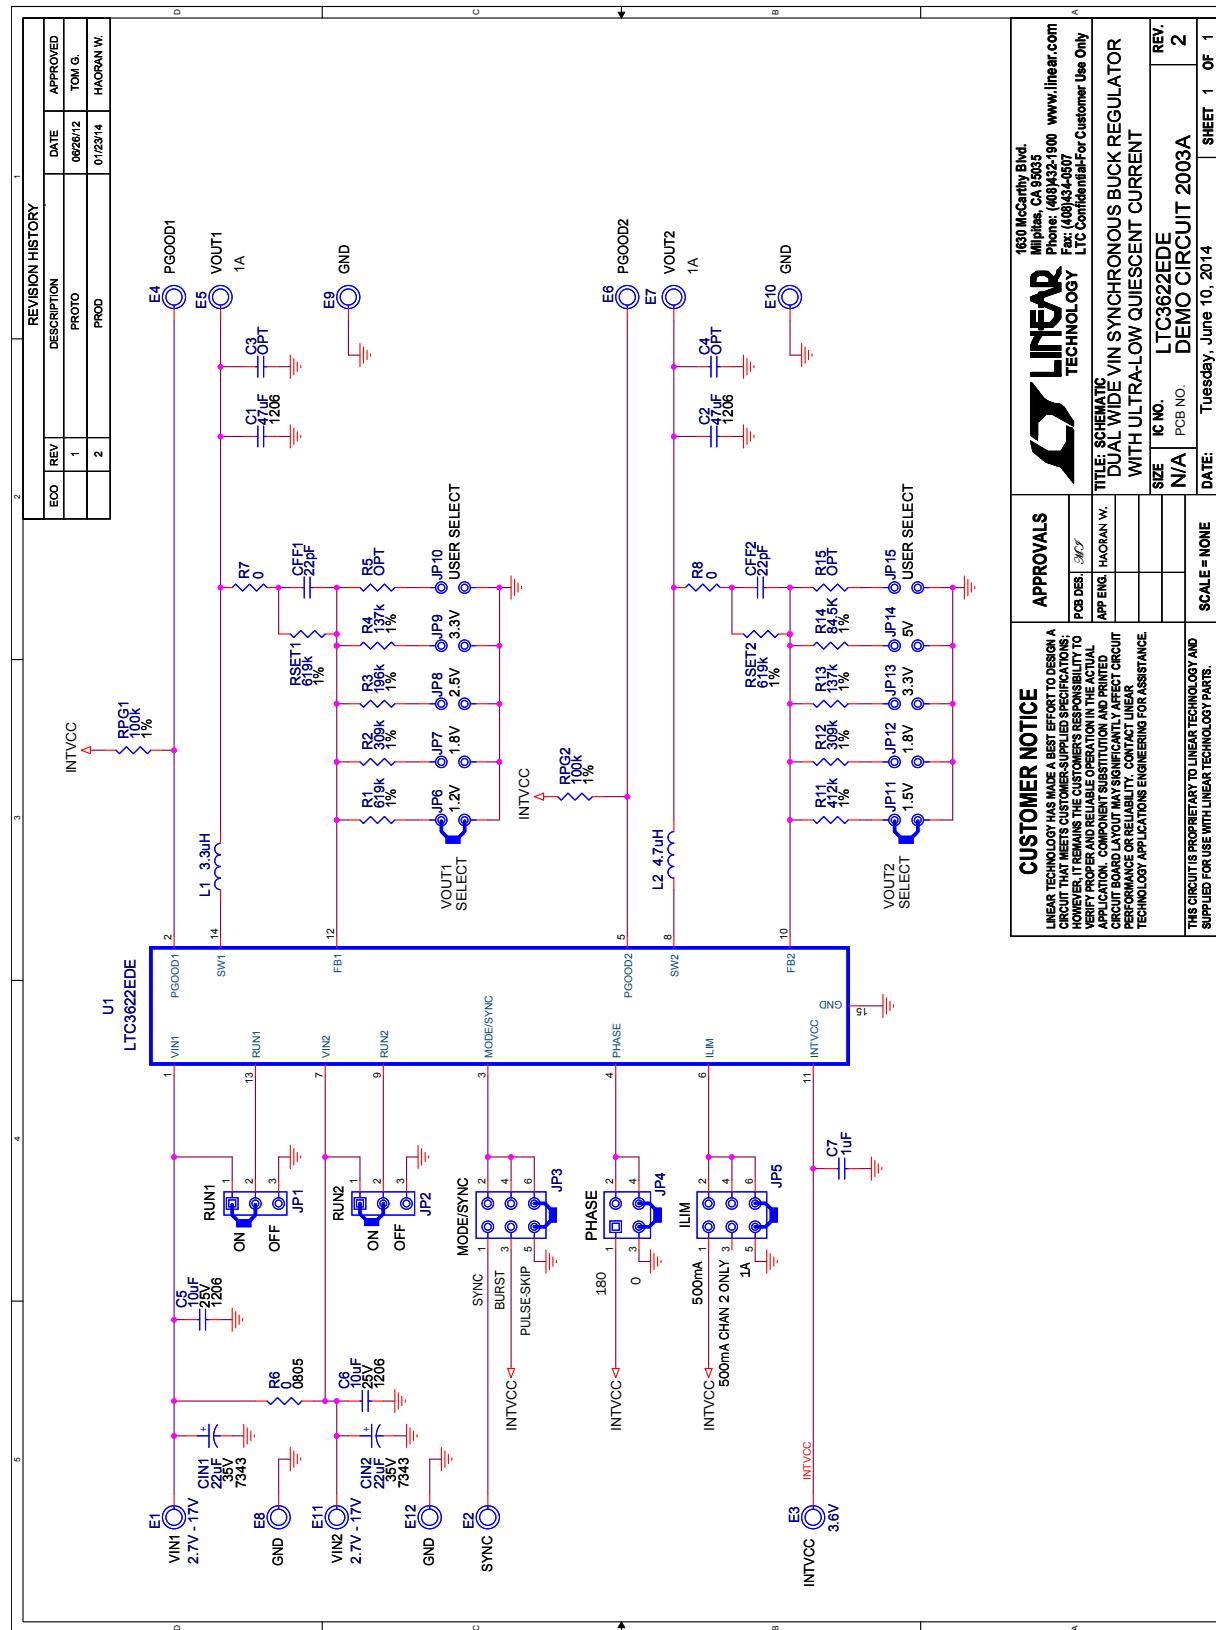

DEMO MANUAL DC2003A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No license is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc2003af



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.