



FWJ 1000V 35-2000A

Electrical Characteristics					Ordering Information			Dimensions	Curves
Type	Rated Current RMS-Amps	I²t (A² Sec)		Watts Loss	Part Number	Carton Qty.	Carton Weight (lbs)	Figure Number	BIF #
		Pre-arc	Clearing at 1000V						
FWJ 1000V	35	210	2000	7	FWJ-35A	10	4.18	Fig. 1	35785303
	40	300	2500	8	FWJ-40A				
	50	470	3500	10	FWJ-50A				
	60	670	5000	11	FWJ-60A				
	70	1100	6900	12	FWJ-70A				
	80	1550	9700	13	FWJ-80A				
	90	1900	12000	14	FWJ-90A				
	100	2800	17500	15	FWJ-100A				
	125	4800	35000	16	FWJ-125A	1	4.40		
	150	6300	45000	25	FWJ-150A				
	175	7500	65000	30	FWJ-175A				
	200	11700	80000	32	FWJ-200A				
	250	16000	112000	50	FWJ-250A		4.84		
	300	23500	164000	56	FWJ-300A				
	350	33000	231000	62	FWJ-350A				
	400	47000	330000	67	FWJ-400A				
	500	39500	329000	95	FWJ-500A				
	600	61000	520000	105	FWJ-600A				
	800	87000	500000	182	FWJ-800A		5.28		
	1000	190000	1100000	206	FWJ-1000A				
	1200	370000	2100000	240	FWJ-1200A				
	1400	470000	2700000	248	FWJ-1400A				
	1600	700000	4000000	267	FWJ-1600A				
	1800	925000	5300000	239	FWJ-1800A				
	2000	1330000	7600000	244	FWJ-2000A				
									35785309

†U.L. Recognition on 35 through 600 amperes only.

1 kg = 2.2 lbs 1 lb = 0.45 kg


- Interrupting rating 25kA for 35 through 200 amperes.
- Interrupting rating 100kA for 250 through 2000 amperes.
- Watts loss provided at rated current.
- (800 Vdc/Interrupting rating 50kA) U.L. Recognition on 35-200 and 450-600 amperes.

FWJ 1000V 35-2000A

Electrical Characteristics


Total Clearing I^2t

The total clearing I^2t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I^2t is found by multiplying by correction factor, K , given as a function of applied working voltage, E_g , (RMS).




Arc Voltage

This curve gives the peak arc voltage, U_L , which may appear across the fuse during its operation as a function of the applied working voltage, E_g , (RMS) at a power factor of 15%.




Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p , is given as a function of the RMS load current, I_b , in % of the rated current.

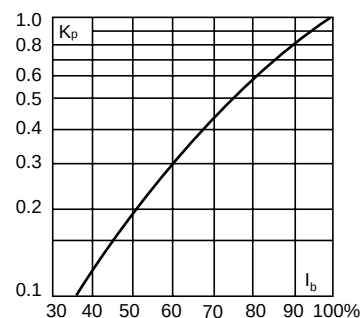

Dimensions

Fig. 1: 35-2000 Amp Range

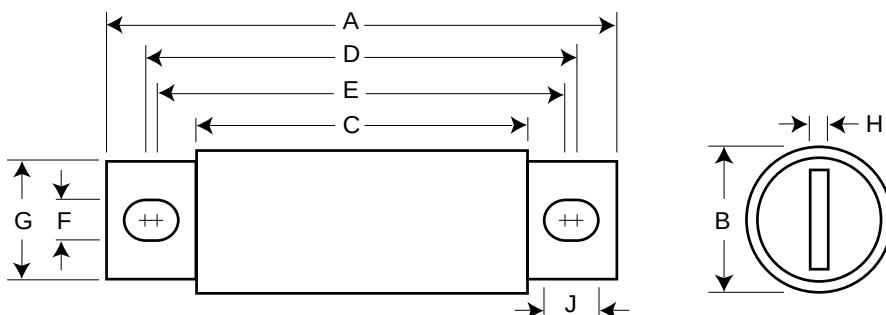

Order #	Fig.	A	B	C	D	E	F	G	H	J
FWJ-35A-60A	1	5.000	0.940	3.110	4.235	4.180	0.352	0.750	0.125	0.380
FWJ-70A-100A	1	4.932	1.125	3.085	4.266	4.156	0.352	1.000	0.188	0.407
FWJ-125A-200A	1	5.685	1.526	3.261	4.803	4.055	0.445	1.000	0.250	0.819
FWJ-250A-400A	1	5.768	2.000	3.500	4.811	4.150	0.433	1.500	0.250	0.764
FWJ-500A-600A	1	7.201	2.500	3.465	5.984	4.706	0.562	2.000	0.375	1.201
FWJ-800A-2000A	1	6.811	3.500	3.312	5.472	4.962	0.625	2.750	0.500	0.880

Dimension in inches.
1mm = 0.0394" 1" = 25.4mm

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.