

**DESCRIPTION**

This "fast recovery" rectifier diode series is military qualified to MIL-PRF-19500/429 and is ideal for high-reliability applications where a failure cannot be tolerated. These industry-recognized 1.0 Amp rated rectifiers for working peak reverse voltages from 200 to 1000 volts are hermetically sealed with voidless-glass construction using an internal "Category I" metallurgical bond. These devices are also available in surface mount MELF package configurations by adding a "US" suffix (see separate data sheet for 1N5615US thru 1N5623US). Microsemi also offers numerous other rectifier products to meet higher and lower current ratings with various recovery time speed requirements including fast and ultrafast device types in both through-hole and surface mount packages.

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

**APPEARANCE**

**"A" Package**
**FEATURES**

- Popular JEDEC registered 1N5615 to 1N5623 series
- Voidless hermetically sealed glass package
- Triple-Layer Passivation
- Internal "Category I" Metallurgical bonds
- Working Peak Reverse Voltage 200 to 1000 Volts.
- JAN, JANTX, JANTXV, and JANS available per MIL-PRF-19500/429
- Surface mount equivalents also available in a square end-cap MELF configuration with "US" suffix (see separate data sheet for 1N5615US thru 1N5623US)

**APPLICATIONS / BENEFITS**

- Fast recovery 1 Amp rectifiers 200 to 1000 V
- Military and other high-reliability applications
- General rectifier applications including bridges, half-bridges, catch diodes, etc.
- High forward surge current capability
- Extremely robust construction
- Low thermal resistance
- Controlled avalanche with peak reverse power capability
- Inherently radiation hard as described in Microsemi MicroNote 050

**MAXIMUM RATINGS**

- Junction & Storage Temperature: -65°C to +175°C
- Thermal Resistance: 38°C/W junction to lead at 3/8 inch (10 mm) lead length from body
- Thermal Impedance: 4.5°C/W @ 10 ms heating time
- Average Rectified Forward Current ( $I_O$ ): 1.0 Amps @  $T_A = 55^\circ\text{C}$
- Forward Surge Current: 30 Amps @ 8.3 ms half-sine
- Solder Temperatures: 260°C for 10 s (maximum)

**MECHANICAL AND PACKAGING**

- CASE: Hermetically sealed voidless hard glass with Tungsten slugs (package dimensions on last page)
- TERMINATIONS: Axial leads are copper with Tin/Lead (Sn/Pb) finish. Note: Previous inventory had solid Silver axial-leads and no finish.
- MARKING: Body paint and part number, etc.
- POLARITY: Cathode band
- TAPE & REEL option: Standard per EIA-296
- WEIGHT: 340 mg

**ELECTRICAL CHARACTERISTICS**

| TYPE   | WORKING<br>PEAK<br>REVERSE<br>VOLTAGE<br>$V_{RWM}$ | MINIMUM<br>BREAKDOWN<br>VOLTAGE<br>$V_{BR}$ @ 50 $\mu\text{A}$ | AVERAGE<br>RECTIFIED<br>CURRENT<br>$I_O$ @ $T_A$<br>(NOTE 1) |       | FORWARD<br>VOLTAGE<br>(MAX.)<br>$V_F$ @ 3A | REVERSE<br>CURRENT<br>(MAX.)<br>$I_R$ @ $V_{RWM}$ |       | CAPACITANCE<br>(MAX.)<br>C @ $V_R = 12\text{ V}$<br>f=1 MHz | MAXIMUM<br>SURGE<br>CURRENT<br>$I_{FSM}$<br>(NOTE 2) | REVERSE<br>RECOVERY<br>(MAX.)<br>(NOTE 3)<br>$t_{rr}$ |
|--------|----------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------|-------|--------------------------------------------|---------------------------------------------------|-------|-------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------|
|        | VOLTS                                              | VOLTS                                                          | AMPS                                                         |       | VOLTS                                      | $\mu\text{A}$                                     |       | pF                                                          | AMPS                                                 | ns                                                    |
|        |                                                    |                                                                | 50°C                                                         | 100°C |                                            | 25°C                                              | 100°C |                                                             |                                                      |                                                       |
| 1N5615 | 200                                                | 220                                                            | 1.00                                                         | .750  | .8 MIN.                                    | .5                                                | 25    | 45                                                          | 25                                                   | 150                                                   |
| 1N5617 | 400                                                | 440                                                            | 1.00                                                         | .750  |                                            | .5                                                | 25    | 35                                                          | 25                                                   | 150                                                   |
| 1N5619 | 600                                                | 660                                                            | 1.00                                                         | .750  |                                            | .5                                                | 25    | 25                                                          | 25                                                   | 250                                                   |
| 1N5621 | 800                                                | 880                                                            | 1.00                                                         | .750  | 1.6                                        | .5                                                | 25    | 20                                                          | 25                                                   | 300                                                   |
| 1N5623 | 1000                                               | 1100                                                           | 1.00                                                         | .750  | MAX.                                       | .5                                                | 25    | 15                                                          | 25                                                   | 500                                                   |

**NOTE 1:** From 1 Amp at  $T_A = 55^\circ\text{C}$ , derate linearly at 5.56 mA/ $^\circ\text{C}$  to 0.75 Amp at  $T_A = 100^\circ\text{C}$ . From  $T_A = 100^\circ\text{C}$ , derate linearly at 7.5 mA/ $^\circ\text{C}$  to 0 Amps at  $T_A = 200^\circ\text{C}$ . These ambient ratings are for PC boards where thermal resistance from mounting point to ambient is sufficiently controlled where  $T_{J(\text{max})}$  does not exceed  $175^\circ\text{C}$ .

**NOTE 2:**  $T_A = 100^\circ\text{C}$ , f = 60 Hz,  $I_O = 750\text{ mA}$  for ten 8.3 ms surges @ 1 minute intervals

**NOTE 3:**  $I_F = 0.5\text{ A}$ ,  $I_{RM} = 1\text{ A}$ ,  $I_{R(\text{REC})} = 0.250\text{ A}$

## SYMBOLS & DEFINITIONS

| Symbol    | Definition                                                                                                                                                                                                                      |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $V_{BR}$  | Minimum Breakdown Voltage: The minimum voltage the device will exhibit at a specified current                                                                                                                                   |
| $V_{RWM}$ | Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range                                                                                                                 |
| $I_O$     | Average Rectified Output Current: Output Current averaged over a full cycle with a 50 hZ or 60 Hz sine-wave input and a 180 degree conduction angle                                                                             |
| $V_F$     | Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current                                                                                                                             |
| $I_R$     | Maximum Leakage Current: The maximum leakage current that will flow at the specified voltage and temperature                                                                                                                    |
| C         | Capacitance: The capacitance in pF at a frequency of 1 MHz and specified voltage                                                                                                                                                |
| $t_{rr}$  | Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified decay point after a peak reverse current occurs. |

## GRAPHS

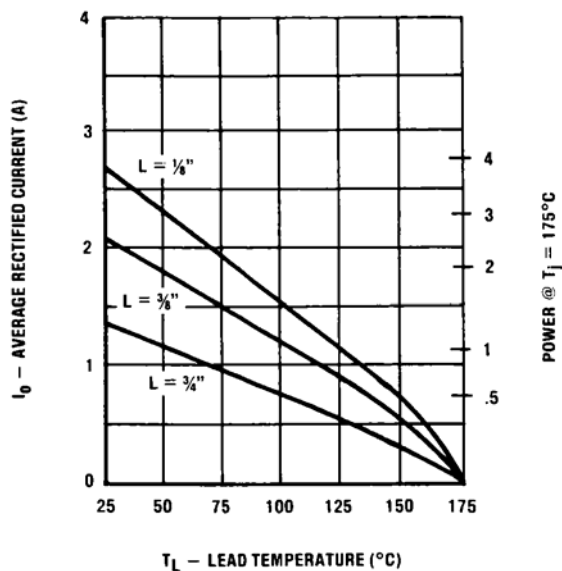


FIGURE 1

MAXIMUM CURRENT vs LEAD TEMPERATURE

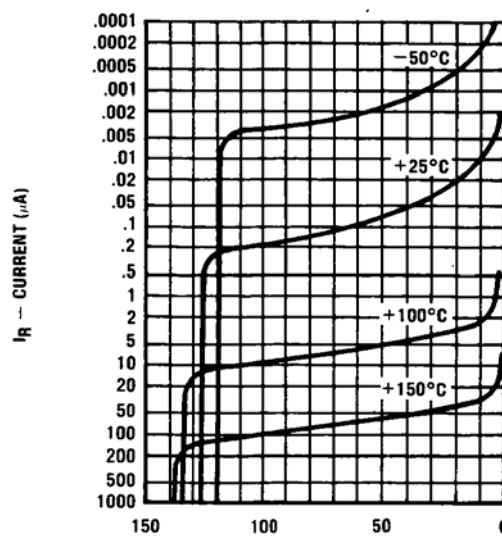


FIGURE 2

TYPICAL REVERSE CURRENT vs PIV



FIGURE 3

MAXIMUM POWER vs LEAD TEMPERATURE



FIGURE 4

TYPICAL FORWARD VOLTAGE vs FORWARD CURRENT

## PACKAGE DIMENSIONS



Dimensions: Inches/[mm]

NOTE: Lead tolerance = +0.003/-0.004 inches

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Microchip:

[JANTXV1N5615/TR](#) [JANS1N5621/TR](#) [JANTXV1N5623/TR](#) [JAN1N5617/TR](#) [JANTX1N5621/TR](#) [JANTXV1N5619/TR](#)  
[JANTX1N5623/TR](#) [JANTX1N5617/TR](#) [JANS1N5617/TR](#) [JAN1N5621/TR](#) [JAN1N5615/TR](#) [JANTXV1N5617/TR](#)  
[JANTXV1N5621/TR](#) [JANTX1N5615/TR](#) [JANTX1N5619/TR](#) [JAN1N5623/TR](#) [JANS1N5615/TR](#) [JAN1N5619/TR](#)  
[1N5617/TR](#) [1N5615E3](#) [1N5615/TR](#) [1N5615E3/TR](#) [1N5617e3/TR](#) [1N5623/TR](#) [1N5619/TR](#) [1N5623E3](#)  
[1N5623E3/TR](#) [JAN1N5615](#) [JAN1N5619](#) [JAN1N5617](#) [JANS1N5615](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.