


BLV SERIES LOW VOLTAGE PRESSURE SENSORS

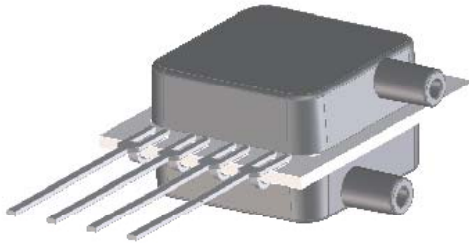

Features

- 0 to 1 "H₂O to 0 to 30 "H₂O Pressure Ranges
- uPower Low Supply Voltage (0.9V to 1.8V)
- 90% Less Power Than Mini-Basic Series
- 0.3% Linearity
- Improved Front to Back Linearity
- Excellent Position Sensitivity
- Improved Warm-Up Shift Distribution
- Parylene Coating Available Upon Request

Applications

- Medical Instrumentation
- Environmental Controls
- HVAC
- Portable / Hand Held Devices

General Description

The BLV Series Basic Sensor is based on All Sensors' CoBeam²™ Technology. The device provides a high output signal at a low operating voltage and reduces the overall supply voltage while maintaining comparable output levels to traditional equivalent basic sensing elements. This lower supply voltage gives rise to improved warm-up shift while the CoBeam² Technology itself reduces package stress susceptibility resulting in improved overall long term stability. The technology also vastly improves position sensitivity compared to conventional single die devices.

This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like. The output is also ratiometric to the supply voltage and is operable from 0.9 to 1.8 volts DC.

| Standard Pressure Ranges | | | | Equivalent Circuit |
|--------------------------|------------------------|------------------------|------------------------|--------------------|
| Device | Operating Range | Proof Pressure | Burst Pressure | |
| BLV-L01D | ±1 inH ₂ O | 100 inH ₂ O | 300 inH ₂ O | |
| BLV-L05D | ±5 inH ₂ O | 200 inH ₂ O | 300 inH ₂ O | |
| BLV-L10D | ±10 inH ₂ O | 200 inH ₂ O | 300 inH ₂ O | |
| BLV-L20D | ±20 inH ₂ O | 200 inH ₂ O | 500 inH ₂ O | |
| BLV-L30D | ±30 inH ₂ O | 200 inH ₂ O | 800 inH ₂ O | |

| Pressure Sensor Maximum Ratings | | Environmental Specifications | |
|---------------------------------------|--------|------------------------------|---------------------------------|
| Supply Voltage (Vs) | 6 Vdc | Temperature Ranges | |
| Common Mode Pressure | 5 psig | Operating | -25 to 85 °C |
| Lead Temperature (soldering 2-4 sec.) | 270 °C | Storage | -40 to 125 °C |
| | | Humidity Limits | 0 to 95% RH (non condensing) |

Approvals

| MKT | DATE | MFG | DATE | ENG | DATE | QA | DATE |
|---|------|---|------|---|------|---|------|
| <input type="checkbox"/> As Is <input type="checkbox"/> With Change | | <input type="checkbox"/> As Is <input type="checkbox"/> With Change | | <input type="checkbox"/> As Is <input type="checkbox"/> With Change | | <input type="checkbox"/> As Is <input type="checkbox"/> With Change | |

Performance Characteristics for BLV Series

ALL PARAMETERS ARE MEASURED AT 1.8 VOLT EXCITATION AND ROOM TEMPERATURE UNLESS OTHERWISE SPECIFIED. PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE APPLIED TO PORT B (THE ONLY PORT FOR THE SINGLE PORT CONFIGURATION).

| Parameter | Min | Typ | Max | Units | Notes |
|--|------|-------|-------|--------|-------|
| Output Span | | | | | |
| L01D @ 1 inH2O | 4.5 | 8.0 | 11.5 | mV | 4 |
| L05D @ 5 inH2O | 13.5 | 24.0 | 34.5 | mV | 4 |
| L10D @ 10 inH2O | 18.0 | 32.0 | 46.0 | mV | 4 |
| L20D @ 20 inH2O | 22.0 | 38.0 | 55.0 | mV | 4 |
| L30D @ 30 inH2O | 25.0 | 42.0 | 60.0 | mV | 4 |
| Offset Voltage @ Zero Diff. Pressure | - | - | ±10 | mV | - |
| Offset Temperature Shift (0°C-70°C) | - | -25.0 | - | uV/°C | 1 |
| Offset Warm-up Shift | - | ±20.0 | ±100 | uV | 2 |
| Offset Position Sensitivity (1g) | - | ±20.0 | - | uV | - |
| Offset Long Term Drift (One Year) | - | ±120 | - | uV | - |
| Linearity, Hysteresis Error | - | 0.10 | ±0.30 | %FSS | 3 |
| Response Time (10% to 90% Pressure Response) | - | 100 | - | uS | - |
| Front to Back Linearity | - | 0.25 | - | %FSS | 5 |
| Temperature Effect on Resistance (0°C-70°C) | - | 2800 | - | ppm/°C | - |
| Temperature Effect on Span (0°C-70°C) | - | -1900 | - | ppm/°C | - |
| Input Resistance | - | 3.0 | - | k ohm | - |
| Output Resistance | - | 3.0 | - | k ohm | - |

Specification Notes

NOTE 1: SHIFT IS RELATIVE TO 25°C.


NOTE 2: SHIFT IS WITHIN THE FIRST HOUR OF EXCITATION APPLIED TO THE DEVICE.

NOTE 3: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BEST STRAIGHT LINE CURVE FIT.

NOTE 4: THE SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN FULL SCALE OUTPUT VOLTAGE AND THE OFFSET VOLTAGE.

NOTE 5: FRONT-BACK LINERITY COMPUTED AS:
$$\text{Lin}_{FB} = \left(\frac{\text{Span}_{\text{Front}}}{\text{Span}_{\text{Back}}} - 1 \right) \cdot 100\%$$


How To Order

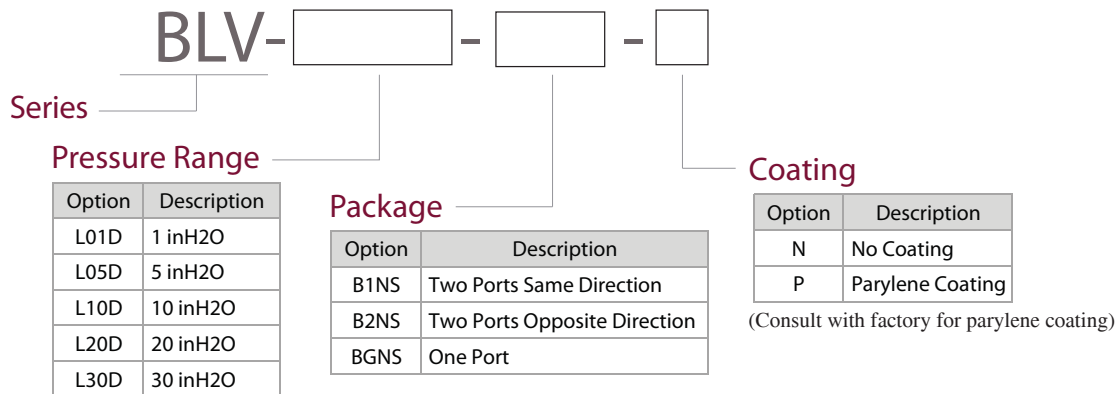

Example: BLV-L10D-B1NS-N

Package Drawings


B1NS Package

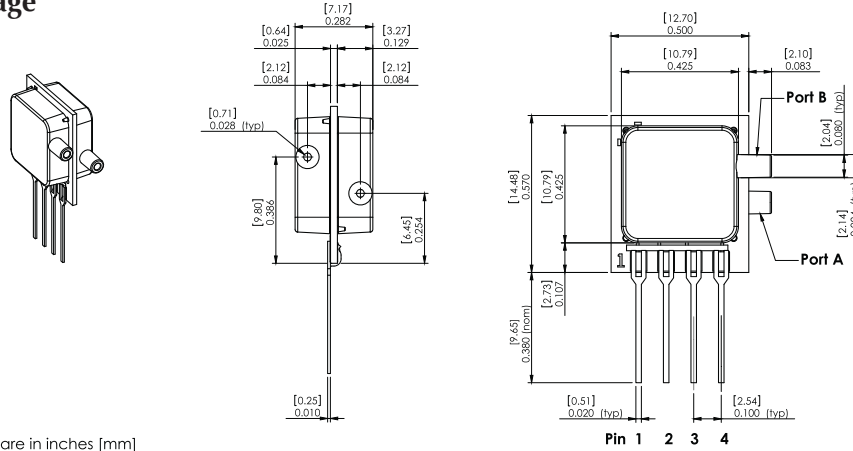

NOTES
 1) Dimensions are in inches [mm]
 2) For suggested pad layout, see drawing: PAD-01

Pinout
 1) Gnd
 2) -Out
 3) Vs
 4) +Out


B2NS Package

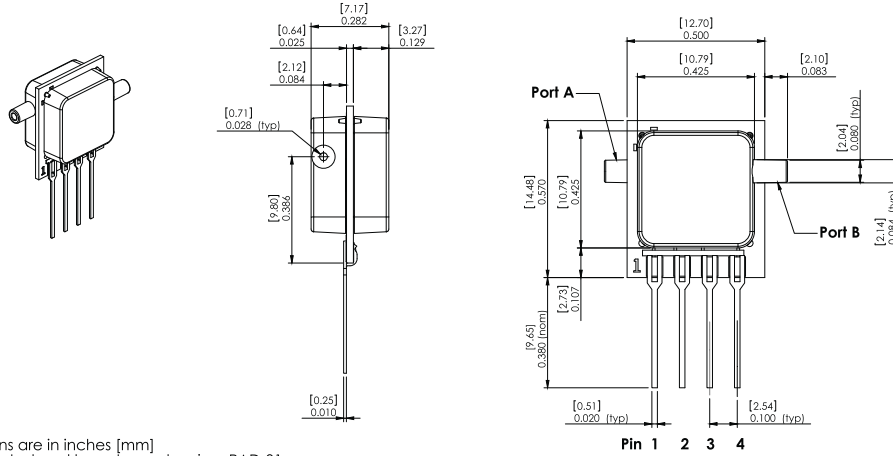

NOTES
 1) Dimensions are in inches [mm]
 2) For suggested pad layout, see drawing: PAD-01

Pinout
 1) Gnd
 2) -Out
 3) Vs
 4) +Out


BGNS Package

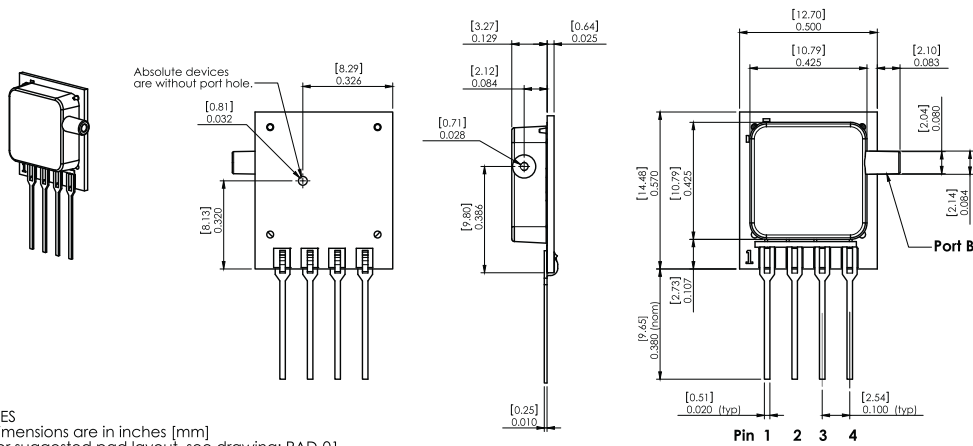

NOTES
 1) Dimensions are in inches [mm]
 2) For suggested pad layout, see drawing: PAD-01

Pinout
 1) Gnd
 2) -Out
 3) Vs
 4) +Out

Suggested Pad Layout

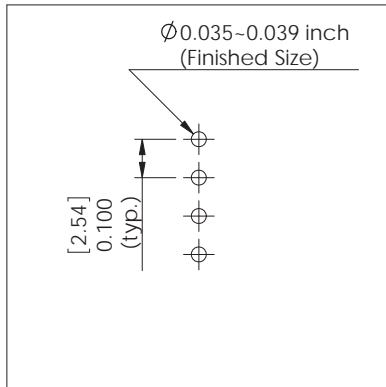


PAD-01

Package Characteristics

| Package ID | Approximate Port Volume | | | Weight | Units |
|------------|-------------------------|--------|-----------------|--------|-------|
| | Port A | Port B | Units | | |
| B1NS | 181 | 176 | mm ³ | 1.2 | Grams |
| B2NS | 181 | 176 | mm ³ | 1.2 | Grams |
| BGNS | 1.5 | 176 | mm ³ | 0.9 | Grams |

Product Labeling

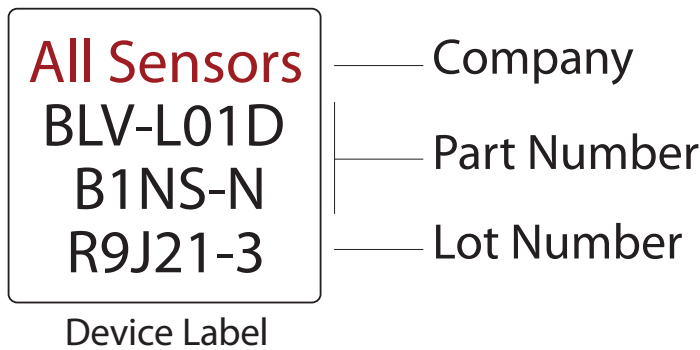

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.