

High Voltage Synchronous Buck Controller with Programmable Frequency and Sync

DESCRIPTION

Demonstration Circuit 1073 is a 100kHz-500kHz programmable frequency, high voltage, current-mode DC/DC step-down converter featuring the LT3845. The operating frequency can be synchronized up to 600kHz. The demo board is designed for 12V @ 6.25A (75W) output from a 20V to 55V input. A soft-start feature controls the output voltage slew rate at start-up, reducing current surges and voltage overshoots. The modes of operation (Burst Mode, Discontinuous Current Mode and Continuous Current Mode) are jumper selectable. Both Burst Mode and Discontinuous Current Mode increase the efficiency at light loads. Continuous Current Mode will maintain a constant switching frequency regardless of the load current.

An Optional Boost Bias circuit is provided on the bottom side of the board for back-driving the LT3845 internal regulator from the output voltage. Customers may want to use this optional circuit with modified applications that have relatively high input voltages and low (~ 3.3V)

output voltages. In such applications, the optional circuit can increase the overall efficiency by reducing the power loss in the LT3845. The demonstration board has also been laid out with the option of doubling the switching MOSFETs to facilitate higher output current. This board is suitable for a wide range of industrial control systems and particularly suitable for 12V/42V automotive applications and 48V Telecom power supplies.

The LT3845 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for demo circuit 1073.

Note: It is best to ground the SYNC pin if the SYNC function is not being used.

Design files for this circuit board are available. Call the LTC factory.

LT, LTC and LT are registered trademarks of Linear Technology Corporation. ThinSOT and PowerPath are trademarks of Linear Technology Corporation.

Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER FOR STEP-DOWN CONVERTER	CONDITION	VALUE
Minimum input voltage		20V
Maximum input voltage		55V
Output voltage V_{OUT}		12V +/- 4%
Maximum output current		6.25A
Typical switching frequency		300kHz

QUICK START PROCEDURE

Demonstration circuit 1073 is easy to set up to evaluate the performance of the LT3845. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place JP1 on the RUN position:
2. With power off, connect the input power supply to Vin and GND.

3. Turn on the power at the input.

NOTE. Make sure that the input voltage does not exceed 60V.

4. Check for the proper output voltages. .
5. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

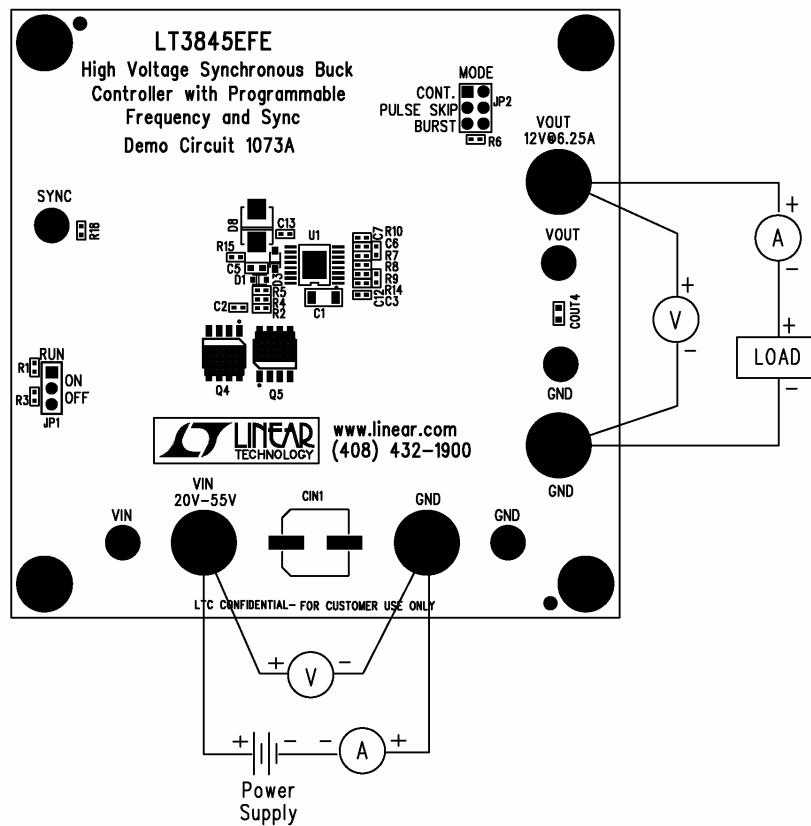


Figure 1. Proper Measurement Equipment Setup






Figure 2. Measuring Input or Output Ripple

LT3845

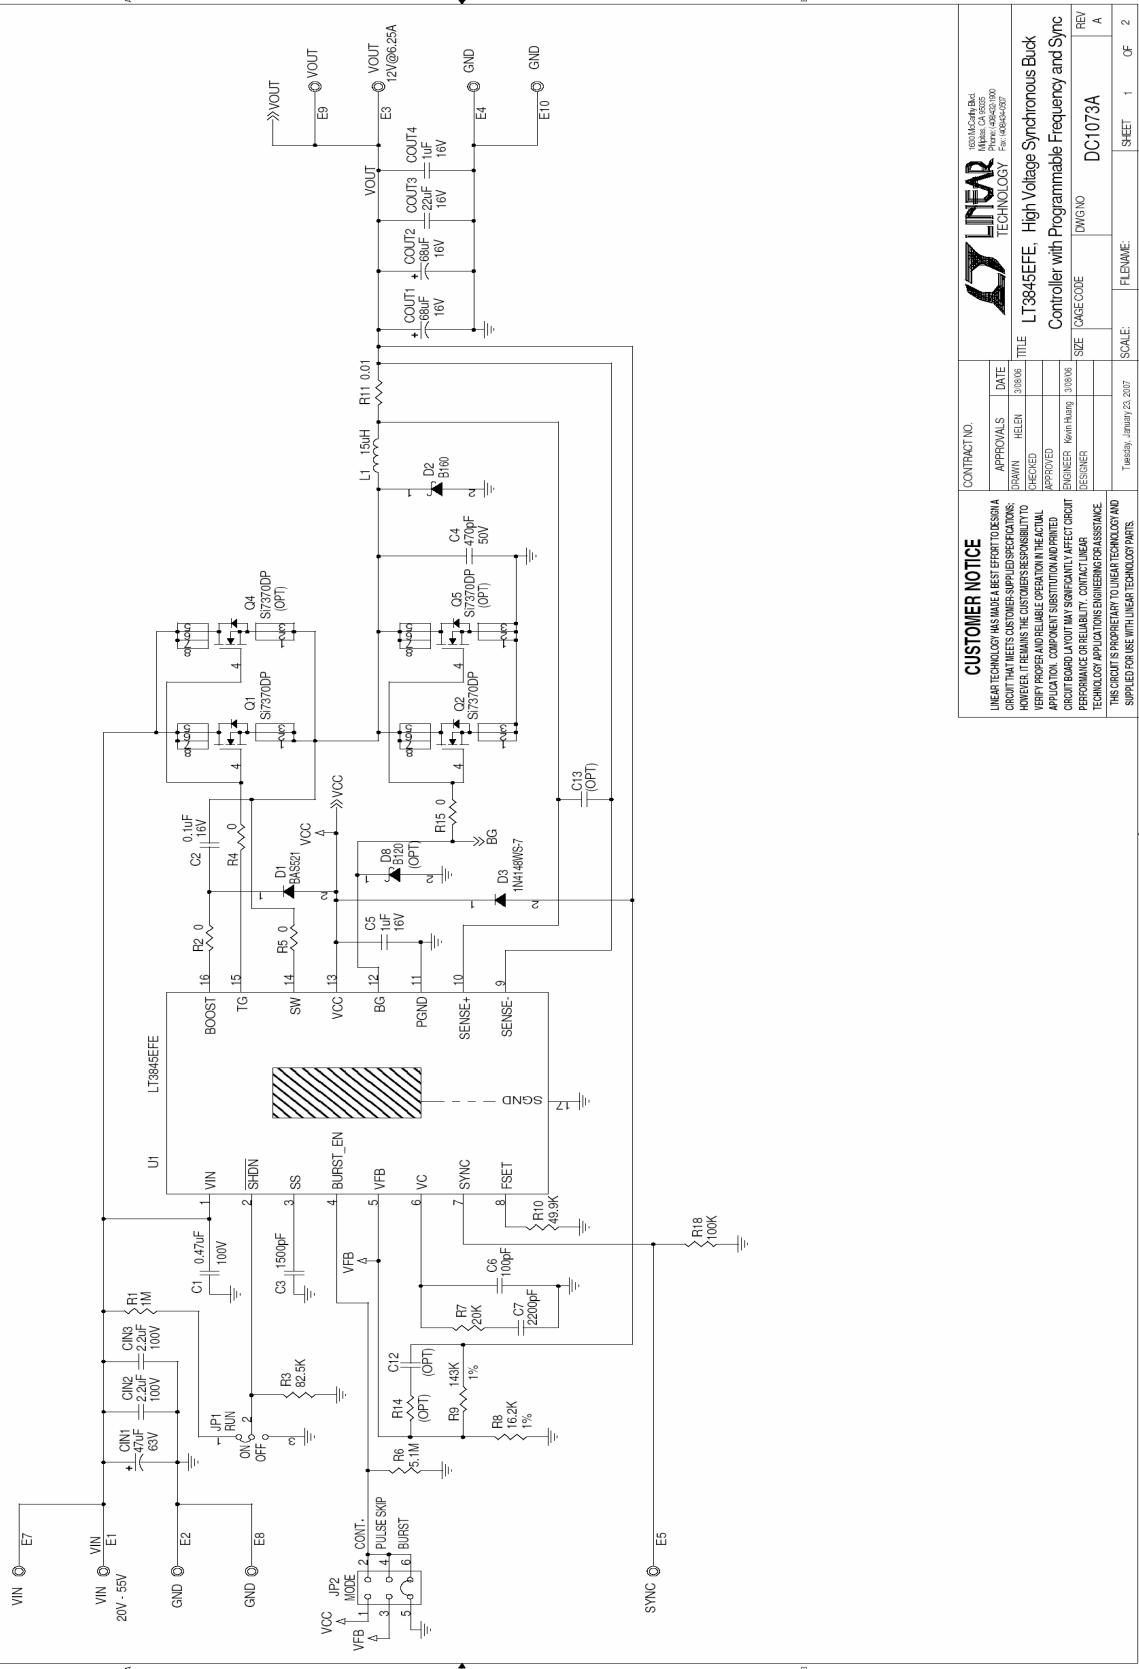

CUSTOMER NOTICE		CONTRACT NO.	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT DESIGNA CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS. HOWEVER, IT BEARNS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER UNDELBLE OPERATION IN THE ACTUAL APPLICATION. COMPONENTS SUBSTITUTED OR ADAPTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.		APPROVALS	DATE
		SIGNIN	TUELEN
		CHECKED	3/08/06
		APPROVED	
		ENGINEER	Karen Huang
		DESIGNER	
SIZE	CAGE CODE	DIAGNO	REV
		DC1073A	A
SCALE	FILENAME	SHEET	OF
		1	2

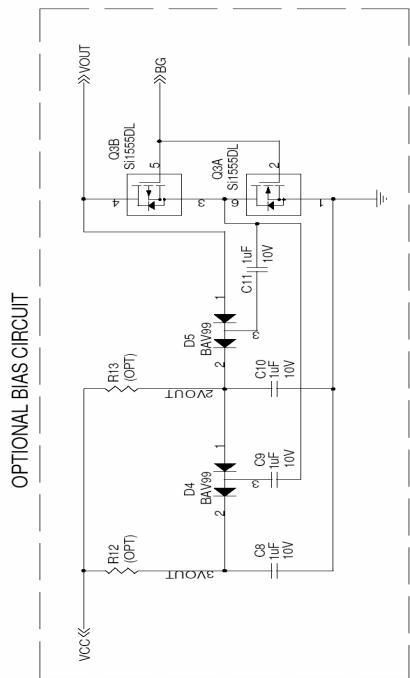

CUSTOMER NOTICE		CONTRACT NO.	
LINEAR TECHNOLOGY	Si1555B, Si1555A Phone: 408-264-3900 Fax: 408-264-3907	DATE	3/8/06
LINEAR TECHNOLOGY	APPROVALS	DRAWN	HELEN
LINEAR TECHNOLOGY	CHECKED	CHESED	
LINEAR TECHNOLOGY	APPROVED	APPROVED	
LINEAR TECHNOLOGY	ENGINEER	Karen Hung	
LINEAR TECHNOLOGY	DESIGNER		
LINEAR TECHNOLOGY	SIZE	CAGE CODE	DWG NO.
LINEAR TECHNOLOGY	PCB	DC1073A	REV A
LINEAR TECHNOLOGY	WEDNESDAY, JANUARY 7, 2007	SCALE:	2
LINEAR TECHNOLOGY		FILENAME:	CF 2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.