

High-performance Regulator IC Series for PCs

Ultra Low Dropout Linear Regulators for PC Chipsets

BD3508EKN



• Description

The BD3508EKN ultra low-dropout linear chipset regulator operates from a very low input supply, and offers ideal performance in low input voltage to low output voltage applications. It incorporates a built-in N-MOSFET power transistor to minimize the input-to-output voltage differential to the ON resistance ($R_{ON}=65m\Omega$) level. By lowering the dropout voltage in this way, the regulator realizes high current output ($I_{omax}=3.0A$) with reduced conversion loss, and thereby obviates the switching regulator and its power transistor, choke coil, and rectifier diode. Thus, the BD3508EKN is designed to enable significant package profile downsizing and cost reduction. An external resistor allows the entire range of output voltage configurations between 0.65 and 2.7V, while the NRCS (soft start) function enables a controlled output voltage ramp-up, which can be programmed to whatever power supply sequence is required.

• Features

- 1) Internal high-precision reference voltage circuit($0.65V\pm1\%$)
- 2) Built-in VCC under voltage lock out circuit ($VCC=3.80V$)
- 3) NRCS (soft start) function reduces the magnitude of in-rush current
- 4) Internal Nch MOSFET driver offers low ON resistance ($65m\Omega$ typ)
- 5) Built-in current limit circuit($3.0A$ min)
- 6) Built-in thermal shutdown (TSD) circuit
- 7) Variable output ($0.65\sim2.7V$)
- 8) Incorporates high-power HQFN20V package: $4.2\times4.2\times0.9(mm)$

• Applications

Notebook computers, Desktop computers, LCD-TV, DVD, Digital appliances

• Model Lineup

●Absolute Maximum Ratings

◎BD3508EKN

○Absolute Maximum Ratings($T_a=100^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATING	UNIT
Input Voltage 1	VCC	6.0 ^{*1}	V
Input Voltage 2	VIN	6.0 ^{*1}	V
Enable Input Voltage	Ven	6.0	V
Power Dissipation 1	Pd1	0.5 ^{*2}	W
Power Dissipation 2	Pd2	0.75 ^{*3}	W
Power Dissipation 3	Pd3	1.75 ^{*4}	W
Power Dissipation 4	Pd4	2.0 ^{*5}	W
Operating Temperature Range	Topr	-10~+100	$^{\circ}\text{C}$
Storage Temperature Range	Tstg	-55~+125	$^{\circ}\text{C}$
Maximum Junction Temperature	Tjmax	+150	$^{\circ}\text{C}$

^{*1} Should not exceed Pd.

^{*2} Reduced by 4mW/ $^{\circ}\text{C}$ for each increase in $T_a \geq 25^{\circ}\text{C}$ (no heat sink)

^{*3} Reduced by 6mW/ $^{\circ}\text{C}$ for each increase in $T_a \geq 25^{\circ}\text{C}$ (when mounted on a 70mm×70mm×1.6mm glass-epoxy board, with no copper foil on the bottom surface)

^{*4} Reduced by 14mW/ $^{\circ}\text{C}$ for each increase in $T_a \geq 25^{\circ}\text{C}$ (when mounted on a 70mm×70mm×1.6mm glass-epoxy board, with 60mm X 60 mm copper foil on the bottom surface...1-layer)

^{*5} Reduced by 16mW/ $^{\circ}\text{C}$ for each increase in $T_a \geq 25^{\circ}\text{C}$ (when mounted on a 70mm×70mm×1.6mm glass-epoxy board, with 60mm X 60 mm copper foil on the bottom surface...2-layer)

●Operating Conditions

○Operating Voltage($T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Input Voltage 1	VCC	4.3	5.5	V
Input Voltage 2	VIN	0.75	VCC-1 ^{*6}	V
Output Voltage Setting Range	Vo	VFB	2.7	V
Enable Input Voltage	Ven	-0.3	5.5	V
NRCS Capacity	CNRCS	0.001	1	uF

^{*6} VCC and VIN do not have to be implemented in the order listed.

★This product is not designed for use in radioactive environments.

●Electrical Characteristics (Unless otherwise specified, Ta=25°C VCC=5V Ven=3V VIN=1.8V R1=3.9KΩ R2=3.3KΩ)

Parameter	Symbol	Limit			Unit	Condition
		Min.	Typ.	Max.		
Bias Current	ICC	-	0.7	1.4	mA	
VCC Shutdown Mode Current	IST	-	0	10	uA	Ven=0V
Output Voltage	VOU	-	1.200	-	V	
Maximum Output Current	I _o	3.0	-	-	A	
Output Short Circuit Current	I _{ost}	3.0	-	-	A	Vo=0V
Output Voltage Temperature Coefficient	Tcvo	-	0.01	-	%/°C	
Feedback Voltage 1	VFB1	0.643	0.650	0.657	V	
Feedback Voltage 2	VFB2	0.630	0.650	0.670	V	I _o =0 to 3A Ta=-10 to 100°C *7
Line Regulation 1	Reg.I1	-	0.1	0.5	%/V	VCC=4.3V to 5.5V
Line Regulation 2	Reg.I2	-	0.1	0.5	%/V	VIN=1.2V to 3.3V
Load Regulation	Reg.L	-	0.5	10	mV	I _o =0 to 3A
Minimum Input-Output Voltage Differential	dVo	-	65	100	mV	I _o =1A, VIN=1.2V Ta=-10 to 100°C *7
Standby Discharge Current	I _{den}	1	-	-	mA	Ven=0V, Vo=1V
[ENABLE]						
Enable Pin Input Voltage High	Enhi	2	-	-	V	
Enable Pin Input Voltage Low	Enlow	-0.2	-	0.8	V	
Enable Input Bias Current	I _{en}	-	7	10	uA	Ven=3V
[FEEDBACK]						
Feedback Pin Bias Current	IFB	-100	0	100	nA	
[NRCS]						
NRCS Charge Current	I _{nrcs}	14	20	26	uA	V _{nrcs} =0.5V
NRCS Standby Voltage	VSTB	-	0	50	mV	Ven=0V
[UVLO]						
VCC Under voltage Lock out Threshold Voltage	V _{ccUVLO}	3.5	3.8	4.1	V	VCC:Sweep-up
VCC Under voltage Lock out Hysteresis Voltage	V _{cchys}	100	160	220	mV	VCC:Sweep-down
[AMP]						
Gate Source Current	I _{GSO}	-	1.6	-	mA	V _{FB} =0, V _{GATE} =2.5V
Gate Sink Current	I _{GSI}	-	4.7	-	mA	V _{FB} =VCC, V _{GATE} =2.5V

*7 Design targets

• Reference Data

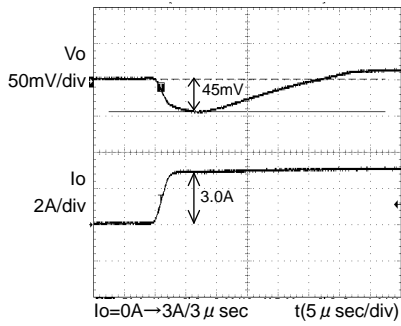


Fig.1 Transient response (0→3A)
Co=150 μ F \times 2

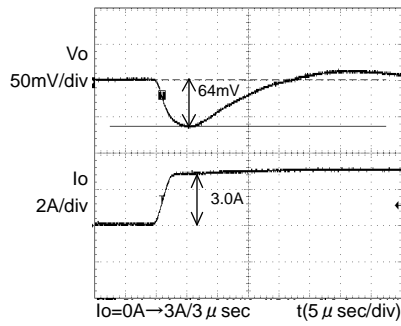


Fig.2 Transient response (0→3A)
Co=150 μ F

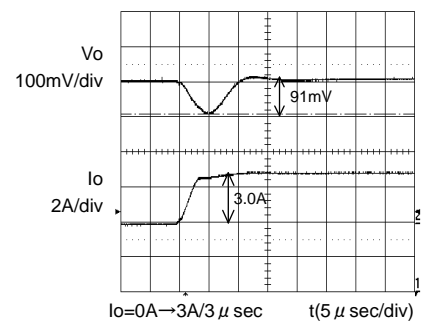


Fig.3 Transient response (0→3A)
Co=47 μ F

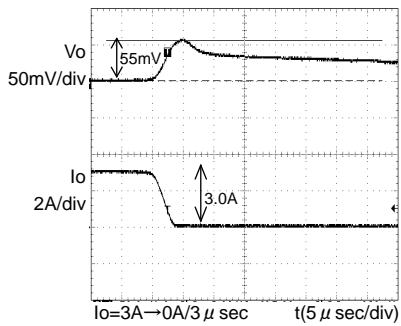


Fig.4 Transient response (3→0A)
Co=150 μ F \times 2

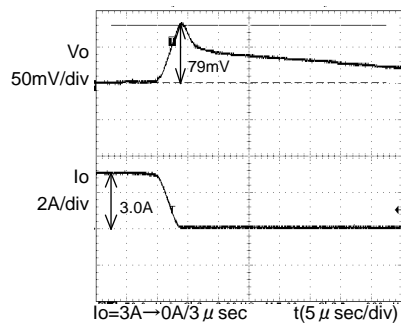


Fig.5 Transient response (3→0A)
Co=150 μ F

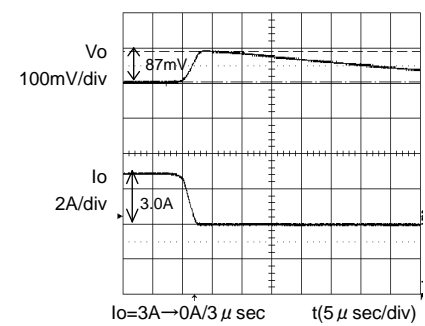


Fig.6 Transient response (3→0A)
Co=47 μ F

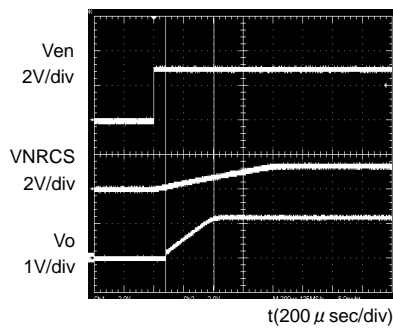


Fig.7 Waveform at output start

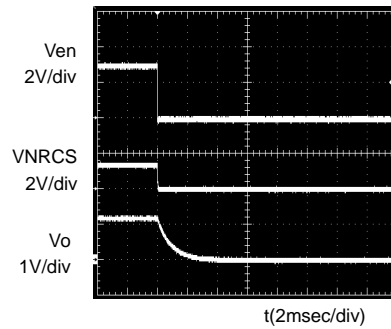


Fig.8 Waveform at output OFF

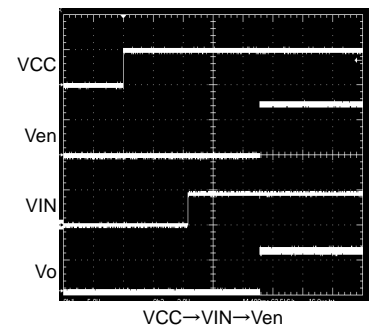


Fig.9 Input sequence

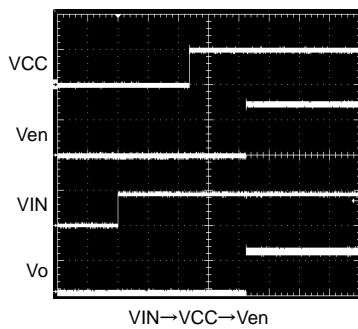


Fig.10 Input sequence

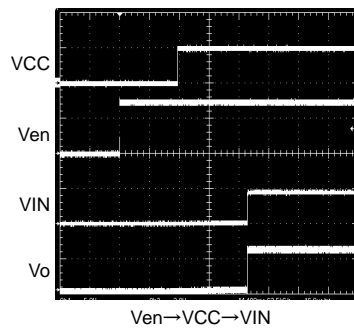


Fig.11 Input sequence

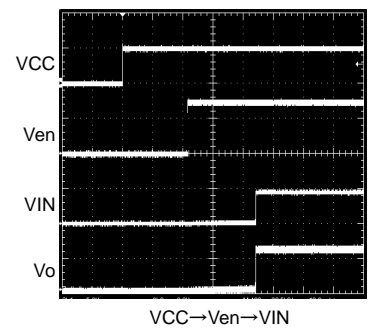


Fig.12 Input sequence

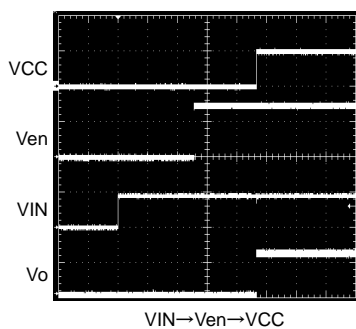


Fig.13 Input sequence

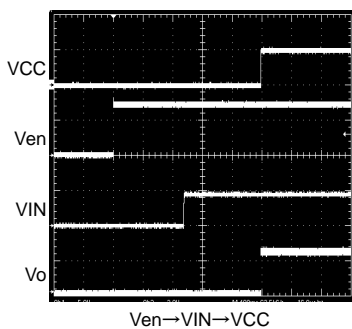


Fig.14 Input sequence

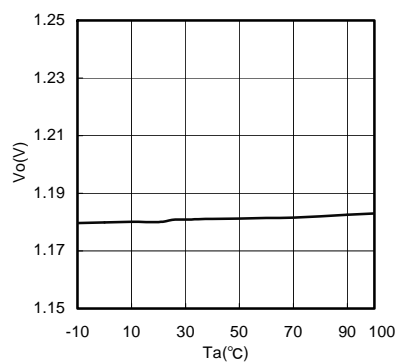


Fig.15 Ta-Vo (Io=0mA)

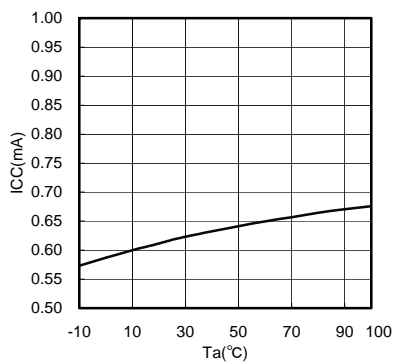


Fig.16 Ta-ICC

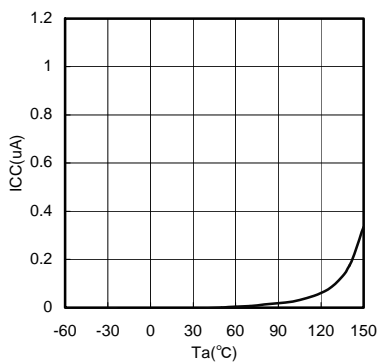


Fig.17 Ta-ISTB

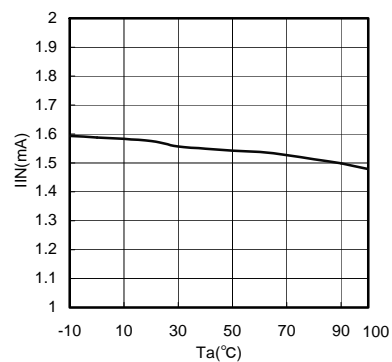


Fig.18 Ta-IIN

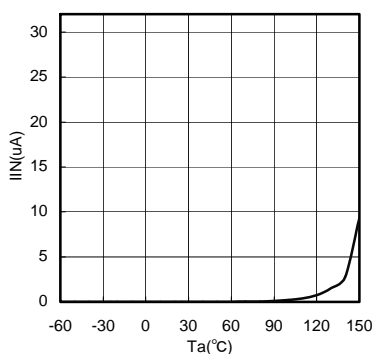


Fig.19 Ta-IINSTB

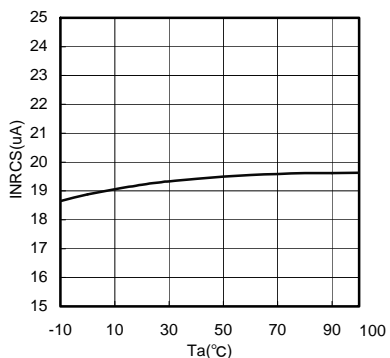


Fig.20 Ta-INRCS

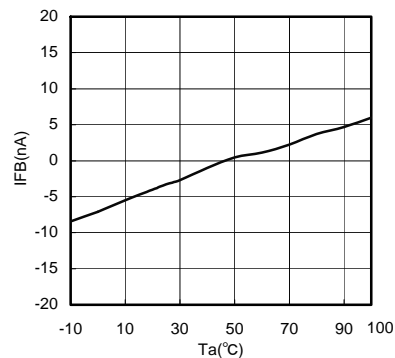


Fig.21 Ta-IFB

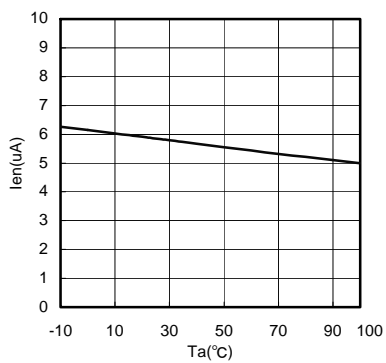


Fig.22 Ta-Ien

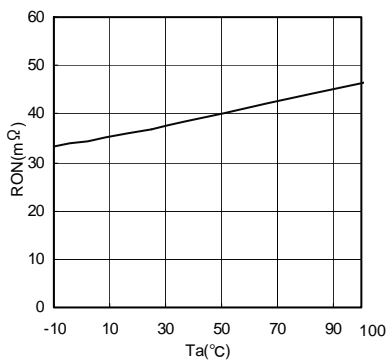


Fig.23 Ta- R_{ON}
(VCC=5V/Vo=1.2V)



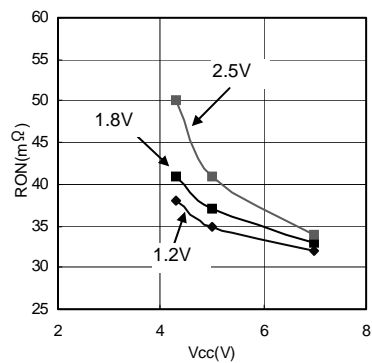


Fig.24 VCC- R_{ON}

• Block Diagram

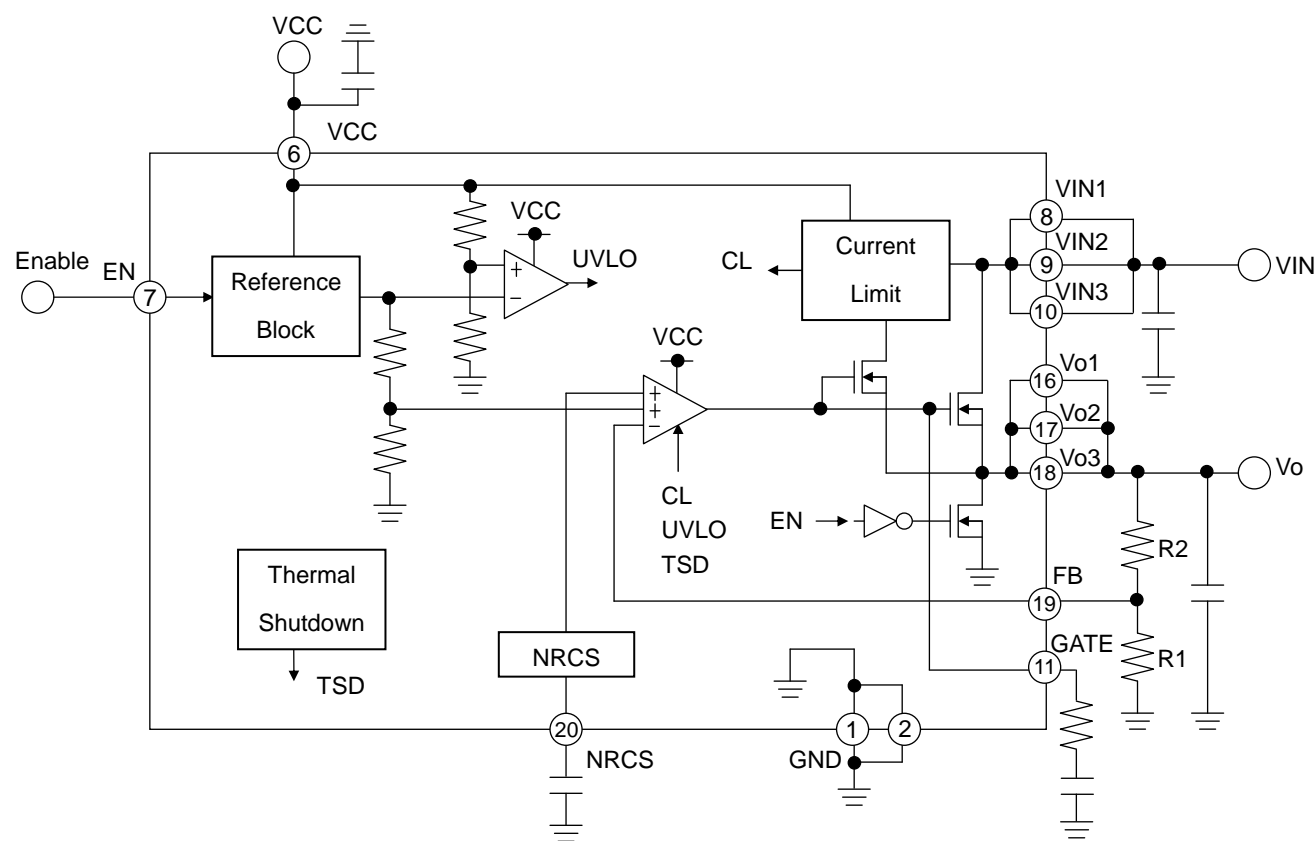

• Pin Function Table

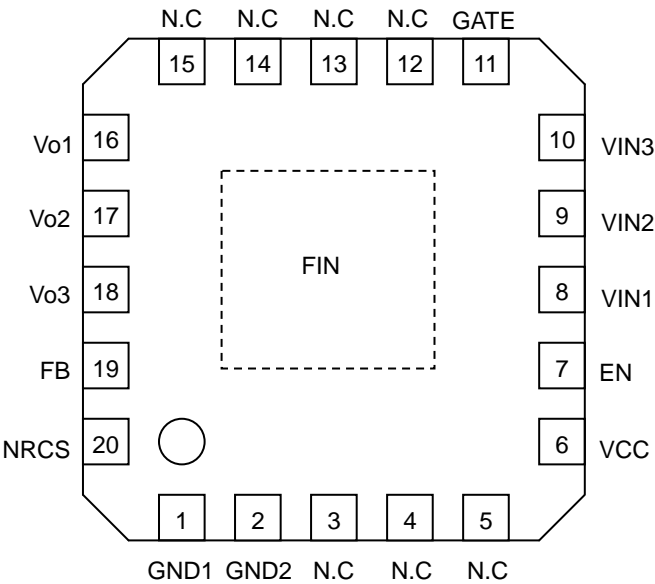

• Pin Layout

PIN No.	PIN Name	PIN Function
1	GND1	Ground pin 1
2	GND2	Ground pin 2
3	N.C.	No connection (empty) pin
4	N.C.	No connection (empty) pin
5	N.C.	No connection (empty) pin
6	VCC	Power supply pin
7	EN	Enable input pin
8	VIN1	Input pin 1
9	VIN2	Input pin 2
10	VIN3	Input pin 3
11	GATE	Gate pin
12	N.C.	No connection (empty) pin
13	N.C.	No connection (empty) pin
14	N.C.	No connection (empty) pin
15	N.C.	No connection (empty) pin
16	Vo1	Output voltage pin 1
17	Vo2	Output voltage pin 2
18	Vo3	Output voltage pin 3
19	FB	Reference voltage feedback pin
20	NRCS	In-rush current protection (NRCS) capacitor connection pin
reverse	FIN	Connected to heatsink and GND

* Please short N.C to the GND

- Operation of Each Block

- AMP

This is an error amp that functions by comparing the reference voltage (0.65V) with Vo to drive the output Nch FET ($R_{on}=65m\Omega$). Frequency optimization helps to realize rapid transit response, and to support the use of functional polymer output capacitors. AMP input voltage ranges from GND to 2.7V, while the AMP output ranges from GND to VCC. When EN is OFF, or when UVLO is active, output goes LOW and the output NchFET switches OFF.

- EN

The EN block controls the regulator ON/OFF pin by means of the logic input pin. In OFF position, circuit voltage is maintained at 0 μ A, thus minimizing current consumption at standby. The FET is switched ON to enable discharge of the NRCS pin Vo, thereby draining the excess charge and preventing the load IC from malfunctioning. Since no electrical connection is required (such as between the VCC pin and the ESD prevention Di), module operation is independent of the input sequence.

- UVLO

To prevent malfunctions that can occur when there is a momentary decrease in VCC supply voltage, the UVLO circuit switches output OFF, and, like the EN block, discharges the NRCS Vo. Once the UVLO threshold voltage (TYP3.80V) is exceeded, the power-on reset is triggered and output begins.

- CURRENT LIMIT

With output ON, the current limit function monitors internal IC output current against the parameter value (3.0A). When current exceeds this level, the current limit module lowers the output current to protect the load IC. When the overcurrent state is eliminated, output voltage is restored at the parameter value.

- NRCS

The soft start function is realized by connecting an NRCS pin external capacitor to the target ground. Output ramp-up can be set for any period up to the time the NRCS pin reaches VFB (0.65V). During startup, the NRCS pin serves as the 20 μ A (TYP) constant current source and charges the externally connected capacitor.


- TSD (Thermal Shut Down)

The shutdown (TSD) circuit automatically switches output OFF when the chip temperature gets too high, thus serving to protect the IC against “thermal runaway” and heat damage. Because the TSD circuit is provided to shut down the IC in the presence of extreme heat, in order to avoid potential problems with the TSD, it is crucial that the Tj (max) parameter not be exceeded in the thermal design.


- VIN

The VIN line is the major current supply line, and is connected to the output NchFET drain. Since no electrical connection (such as between the VCC pin and an ESD protective Di) is necessary, VIN operates independent of the input sequence. However, since there is an output NchFET body Di between VIN and Vo, a VIN-Vo electric (Di) connection is present. Note, therefore, that when output is switched ON or OFF, reverse current may flow to the VIN from Vo.

●Timing Chart
EN ON/OFF

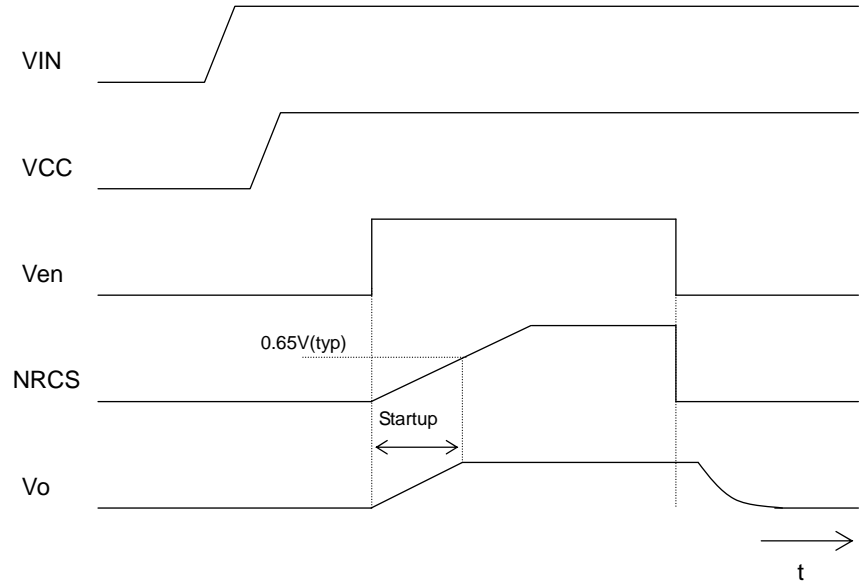


VCC ON/OFF

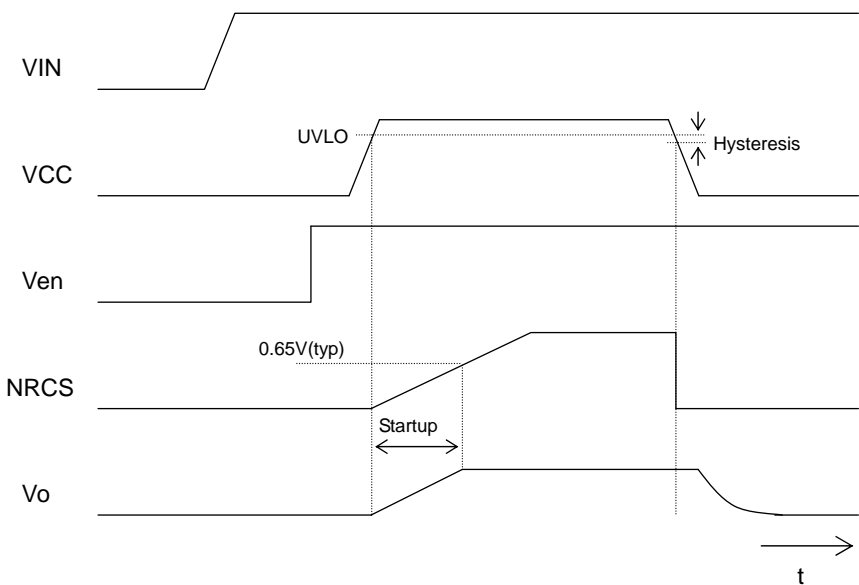

●Evaluation Board

■ BD3508EKN Evaluation Board Schematic

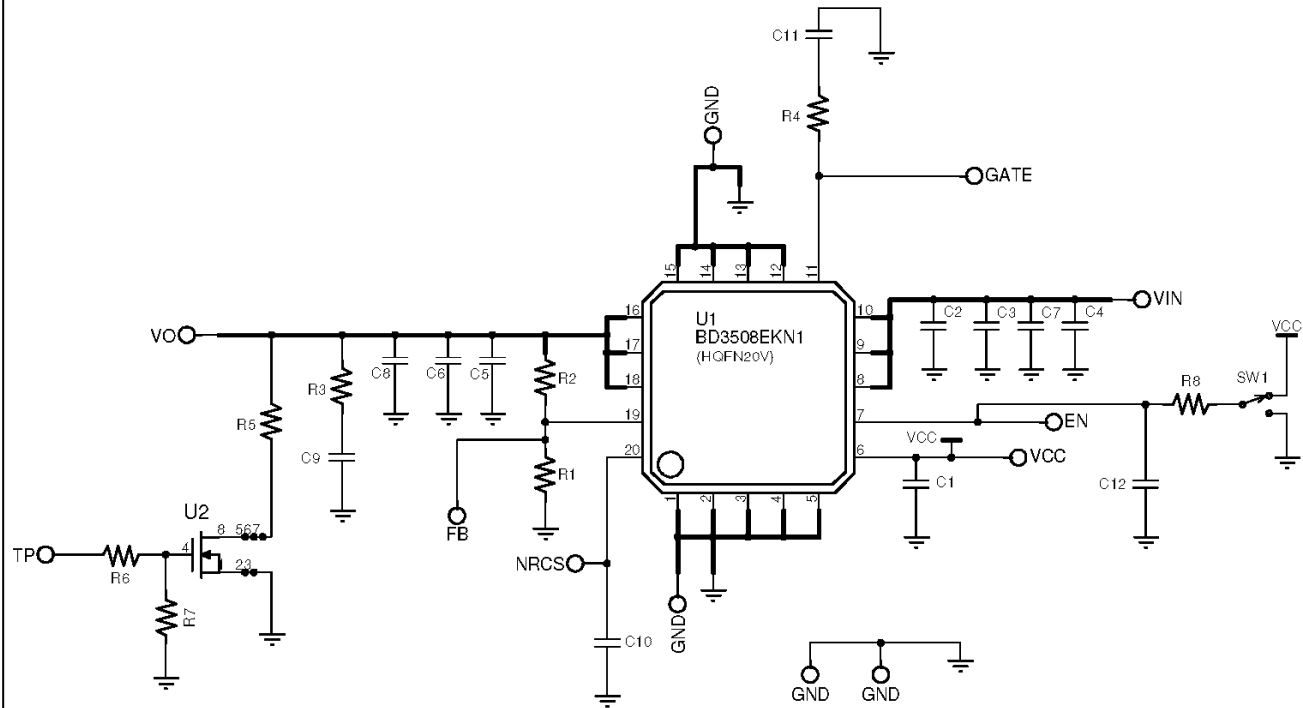

■ BD3508EKN Evaluation Board Standard Component List

Component	Rating	Manufacturer	Product Name
U1	-	ROHM	BD3508EKN
C1	1uF	ROHM	MCH184CN105K
C10	0.01uF	ROHM	MCH185CN103K
R8	0Ω	-	Jumper


Component	Rating	Manufacturer	Product Name
C5	47uF	ROHM	MCH318CN476K
C4	10uF	ROHM	MCH218CN106K
R1	3.9k	ROHM	MCR03EZPF3301
R2	3.3k	ROHM	MCR03EZPF3901

■ BD3508EKN Evaluation Board Layout


Silkscreen

TOP Layer

Bottom Layer

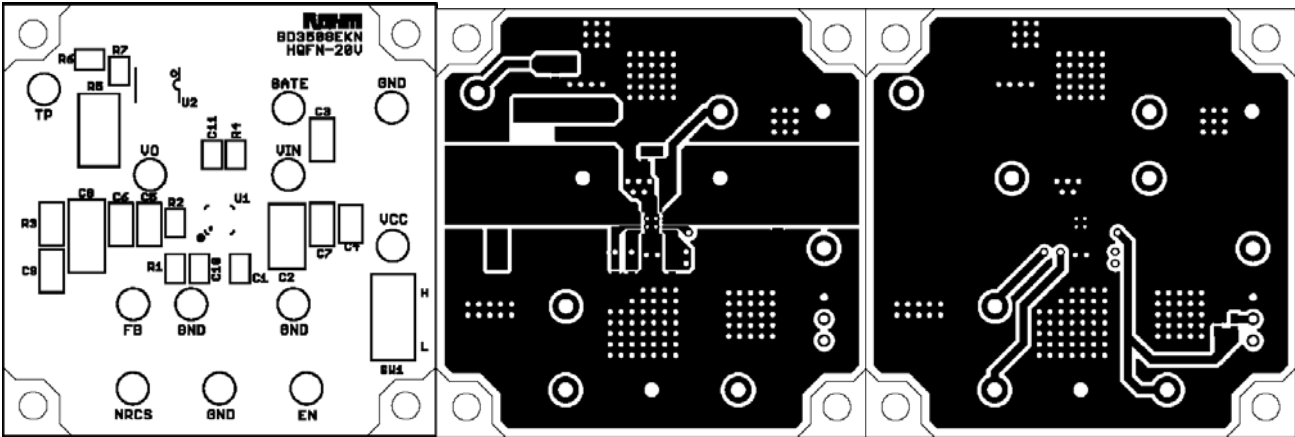

- Recommended Circuit Example

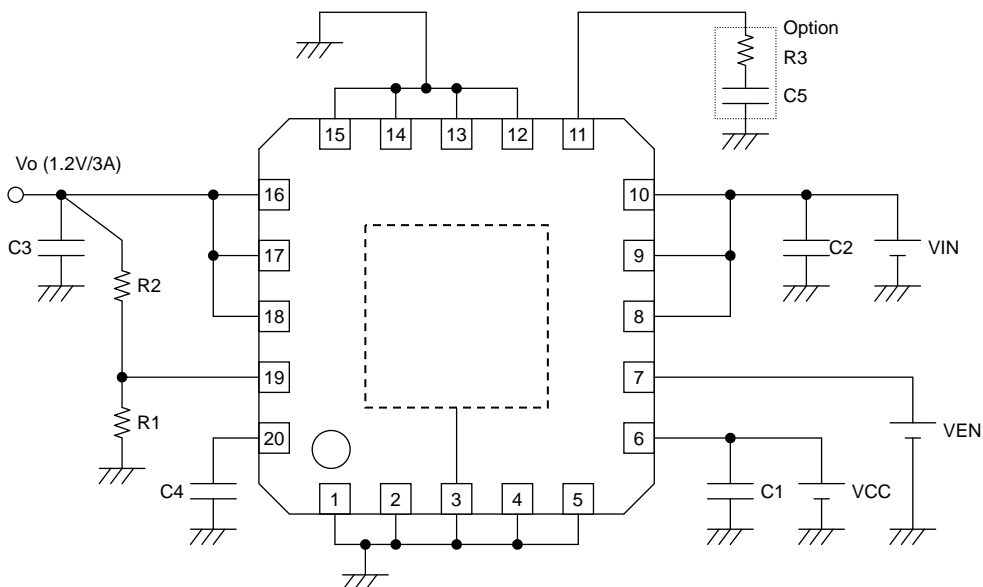

Component	Recommended Value	Programming Notes and Precautions
R1/R2	3.9k/3.3k	IC output voltage can be set with a configuration formula using the values for the internal reference output voltage (V_{FB}) and the output voltage resistors (R1, R2). Select resistance values that will avoid the impact of the V_{FB} current ($\pm 100nA$). The recommended total resistance value is 10K Ω .
C3	47 μF	To assure output voltage stability, please be certain the Vo1, Vo2, and Vo3 pins and the GND pins are connected. Output capacitors play a role in loop gain phase compensation and in mitigating output fluctuation during rapid changes in load level. Insufficient capacitance may cause oscillation, while high equivalent series resistance (ESR) will exacerbate output voltage fluctuation under rapid load change conditions. While a 47 μF ceramic capacitor is recommended, actual stability is highly dependent on temperature and load conditions. Also, note that connecting different types of capacitors in series may result in insufficient total phase compensation, thus causing oscillation. In light of this information, please confirm operation across a variety of temperature and load conditions.
C1	1 μF	Input capacitors reduce the output impedance of the voltage supply source connected to the (VCC) input pins. If the impedance of this power supply were to increase, input voltage (VCC) could become unstable, leading to oscillation or lowered ripple rejection function. While a low-ESR 1 μF capacitor with minimal susceptibility to temperature is recommended, stability is highly dependent on the input power supply characteristics and the substrate wiring pattern. In light of this information, please confirm operation across a variety of temperature and load conditions.
C2	10 μF	Input capacitors reduce the output impedance of the voltage supply source connected to the (VCC) input pins. If the impedance of this power supply were to increase, input voltage (VCC) could become unstable, leading to oscillation or lowered ripple rejection function. While a low-ESR 10 μF capacitor with minimal susceptibility to temperature is recommended, stability is highly dependent on the input power supply characteristics and the substrate wiring pattern. In light of this information, please confirm operation across a variety of temperature and load conditions.
C4	0.01 μF	The Non Rush Current on Startup (NRCS) function is built into the IC to prevent rush current from going through the load (VIN to Vo) and impacting output capacitors at power supply start-up. Constant current comes from the NRCS pin when EN is HIGH or the UVLO function is deactivated. The temporary reference voltage is proportionate to time, due to the current charge of the NRCS pin capacitor, and output voltage start-up is proportionate to this reference voltage. Capacitors with low susceptibility to temperature are recommended, in order to assure a stable soft-start time.
R3/C5	-	This component is employed when the C3 capacitor causes, or may cause, oscillation. It provides more precise internal phase correction.

● Heat Loss

Thermal design should allow operation within the following conditions. Note that the temperatures listed are the allowed temperature limits, and thermal design should allow sufficient margin from the limits.

1. Ambient temperature T_a can be no higher than 100 °C.
2. Chip junction temperature (T_j) can be no higher than 150°C.

Chip junction temperature can be determined as follows:

- ① Calculation based on ambient temperature (T_a)

$$T_j = T_a + \theta_{j-a} \times W$$

<Reference values>

θ_{j-a} : HQFN20V 250.0°C/W Bare (unmounted) IC


166.7°C/W 1-layer substrate (top layer copper foil less than 3%)

71.4°C/W 1-layer substrate (bottom layer surface copper foil area 60×60mm²)

62.5°C/W 2-layer substrate (top layer copper foil area 60×60mm²)

Substrate size: 70×70×1.6mm³ (substrate with thermal via)

It is recommended to layout the VIA for heat radiation in the GND pattern of reverse (of IC) when there is the GND pattern in the inner layer (in using multilayer substrate). This package is so small (size: 4.2mm×4.2mm) that it is not available to layout the VIA in the bottom of IC. Spreading the pattern and being increased the number of VIA like the figure below). enable to get the superior heat radiation characteristic. (This figure is the image. It is recommended that the VIA size and the number is designed suitable for the actual situation.).

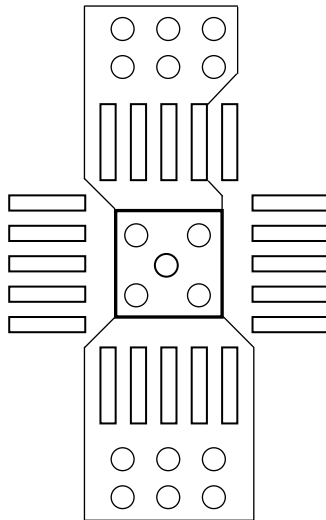

Most of the heat loss that occurs in the BD3508EKN is generated from the output Nch FET. Power loss is determined by the total V_{IN} - V_o voltage and output current. Be sure to confirm the system input and output voltage and the output current conditions in relation to the heat dissipation characteristics of the V_{IN} and V_o in the design. Bearing in mind that heat dissipation may vary substantially depending on the substrate employed (due to the power package incorporated in the BD3508EKN) make certain to factor conditions such as substrate size into the thermal design.


$$\text{Power consumption (W)} = \{ \text{Input voltage (V}_{IN}\text{)} - \text{output voltage (V}_o\text{)} \} \times I_o \text{ (Ave)}$$

Example) $V_{IN}=1.5\text{V}$, $V_o=1.2\text{V}$, $I_o(\text{Ave}) = 3\text{A}$


$$\text{Power consumption (W)} = \{ 1.5(\text{V}) - 1.2(\text{V}) \} \times 3.0(\text{A})$$

$$= 0.9(\text{W})$$

● Input-Output Equivalent Circuit Diagram

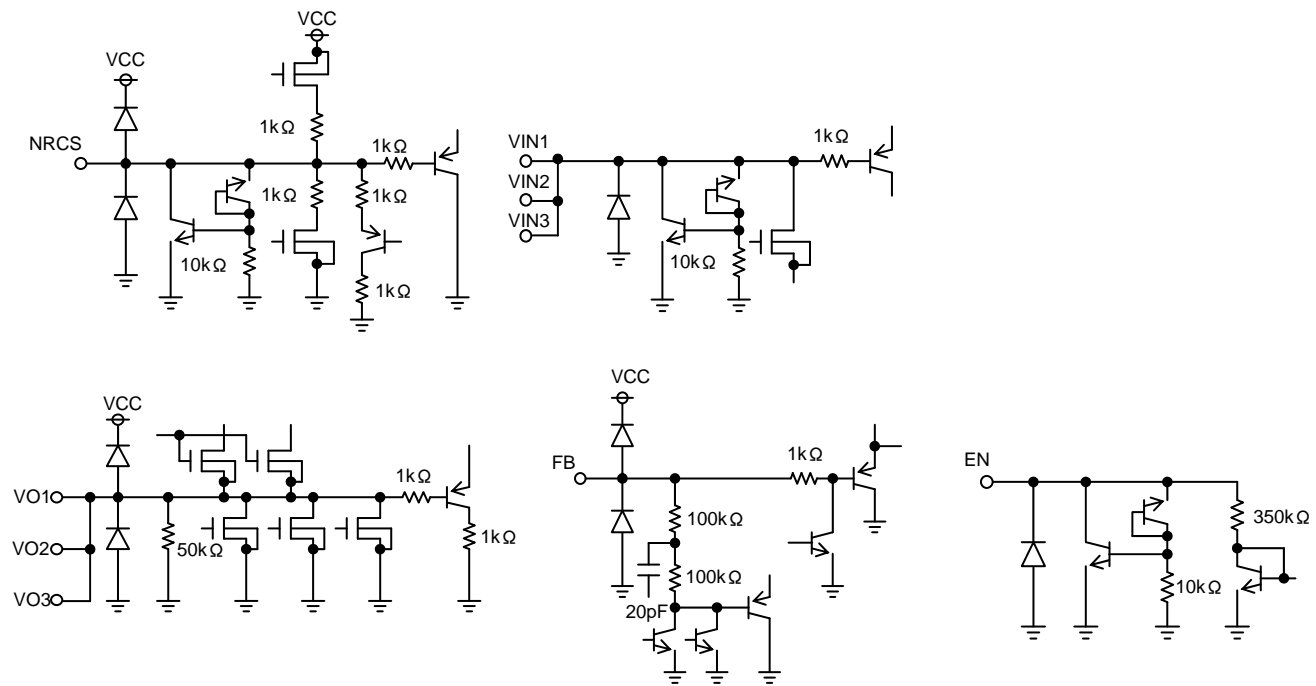

●Reference landing pattern

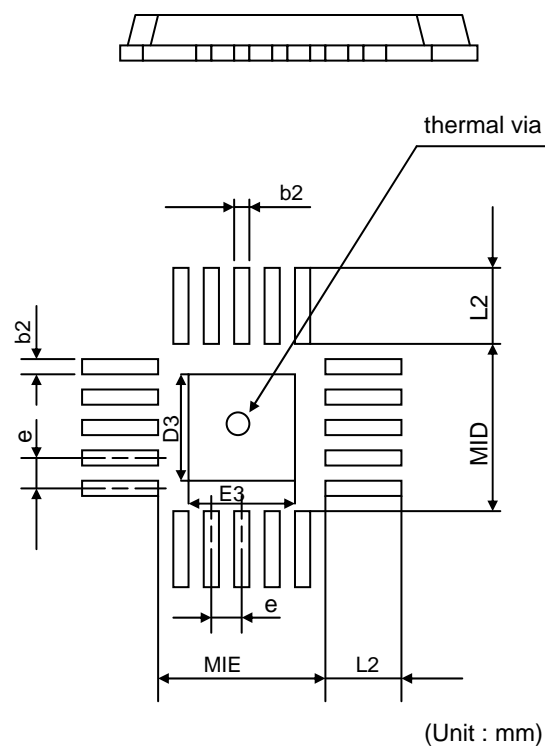

(Unit : mm)

Lead pitch	landing pitch	landing length	landing pitch
e	MIE	≥ 12	b2
0.50	2.60	1.10	0.25
central pad length	central pad pitch	thermal via	
D3	E3	Diameter	
1.60	1.60	$\Phi 0.30$	

*It is recommended to design suitable for the actual application.

●Operation Notes

1. Absolute maximum ratings


An excess in the absolute maximum ratings, such as supply voltage, temperature range of operating conditions, etc., can break down the devices, thus making impossible to identify breaking mode, such as a short circuit or an open circuit. If any over rated values will expect to exceed the absolute maximum ratings, consider adding circuit protection devices, such as fuses.

2. Connecting the power supply connector backward

Connecting of the power supply in reverse polarity can damage IC. Take precautions when connecting the power supply lines. An external direction diode can be added.

3. Output pin

In the event that load containing a large inductance component is connected to the output terminal, and generation of back-EMF at the start-up and when output is turned OFF is assumed, it is requested to insert a protection diode.

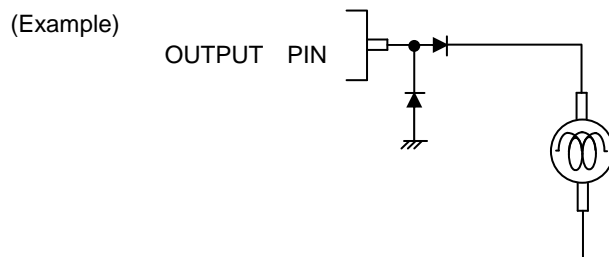

4. GND voltage

The potential of GND pin must be minimum potential in all operating conditions.

5. Thermal design

Use a thermal design that allows for a sufficient margin in light of the power dissipation (Pd) in actual operating conditions.

6. Inter-pin shorts and mounting errors

Use caution when positioning the IC for mounting on printed circuit boards. The IC may be damaged if there is any connection error or if pins are shorted together.

7. Actions in strong electromagnetic field

Use caution when using the IC in the presence of a strong electromagnetic field as doing so may cause the IC to malfunction.

8. ASO

When using the IC, set the output transistor so that it does not exceed absolute maximum ratings or ASO.

9. Thermal shutdown circuit

The IC incorporates a built-in thermal shutdown circuit (TSD circuit). The thermal shutdown circuit (TSD circuit) is designed only to shut the IC off to prevent thermal runaway. It is not designed to protect the IC or guarantee its operation. Do not continue to use the IC after operating this circuit or use the IC in an environment where the operation of this circuit is assumed.

	TSD on temperature [°C] (typ.)	Hysteresis temperature [°C] (typ.)
BD3508EKN	175	15

10. Testing on application boards

When testing the IC on an application board, connecting a capacitor to a pin with low impedance subjects the IC to stress. Always discharge capacitors after each process or step. Always turn the IC's power supply off before connecting it to or removing it from a jig or fixture during the inspection process. Ground the IC during assembly steps as an antistatic measure. Use similar precaution when transporting or storing the IC.


11. Regarding input pin of the IC

This monolithic IC contains P+ isolation and P substrate layers between adjacent elements in order to keep them isolated. P-N junctions are formed at the intersection of these P layers with the N layers of other elements, creating a parasitic diode or transistor. For example, the relation between each potential is as follows:

When $GND > Pin\ A$ and $GND > Pin\ B$, the P-N junction operates as a parasitic diode.

When $GND > Pin\ B$, the P-N junction operates as a parasitic transistor.

Parasitic diodes can occur inevitable in the structure of the IC. The operation of parasitic diodes can result in mutual interference among circuits, operational faults, or physical damage. Accordingly, methods by which parasitic diodes operate, such as applying a voltage that is lower than the GND (P substrate) voltage to an input pin, should not be used.

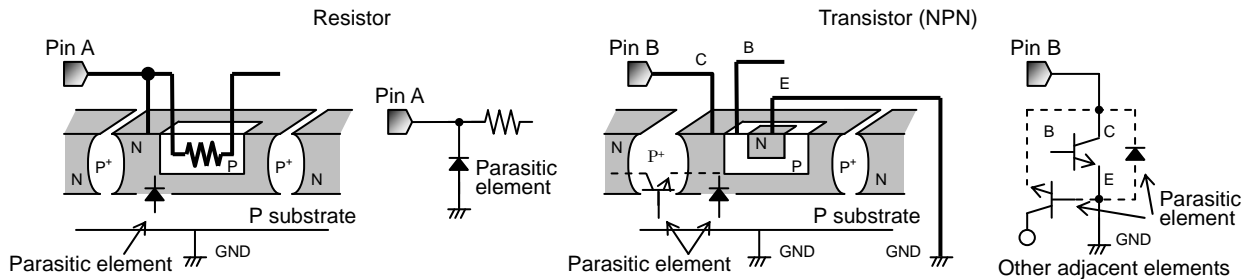


12. Ground Wiring Pattern

When using both small signal and large current GND patterns, it is recommended to isolate the two ground patterns, placing a single ground point at the ground potential of application so that the pattern wiring resistance and voltage variations caused by large currents do not cause variations in the small signal ground voltage. Be careful not to change the GND wiring pattern of any external components, either.


• Heat Dissipation Characteristics

©HQFN20V

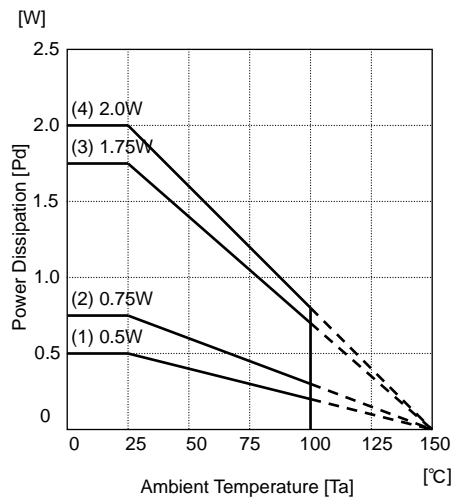

- (1) IC unit
 $\theta_{j-a}=250^{\circ}\text{C/W}$
- (2) Substrate (Bottom surface copper foil area: none)
 $\theta_{j-a}=166.7^{\circ}\text{C/W}$
- (3) Substrate (Bottom surface copper foil area: 60mm×60mm...1 layer)
 $\theta_{j-a}=71.4^{\circ}\text{C/W}$
- (4) Substrate (Bottom surface copper foil area: 60mm×60mm...2 layers)
 $\theta_{j-a}=62.5^{\circ}\text{C/W}$

● Type Designations (Ordering Information)

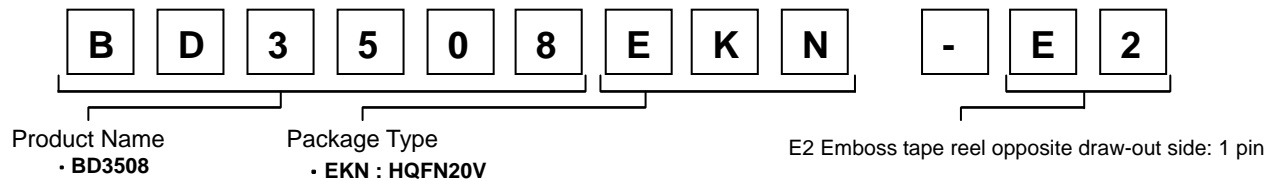

● Package specification

HQFN20V

External View

(Unit: mm)

Packing Specs

Packing	Embossed tape (moisture-proof packing)
Pieces/Reel	2500pcs
Unreeling Direction	E2 (With reel in left hand, unreeling with the right, the index [number 1] pin is at the top left)

Note: Please order by the number of reels desired

- The contents described herein are correct as of October, 2008
- The contents described herein are subject to change without notice. For updates of the latest information, please contact and confirm with ROHM CO.,LTD.
- Any part of this application note must not be duplicated or copied without our permission.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams and information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.
- The products described herein utilize silicon as the main material.
- The products described herein are not designed to be X ray proof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Excellence in Electronics

ROHM

ROHM CO., LTD.

21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto
615-8585, Japan
TEL: +81-75-311-2121 FAX: +81-75-315-0172
URL: <http://www.rohm.com>

Published by
KTC LSI Development Headquarters
LSI Business Promotion Group

Contact us for further information about the products.

San Diego

Atlanta

Boston

Chicago

Dallas

Denver

Detroit

Nashville

Mexico

Düsseldorf

Munich

Stuttgart

France

United Kingdom

Denmark

Espoo

Salo

Oulu

Barcelona

Hungary

Poland

Russia

Seoul

Masan

Dalian

Beijing

TEL: +1-858-625-3630

TEL: +1-770-754-5972

TEL: +1-978-371-0382

TEL: +1-847-368-1006

TEL: +1-469-287-5366

TEL: +1-303-708-0908

TEL: +1-248-348-9920

TEL: +1-615-620-6700

TEL: +52-33-3123-2001

TEL: +49-2154-9210

TEL: +49-8999-216168

TEL: +49-711-7272-370

TEL: +33-1-5697-3060

TEL: +44-1-908-306700

TEL: +45-3694-4739

TEL: +358-9725-54491

TEL: +358-2-7332234

TEL: +358-8-5372930

TEL: +34-9375-24320

TEL: +36-1-4719338

TEL: +48-22-5757213

TEL: +7-495-739-41-74

TEL: +82-2-8182-700

TEL: +82-55-240-6234

TEL: +86-411-8230-8549

TEL: +86-10-8525-2483

FAX: +1-858-625-3670

FAX: +1-770-754-0691

FAX: +1-928-438-7164

FAX: +1-847-368-1008

FAX: +1-469-362-7973

FAX: +1-303-708-0858

FAX: +1-248-348-9942

FAX: +1-615-620-6702

FAX: +52-33-3123-2002

FAX: +49-2154-921400

FAX: +49-8999-216176

FAX: +49-711-7272-3720

FAX: +33-1-5697-3080

FAX: +44-1-908-235788

FAX: +45-3694-4789

FAX: +358-9-7255-4499

FAX: +358-2-7332237

FAX: +358-8-5372931

FAX: +34-9375-24410

FAX: +36-1-4719339

FAX: +48-22-5757001

FAX: +7-495-739-41-74

FAX: +82-2-8182-715

FAX: +82-55-240-6236

FAX: +86-411-8230-8537

FAX: +86-10-8525-2489

Tianjin

Shanghai

Hangzhou

Nanjing

Ningbo

Qingdao

Suzhou

Wuxi

Shenzhen

Dongguan

Fuzhou

Guangzhou

Huizhou

Xiamen

Zhuhai

Hong Kong

Taipei

Kaohsiung

Singapore

Philippines

Thailand

Kuala Lumpur

Penang

Kyoto

Yokohama

TEL: +86-22-23029181

TEL: +86-21-6279-2727

TEL: +86-571-87658072

TEL: +86-25-8689-0015

TEL: +86-574-87654201

TEL: +86-532-5779-312

TEL: +86-512-6807-1300

TEL: +86-510-82702693

TEL: +86-755-8307-3008

TEL: +86-769-8393-3320

TEL: +86-591-8801-8698

TEL: +86-20-3878-8100

TEL: +86-752-205-1054

TEL: +86-592-238-5705

TEL: +86-756-3232-480

TEL: +852-2-740-6262

TEL: +886-2-2500-6956

TEL: +886-7-237-0881

TEL: +65-6332-2322

TEL: +63-2-807-6872

TEL: +66-2-254-4890

TEL: +60-3-7958-8355

TEL: +60-4-2286453

TEL: +81-75-365-1218

TEL: +81-45-476-2290

FAX: +86-22-23029183

FAX: +86-21-6247-2066

FAX: +86-571-87658071

FAX: +86-25-8689-0393

FAX: +86-574-87654208

FAX: +86-532-5779-653

FAX: +86-512-6807-2300

FAX: +86-510-82702992

FAX: +86-755-8307-3003

FAX: +86-769-8398-4140

FAX: +86-591-8801-8690

FAX: +86-20-3825-5965

FAX: +86-752-205-1059

FAX: +86-592-239-8380

FAX: +86-756-3232-460

FAX: +852-2-375-8971

FAX: +886-2-2503-2869

FAX: +886-7-238-7332

FAX: +65-6332-5662

FAX: +63-2-809-1422

FAX: +66-2-256-6334

FAX: +60-3-7958-8377

FAX: +60-4-2286452

FAX: +81-75-365-1228

FAX: +81-45-476-2295

Catalog No.08T431A '08.10 ROHM ©

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM CO.,LTD.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.