

# 36V, 3A Step-Down $\mu$ Module Regulator

## FEATURES

- Complete Step-Down Switch Mode Power Supply
- Wide Input Voltage Range: 3.6V to 36V
- Up to 3A Output Current
- Parallelable for Increased Output Current
- 0.8V to 24V Output Voltage
- Selectable Switching Frequency: 200kHz to 2.4MHz
- Current Mode Control
- SnPb or RoHS Compliant Finish
- Programmable Soft-Start
- 9mm × 15mm × 4.32mm LGA and 9mm × 15mm × 4.92mm BGA Packages

## APPLICATIONS

- Automotive Battery Regulation
- Power for Portable Products
- Distributed Supply Regulation
- Industrial Supplies
- Wall Transformer Regulation



## DESCRIPTION

The LTM<sup>®</sup>8025 is a 36V<sub>IN</sub>, 3A step-down  $\mu$ Module<sup>®</sup> (micromodule) converter. Included in the package are the switching controller, power switches, inductor and all support components. Operating over an input voltage range of 3.6V to 36V, the LTM8025 supports an output voltage range of 0.8V to 24V and a switching frequency range of 200kHz to 2.4MHz, each set by a single resistor. Only the bulk input and output filter capacitors are needed to finish the design.

The LTM8025 is packaged in a thermally enhanced, compact (9mm × 15mm) and low profile over-molded land grid array (LGA) and ball grid array (BGA) packages suitable for automated assembly by standard surface mount equipment. The LTM8025 is available with SnPb (BGA) or RoHS compliant terminal finish.

All registered trademarks and trademarks are the property of their respective owners.

## TYPICAL APPLICATION

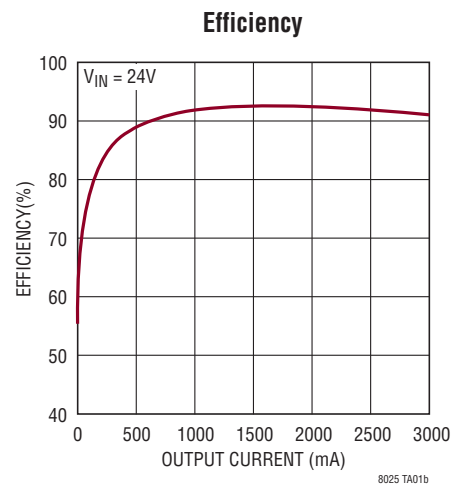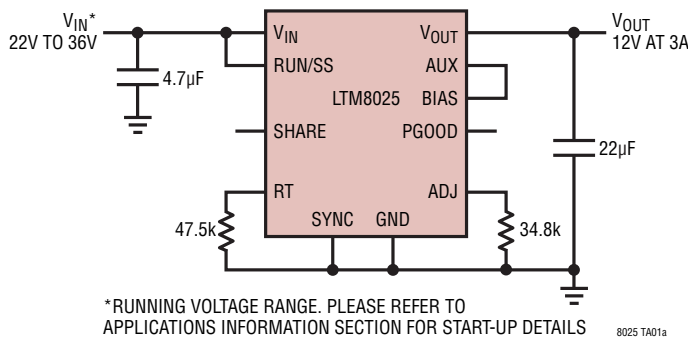


# LTM8025

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                                |     |   |       |
|--------------------------------|-----|---|-------|
| $V_{IN}$ , RUN/SS Voltage..... | 36V | BIAS.....                                   | 25V   |
| ADJ, RT, SHARE Voltage.....    | 6V  | $V_{IN}$ + BIAS.....                        | 56V   |
| $V_{OUT}$ , AUX.....           | 25V | Maximum Junction Temperature (Note 2) ..... | 125°C |
| PGOOD, SYNC.....               | 30V | Solder Temperature.....                     | 245°C |

## PIN CONFIGURATION

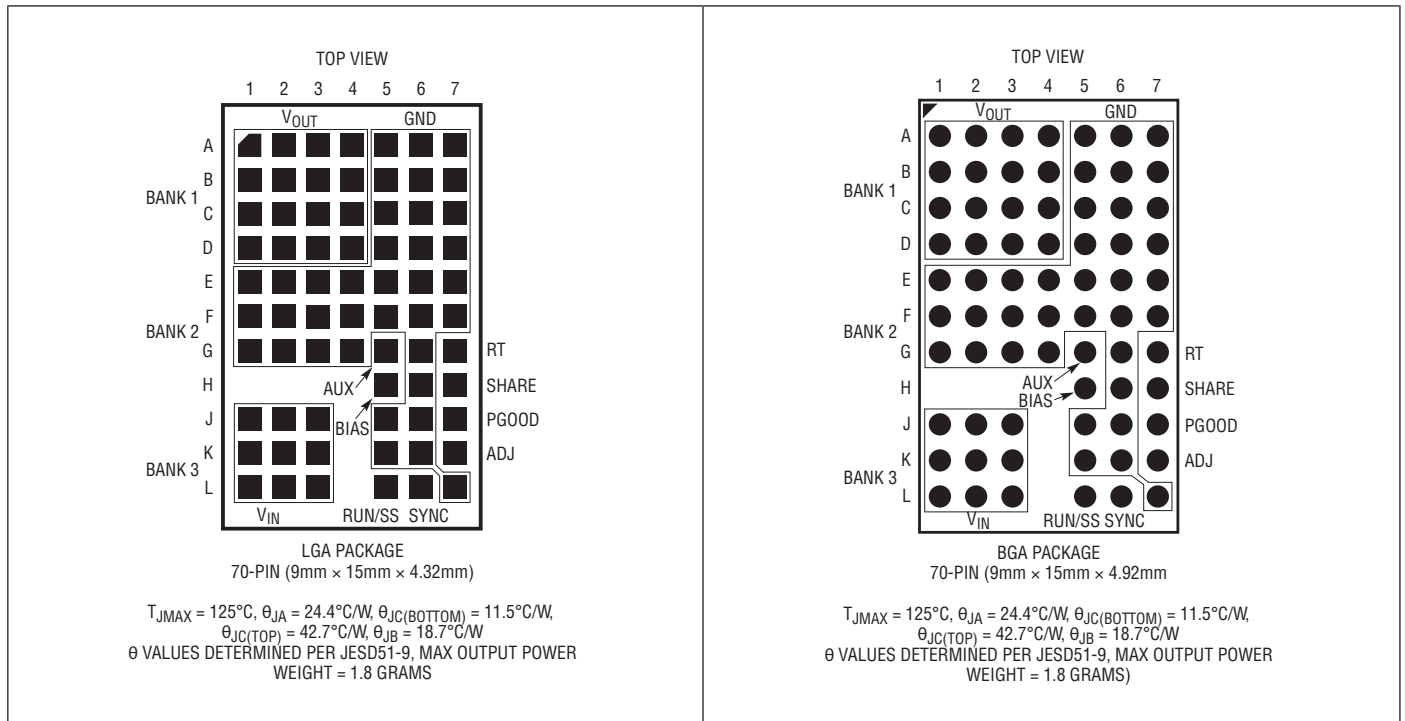

## ORDER INFORMATION

| PART NUMBER    | PAD OR BALL FINISH | PART MARKING* |             | PACKAGE TYPE | MSL RATING | TEMPERATURE RANGE (NOTE 2) |
|----------------|--------------------|---------------|-------------|--------------|------------|----------------------------|
|                |                    | DEVICE        | FINISH CODE |              |            |                            |
| LTM8025EV#PBF  | Au (RoHS)          | LTM8025V      | e4          | LGA          | 3          | -40°C to 125°C             |
| LTM8025IV#PBF  | Au (RoHS)          | LTM8025V      | e4          | LGA          | 3          | -40°C to 125°C             |
| LTM8025MPV#PBF | Au (RoHS)          | LTM8025MPV    | e4          | LGA          | 3          | -55°C to 125°C             |
| LTM8025EY#PBF  | SAC305 (RoHS)      | LTM8025Y      | e1          | BGA          | 3          | -40°C to 125°C             |
| LTM8025IY#PBF  | SAC305 (RoHS)      | LTM8025Y      | e1          | BGA          | 3          | -40°C to 125°C             |
| LTM8025IY      | SnPb (63/37)       | LTM8025Y      | e0          | BGA          | 3          | -40°C to 125°C             |
| LTM8025MPY#PBF | SAC305 (RoHS)      | LTM8025Y      | e1          | BGA          | 3          | -55°C to 125°C             |
| LTM8025MPY     | SnPb (63/37)       | LTM8025Y      | e0          | BGA          | 3          | -55°C to 125°C             |

• Contact the factory for parts specified with wider operating temperature ranges.  
 \*Pad or ball finish code is per IPC/JEDEC J-STD-609.

- [Recommended LGA and BGA PCB Assembly and Manufacturing Procedures](#)
- [LGA and BGA Package and Tray Drawings](#)

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{IN} = 12\text{V}$ ,  $\text{RUN/SS} = 12\text{V}$ ,  $\text{BIAS} = 3\text{V}$  unless otherwise noted. (Note 2)










| PARAMETER                                 | CONDITIONS  |   | MIN        | TYP              | MAX             | UNITS   |
|---|---|---|------------|------------------|-----------------|---|
| Minimum Input Voltage                     |   | ● |            |                  | 3.6             | V   |
| Output DC Voltage                         | $R_{ADJ}$ Open<br>$R_{ADJ} = 16.9\text{k}$ ; $V_{IN} = 36\text{V}$                        |   |            | 0.8<br>24        |                 | V<br>V  |
| Output DC Current                         | $V_{OUT} = 3.3\text{V}$   |   | 0          |                  | 3               | A   |
| Quiescent Current into $V_{IN}$           | $\text{RUN/SS} = 0\text{V}$<br>Not Switching<br>$\text{BIAS} = 0\text{V}$ , Not Switching |   |            | 0.01<br>25<br>85 | 1<br>60<br>150  | $\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$ |
| Quiescent Current into BIAS               | $\text{RUN/SS} = 0\text{V}$<br>Not Switching<br>$\text{BIAS} = 0\text{V}$ , Not Switching |   |            | 0.01<br>65<br>0  | 0.5<br>120<br>5 | $\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$ |
| Line Regulation                           | $5.5\text{V} < V_{IN} < 36\text{V}$ , $I_{OUT} = 1\text{A}$                               |   |            | 0.3              |                 | %   |
| Load Regulation                           | $0\text{A} < I_{OUT} < 3\text{A}$   |   |            | 0.4              |                 | %   |
| Output Voltage Ripple (RMS)               | $0\text{A} < I_{OUT} < 3\text{A}$   |   |            | 10               |                 | mV  |
| Switching Frequency                       | $R_T = 45.3\text{k}$  |   |            | 775              |                 | kHz   |
| Voltage (at ADJ Pin)                      |   | ● | 775<br>770 | 790              | 805<br>810      | mV<br>mV  |
| Current Out of ADJ Pin                    | $\text{ADJ} = 1\text{V}$ , $V_{OUT} = 0\text{V}$  |   |            | 2                |                 | $\mu\text{A}$                                   |
| Minimum BIAS Voltage for Proper Operation |   |   |            | 2                | 2.8             | V   |
| $\text{RUN/SS}$ Pin Current               | $\text{RUN/SS} = 2.5\text{V}$   |   |            | 5                | 10              | $\mu\text{A}$                                   |
| $\text{RUN}$ Input High Voltage           |   |   | 2.5        |                  |                 | V   |
| $\text{RUN}$ Input Low Voltage            |   |   |            |                  | 0.2             | V   |
| PGOOD Threshold (at ADJ Pin)              | $V_{OUT}$ Rising  |   |            | 710              |                 | mV  |
| PGOOD Leakage Current                     | $\text{PGOOD} = 30\text{V}$   |   |            | 0.1              | 1               | $\mu\text{A}$                                   |
| PGOOD Sink Current                        | $\text{PGOOD} = 0.4\text{V}$  |   | 200        | 700              |                 | $\mu\text{A}$                                   |
| SYNC Input Low Threshold                  | $f_{\text{SYNC}} = 550\text{kHz}$   |   |            |                  | 0.5             | V   |
| SYNC Input High Threshold                 | $f_{\text{SYNC}} = 550\text{kHz}$   |   | 0.7        |                  |                 | V   |
| SYNC Bias Current                         | $\text{SYNC} = 0\text{V}$   |   |            | 0.1              |                 | $\mu\text{A}$                                   |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** The LTM8025E is guaranteed to meet performance specifications from  $0^\circ\text{C}$  to  $125^\circ\text{C}$  internal. Specifications over the full  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  internal operating temperature range are assured by design,


characterization and correlation with statistical process controls. The LTM8025I is guaranteed to meet specifications over the full  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  internal operating temperature range. The LTM8025MP is guaranteed to meet specifications over the full  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  internal operating temperature range. Note that the maximum internal temperature is determined by specific operating conditions in conjunction with board layout, the rated package thermal resistance and other environmental factors.

**TYPICAL PERFORMANCE CHARACTERISTICS**  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

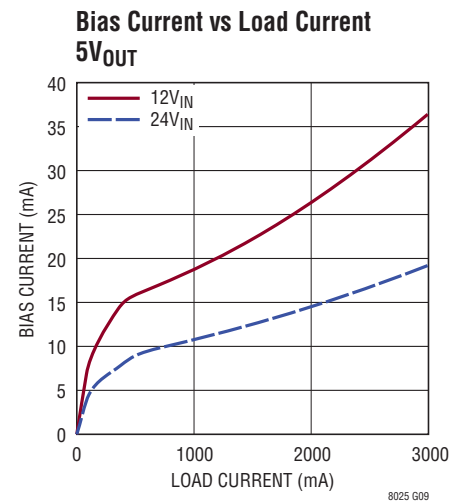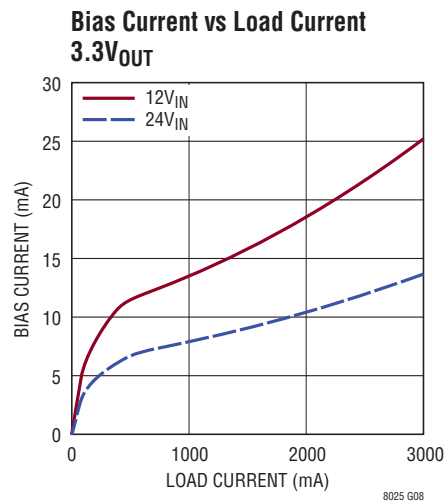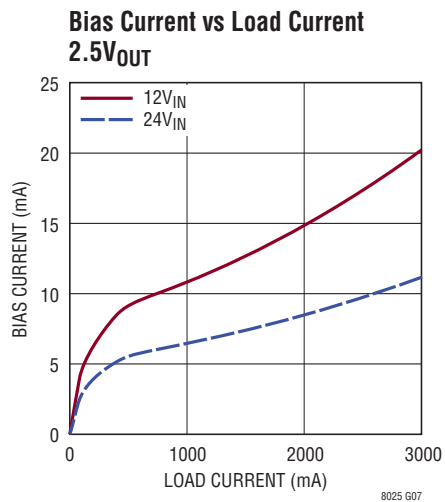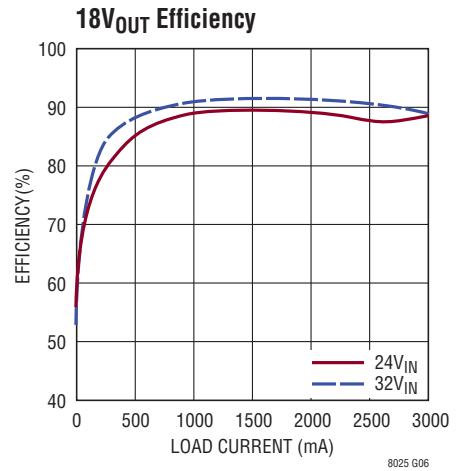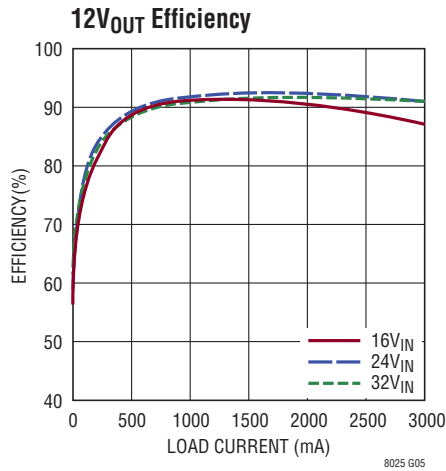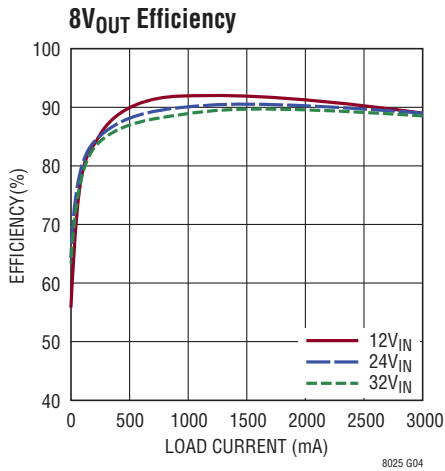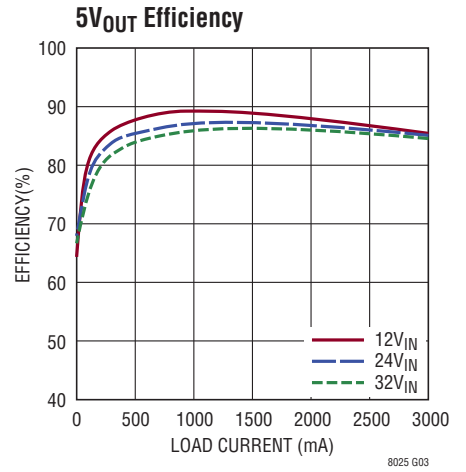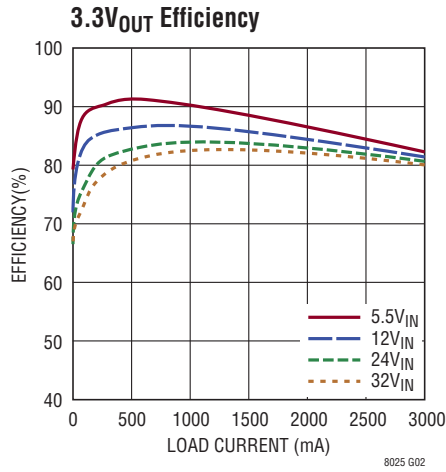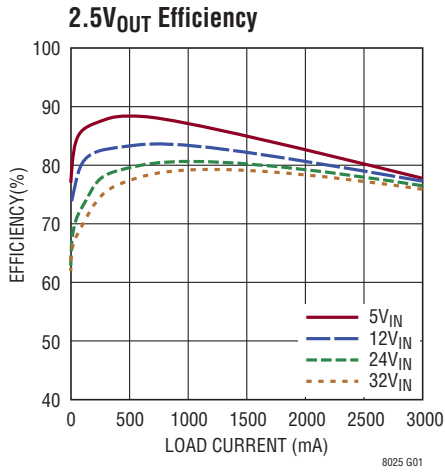


**TYPICAL PERFORMANCE CHARACTERISTICS**  $T_A = 25^\circ\text{C}$ , unless otherwise noted.


**Bias Current vs Load Current**  
**8V<sub>OUT</sub>**

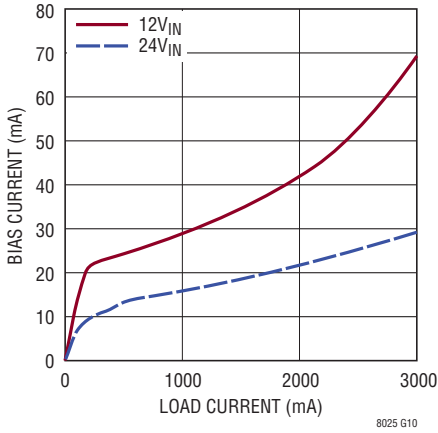


**Bias Current vs Load Current**  
**12V<sub>OUT</sub>**

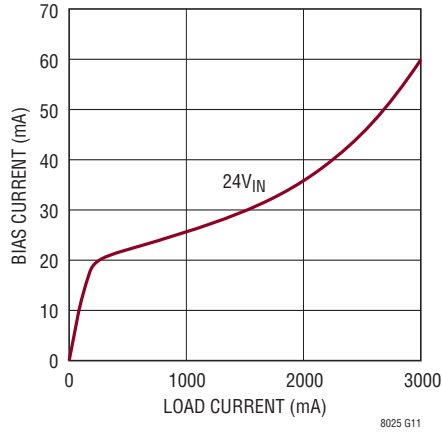


**Bias Current vs Load Current**  
**18V<sub>OUT</sub>**

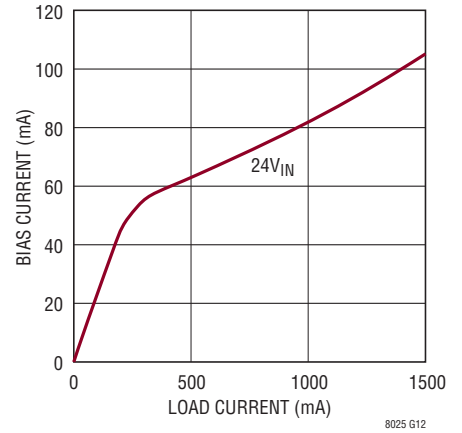


**Input Current vs Load Current**  
**2.5V<sub>OUT</sub>**

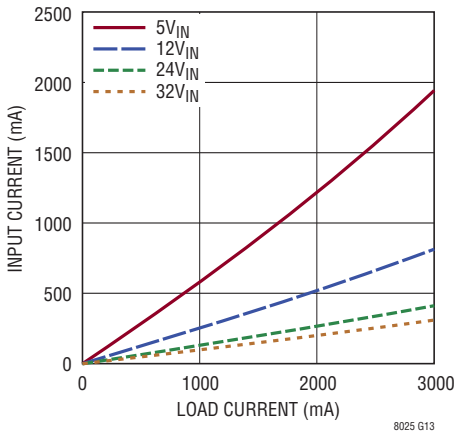


**Input Current vs Load Current**  
**3.3V<sub>OUT</sub>**

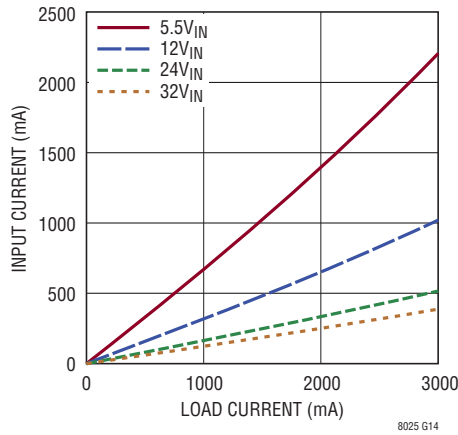


**Input Current vs Load Current**  
**5V<sub>OUT</sub>**

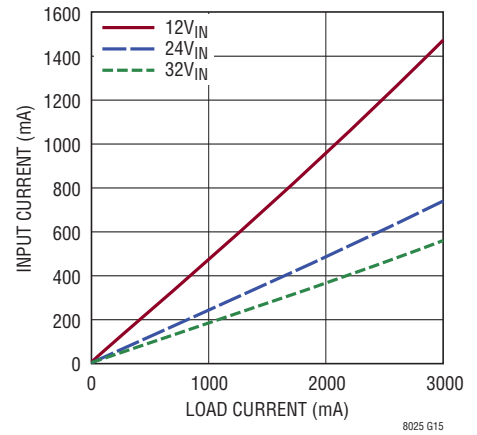


**Input Current vs Load Current**  
**8V<sub>OUT</sub>**

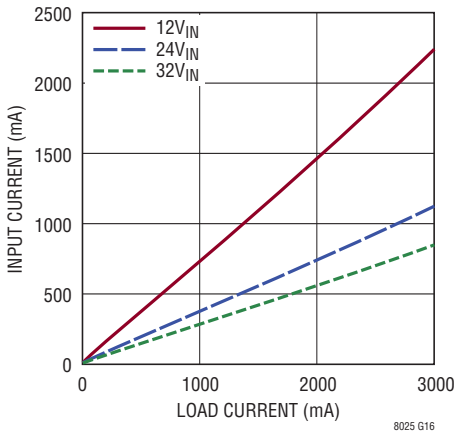

**Input Current vs Load Current**  
**12V<sub>OUT</sub>**

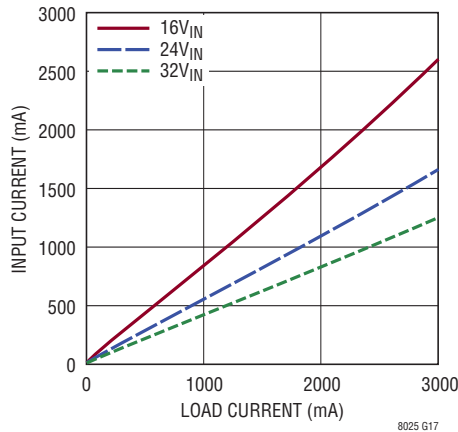


**Input Current vs Load Current**  
**18V<sub>OUT</sub>**

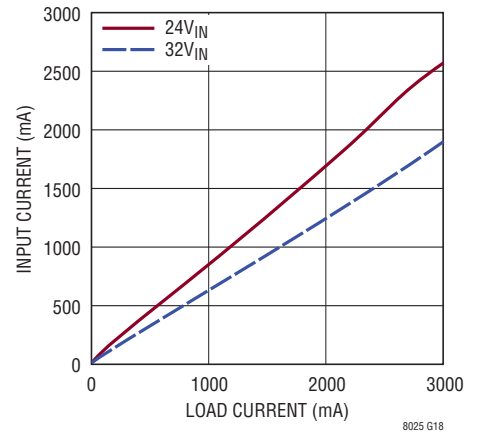


## TYPICAL PERFORMANCE CHARACTERISTICS $T_A = 25^\circ\text{C}$ , unless otherwise noted.


**Input Current vs Input Voltage  
Output Shorted**

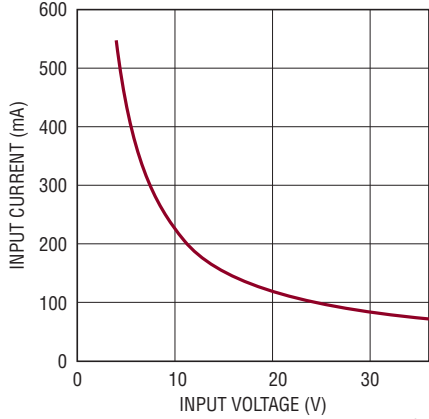


**Minimum Input Running Voltage  
vs  $V_{OUT}$ ,  $I_{OUT} = 3\text{A}$**

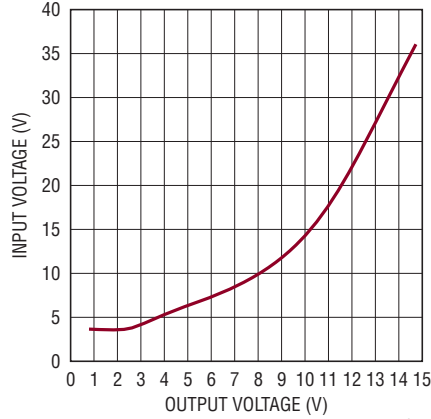


**Minimum Input Voltage vs Load  
Current,  $3.3V_{OUT}$**

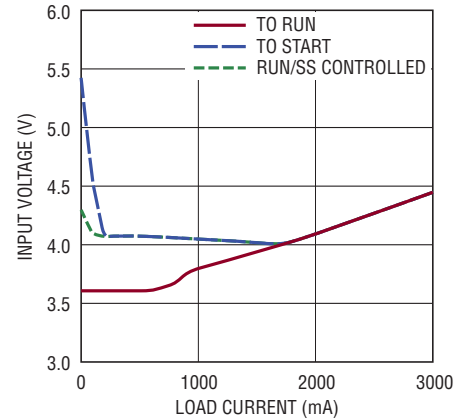


**Minimum Input Voltage vs Load  
Current,  $5V_{OUT}$**

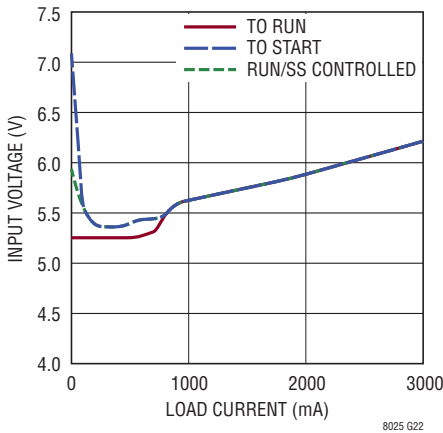


**Minimum Input Voltage vs Load  
Current,  $8V_{OUT}$**

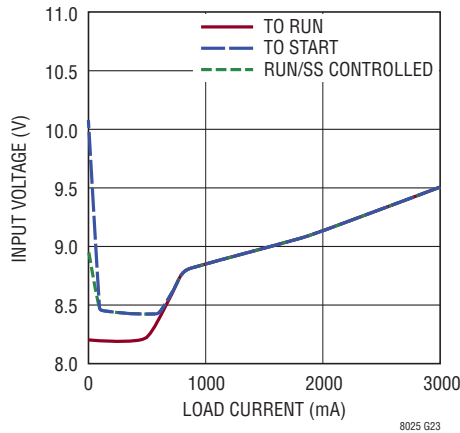


**Minimum Input Voltage vs Load  
Current,  $12V_{OUT}$**

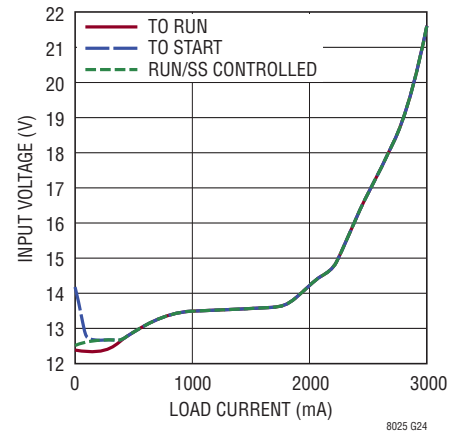


**Minimum Input Voltage vs Load  
Current,  $18V_{OUT}$**

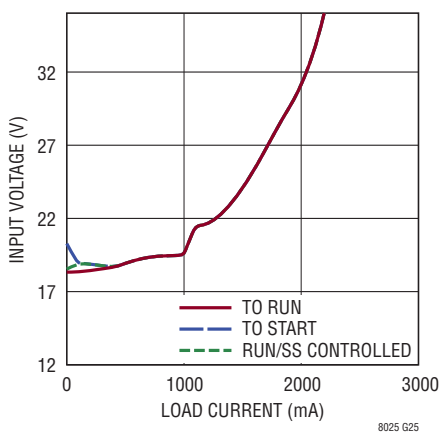

**Minimum Input Voltage vs Load  
Current,  $-3.3V_{OUT}$**

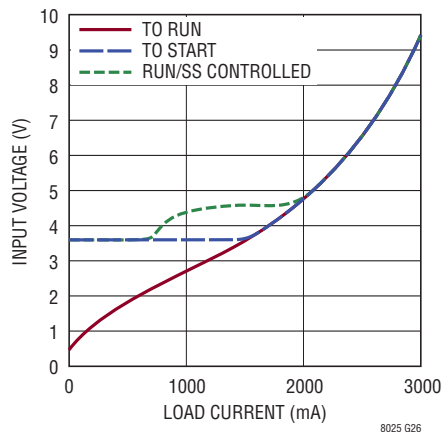


**Minimum Input Voltage vs Load  
Current,  $-5V_{OUT}$**

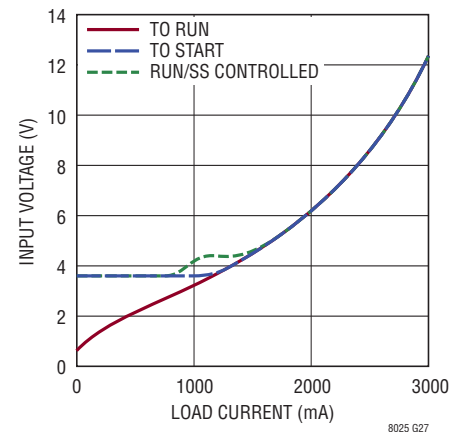


**TYPICAL PERFORMANCE CHARACTERISTICS**  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

**Minimum Input Voltage vs Load Current,  $-8V_{OUT}$**

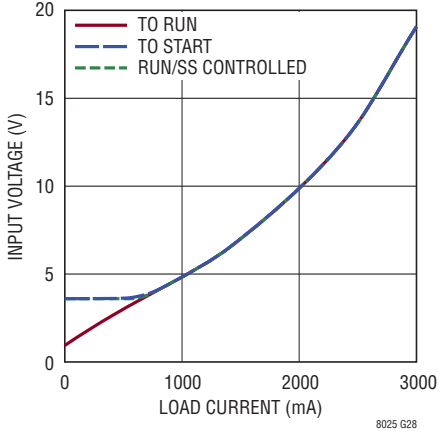


8025 G28

**Minimum Input Voltage vs Load Current,  $-12V_{OUT}$**

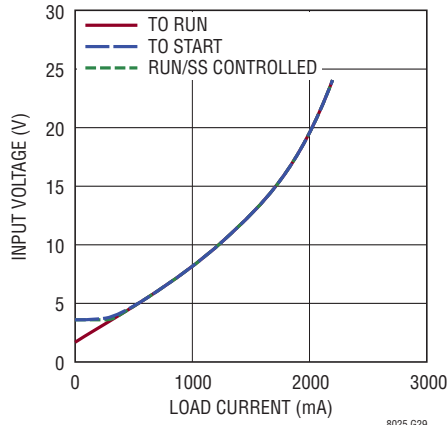


8025 G29

**Minimum Input Voltage vs Negative  $V_{OUT}$**

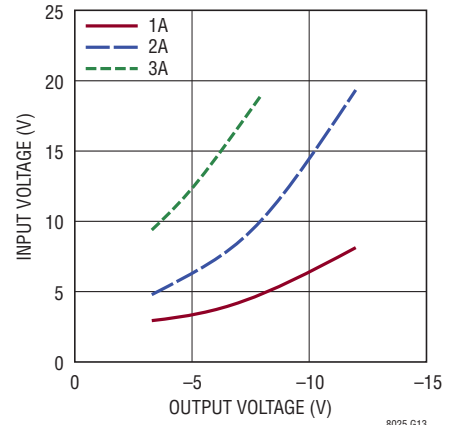


8025 G13

**Junction Temperature Rise vs Load Current,  $2.5V_{OUT}$**

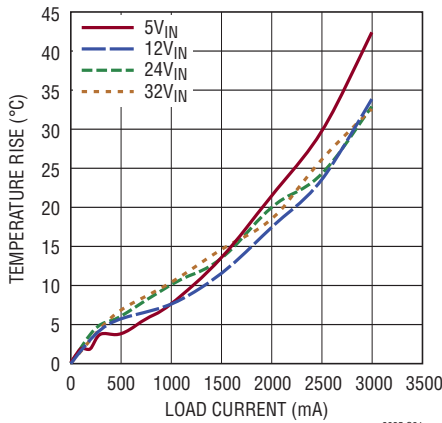


8025 G31

**Junction Temperature Rise vs Load Current,  $3.3V_{OUT}$**

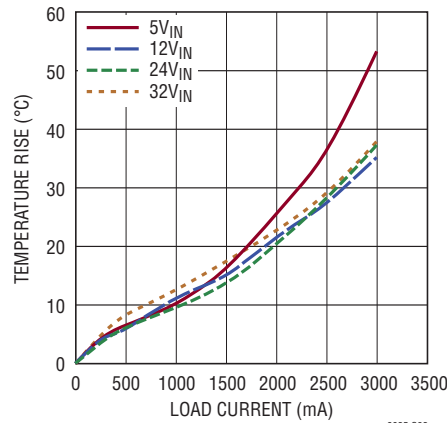


8025 G32

**Junction Temperature Rise vs Load Current,  $5V_{OUT}$**

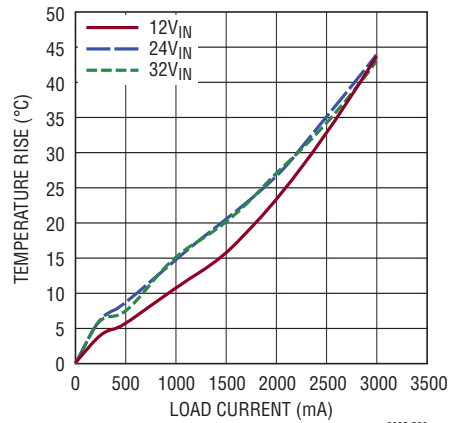


8025 G33

**Junction Temperature Rise vs Load Current,  $8V_{OUT}$**

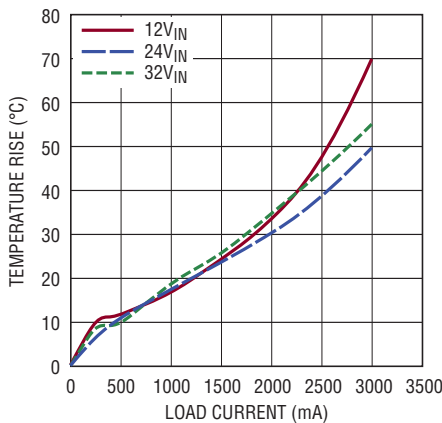


8025 G34

**Junction Temperature Rise vs Load Current,  $12V_{OUT}$**

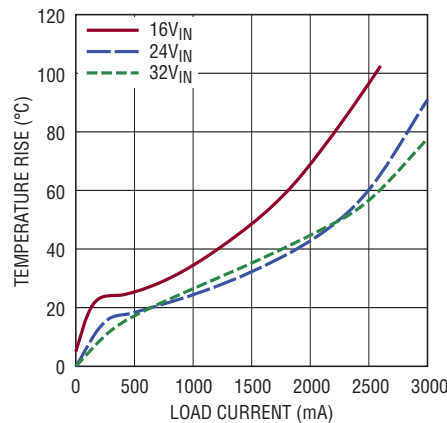

8025 G35

**Junction Temperature Rise vs Load Current,  $18V_{OUT}$**

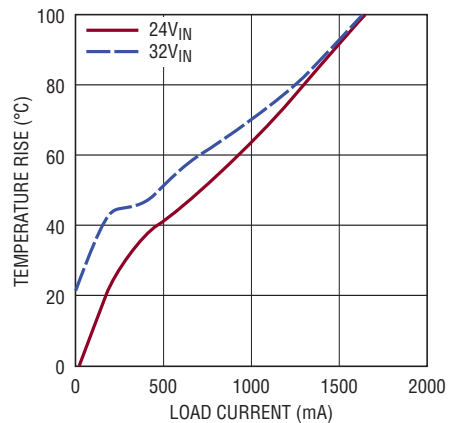

8025 G36

## PIN FUNCTIONS

**V<sub>OUT</sub> (Bank 1):** Power Output Pins. Apply the output filter capacitor and the output load between these pins and GND pins.

**GND (Bank 2):** Tie these GND pins to a local ground plane below the LTM8025 and the circuit components. In most applications, the bulk of the heat flow out of the LTM8025 is through these pads, so the printed circuit design has a large impact on the thermal performance of the part. See the PCB Layout and Thermal Considerations sections for more details. Return the feedback divider ( $R_{ADJ}$ ) to this net.

**V<sub>IN</sub> (Bank 3):** The V<sub>IN</sub> pin supplies current to the LTM8025's internal regulator and to the internal power switch. This pin must be locally bypassed with an external, low ESR capacitor; see Table 1 for recommended values.

**AUX (Pin G5):** Low Current Voltage Source for BIAS. In many designs, the BIAS pin is simply connected to V<sub>OUT</sub>. The AUX pin is internally connected to V<sub>OUT</sub> and is placed adjacent to the BIAS pin to ease printed circuit board routing. Although this pin is internally connected to V<sub>OUT</sub>, it is not intended to deliver a high current, so do **not** draw current from this pin to the load. If this pin is not tied to BIAS, leave it floating.

**BIAS (Pin H5):** The BIAS pin connects to the internal power bus. Connect to a power source greater than 2.8V and less than 25V. If the output is greater than 2.8V, connect this pin there. If the output voltage is less, connect this to a voltage source between 2.8V and 25V. Also, make sure that BIAS + V<sub>IN</sub> is less than 56V.

**RUN/SS (Pin L5):** Pull the RUN/SS pin below 0.2V to shut down the LTM8025. Tie to 2.5V or more for normal operation. If the shutdown feature is not used, tie this pin to the V<sub>IN</sub> pin. RUN/SS also provides a soft-start function; see the Applications Information section.

**SYNC (Pin L6):** This is the external clock synchronization input. Ground this pin for low ripple Burst Mode operation at low output loads. Tie to a stable voltage source greater than 0.7V to disable Burst Mode operation. Do not leave this pin floating. Tie to a clock source for synchronization. Clock edges should have rise and fall times faster than 1 $\mu$ s. See the Synchronization section in Applications Information.

**RT (Pin G7):** The RT pin is used to program the switching frequency of the LTM8025 by connecting a resistor from this pin to ground. Table 2 gives the resistor values that correspond to the resultant switching frequency. Minimize the capacitance at this pin.


**SHARE (Pin H7):** Tie this to the SHARE pin of another LTM8025 when paralleling the outputs. Otherwise, do not connect.

**PGOOD (Pin J7):** The PGOOD pin is the open-collector output of an internal comparator. PGOOD remains low until the ADJ pin is within 10% of the final regulation voltage. PGOOD output is valid when V<sub>IN</sub> is above 3.6V and RUN/SS is high. If this function is not used, leave this pin floating.

**ADJ (Pin K7):** The LTM8025 regulates its ADJ pin to 0.79V. Connect the adjust resistor from this pin to ground. The value of  $R_{ADJ}$  is given by the equation  $R_{ADJ} = 394.21 / (V_{OUT} - 0.79)$ , where  $R_{ADJ}$  is in k $\Omega$ .



## BLOCK DIAGRAM

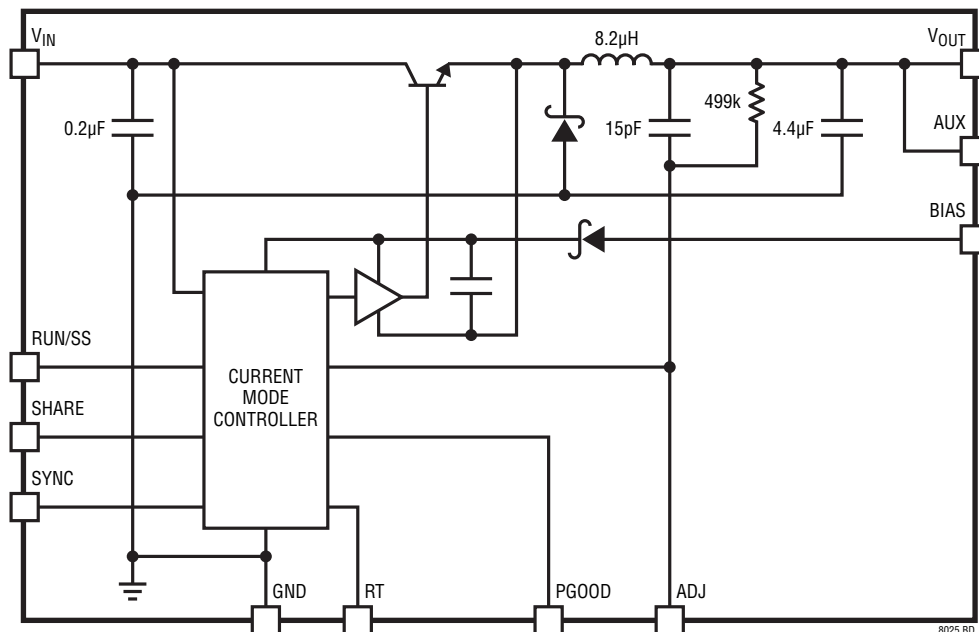

## OPERATION

The LTM8025 is a standalone nonisolated step-down switching DC/DC power supply that can deliver up to 3A of output current. This module provides a precisely regulated output voltage programmable via one external resistor from 0.8V to 25V. The input voltage range is 3.6V to 36V. Given that the LTM8025 is a step-down converter, make sure that the input voltage is high enough to support the desired output voltage and load current.

As shown in the Block Diagram, the LTM8025 contains a current mode controller, power switching element, power inductor, power Schottky diode and a modest amount of input and output capacitance. The LTM8025 is a fixed frequency PWM regulator. The switching frequency is set by simply connecting the appropriate resistor value from the RT pin to GND.

An internal regulator provides power to the control circuitry. The bias regulator normally draws power from the  $V_{IN}$  pin, but if the BIAS pin is connected to an external voltage higher than 2.8V, bias power will be drawn from the external source (typically the regulated output voltage). This improves efficiency. The RUN/SS pin is used to place the LTM8025 in shutdown, disconnecting the output and reducing the input current to less than 1µA.

To further optimize efficiency, the LTM8025 automatically switches to Burst Mode® operation in light load situations. Between bursts, all circuitry associated with controlling the output switch is shut down reducing the input supply current to 50µA in a typical application.

The oscillator reduces the LTM8025's operating frequency when the voltage at the ADJ pin is low. This frequency foldback helps to control the output current during start-up and overload.

The LTM8025 contains a power good comparator which trips when the ADJ pin is at roughly 90% of its regulated value. The PGOOD output is an open-collector transistor that is off when the output is in regulation, allowing an external resistor to pull the PGOOD pin high. Power good is valid when the LTM8025 is enabled and  $V_{IN}$  is above 3.6V.

The LTM8025 is equipped with a thermal shutdown that will inhibit power switching at high junction temperatures. The activation threshold of this function, however, is above 125°C to avoid interfering with normal operation. Thus, prolonged or repetitive operation under a condition in which the thermal shutdown activates may damage or impair the reliability of the device.

## APPLICATIONS INFORMATION

For most applications, the design process is straight forward, summarized as follows:

1. Look at Table 1 and find the row that has the desired input range and output voltage.
2. Apply the recommended  $C_{IN}$ ,  $C_{OUT}$ ,  $R_{ADJ}$  and  $R_T$  values.
3. Connect BIAS as indicated.

While these component combinations have been tested for proper operation, it is incumbent upon the user to verify proper operation over the intended system's line, load and environmental conditions. Bear in mind that the maximum output current is limited by junction temperature, the relationship between the input and output voltage magnitude and polarity and other factors. Please refer to the graphs in the Typical Performance Characteristics section for guidance.

The maximum frequency (and attendant  $R_T$  value) at which the LTM8025 should be allowed to switch is given in Table 1 in the  $f_{MAX}$  column, while the recommended frequency (and  $R_T$  value) for optimal efficiency over the given input condition is given in the  $f_{OPTIMAL}$  column. There are additional conditions that must be satisfied if the synchronization function is used. Please refer to the Synchronization section for details.

### Capacitor Selection Considerations

The  $C_{IN}$  and  $C_{OUT}$  capacitor values in Table 1 are the minimum recommended values for the associated operating conditions. Applying capacitor values below those indicated in Table 1 is not recommended, and may result in undesirable operation. Using larger values is generally acceptable, and can yield improved dynamic response, if it is necessary. Again, it is incumbent upon the user to verify proper operation over the intended system's line, load and environmental conditions.

Ceramic capacitors are small, robust and have very low ESR. However, not all ceramic capacitors are suitable. X5R and X7R types are stable over temperature and applied voltage and give dependable service. Other types, including Y5V and Z5U have very large temperature and voltage coefficients of capacitance. In an application circuit they may have only a small fraction of their nominal capacitance resulting in much higher output voltage ripple than expected.

Ceramic capacitors are also piezoelectric. In Burst Mode operation, the LTM8025's switching frequency depends on the load current, and can excite a ceramic capacitor at audio frequencies, generating audible noise. Since the LTM8025 operates at a lower current limit during Burst Mode operation, the noise is typically very quiet to a casual ear.

If this audible noise is unacceptable, use a high performance electrolytic capacitor at the output. It may also be a parallel combination of a ceramic capacitor and a low cost electrolytic capacitor.

A final precaution regarding ceramic capacitors concerns the maximum input voltage rating of the LTM8025. A ceramic input capacitor combined with trace or cable inductance forms a high Q (under damped) tank circuit. If the LTM8025 circuit is plugged into a live supply, the input voltage can ring to twice its nominal value, possibly exceeding the device's rating. This situation is easily avoided; see the Hot-Plugging Safely section.

### Frequency Selection

The LTM8025 uses a constant frequency PWM architecture that can be programmed to switch from 200kHz to 2.4MHz by using a resistor tied from the  $R_T$  pin to ground. Table 2 provides a list of  $R_T$  resistor values and their resultant frequencies.

## APPLICATIONS INFORMATION

**Table 1. Recommended Component Values and Configuration (T<sub>A</sub> = 25°C)**

| V <sub>IN</sub> | V <sub>OUT</sub> | C <sub>IN</sub>  | C <sub>OUT</sub>     | R <sub>ADJ</sub> | BIAS            | f <sub>OPTIMAL</sub> | R <sub>T(OPTIMAL)</sub> | f <sub>MAX</sub> | R <sub>T(MIN)</sub> |
|-----------------|------------------|------------------|----------------------|------------------|-----------------|----------------------|-------------------------|------------------|---------------------|
| 3.6V to 36V     | 0.8V             | 10µF, 50V, 1210  | 4× 100µF, 6.3V, 1210 | Open             | 2.8V to 25V     | 230kHz               | 182k                    | 250kHz           | 169k                |
| 3.6V to 36V     | 1V               | 10µF, 50V, 1210  | 4× 100µF, 6.3V, 1210 | 1.87M            | 2.8V to 25V     | 240kHz               | 174k                    | 285kHz           | 147k                |
| 3.6V to 36V     | 1.2V             | 10µF, 50V, 1210  | 4× 100µF, 6.3V, 1210 | 953k             | 2.8V to 25V     | 255kHz               | 162k                    | 315kHz           | 130k                |
| 3.6V to 36V     | 1.5V             | 10µF, 50V, 1210  | 4× 100µF, 6.3V, 1210 | 549k             | 2.8V to 25V     | 270kHz               | 154k                    | 360kHz           | 113k                |
| 3.6V to 36V     | 1.8V             | 10µF, 50V, 1210  | 3× 100µF, 6.3V, 1210 | 383k             | 2.8V to 25V     | 285kHz               | 147k                    | 420kHz           | 95.3k               |
| 4.1V to 36V     | 2.5V             | 4.7µF, 50V, 1206 | 2× 100µF, 6.3V, 1210 | 226k             | 2.8V to 25V     | 300kHz               | 137k                    | 540kHz           | 71.5k               |
| 5.3V to 36V     | 3.3V             | 4.7µF, 50V, 1206 | 100µF, 6.3V, 1210    | 154k             | AUX             | 345kHz               | 118k                    | 675kHz           | 54.9k               |
| 7.5V to 36V     | 5V               | 4.7µF, 50V, 1206 | 100µF, 6.3V, 1206    | 93.1k            | AUX             | 425kHz               | 93.1k                   | 950kHz           | 36.5k               |
| 10.5V to 36V    | 8V               | 4.7µF, 50V, 1206 | 47µF, 16V, 1210      | 54.9k            | AUX             | 550kHz               | 69.8k                   | 1.45MHz          | 20.5k               |
| 16V to 36V      | 12V              | 2.2µF, 50V, 1206 | 22µF, 16V, 1210      | 34.8k            | AUX             | 760kHz               | 47.5k                   | 2.3MHz           | 9.09k               |
| 23V to 36V      | 18V              | 2.2µF, 50V, 1206 | 22µF, 25V, 1812      | 22.6k            | AUX             | 800kHz               | 44.2k                   | 2.4MHz           | 8.25k               |
| 31V to 36V      | 24V              | 1µF, 50V, 1206   | 22µF, 25V, 1812      | 16.5k            | 2.8V to 25V     | 1MHz                 | 34k                     | 2.4MHz           | 8.25k               |
| 3.6V to 15V     | 0.8V             | 10µF, 25V, 1210  | 4× 100µF, 6.3V, 1210 | Open             | V <sub>IN</sub> | 230kHz               | 182k                    | 575kHz           | 66.5k               |
| 3.6V to 15V     | 1V               | 10µF, 25V, 1210  | 4× 100µF, 6.3V, 1210 | 1.87M            | V <sub>IN</sub> | 240kHz               | 174k                    | 660kHz           | 56.2k               |
| 3.6V to 15V     | 1.2V             | 10µF, 25V, 1210  | 4× 100µF, 6.3V, 1210 | 953k             | V <sub>IN</sub> | 255kHz               | 162k                    | 760kHz           | 47.5k               |
| 3.6V to 15V     | 1.5V             | 10µF, 25V, 1210  | 4× 100µF, 6.3V, 1210 | 549k             | V <sub>IN</sub> | 270kHz               | 154k                    | 840kHz           | 42.2k               |
| 3.6V to 15V     | 1.8V             | 10µF, 25V, 1210  | 4× 100µF, 6.3V, 1210 | 383k             | V <sub>IN</sub> | 285kHz               | 147k                    | 1.0MHz           | 34k                 |
| 4.1V to 15V     | 2.5V             | 4.7µF, 16V, 1206 | 2× 100µF, 6.3V, 1210 | 226k             | V <sub>IN</sub> | 300kHz               | 137k                    | 1.3MHz           | 23.7k               |
| 5.3V to 15V     | 3.3V             | 4.7µF, 16V, 1206 | 100µF, 6.3V, 1206    | 154k             | AUX             | 345kHz               | 118k                    | 1.6MHz           | 17.8k               |
| 7.5V to 15V     | 5V               | 4.7µF, 16V, 1206 | 100µF, 6.3V, 1206    | 93.1k            | AUX             | 425kHz               | 93.1k                   | 2.4MHz           | 8.25k               |
| 10.5V to 15V    | 8V               | 2.2µF, 25V, 1206 | 47µF, 16V, 1210      | 54.9k            | AUX             | 550kHz               | 69.8k                   | 2.4MHz           | 8.25k               |
| 9V to 24V       | 0.8V             | 4.7µF, 25V, 1206 | 4× 100µF, 6.3V, 1210 | Open             | V <sub>IN</sub> | 270kHz               | 154k                    | 360kHz           | 113k                |
| 9V to 24V       | 1V               | 4.7µF, 25V, 1206 | 4× 100µF, 6.3V, 1210 | 1.87M            | V <sub>IN</sub> | 285kHz               | 147k                    | 410kHz           | 97.6k               |
| 9V to 24V       | 1.2V             | 4.7µF, 25V, 1206 | 4× 100µF, 6.3V, 1210 | 953k             | V <sub>IN</sub> | 295kHz               | 140k                    | 475kHz           | 82.5k               |
| 9V to 24V       | 1.5V             | 4.7µF, 25V, 1206 | 4× 100µF, 6.3V, 1210 | 549k             | V <sub>IN</sub> | 310kHz               | 133k                    | 550kHz           | 69.8k               |
| 9V to 24V       | 1.8V             | 4.7µF, 25V, 1206 | 3× 100µF, 6.3V, 1210 | 383k             | V <sub>IN</sub> | 330kHz               | 124k                    | 620kHz           | 60.4k               |
| 9V to 24V       | 2.5V             | 4.7µF, 25V, 1206 | 100µF, 6.3V, 1206    | 226k             | V <sub>IN</sub> | 345kHz               | 118k                    | 800kHz           | 44.2k               |
| 9V to 24V       | 3.3V             | 4.7µF, 25V, 1206 | 100µF, 6.3V, 1206    | 154k             | AUX             | 425kHz               | 93.1k                   | 1MHz             | 34k                 |
| 9V to 24V       | 5V               | 4.7µF, 25V, 1206 | 47µF, 16V, 1210      | 93.1k            | AUX             | 500kHz               | 76.8k                   | 1.4MHz           | 21.5k               |
| 10.5V to 24V    | 8V               | 2.2µF, 25V, 1206 | 22µF, 16V, 1210      | 54.9k            | AUX             | 590kHz               | 64.9k                   | 2.2MHz           | 9.76k               |
| 16V to 24V      | 12V              | 2.2µF, 50V, 1206 | 22µF, 16V, 1210      | 34.8k            | AUX             | 760kHz               | 47.5k                   | 2.3MHz           | 9.09k               |
| 23V to 24V      | 18V              | 2.2µF, 50V, 1206 | 22µF, 25V, 1812      | 22.6k            | AUX             | 800kHz               | 44.2k                   | 2.4MHz           | 8.25k               |
| 18V to 36V      | 0.8V             | 1µF, 50V, 1206   | 4× 100µF, 6.3V, 1210 | Open             | 2.8V to 25V     | 230kHz               | 182k                    | 250kHz           | 169k                |
| 18V to 36V      | 1V               | 1µF, 50V, 1206   | 4× 100µF, 6.3V, 1210 | 1.87M            | 2.8V to 25V     | 240kHz               | 174k                    | 285kHz           | 147k                |
| 18V to 36V      | 1.2V             | 1µF, 50V, 1206   | 4× 100µF, 6.3V, 1210 | 953k             | 2.8V to 25V     | 255kHz               | 162k                    | 315kHz           | 130k                |
| 18V to 36V      | 1.5V             | 1µF, 50V, 1206   | 4× 100µF, 6.3V, 1210 | 549k             | 2.8V to 25V     | 270kHz               | 154k                    | 360kHz           | 113k                |
| 18V to 36V      | 1.8V             | 1µF, 50V, 1206   | 3× 100µF, 6.3V, 1210 | 383k             | 2.8V to 25V     | 300kHz               | 137k                    | 420kHz           | 95.3k               |
| 18V to 36V      | 2.5V             | 1µF, 50V, 1206   | 100µF, 6.3V, 1206    | 226k             | 2.8V to 25V     | 345kHz               | 118k                    | 540kHz           | 71.5k               |
| 18V to 36V      | 3.3V             | 1µF, 50V, 1206   | 100µF, 6.3V, 1206    | 154k             | AUX             | 385kHz               | 105k                    | 675kHz           | 54.9k               |
| 18V to 36V      | 5V               | 1µF, 50V, 1206   | 47µF, 16V, 1210      | 93.1k            | AUX             | 500kHz               | 76.8k                   | 950kHz           | 36.5k               |
| 18V to 36V      | 8V               | 2.2µF, 50V, 1206 | 22µF, 16V, 1210      | 54.9k            | AUX             | 550kHz               | 69.8k                   | 1.45MHz          | 20.5k               |
| 18V to 36V      | 12V              | 2.2µF, 50V, 1206 | 22µF, 16V, 1210      | 34.8k            | AUX             | 760kHz               | 47.5k                   | 2.3MHz           | 9.09k               |
| 4.75V to 32V    | -3.3V            | 4.7µF, 50V, 1206 | 100µF, 6.3V, 1210    | 154k             | AUX             | 345kHz               | 118k                    | 675kHz           | 54.9k               |
| 7V to 31V       | -5V              | 4.7µF, 50V, 1206 | 100µF, 6.3V, 1210    | 93.1k            | AUX             | 425kHz               | 93.1k                   | 950kHz           | 36.5k               |
| 15V to 28V      | -8V              | 4.7µF, 50V, 1206 | 47µF, 16V, 1210      | 54.9k            | AUX             | 550kHz               | 69.8k                   | 1.45MHz          | 20.5k               |
| 20V to 24V      | -12V             | 4.7µF, 50V, 1206 | 22µF, 16V, 1210      | 34.8k            | AUX             | 760kHz               | 47.5k                   | 2.3MHz           | 9.09k               |

Note: An input bulk capacitance is required. Do not allow V<sub>IN</sub> + BIAS to exceed 56V. Refer to the Typical Performance Characteristics section for load conditions.

## APPLICATIONS INFORMATION

Table 2. Switching Frequency vs  $R_T$  Value

| SWITCHING FREQUENCY | $R_T$ VALUE    |
|---------------------|----------------|
| 0.2MHz              | 215k $\Omega$  |
| 0.3MHz              | 137k $\Omega$  |
| 0.4MHz              | 100k $\Omega$  |
| 0.5MHz              | 76.8k $\Omega$ |
| 0.6MHz              | 63.4k $\Omega$ |
| 0.7MHz              | 52.3k $\Omega$ |
| 0.8MHz              | 44.2k $\Omega$ |
| 0.9MHz              | 38.3k $\Omega$ |
| 1MHz                | 34.0k $\Omega$ |
| 1.2MHz              | 26.7k $\Omega$ |
| 1.4MHz              | 21.5k $\Omega$ |
| 1.6MHz              | 17.8k $\Omega$ |
| 1.8MHz              | 14.7k $\Omega$ |
| 2MHz                | 12.1k $\Omega$ |
| 2.2MHz              | 9.76k $\Omega$ |
| 2.4MHz              | 8.25k $\Omega$ |

### Operating Frequency Tradeoffs

It is recommended that the user apply the optimal  $R_T$  value given in Table 1 for the input and output operating condition. System level or other considerations, however, may necessitate another operating frequency. While the LTM8025 is flexible enough to accommodate a wide range of operating frequencies, a haphazardly chosen one may result in undesirable operation under certain operating or fault conditions. A frequency that is too high can reduce efficiency, generate excessive heat or even damage the LTM8025 if the output is overloaded or short circuited. A frequency that is too low can result in a final design that has too much output ripple or too large of an output capacitor.

### BIAS Pin Considerations

The BIAS pin is used to provide drive power for the internal power switching stage and operate other internal circuitry. For proper operation, it must be powered by at least 2.8V. If the output voltage is programmed to 2.8V or higher, BIAS may be simply tied to AUX. If  $V_{OUT}$  is less than 2.8V, BIAS can be tied to  $V_{IN}$  or some other voltage source. If the BIAS pin voltage is too high, the efficiency of the LTM8025 may suffer. The optimum BIAS voltage is

dependent upon many factors, such as load current, input voltage, output voltage and switching frequency, but 4V to 5V works well in many applications. In all cases, ensure that the maximum voltage at the BIAS pin is less than 25V and that the sum of  $V_{IN}$  and BIAS is less than 56V. If BIAS power is applied from a remote or noisy voltage source, it may be necessary to apply a decoupling capacitor locally to the pin.

### Load Sharing

Two or more LTM8025's may be paralleled to produce higher currents. To do this, tie the  $V_{IN}$ , ADJ,  $V_{OUT}$  and SHARE pins of all the paralleled LTM8025's together. To ensure that paralleled modules start up together, the RUN/SS pins may be tied together, as well. If the RUN/SS pins are not tied together, make sure that the same valued soft-start capacitors are used for each module. Current sharing can be improved by synchronizing the LTM8025s. An example of two LTM8025s configured for load sharing is given in the Typical Application section.

### Burst Mode Operation

To enhance efficiency at light loads, the LTM8025 automatically switches to Burst Mode operation which keeps the output capacitor charged to the proper voltage while minimizing the input quiescent current. During Burst Mode operation, the LTM8025 delivers single cycle bursts of current to the output capacitor followed by sleep periods where the output power is delivered to the load by the output capacitor. In addition,  $V_{IN}$  and BIAS quiescent currents are each reduced to microamps during the sleep time. As the load current decreases towards a no load condition, the percentage of time that the LTM8025 operates in sleep mode increases and the average input current is greatly reduced, resulting in higher efficiency.

Burst Mode operation is enabled by tying SYNC to GND. To disable Burst Mode operation, tie SYNC to a stable voltage above 0.7V. *Do not leave the SYNC pin floating.*

### Minimum Input Voltage


The LTM8025 is a step-down converter, so a minimum amount of headroom is required to keep the output in regulation. In addition, the input voltage required to turn

## APPLICATIONS INFORMATION

on is higher than that required to run, and depends upon whether the RUN/SS is used. As shown in the Typical Performance Characteristics section, the minimum input voltage to run a 3.3V output at light load is only about 3.6V, but, if the RUN/SS is pulled up to  $V_{IN}$ , it takes  $5.5V_{IN}$  to start. If the LTM8025 is enabled with the RUN/SS pin, the minimum voltage to start at light loads is lower, about 4.3V. Similar curves detailing this behavior of the LTM8025 for other outputs are also included in the Typical Performance Characteristics section.

### Soft-Start

The RUN/SS pin can be used to soft-start the LTM8025, reducing the maximum input current during start-up. The RUN/SS pin is driven through an external RC filter to create a voltage ramp at this pin, as shown in Figure 1. By choosing an appropriate RC time constant, the peak start-up current can be reduced to the current that is required to regulate the output, with no overshoot. Choose the value of the resistor so that it can supply at least  $20\mu\text{A}$  when the RUN/SS pin reaches 2.5V.



**Figure 1. To Soft-Start the LTM8025, Add a Resistor and Capacitor to the RUN/SS Pin**

### Frequency Foldback

The LTM8025 is equipped with frequency foldback which acts to reduce the thermal and energy stress on the internal power elements during a short circuit or output overload condition. If the LTM8025 detects that the output has fallen out of regulation, the switching frequency is reduced as a function of how far the output is below the target voltage. This in turn limits the amount of energy that can be delivered to the load under fault. During the start-up time, frequency foldback is also active to limit

the energy delivered to the potentially large output capacitance of the load.

### Synchronization

The internal oscillator of the LTM8025 can be synchronized by applying an external 250kHz to 2MHz clock to the SYNC pin. Do not leave this pin floating. When synchronizing the LTM8025, select an  $R_T$  resistor value that corresponds to an operating frequency 20% lower than the intended synchronization frequency (see the Frequency Selection section).

In addition to synchronization, the SYNC pin controls Burst Mode behavior. If the SYNC pin is driven by an external clock, or pulled up above 0.7V, the LTM8025 will not enter Burst Mode operation, but will instead skip pulses to maintain regulation instead.

### Shorted Input Protection


Care needs to be taken in systems where the output will be held high when the input to the LTM8025 is absent. This may occur in battery charging applications or in battery backup systems where a battery or some other supply is diode ORed with the LTM8025's output. If the  $V_{IN}$  pin is allowed to float and the SHDN pin is held high (either by a logic signal or because it is tied to  $V_{IN}$ ), then the LTM8025's internal circuitry will pull its quiescent current through its internal power switch. This is fine if your system can tolerate a few milliamps in this state. If you ground the RUN/SS pin, the input current will drop to essentially zero. However, if the  $V_{IN}$  pin is grounded while the output is held high, then parasitic diodes inside the LTM8025 can pull large currents from the output through the  $V_{IN}$  pin. Figure 2 shows a circuit that will run only when the input voltage is present and that protects against a shorted or reversed input.

### PCB Layout

Most of the headaches associated with PCB layout have been alleviated or even eliminated by the high level of integration of the LTM8025. The LTM8025 is nevertheless a switching power supply, and care must be taken to minimize EMI and ensure proper operation. Even with the high level of integration, you may fail to achieve specified




## APPLICATIONS INFORMATION

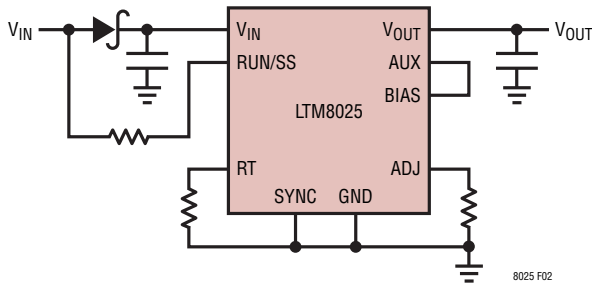

**Figure 2. The Input Diode Prevents a Shorted Input from Discharging a Backup Battery Tied to the Output. It Also Protects the Circuit from a Reversed Input. The LTM8025 Runs Only When the Input is Present.**

operation with a haphazard or poor layout. See Figure 3 for a suggested layout. Ensure that the grounding and heatsinking are acceptable.

1. Place the  $R_{ADJ}$  and  $R_T$  resistors as close as possible to their respective pins.
2. Place the  $C_{IN}$  capacitor as close as possible to the  $V_{IN}$  and GND connection of the LTM8025.
3. Place the  $C_{OUT}$  capacitor as close as possible to the  $V_{OUT}$  and GND connection of the LTM8025.
4. Place the  $C_{IN}$  and  $C_{OUT}$  capacitors such that their ground current flow directly adjacent or underneath the LTM8025.
5. Connect all of the GND connections to as large a copper pour or plane area as possible on the top layer. Avoid breaking the ground connection between the external components and the LTM8025.
6. For good heatsinking, use vias to connect the GND copper area to the board's internal ground planes. Liberally distribute these GND vias to provide both a good ground connection and thermal path to the internal planes of the printed circuit board. Pay attention to the location and density of the thermal vias in Figure 3. The LTM8025 can benefit from the heat-sinking afforded by vias that connect to internal GND planes at these locations, due to their proximity to internal power handling components. The optimum number of thermal vias depends upon the printed circuit board design. For example, a board might use very small via holes. It should employ more thermal vias than a board that uses larger holes.

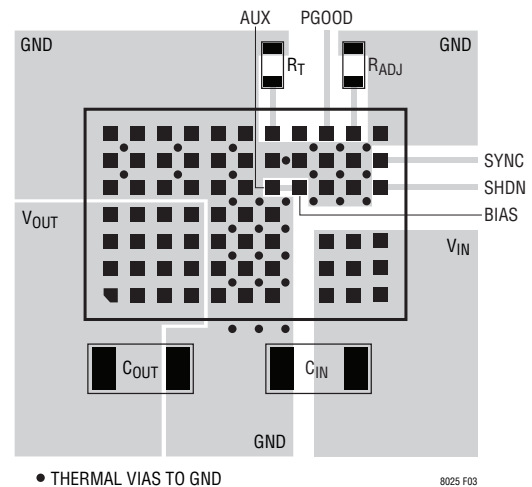

**Figure 3. Layout Showing Suggested External Components, GND Plane and Thermal ViAs.**

## Hot-Plugging Safely

The small size, robustness and low impedance of ceramic capacitors make them an attractive option for the input bypass capacitor of LTM8025. However, these capacitors can cause problems if the LTM8025 is plugged into a live supply (see Linear Technology Application Note 88 for a complete discussion). The low loss ceramic capacitor combined with stray inductance in series with the power source forms an underdamped tank circuit, and the voltage at the  $V_{IN}$  pin of the LTM8025 can ring to more than twice the nominal input voltage, possibly exceeding the LTM8025's rating and damaging the part. If the input supply is poorly controlled or the user will be plugging the LTM8025 into an energized supply, the input network should be designed to prevent this overshoot. This can be accomplished by installing a small resistor in series to  $V_{IN}$ , but the most popular method of controlling input voltage overshoot is to add an electrolytic bulk capacitor to the  $V_{IN}$  net. This capacitor's relatively high equivalent series resistance damps the circuit and eliminates the voltage overshoot. The extra capacitor improves low frequency ripple filtering and can slightly improve the efficiency of the circuit, though it is likely to be the largest component in the circuit.

## APPLICATIONS INFORMATION

### Thermal Considerations

The LTM8025 output current may need to be derated if it is required to operate in a high ambient temperature or deliver a large amount of continuous power. The amount of current derating is dependent upon the input voltage, output power and ambient temperature. The temperature rise curves given in the Typical Performance Characteristics section can be used as a guide. These curves were generated by a LTM8025 mounted to a 58cm<sup>2</sup> 4-layer FR4 printed circuit board. Boards of other sizes and layer count can exhibit different thermal behavior, so it is incumbent upon the user to verify proper operation over the intended system's line, load and environmental operating conditions.

The junction to air and junction to board thermal resistances given in the Pin Configuration diagram may also be used to estimate the LTM8025 internal temperature. These thermal coefficients are determined for maximum output power per JESD 51-9 "JEDEC Standard, Test Boards for Area Array Surface Mount Package Thermal Measurements" through analysis and physical correlation. Bear in mind that the actual thermal resistance of the LTM8025 to the printed circuit board depends upon the design of the circuit board.


The die temperature of the LTM8025 must be lower than the maximum rating of 125°C, so care should be taken in the layout of the circuit to ensure good heat sinking of the LTM8025. The bulk of the heat flow out of the LTM8025 is through the bottom of the module and the LGA pads into the printed circuit board. Consequently a poor printed circuit board design can cause excessive heating, resulting in impaired performance or reliability. Please refer to the PCB Layout section for printed circuit board design suggestions.

The LTM8025 is equipped with a thermal shutdown that will inhibit power switching at high junction temperatures. The activation threshold of this function, however, is above 125°C to avoid interfering with normal operation. Thus, it follows that prolonged or repetitive operation under a condition in which the thermal shutdown activates necessarily means that the internal components are subjected to temperatures above the 125°C rating for prolonged or repetitive intervals, which may damage or impair the reliability of the device.


Finally, be aware that at high ambient temperatures the internal Schottky diode will have significant leakage current increasing the quiescent current of the LTM8025.

## TYPICAL APPLICATIONS


### 1.8V Step-Down Converter

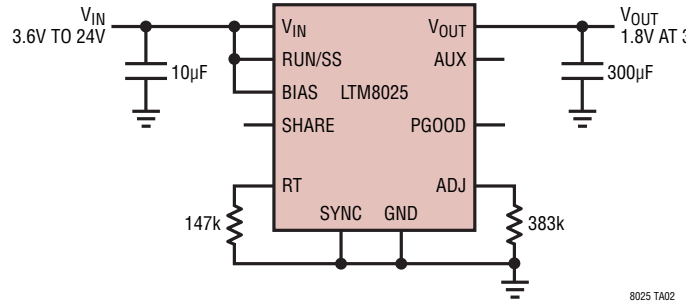

### 2.5V Step-Down Converter

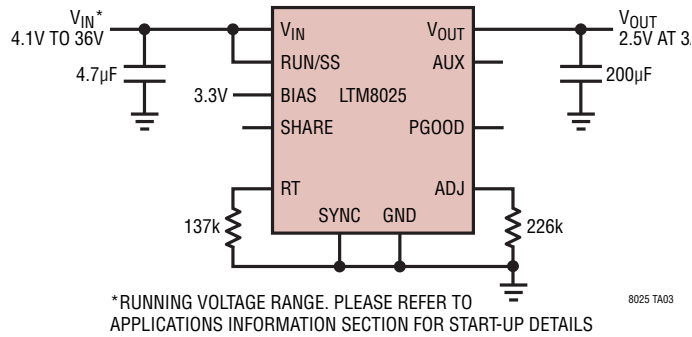


### 8V Step-Down Converter

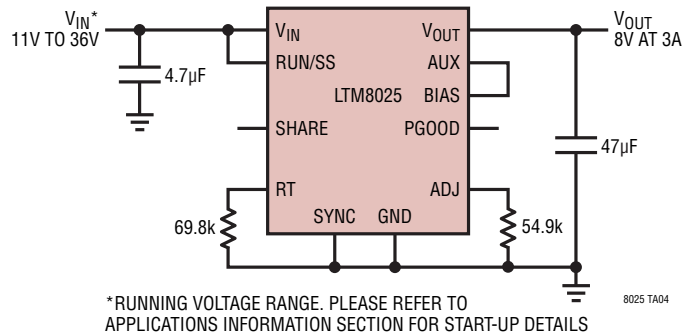




# TYPICAL APPLICATIONS

## -5V Negative Output Converter

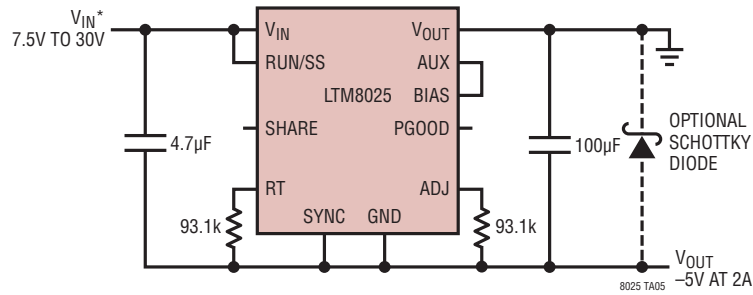

\*RUNNING VOLTAGE RANGE. PLEASE REFER TO APPLICATIONS INFORMATION SECTION FOR START-UP DETAILS

## Two LTM8025s in Parallel, 2.5V at 5.5A


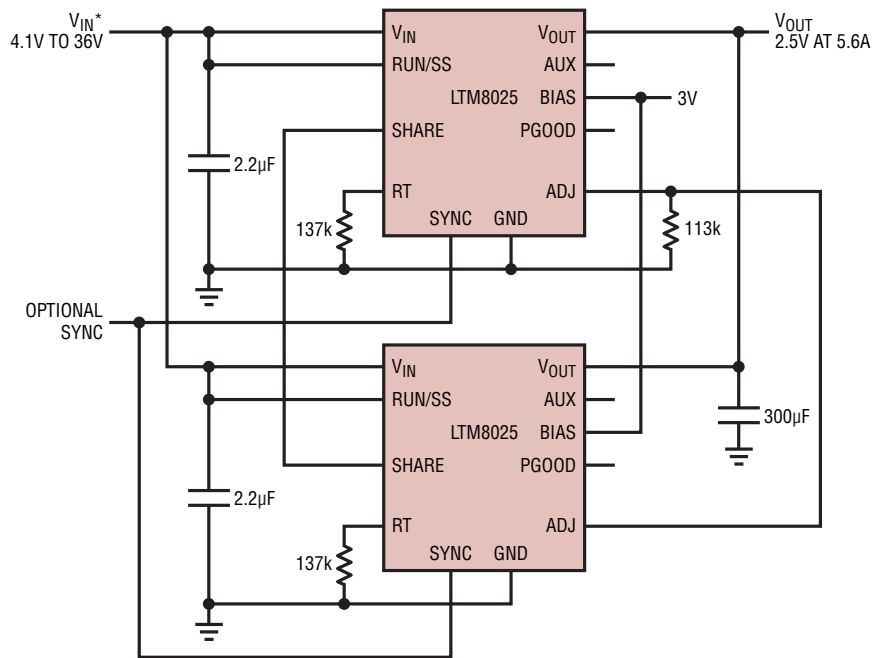


\*RUNNING VOLTAGE RANGE. PLEASE REFER TO APPLICATIONS INFORMATION SECTION FOR START-UP DETAILS  
 NOTE: SYNCHRONIZE THE TWO MODULES TO AVOID BEAT FREQUENCIES, IF NECESSARY. OTHERWISE, TIE EACH SYNC TO GND

8025 TA06


# PACKAGE DESCRIPTION

**LGA Package**  
**70-Lead (15mm × 9mm × 4.32mm)**  
 (Reference LTC DWG # 05-08-1817 Rev A)

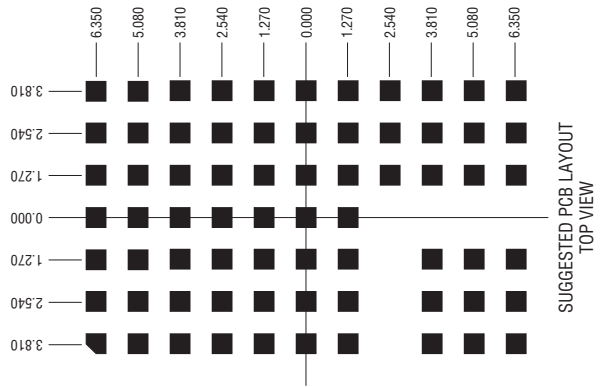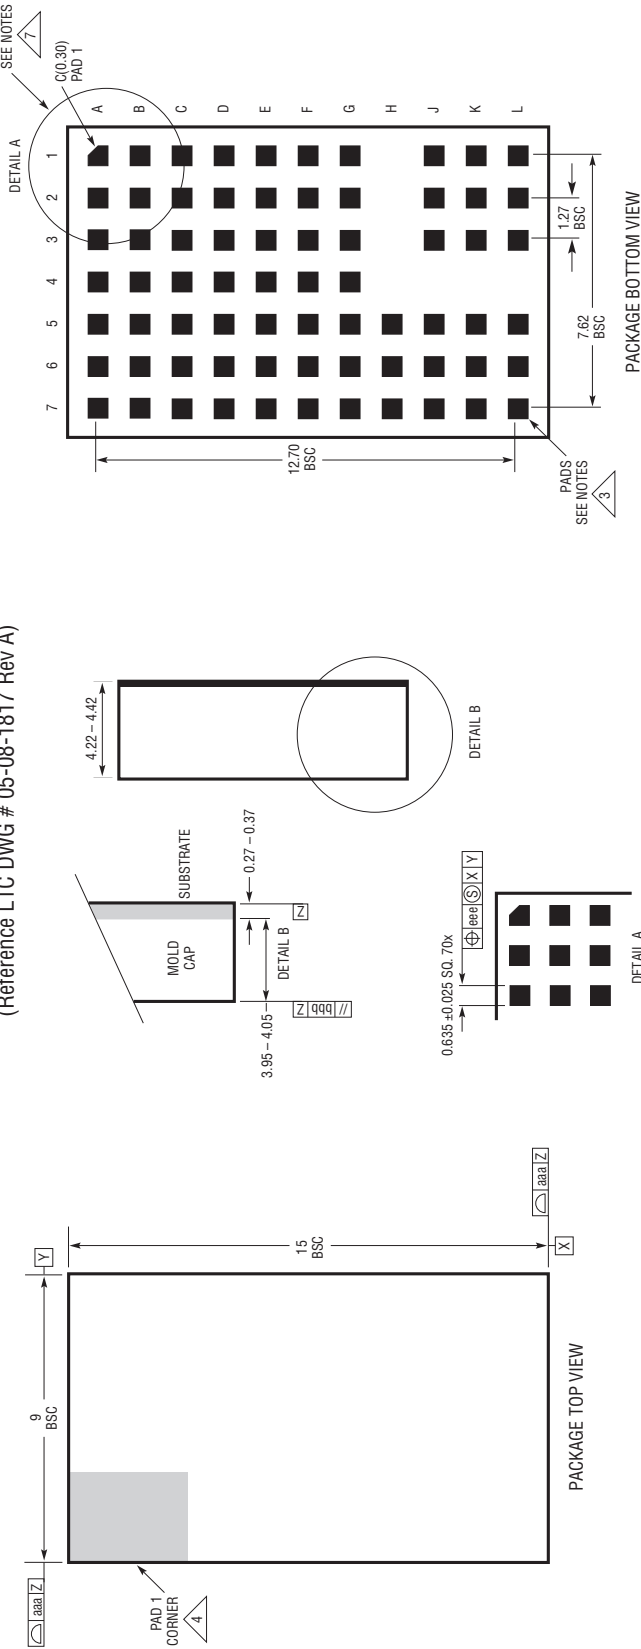

- NOTES:**
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
  2. ALL DIMENSIONS ARE IN MILLIMETERS
  3. LAND DESIGNATION PER JEDEC MO-222, SPP-010
  4. DETAILS OF PAD #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE PAD #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE
  5. PRIMARY DATUM -Z- IS SEATING PLANE
  6. THE TOTAL NUMBER OF PADS: 70
  7. PACKAGE ROW AND COLUMN LABELING MAY VARY AMONG  $\mu$ Module PRODUCTS. REVIEW EACH PACKAGE LAYOUT CAREFULLY


| SYMBOL | TOLERANCE |
|--------|-----------|
| aaa    | 0.15      |
| bbb    | 0.10      |
| eee    | 0.05      |

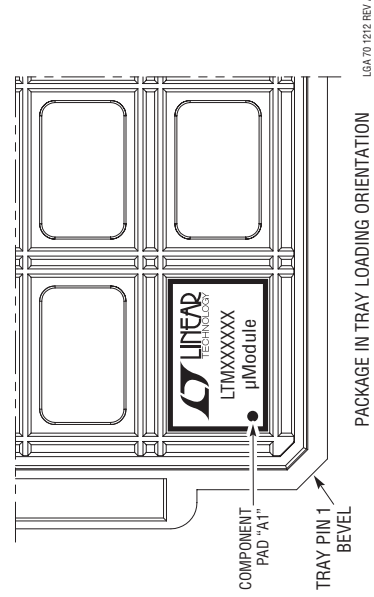

LGA 70 1212 REV A



# PACKAGE DESCRIPTION

## BGA Package 70-Lead (15mm × 9mm × 4.92mm) (Reference LTC DWG# 05-08-1918 Rev B)

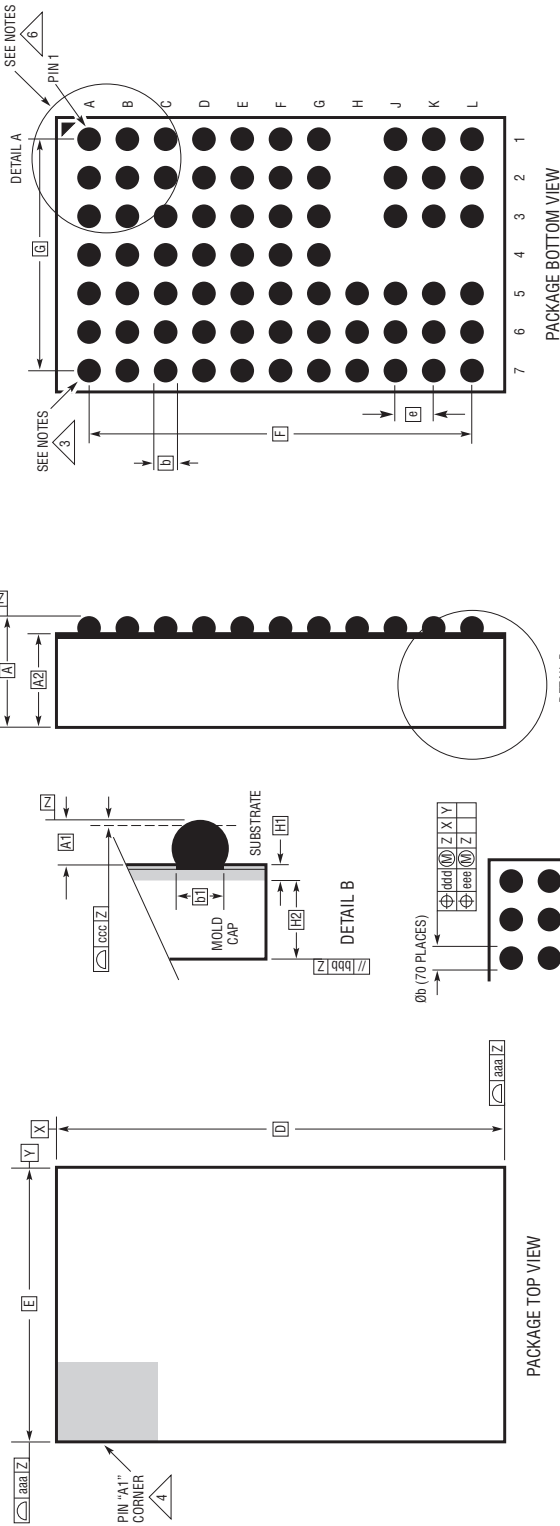

- NOTES:**
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
  2. ALL DIMENSIONS ARE IN MILLIMETERS
  3. BALL DESIGNATION PER JEDEC MS-028 AND JEP95
  4. DETAILS OF PIN #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE PIN #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE
  5. PRIMARY DATUM -Z- IS SEATING PLANE
  6. PACKAGE ROW AND COLUMN LABELING MAY VARY AMONG  $\mu$ Module PRODUCTS. REVIEW EACH PACKAGE LAYOUT CAREFULLY

| DIMENSIONS                |       |      |      | NOTES          |
|---------------------------|-------|------|------|----------------|
| SYMBOL                    | MIN   | NOM  | MAX  |                |
| A                         | 4.72  | 4.92 | 5.12 |                |
| A1                        | 0.50  | 0.60 | 0.70 | BALL HT        |
| A2                        | 4.22  | 4.32 | 4.42 |                |
| b                         | 0.60  | 0.75 | 0.90 | BALL DIMENSION |
| b1                        | 0.60  | 0.63 | 0.66 | PAD DIMENSION  |
| D                         | 15.00 |      |      |                |
| E                         | 9.00  |      |      |                |
| e                         | 1.27  |      |      |                |
| F                         | 12.70 |      |      |                |
| G                         | 7.62  |      |      |                |
| H1                        | 0.27  | 0.32 | 0.37 | SUBSTRATE THK  |
| H2                        | 3.95  | 4.00 | 4.05 | MOLD CAP HT    |
| aaa                       | 0.15  |      |      |                |
| bbb                       | 0.10  |      |      |                |
| ccc                       | 0.20  |      |      |                |
| ddd                       | 0.30  |      |      |                |
| eee                       | 0.15  |      |      |                |
| TOTAL NUMBER OF BALLS: 70 |       |      |      |                |

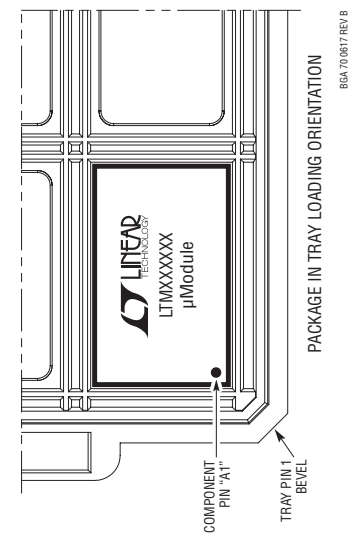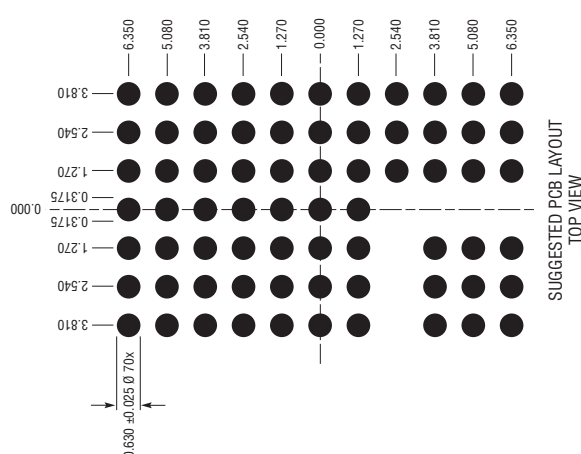

86A700617REV B

## PACKAGE DESCRIPTION

**Pin Assignment Table  
(Arranged by Pin Number)**


| PIN NAME            | PIN NAME            | PIN NAME            | PIN NAME            | PIN NAME | PIN NAME |
|---------------------|---------------------|---------------------|---------------------|----------|----------|
| A1 V <sub>OUT</sub> | B1 V <sub>OUT</sub> | C1 V <sub>OUT</sub> | D1 V <sub>OUT</sub> | E1 GND   | F1 GND   |
| A2 V <sub>OUT</sub> | B2 V <sub>OUT</sub> | C2 V <sub>OUT</sub> | D2 V <sub>OUT</sub> | E2 GND   | F2 GND   |
| A3 V <sub>OUT</sub> | B3 V <sub>OUT</sub> | C3 V <sub>OUT</sub> | D3 V <sub>OUT</sub> | E3 GND   | F3 GND   |
| A4 V <sub>OUT</sub> | B4 V <sub>OUT</sub> | C4 V <sub>OUT</sub> | D4 V <sub>OUT</sub> | E4 GND   | F4 GND   |
| A5 GND              | B5 GND              | C5 GND              | D5 GND              | E5 GND   | F5 GND   |
| A6 GND              | B6 GND              | C6 GND              | D6 GND              | E6 GND   | F6 GND   |
| A7 GND              | B7 GND              | C7 GND              | D7 GND              | E7 GND   | F7 GND   |

| PIN NAME | PIN NAME | PIN NAME           | PIN NAME           | PIN NAME           |
|----------|----------|--------------------|--------------------|--------------------|
| G1 GND   | H1 -     | J1 V <sub>IN</sub> | K1 V <sub>IN</sub> | L1 V <sub>IN</sub> |
| G2 GND   | H2 -     | J2 V <sub>IN</sub> | K2 V <sub>IN</sub> | L2 V <sub>IN</sub> |
| G3 GND   | H3 -     | J3 V <sub>IN</sub> | K3 V <sub>IN</sub> | L3 V <sub>IN</sub> |
| G4 GND   | H4 -     | J4 -               | K4 -               | L4 -               |
| G5 AUX   | H5 BIAS  | J5 GND             | K5 GND             | L5 RUN/SS          |
| G6 GND   | H6 GND   | J6 GND             | K6 GND             | L6 SYNC            |
| G7 RT    | H7 SHARE | J7 PGOOD           | K7 ADJ             | L7 GND             |

## REVISION HISTORY


| REV | DATE | DESCRIPTION   | PAGE NUMBER |
|-----|------|---|-------------|
| A   | 2/10 | Changed to "Current Out of ADJ Operation" in Electrical Characteristics | 3           |
|     |      | Additions to Table 1  | 11          |
|     |      | Changes to "Shorted Input Protection" section                           | 13          |
|     |      | Changes to Related Parts Table  | 20          |
| B   | 8/13 | Added BGA package   | 1, 2, 19    |
| C   | 2/14 | Added SnPb BGA option   | 1, 2        |
| D   | 2/19 | Added new link for product  | 1           |
|     |      | Changed $V_{IN}$ 3.2V to 3.6V in the Electrical Characteristics table   | 3           |

## PACKAGE PHOTOGRAPHY

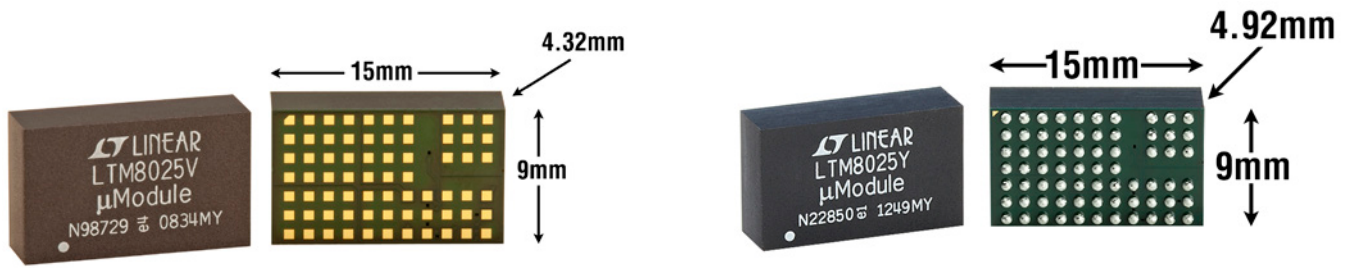

## TYPICAL APPLICATION

### 3.3V Step-Down Converter

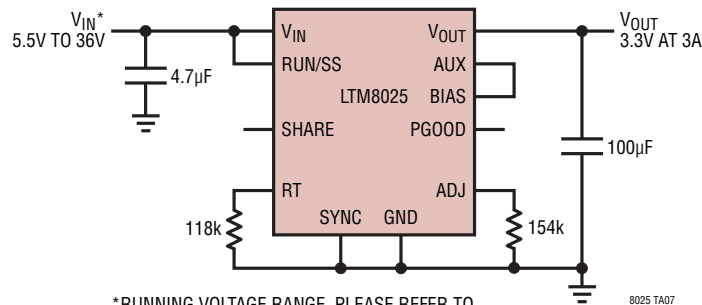

\* RUNNING VOLTAGE RANGE. PLEASE REFER TO APPLICATIONS INFORMATION SECTION FOR START-UP DETAILS

8025 TA07

## RELATED PARTS

| PART NUMBER                          | DESCRIPTION                    | COMMENTS   |
|--------------------------------------|--------------------------------|--|
| <a href="#">LTM4600/<br/>LTM4602</a> | 10A and 6A DC/DC μModule       | Pin Compatible, $4.5V \leq V_{IN} \leq 28V$ , $15mm \times 15mm \times 2.8mm$ LGA Package                                  |
| <a href="#">LTM4601/<br/>LTM4603</a> | 12A and 6A DC/DC μModule       | Pin Compatible; Remote Sensing; PLL, Tracking and Margining, $4.5V \leq V_{IN} \leq 28V$                                   |
| <a href="#">LTM4604A</a>             | 4A, Low $V_{IN}$ DC/DC μModule | $2.375V \leq V_{IN} \leq 5.5V$ , $0.8V \leq V_{OUT} \leq 5V$ , $9mm \times 15mm \times 2.3mm$ LGA Package                  |
| <a href="#">LTM4606</a>              | Low EMI 6A, 28V DC/DC μModule  | $4.5V \leq V_{IN} \leq 28V$ , $0.6V \leq V_{OUT} \leq 5V$ , $15mm \times 15mm \times 2.8mm$ LGA Package                    |
| <a href="#">LTM8020</a>              | 200mA, 36V DC/DC μModule       | $4V \leq V_{IN} \leq 36V$ , $1.25V \leq V_{OUT} \leq 5V$ , $6.25mm \times 6.25mm \times 2.32mm$ LGA Package                |
| <a href="#">LTM8022/<br/>LTM8023</a> | 1A and 2A, 36V DC/DC μModule   | Pin Compatible $3.6V \leq V_{IN} \leq 36V$ , $0.8V \leq V_{OUT} \leq 10V$ , $11.25mm \times 9mm \times 2.82mm$ LGA Package |
| <a href="#">LTM8027</a>              | 60V, 4A DC/DC μModule          | $4.5V \leq V_{IN} \leq 60V$ ; $2.5V \leq V_{OUT} \leq 24V$ , $15mm \times 15mm \times 4.32mm$ LGA Package                  |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.