

## Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid  
(<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 3-position, PUR halogen-free, Black-gray RAL 7021, Plug angled M12 SPEEDCON, A-coded, on Valve connector BI (11 mm), with 1 LED, connected with Z diode, Cable length: 0.3 m

### Product Features

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Robust valve connector with Zener diode as protective circuit
- ✓ Save time, thanks to installation with SPEEDCON rapid interlock system
- ✓ Convenient: increased machine availability thanks to quick and easy diagnostics
- ✓ Our standard: robust halogen-free PUR cable



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 1      |
| Custom tariff number | 85444290 |
| Country of origin    | Poland   |

### Technical data

#### Dimensions

|                 |       |
|-----------------|-------|
| Length of cable | 0.3 m |
|-----------------|-------|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
|                                 | -20 °C ... 85 °C (valve plug)    |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |     |
|-----------------------|-----|
| Rated current at 40°C | 4 A |
|-----------------------|-----|

# Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182

## Technical data

### General

|                              |                               |
|------------------------------|-------------------------------|
| Rated voltage                | 24 V                          |
| Number of positions          | 3                             |
| Contact resistance           | $\leq 5 \text{ m}\Omega$      |
| Insulation resistance        | $\geq 100 \text{ M}\Omega$    |
| Coding                       | A - standard                  |
| Standards/regulations        | M12 connector IEC 61076-2-101 |
| Status display               | 1 LED                         |
| Protective circuit/component | Z diode                       |
| Surge voltage category       | III                           |
| Pollution degree             | 3                             |
| Insertion/withdrawal cycles  | $\geq 100$ (M12 connector)    |
| Torque                       | 0.4 Nm (M12 connector)        |
|                              | 0.6 Nm (Valve connector)      |

### Material

|                                         |                              |
|-----------------------------------------|------------------------------|
| Inflammability class according to UL 94 | HB                           |
| Contact material                        | CuSn                         |
| Contact surface material                | Ni/Au                        |
| Contact carrier material                | TPU GF                       |
| Material of grip body                   | TPU                          |
| Valve plug contact material             | CuSn                         |
| Valve plug contact surface material     | Sn                           |
| Valve plug contact insert material      | PA 66                        |
| Material housing valve plug             | TPU                          |
| Material, knurls                        | Zinc die-cast, nickel-plated |
| Sealing material                        | TPU (Seal molded)            |

### Cable

|                                    |                                    |
|------------------------------------|------------------------------------|
| Cable type                         | PUR halogen-free black             |
| Cable type (abbreviation)          | PUR                                |
| Cable abbreviation                 | Li9Y11Y-HF                         |
| UL AWM style                       | 20549                              |
| Conductor cross section            | 3x 0.5 mm <sup>2</sup>             |
| AWG signal line                    | 20                                 |
| Conductor structure signal line    | 28x 0.15 mm                        |
| Core diameter including insulation | 1.5 mm $\pm$ 0.05 mm (signal line) |
| Wire colors                        | Black 1, black 2, green/yellow     |
| Overall twist                      | 3 wires, twisted                   |

## Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182

### Technical data

#### Cable

|                                             |                                                            |
|---------------------------------------------|------------------------------------------------------------|
| External sheath, color                      | Black-gray RAL 7021                                        |
| External cable diameter D                   | 4.5 mm ± 0.2 mm                                            |
| Smallest bending radius, fixed installation | 22.5 mm                                                    |
| Number of bending cycles                    | 15000000                                                   |
| Bending radius                              | 50 mm                                                      |
| Traversing path                             | 0.9 m                                                      |
| Traversing rate                             | 5 m/s                                                      |
| Acceleration                                | 30 m/s <sup>2</sup>                                        |
| Outer sheath, material                      | PUR                                                        |
| Material conductor insulation               | PP                                                         |
| Conductor material                          | Bare Cu litz wires                                         |
| Insulation resistance                       | min. 20 MΩ*km                                              |
| Conductor resistance                        | 39 Ω/km (at 20 °C)                                         |
| Nominal voltage, cable                      | ≤ 300 V                                                    |
| Test voltage, cable                         | ≥ 1200 V                                                   |
| Flame resistance                            | According to DIN VDE 0482                                  |
|                                             | According to DIN EN 50265-2-1                              |
| Halogen-free                                | in accordance with DIN VDE 0472 part 815                   |
| Other resistance                            | Largely oil-resistant                                      |
|                                             | partly UV-resistant in accordance with DIN EN ISO 4892-2-A |
| Ambient temperature (operation)             | -40 °C ... 80 °C (cable, fixed installation)               |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

## Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |

### Approvals

#### Approvals

Approvals

GOST

Ex Approvals

Approvals submitted

#### Approval details



### Accessories

#### Accessories

##### Conductor marking

Insert label - PABA WH/15 - 1013151



Insert label, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

## Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182

### Accessories

Insert label - PABA YE/15 - 1013698



Insert label, Strip, yellow, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

---

Insert label - PABA RD/15 - 1013944



Insert label, Strip, red, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

---

### Marker carrier cable

Conductor marker carrier - PATO 2/15 - 1013122



Conductor marker carrier, transparent, Unlabeled, Mounting type: Clip on, Cable diameter: 2.8-4.4 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATO 3/15 - 1013135



Conductor marker carrier, transparent, Unlabeled, Mounting type: Clip on, Cable diameter: 4.4-6.7 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATO 4/15 - 1013148



Conductor marker carrier, transparent, Unlabeled, Mounting type: Clip on, Cable diameter: 6.7-10 mm, Lettering field: 4 x 15 mm

## Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182

### Accessories

#### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

#### Mounting material

Screw - SAC-V-SCREW-M3-29 KNURL - 1403779



Fillister head screw with plastic knurl, M3 x 40

---

#### Protective cap

Sealing cap - PROT-M12 FS-PA-CHAIN - 1430873



M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 sockets

---

#### Safety locking

Fuse clip - SAC-M12-EXCLIP-M - 1558988



Fuse clip for the pin side of various M12 sensor/actuator connectors prevents plug-in connections being interrupted without using a tool

---

#### Screwdriver tools

## Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182

### Accessories

Screw insert - SF-BIT-PH 1-70 - 1212582



Screw bit, PH crosshead, E6.3-1/4" drive, size: PH 1 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

---

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

---

### Torque tool

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

Torque screwdriver - TSD-M 1,2NM - 1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

# Sensor/Actuator cable - SAC-3P-MR/ 0,3-PUR/BI-1L-Z SCO - 1435182


## Drawings

Schematic diagram




Pin assignment M12 plug, 3-pos., valve connector

Cable cross section




PUR halogen-free black [PUR]

Dimensioned drawing




Valve connector, type BI

Circuit diagram

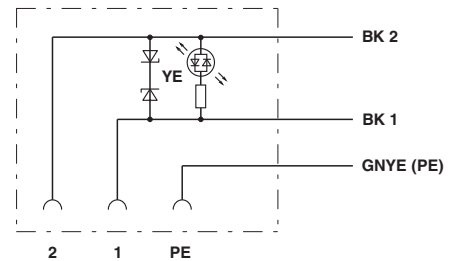


Contact assignment of the valve plug

Dimensioned drawing



M12 x 1 male plug, angled

Dimensioned drawing



Valve connector, type BI, side view



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.