

**ALTERNATIVE 5W STEREO AUDIO AMPLIFIER**
**Description**

The PAM8406 is a 5W audio amplifier with an alternative option between Class-D and Class-AB output which makes PAM8406 very ideally for the applications efficiency-EMI compatible.


PAM8406 offers low THD+N, high SNR allowing it to achieve high-quality sound reproduction. The fully differential output with new filterless architecture (Class-D Mode) allows the device to drive the speaker directly, requiring no low-pass output filters and DC blocking capacitors, thus to save the system cost and PCB area.

The efficiency of the PAM8406 is up to 90%. It can extend the battery life, ideally for portable applications. The PAM8406 is fully protected against faults with short circuit protection and thermal protection.


The PAM8406 is available in SOP-16L/SOP-16(EP) package.

**Features**

- Alternative Output: Class-D or Class-AB
- 5W Output at 10% THD with a 2Ω Load and 5V Power Supply at Class-D Mode
- 3W Output at 10% THD with a 4Ω Load and 5V Power Supply
- Filterless, Low Quiescent Current and No EMI
- Low THD+N at Fully Output Range
- Superior Low Noise
- Efficiency up to 90% with Class-D Mode
- No Pop At Turn-on/off
- Fully Short Circuit Protection With Auto Recovery
- Thermal Shutdown
- Few External Components to Save the Space and Cost
- SOP-16L/SOP-16(EP) Package

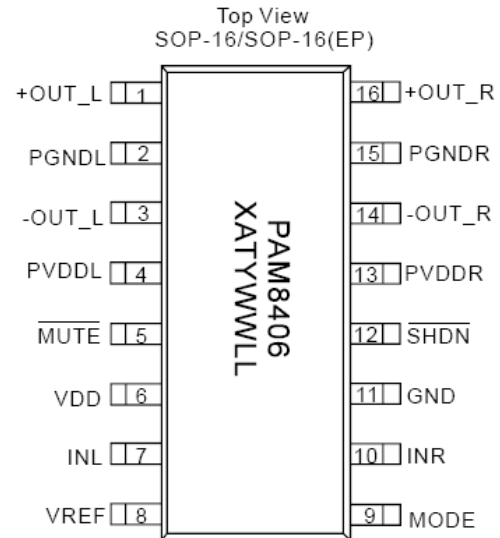**Pin Assignments**

**Applications**

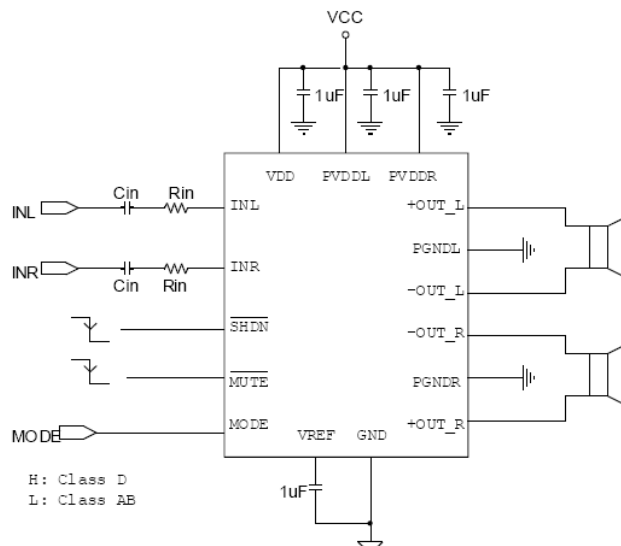
- LCD TVs
- Multimedia Speakers
- AM/FM System
- DABs

**Typical Applications Circuit**


## Pin Descriptions

| Pin Number | Pin Name | Function  |
|------------|----------|---|
| 1          | +OUT_L   | Left Channel Positive Output  |
| 2          | PGNDL    | Power GND   |
| 3          | -OUT_L   | Left Channel Negative Output  |
| 4          | PVDDL    | Power VDD   |
| 5          | MUTE     | Mute Control Input (active low)   |
| 6          | VDD      | Analog VDD  |
| 7          | INL      | Left Channel Input  |
| 8          | VREF     | Internal analog reference, connect a bypass capacitor from VREF to GND. |
| 9          | MODE     | High: Class-D; Low: Class-AB  |
| 10         | INR      | Right Channel Input   |
| 11         | GND      | Analog GND  |
| 12         | SHDN     | Shutdown Control Input (active low)                                     |
| 13         | PVDDR    | Power VDD   |
| 14         | -OUT_R   | Right Channel Negative Output   |
| 15         | PGNDR    | Power GND   |
| 16         | +OUT_R   | Right Channel Positive Output   |

## Functional Block Diagram

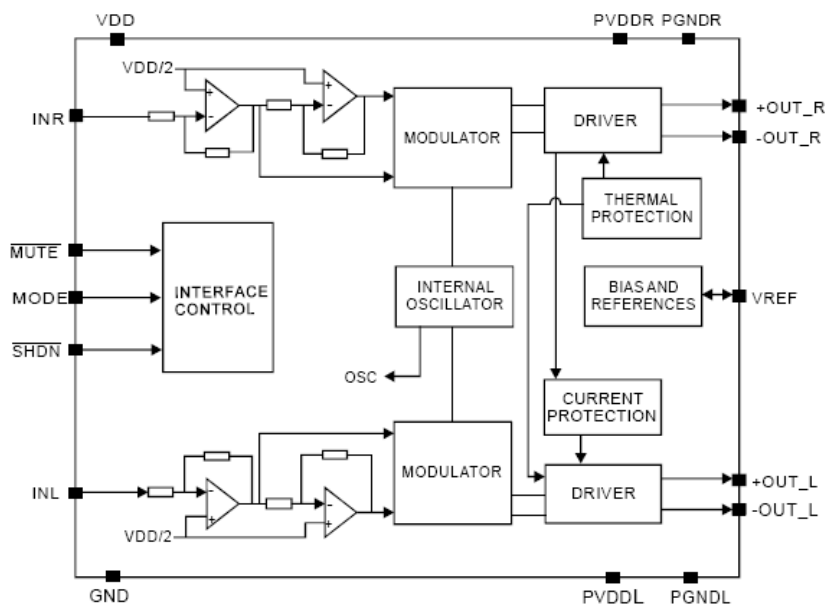

## Absolute Maximum Ratings (@T<sub>A</sub> = +25°C, unless otherwise specified.)

These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.

| Parameter                      | Rating                        | Unit |
|--------------------------------|-------------------------------|------|
| Supply Voltage                 | 6.0                           | V    |
| Input Voltage                  | -0.3 to V <sub>DD</sub> +0.3V |      |
| Operation Temperature Range    | -40 to +85                    | °C   |
| Maximum Junction Temperature   | 150                           |      |
| Operation Junction Temperature | -40 to +125                   |      |
| Storage Temperature            | -65 to +150                   |      |
| Soldering Temperature          | 300, 5 sec                    |      |

## Recommended Operating Conditions (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Parameter                   | Rating      | Unit |
|-----------------------------|-------------|------|
| Supply Voltage Range        | 2.5 to 5.5  | V    |
| Operation Temperature Range | -40 to +85  | °C   |
| Junction Temperature Range  | -40 to +125 | °C   |

## Thermal Information

| Parameter                                | Package | Symbol          | Max | Unit |
|--|---------|-----------------|-----|------|
| Thermal Resistance (Junction to Ambient) | SOP-16  | θ <sub>JA</sub> | 110 | °C/W |
| Thermal Resistance (Junction to Case)    | SOP-16  | θ <sub>JC</sub> | 23  |      |

## Electrical Characteristics

 (@T<sub>A</sub> = +25°C, V<sub>DD</sub> = 5V, Gain = 24dB, R<sub>L</sub> = 8Ω, both Class-AB and D mode, unless otherwise specified.)

| Symbol          | Parameter                            | Test Conditions   | Min                      | Typ  | Max | Units |
|-----------------|--------------------------------------|---|--------------------------|------|-----|-------|
| V <sub>DD</sub> | Supply Voltage                       |   | 2.5                      |      | 5.5 | V     |
| P <sub>O</sub>  | Output Power                         | THD+N = 10%, f = 1KHz, R <sub>L</sub> = 2Ω<br>(Class-D)   | V <sub>DD</sub> = 5.0V   | 5.0  |     | W     |
|                 |                                      |   | V <sub>DD</sub> = 3.6V   | 2.6  |     |       |
|                 |                                      |   | V <sub>DD</sub> = 2.5V   | 1.3  |     |       |
|                 |                                      | THD+N = 1%, f = 1KHz, R <sub>L</sub> = 2Ω<br>(Class-D)  | V <sub>DD</sub> = 5.0V   | 4.0  |     | W     |
|                 |                                      |   | V <sub>DD</sub> = 3.6V   | 2.0  |     |       |
|                 |                                      |   | V <sub>DD</sub> = 2.5V   | 1.0  |     |       |
|                 |                                      | THD+N = 10%, f = 1KHz, R <sub>L</sub> = 4Ω  | V <sub>DD</sub> = 5.0V   | 3.14 |     | W     |
|                 |                                      |   | V <sub>DD</sub> = 3.6V   | 1.5  |     |       |
|                 |                                      |   | V <sub>DD</sub> = 2.5V   | 0.76 |     |       |
|                 |                                      | THD+N = 1%, f = 1KHz, R <sub>L</sub> = 4Ω   | V <sub>DD</sub> = 5.0V   | 2.55 |     | W     |
|                 |                                      |   | V <sub>DD</sub> = 3.6V   | 1.45 |     |       |
|                 |                                      |   | V <sub>DD</sub> = 2.5V   | 0.63 |     |       |
| THD+N           | Total Harmonic Distortion Plus Noise | V <sub>DD</sub> = 5.0V, P <sub>O</sub> = 0.1W to 1W, R <sub>L</sub> = 8Ω<br>V <sub>DD</sub> = 3.6V, P <sub>O</sub> = 0.05W to 0.5W, R <sub>L</sub> = 8Ω                         | f = 1kHz                 | 0.15 |     | %     |
|                 |                                      |   |                          | 0.11 |     |       |
|                 |                                      | V <sub>DD</sub> = 5.0V, P <sub>O</sub> = 0.1W to 2W, R <sub>L</sub> = 4Ω<br>V <sub>DD</sub> = 3.6V, P <sub>O</sub> = 0.05W to 2W, R <sub>L</sub> = 4Ω                           | f = 1kHz                 | 0.15 |     | %     |
|                 |                                      |   |                          | 0.11 |     |       |
|                 |                                      | V <sub>DD</sub> = 5.0V, P <sub>O</sub> = 0.1W to 2W, R <sub>L</sub> = 2Ω<br>(Class-D)<br>V <sub>DD</sub> = 3.6V, P <sub>O</sub> = 0.05W to 1W, R <sub>L</sub> = 2Ω<br>(Class-D) | f = 1kHz                 | 0.15 |     | %     |
|                 |                                      |   |                          | 0.11 |     |       |
| G <sub>V</sub>  | Closed Loop Gain                     | V <sub>DD</sub> = 3V to 5V  |                          |      |     | dB    |
| PSRR            | Power Supply Ripple Rejection        | V <sub>DD</sub> = 5.0V, Inputs AC-Grounded with C <sub>IN</sub> = 0.47μF  | f = 100Hz                | -70  |     | dB    |
|                 |                                      |   | f = 1kHz                 | -65  |     |       |
| C <sub>S</sub>  | Crosstalk                            | V <sub>DD</sub> = 5.0V, P <sub>O</sub> = 0.5W, R <sub>L</sub> = 8Ω,<br>G <sub>V</sub> = 24db  | f = 1kHz                 | -95  |     | dB    |
| SNR             | Signal-to-Noise Ratio                | V <sub>DD</sub> = 5.0V, THD = 1%, G <sub>V</sub> = 24db   | f = 1kHz                 | 90   |     | dB    |
| V <sub>N</sub>  | Output Noise                         | V <sub>DD</sub> = 5.0V, Inputs AC-Grounded  | A-Weighting              | 100  |     | μV    |
|                 |                                      |   | No A-Weighting           | 150  |     |       |
| η               | Efficiency                           | R <sub>L</sub> = 8Ω, THD = 10%  | Class D Mode<br>f = 1kHz | 90   |     | %     |
|                 |                                      | R <sub>L</sub> = 4Ω, THD = 10%  |                          | 85   |     |       |
|                 |                                      | R <sub>L</sub> = 2Ω, THD = 10%  |                          | 80   |     |       |
| I <sub>Q</sub>  | Quiescent Current                    | V <sub>DD</sub> = 5.0V  | No Load                  | 10   |     | mA    |
|                 |                                      | V <sub>DD</sub> = 3.6V  |                          | 8    |     |       |
|                 |                                      | V <sub>DD</sub> = 2.5V  |                          | 6    |     |       |
|                 | Quiescent Current                    | V <sub>DD</sub> = 5.0V  | No Load                  | 25   |     | mA    |
|                 |                                      | V <sub>DD</sub> = 3.6V  |                          | 15   |     |       |
|                 |                                      | V <sub>DD</sub> = 2.5V  |                          | 10   |     |       |







## Electrical Characteristics (cont.)

(@T<sub>A</sub> = +25°C, V<sub>DD</sub> = 5V, Gain = 24dB, R<sub>L</sub> = 8Ω, both Class-AB and D mode, unless otherwise specified.)

| Symbol              | Parameter                                | Test Conditions                               |                          | Min | Typ | Max | Units |
|---------------------|--|---|--------------------------|-----|-----|-----|-------|
| I <sub>MUTE</sub>   | Muting Current                           | V <sub>DD</sub> = 5.0V                        | V <sub>MUTE</sub> = 0.3V |     | 2.4 |     | mA    |
| I <sub>SD</sub>     | Shutdown Current                         | V <sub>DD</sub> = 2.5V to 5.5V                | V <sub>SD</sub> = 0.3V   |     | < 1 |     | μA    |
| R <sub>DS(ON)</sub> | Static Drain-to-Source On-State Resistor | I <sub>DS</sub> = 500mA, V <sub>GS</sub> = 5V | PMOS                     |     | 180 |     | mΩ    |
|                     |  |   | NMOS                     |     | 140 |     |       |
| f <sub>SW</sub>     | Switching Frequency                      | V <sub>DD</sub> = 2.5V to 5.5V                | Class-D                  |     | 250 |     | kHz   |
| V <sub>OS</sub>     | Output Offset Voltage                    | Input AC-GND, V <sub>DD</sub> = 5.0V          |                          |     | 10  |     | mV    |
| V <sub>IH</sub>     | Enable Input High Voltage                | V <sub>DD</sub> = 5.0V                        |                          | 1.4 |     |     | V     |
| V <sub>IL</sub>     | Enable Input Low Voltage                 | V <sub>DD</sub> = 5.0V                        |                          |     |     | 0.4 |       |
| V <sub>IH</sub>     | MUTE Input High Voltage                  | V <sub>DD</sub> = 5.0V                        |                          | 1.4 |     |     | V     |
| V <sub>IL</sub>     | MUTE Input Low Voltage                   | V <sub>DD</sub> = 5.0V                        |                          |     |     | 0.4 |       |
| V <sub>IH</sub>     | MODE Input High Voltage                  | V <sub>DD</sub> = 5.0V                        |                          | 1.4 |     |     | V     |
| V <sub>IL</sub>     | MODE Input Low Voltage                   | V <sub>DD</sub> = 5.0V                        |                          |     |     | 0.4 |       |
| OTP                 | Over Temperature Protection              | No Load, Junction Temperature                 | V <sub>DD</sub> = 5.0V   |     | 150 |     | °C    |
| OTH                 | Over Temperature Hysteresis              |   |                          |     | 30  |     |       |

## Typical Performance Characteristics


(@ $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5\text{V}$ , Gain = 24dB,  $R_L = 8\Omega$ , both Class-AB and D mode, unless otherwise specified.)

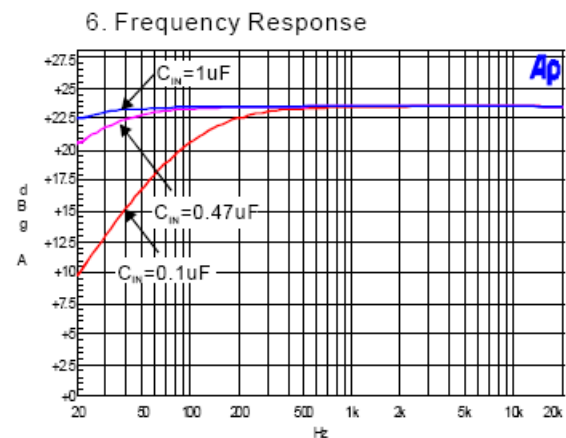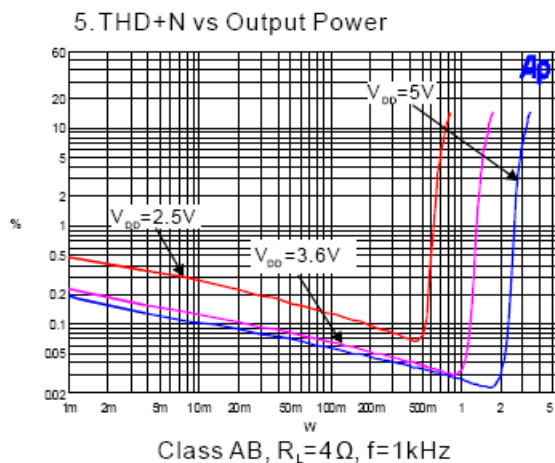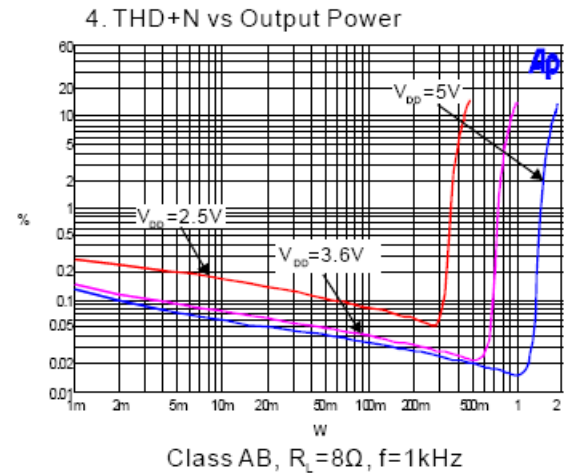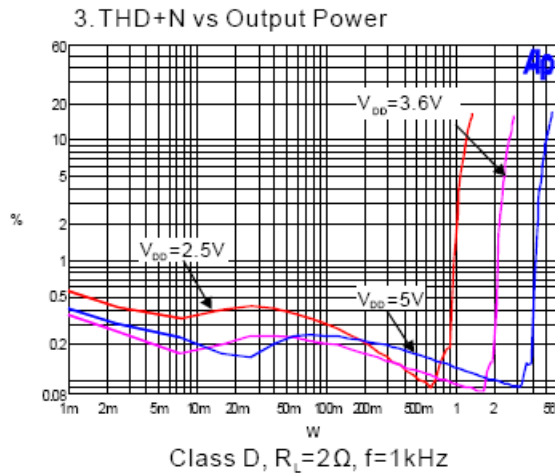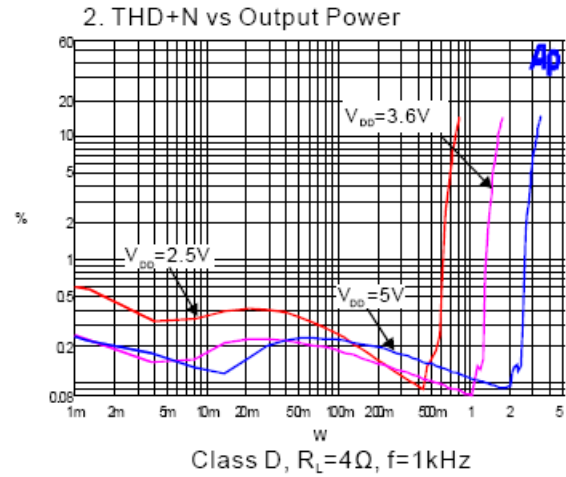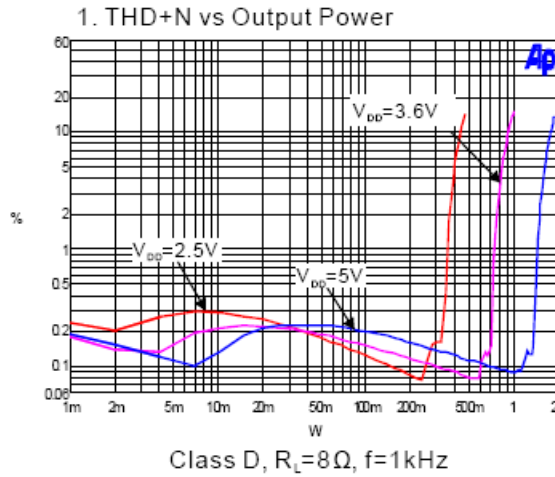


## Typical Performance Characteristics (cont.)

(@ $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5\text{V}$ , Gain = 24dB,  $R_L = 8\Omega$ , both Class-AB and D mode, unless otherwise specified.)


7. THD+N vs Frequency (Class D)

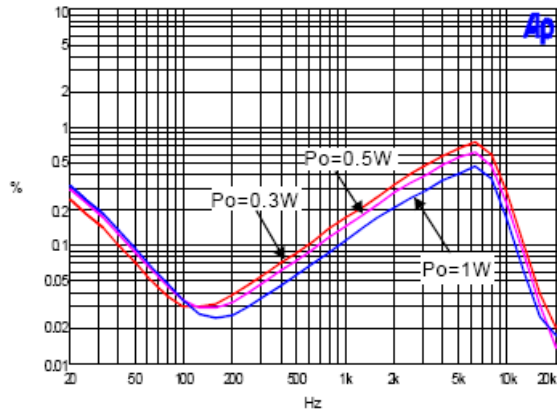

8. THD+N vs Output Power (Class AB)

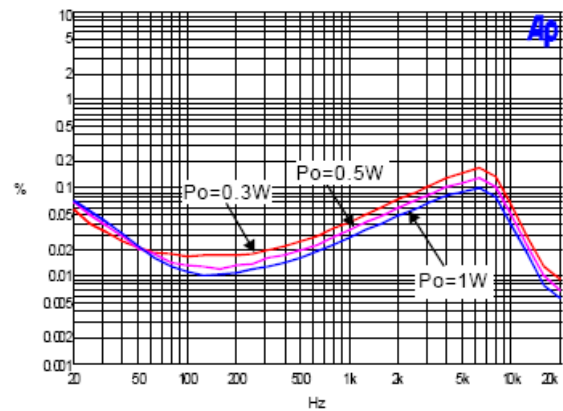


9. Noise Floor (Class D)

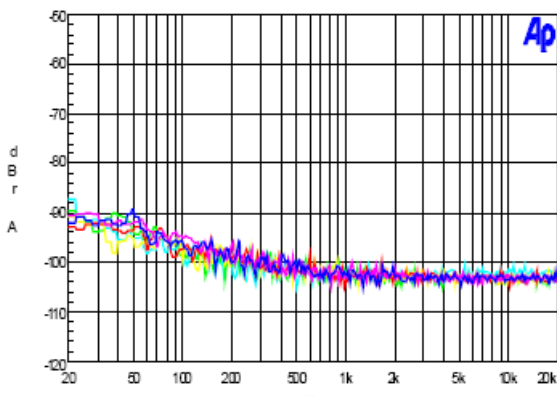


$R_L = 4\Omega$ ,  $V_{in} = 2.5\text{V}/3.3\text{V}/3.6\text{V}/4.2\text{V}/5\text{V}/5.5\text{V}$

10. Noise Floor (Class AB)

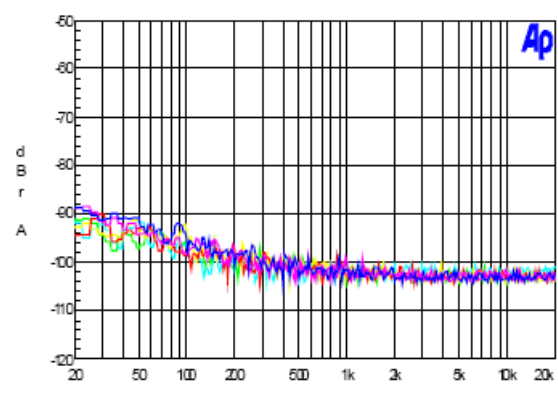


$R_L = 4\Omega$ ,  $V_{in} = 2.5\text{V}/3.3\text{V}/3.6\text{V}/4.2\text{V}/5\text{V}/5.5\text{V}$

11. PSRR (Class D)





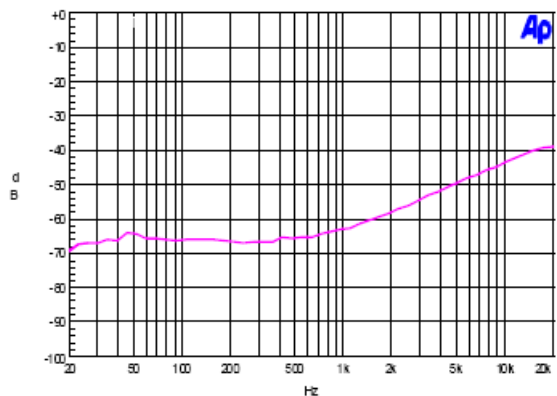


12. PSRR (Class AB)

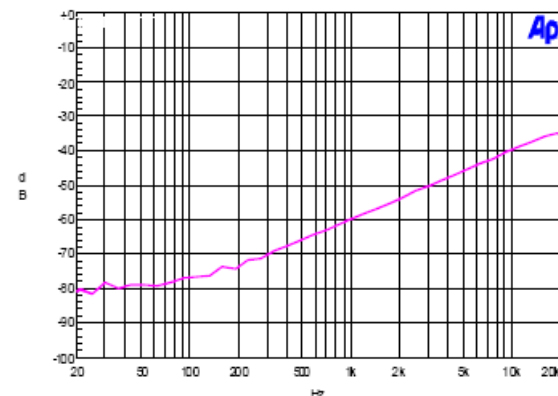

## Typical Performance Characteristics (cont.)

(@ $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5\text{V}$ , Gain = 24dB,  $R_L = 8\Omega$ , both Class-AB and D mode, unless otherwise specified.)

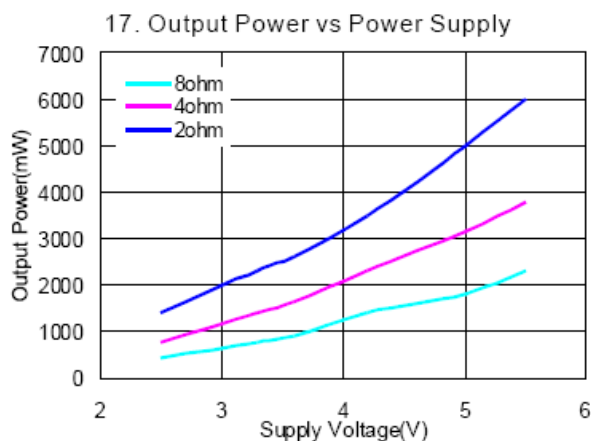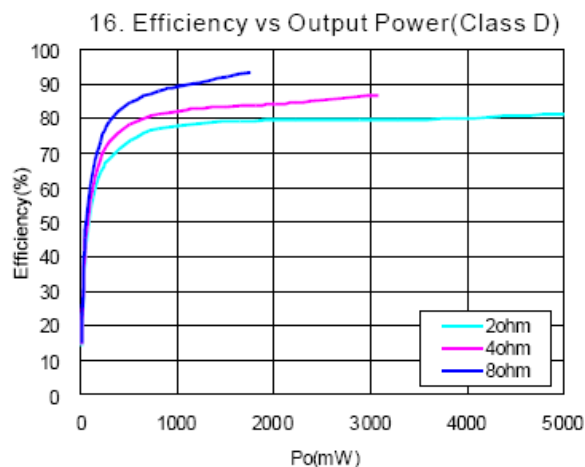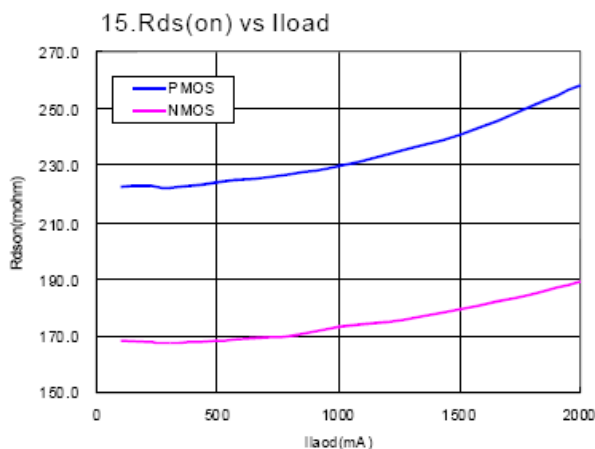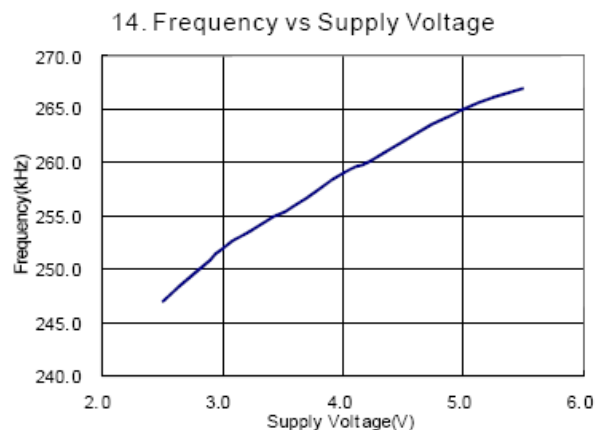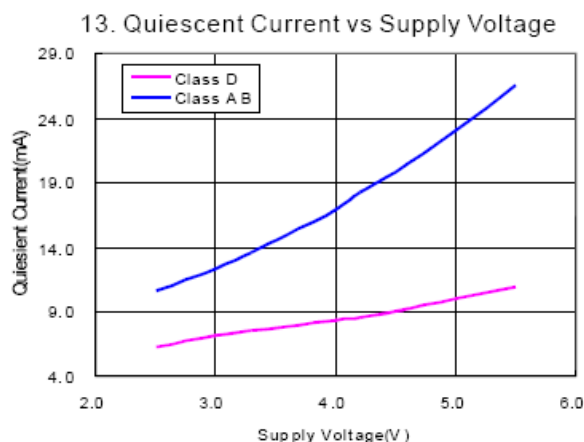




## Application Information

### Application Note

1. When the PAM8406 works in Class-D with LC filters, it should be connected with the speaker before it's powered on, otherwise it will be damaged easily.
2. When the PAM8406 works without LC filters, it's better to add a ferrite chip bead at the outgoing line of speaker for suppressing the possible electromagnetic interference.
3. The recommended operating voltage is 5.5V. When the PAM8406 is powered with four battery cells, it should be noted that the voltage of four new dry or alkaline batteries is over 6.0V, higher than its operation voltage, which will probably damage the device. Therefore, it's recommended to use either four Ni-MH (Nickel Metal Hydride) rechargeable batteries or 3 dry or alkaline batteries.
4. One should not make the input signal too large. Large signal can cause the clipping of output signal when increasing the volume. This will damage the device because of big gain of the PAM8406.

### Test Setup for Performance Testing

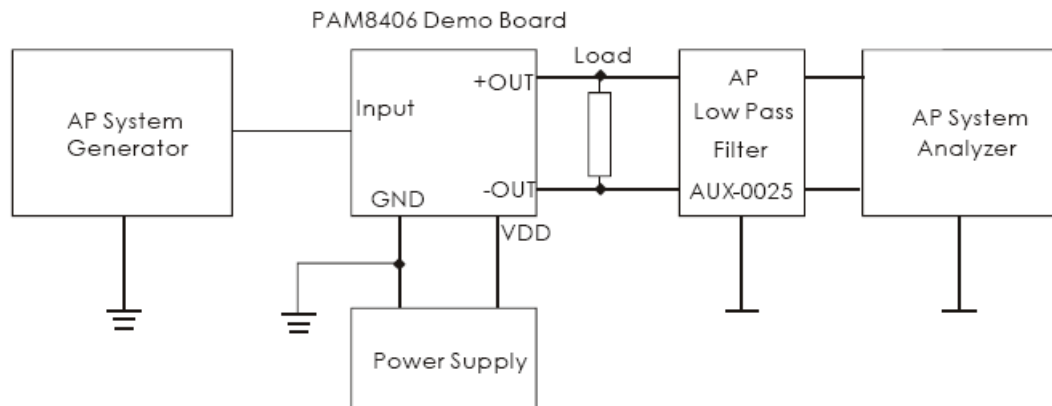

- Notes:
1. The AP AUX-0025 low pass filter is necessary for Class-D amplifier measurement with AP analyzer.
  2. Two 22μH inductors are used in series with load resistor to emulate the small speaker for efficiency measurement.

### Maximum Gain

As shown in block diagram (Page 2), the PAM8406 has two internal amplifier stages. The first stage's gain is externally configurable, while the second stage's is internally fixed. The closed-loop gain of the first stage is set by selecting the ratio of  $R_F$  to  $R_I$  while the second stage's gain is fixed at 2x. The output of amplifier 1 serves as the input to amplifier 2, thus the two amplifiers produce signals identical in magnitude, but different in phase by 180°. Consequently, the differential gain for the IC is

$$A_{VD} = 20 \cdot \log [2 \cdot (R_F/R_I)]$$

The PAM8406 sets maximum  $R_F = 142k\Omega$ , minimum  $R_I = 18k\Omega$ , so the maximum closed-gain is 24dB.

### Mode Selection

When mode pin high, it features Class-D; mode pin low, it's class AB. Mode pin can't be floating.

### Mute Operation

The MUTE pin is an input for controlling the output state of the PAM8406. A logic low on this pin disables the outputs, and a logic high on this pin enables the outputs. This pin may be used as a quick disable or enable of the outputs without a volume fade. Quiescent current is listed in the electrical characteristic table. The MUTE pin can be left floating due to the internal pull-up.

### Shutdown Operation

In order to reduce power consumption while not in use, the PAM8406 contains shutdown circuitry to turn off the amplifier's bias circuitry. This shutdown feature turns the amplifier off when logic low is applied to the SHDN pin. By switching the SHDN pin connected to GND, the PAM8406 supply current draw will be minimized in idle mode. The SHDN pin can be left floating due to the internal pull-up.

## Application Information (cont.)

### Power Supply Decoupling

The PAM8406 is a high performance CMOS audio amplifier that requires adequate power supply decoupling to ensure the output THD and PSRR as low as possible. Power supply decoupling affects low frequency response. Optimum decoupling is achieved by using two capacitors of different types targeting to different types of noise on the power supply leads. For higher frequency transients, spikes, or digital hash on the line, a good low equivalent-series resistance (ESR) ceramic capacitor, typically 1.0μF, works best, placing it as close as possible to the device V<sub>DD</sub> terminal. For filtering lower frequency noise signals, a large capacitor of 20μF (ceramic) or greater is recommended, placing it near the audio power amplifier.

### Input Capacitor (C<sub>I</sub>)

Large input capacitors are both expensive and space hungry for portable designs. Clearly, a certain sized capacitor is needed to couple in low frequencies without severe attenuation. But in many cases the speakers used in portable systems, whether internal or external, have little ability to reproduce signals below 100Hz to 150Hz. Thus, using a large input capacitor may not increase actual system performance. In this case, input capacitor (C<sub>I</sub>) and input resistance (R<sub>I</sub>) of the amplifier form a high-pass filter with the corner frequency determined by equation below,

$$f_c = \frac{1}{2\pi R_I C_I}$$

In addition to system cost and size, click and pop performance is affected by the size of the input coupling capacitor, C<sub>I</sub>. A larger input coupling capacitor requires more charge to reach its quiescent DC voltage (nominally 1/2 V<sub>DD</sub>). This charge comes from the internal circuit via the feedback and is apt to create pops upon device enable. Thus, by minimizing the capacitor size based on necessary low frequency response, turn-on pops can be minimized.

### Analog Reference Bypass Capacitor (C<sub>BYP</sub>)

The Analog Reference Bypass Capacitor (C<sub>BYP</sub>) is the most critical capacitor and serves several important functions. During start-up or recovery from shutdown mode, C<sub>BYP</sub> determines the rate at which the amplifier starts up. The second function is to reduce noise caused by the power supply coupling into the output drive signal. This noise is from the internal analog reference to the amplifier, which appears as degraded PSRR and THD+N.

A ceramic bypass capacitor (C<sub>BYP</sub>) with values of 0.47μF to 1.0μF is recommended for the best THD and noise performance. Increasing the bypass capacitor reduces clicking and popping noise from power on/off and entering and leaving shutdown.

### Under Voltage Lock-Out (UVLO)

The PAM8406 incorporates circuitry designed to detect low supply voltage. When the supply voltage drops to 2.0V or below, the PAM8406 outputs are disabled, and the device comes out of this state and starts to normal function when V<sub>DD</sub> ≥ 2.2V.


### Short Circuit Protection (SCP)

The PAM8406 has short circuit protection circuitry on the outputs to prevent damage to the device when output-to-output or output-to-GND short occurs. When a short circuit is detected on the outputs, the outputs are disabled immediately. If the short was removed, the device activates again.

### Over Temperature Protection


Thermal protection on the PAM8406 prevents the device from damage when the internal die temperature exceeds +150°C. There is a 15 degree tolerance on this trip point from device to device. Once the die temperature exceeds the thermal set point, the device outputs are disabled. This is not a latched fault. The thermal fault is cleared once the temperature of the die is reduced by 30°C. This large hysteresis will prevent motor boating sound well and the device begins normal operation at this point without external system intervention.

## Ordering Information

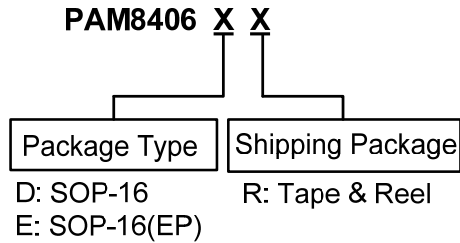


| Part Number | Part Marking        | Package Type | Standard Package     |
|-------------|---------------------|--------------|----------------------|
| PAM8406DR   | PAM8406<br>XATYWWLL | SOP-16       | 2500 Units/Tape&Reel |
| PAM8406ER   | PAM8406<br>XATYWWLL | SOP-16(EP)   | 2500 Units/Tape&Reel |

## Marking Information

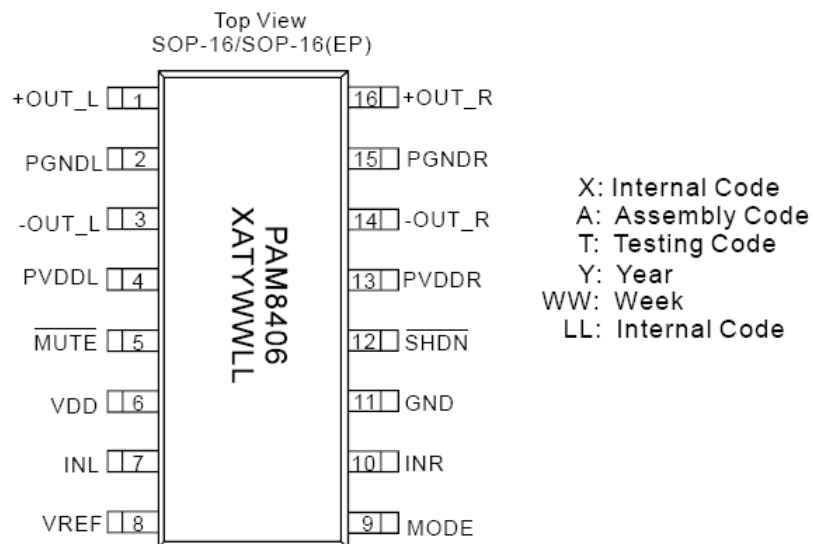

## Package Outline Dimensions (All dimensions in mm.)


SOP-16

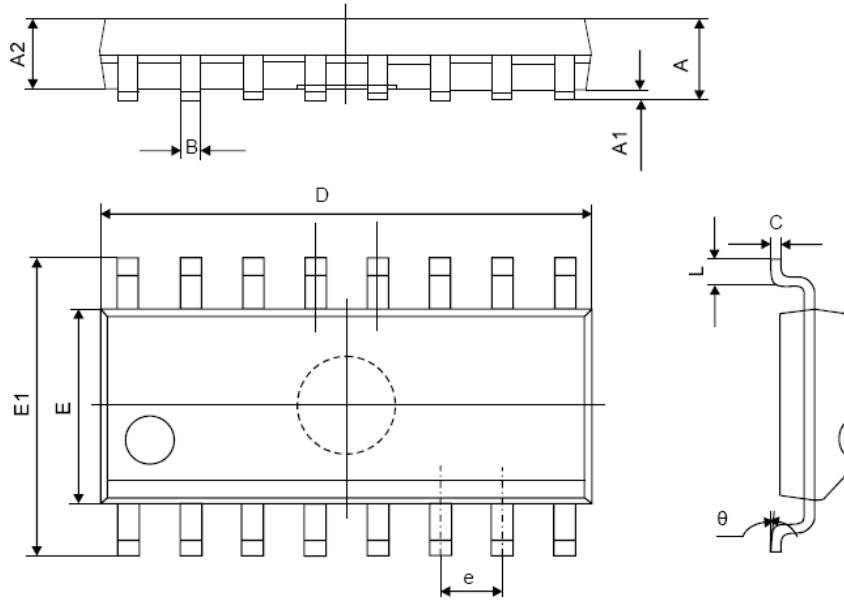



| Symbol | Dimensions Millimeters |        |
|--------|------------------------|--------|
|        | Min                    | Max    |
| A      | 1.350                  | 1.750  |
| A1     | 0.100                  | 0.250  |
| A2     | 1.350                  | 1.550  |
| B      | 0.330                  | 0.510  |
| C      | 0.190                  | 0.250  |
| D      | 9.800                  | 10.000 |
| E      | 3.800                  | 4.000  |
| E1     | 5.800                  | 6.300  |
| e      | 1.270(TYP)             |        |
| L      | 0.400                  | 1.270  |
| θ      | 0°                     | 8°     |

## Package Outline Dimensions (All dimensions in mm.)

### SOP-16(EP)

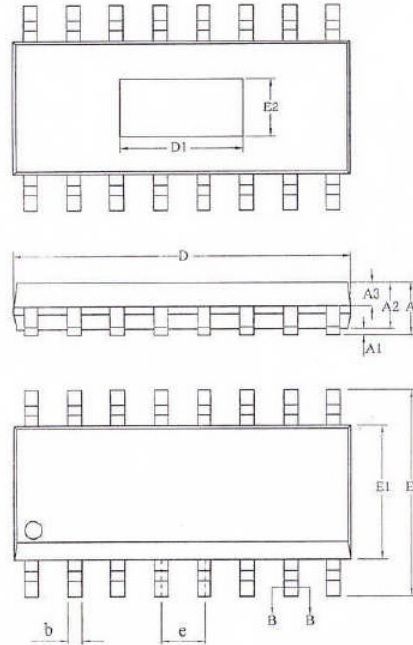

| SYMBOL         | MILLIMETER |      |       |
|----------------|------------|------|-------|
|                | MIN        | NOM  | MAX   |
| A              | —          | —    | 1.75  |
| A1             | 0.05       | —    | 0.225 |
| A2             | 1.30       | 1.40 | 1.50  |
| A3             | 0.60       | 0.65 | 0.70  |
| b              | 0.39       | —    | 0.48  |
| b1             | 0.38       | 0.41 | 0.43  |
| e              | 0.21       | —    | 0.26  |
| e1             | 0.19       | 0.20 | 0.21  |
| D              | 9.70       | 9.90 | 10.10 |
| E              | 5.80       | 6.00 | 6.20  |
| E1             | 3.70       | 3.90 | 4.10  |
| e              | 1.27BSC    |      |       |
| h              | 0.25       | —    | 0.50  |
| L              | 0.50       | —    | 0.80  |
| L1             | 1.05BSC    |      |       |
| 0              | 0          | —    | 8°    |
| D1             | 3.86REF    |      |       |
| E2             | 1.67REF    |      |       |
| 1. 平装使用尺寸 (mm) | 95*180     |      |       |



**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2012, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.