

## Operational Amplifiers / Comparators



# Ground Sense Low Voltage Operation CMOS Operational Amplifiers

BU7461G, BU7461SG, BU7441G, BU7441SG, BU7462F/FVM/NUX, BU7462SF/FVM/NUX, BU7442F/FVM/NUX, BU7442SF/FVM/NUX, BU7464F, BU7464SF, BU7444F, BU7444SF, BU7465HFV, BU7465SHFV, BU7445HFV, BU7445SHFV

No.10049JET21


## ●Description

Low Voltage CMOS Op-Amp integrates one or two independent outputs full swing Op-Amps and phase compensation capacitors on a single chip. Especially, this series is operable with low voltage, low supply current and low input bias current.




Ground Sense : BU7461 (BU7461S) family, BU7441 (BU7441S) family, BU7462 (BU7462S) family, BU7442 (BU7442S) family, BU7464 (BU7464S) family, BU7444 (BU7444S) family, BU7465 (BU7465S) family, BU7445 (BU7445S) family,

## ●Features

- 1) Operable with low voltage  
+1.7[V] ~ +5.5[V] (Single supply) :  
BU7461/BU7441 family, BU7462/BU7442 family  
BU7464/BU7444 family, BU7465/BU7445 family
- 2) Input Ground Sense, Output Full Swing
- 3) High speed operation (BU7461 family, BU7462 family)
- 4) Internal phase compensation
- 5) Wide temperature range  
-40[°C] ~ +85[°C]  
(BU7461G, BU7462 family, BU7464F, BU7465HFV)  
(BU7441G, BU7442 family, BU7444F, BU7445HFV)  
-40[°C] ~ +105[°C]  
(BU7461SG, BU7462S family, BU7464SF, BU7465SHFV)  
(BU7441SG, BU7442S family, BU7444SF, BU7445SHFV)
- 6) High open loop voltage gain
- 7) Low supply current  
(BU7441 family, BU7442 family)  
(BU7445 family, BU7444 family)
- 8) Low input bias current 1[pA](Typ.)
- 9) ESD protection circuit  
Human body mode (HBM) ±4000[V](Typ.)

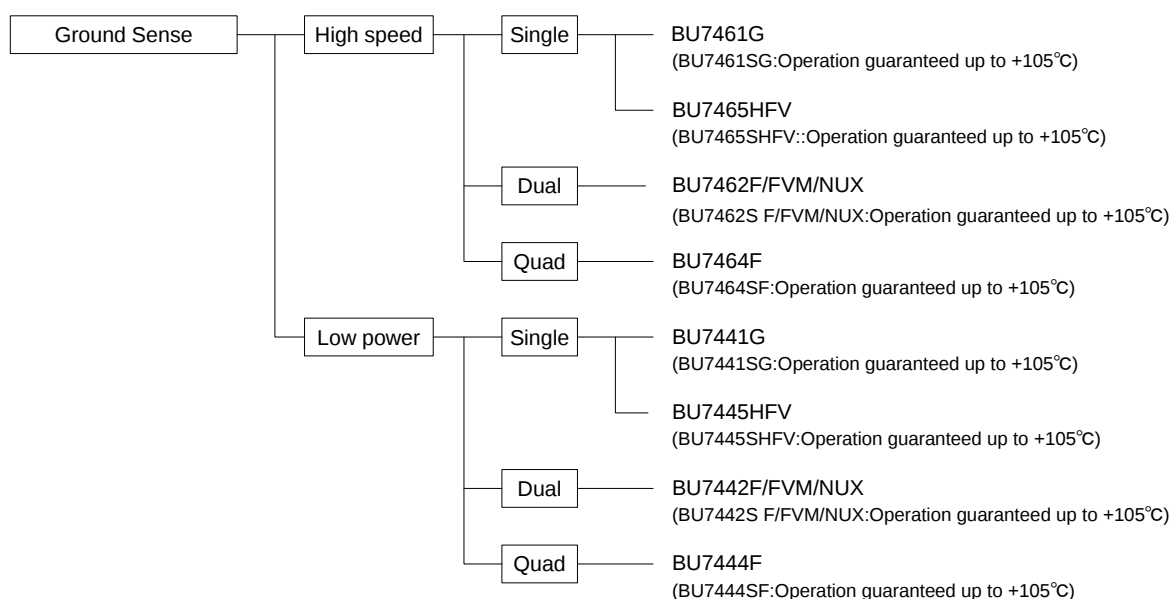

## ●Pin Assignments

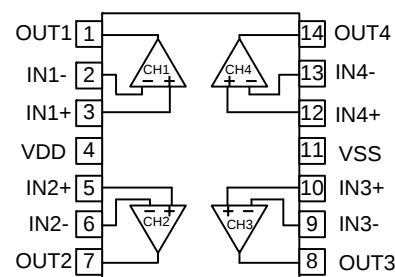

SSOP5

HVSOF5

SOP8

MSOP8

VSON008X2030

SOP14

| Input type   | Package                                    |                                                    |                                            |                                                    |                                                    |                                            |
|--------------|--------------------------------------------|----------------------------------------------------|--------------------------------------------|----------------------------------------------------|----------------------------------------------------|--------------------------------------------|
|              | SSOP5                                      | HVSOF5                                             | SOP8                                       | VSON008X2030                                       | MSOP8                                              | SOP14                                      |
| Ground Sense | BU7461G<br>BU7461SG<br>BU7441G<br>BU7441SG | BU7465HFV<br>BU7465SHFV<br>BU7445HFV<br>BU7445SHFV | BU7462F<br>BU7462SF<br>BU7442F<br>BU7442SF | BU7462NUX<br>BU7462SNUX<br>BU7442NUX<br>BU7442SNUX | BU7462FVM<br>BU7462SFVM<br>BU7442FVM<br>BU7442SFVM | BU7464F<br>BU7464SF<br>BU7444F<br>BU7444SF |

## ●Absolute maximum rating (Ta=25[°C])

| Parameter                                  | Symbol  | Rating                                                                                           |                                                                                                            | Unit |
|--------------------------------------------|---------|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------|
|                                            |         | BU7461G, BU7462F/FVM/NUX<br>BU7441G, BU7442F/FVM/NUX<br>BU7464F, BU7444F<br>BU7445HFV, BU7465HFV | BU7461SG, BU7462S F/FVM/NUX<br>BU7441SG, BU7442S F/FVM/NUX<br>BU7464SF, BU7444SF<br>BU7445SHFV, BU7465SHFV |      |
| Supply Voltage                             | VDD-VSS | +7                                                                                               |                                                                                                            | V    |
| Differential Input Voltage <sup>(*1)</sup> | Vid     | VDD-VSS                                                                                          |                                                                                                            | V    |
| Input Common-mode Voltage Range            | Vicm    | (VSS-0.3) ~ (VDD+0.3)                                                                            |                                                                                                            | V    |
| Operating Temperature                      | Topr    | -40 ~ +85                                                                                        | -40 ~ +105                                                                                                 | °C   |
| Storage Temperature                        | Tstg    | -55 ~ +125                                                                                       |                                                                                                            | °C   |
| Maximum Junction Temperature               | Tjmax   | +125                                                                                             |                                                                                                            | °C   |

Note: Absolute maximum rating item indicates the condition which must not be exceeded.

Application of voltage in excess of absolute maximum rating or use out absolute maximum rated temperature environment may cause deterioration of characteristics.

(\*1) The voltage difference between inverting input and non-inverting input is the differential input voltage. Then input terminal voltage is set to more than VSS.

●Electrical characteristics

OBU7461 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                             | Symbol | Temperature Range | Limits            |      |         | Unit | Condition                                |
|---------------------------------------|--------|-------------------|-------------------|------|---------|------|------------------------------------------|
|                                       |        |                   | BU7461G, BU7461SG |      |         |      |                                          |
|                                       |        |                   | Min.              | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*2)</sup>  | Vio    | 25°C              | -                 | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*2)</sup>  | Iio    | 25°C              | -                 | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*2)</sup>    | Ib     | 25°C              | -                 | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*3)</sup>        | IDD    | 25°C              | -                 | 150  | 350     | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                       |        | Full range        | -                 | -    | 450     |      |                                          |
| High Level Output Voltage             | VOH    | 25°C              | VDD-0.1           | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage              | VOL    | 25°C              | -                 | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain             | AV     | 25°C              | 70                | 95   | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range       | Vicm   | 25°C              | 0                 | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio           | CMRR   | 25°C              | 45                | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio          | PSRR   | 25°C              | 60                | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*4)</sup> | IOH    | 25°C              | 4                 | 8    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*4)</sup>   | IOL    | 25°C              | 6                 | 12   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                             | SR     | 25°C              | -                 | 1.0  | -       | V/μs | CL=25[pF]                                |
| Gain Band width                       | FT     | 25°C              | -                 | 1    | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                          | θ      | 25°C              | -                 | 50   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion             | THD    | 25°C              | -                 | 0.05 | -       | %    | VOUT=1[Vp-p]<br>f=1[kHz]                 |

(\*2) Absolute value

(\*3) Full range: BU7461: Ta=-40[°C] to +85[°C] BU7461S: Ta=-40[°C] to +105[°C]

(\*4) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.

When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

OBU7462 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                             | Symbol | Temperature Range | Limits                               |      |         | Unit | Condition                                |
|---------------------------------------|--------|-------------------|--------------------------------------|------|---------|------|------------------------------------------|
|                                       |        |                   | BU7462F/FVM/NUX<br>BU7462S F/FVM/NUX |      |         |      |                                          |
|                                       |        |                   | Min.                                 | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*5)</sup>  | Vio    | 25°C              | -                                    | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*5)</sup>  | Iio    | 25°C              | -                                    | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*5)</sup>    | Ib     | 25°C              | -                                    | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*6)</sup>        | IDD    | 25°C              | -                                    | 300  | 700     | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                       |        | Full range        | -                                    | -    | 900     |      |                                          |
| High Level Output Voltage             | VOH    | 25°C              | VDD-0.1                              | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage              | VOL    | 25°C              | -                                    | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain             | AV     | 25°C              | 70                                   | 95   | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range       | Vicm   | 25°C              | 0                                    | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio           | CMRR   | 25°C              | 45                                   | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio          | PSRR   | 25°C              | 60                                   | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*7)</sup> | IOH    | 25°C              | 4                                    | 8    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*7)</sup>   | IOL    | 25°C              | 6                                    | 12   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                             | SR     | 25°C              | -                                    | 1.0  | -       | V/μs | CL=25[pF]                                |
| Gain Band width                       | FT     | 25°C              | -                                    | 1    | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                          | θ      | 25°C              | -                                    | 50   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion             | THD    | 25°C              | -                                    | 0.05 | -       | %    | VOUT=1[Vp-p] ,<br>f=1[kHz]               |
| Channel Separation                    | CS     | 25°C              | -                                    | 100  | -       | dB   | AV=40[dB]                                |

(\*5) Absolute value

(\*6) Full range: BU7261, BU7262: Ta=-40[°C] to +85[°C] BU7462S: Ta=-40[°C] to +105[°C]

(\*7) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.  
 When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

OBU7464 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                             | Symbol | Temperature Range | Limits              |      |         | Unit | Condition                                |
|---------------------------------------|--------|-------------------|---------------------|------|---------|------|------------------------------------------|
|                                       |        |                   | BU7464F<br>BU7464SF |      |         |      |                                          |
|                                       |        |                   | Min.                | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*5)</sup>  | Vio    | 25°C              | -                   | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*5)</sup>  | Iio    | 25°C              | -                   | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*5)</sup>    | Ib     | 25°C              | -                   | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*6)</sup>        | IDD    | 25°C              | -                   | 600  | 1400    | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                       |        | Full range        | -                   | -    | 1800    |      |                                          |
| High Level Output Voltage             | VOH    | 25°C              | VDD-0.1             | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage              | VOL    | 25°C              | -                   | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain             | AV     | 25°C              | 70                  | 95   | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range       | Vicm   | 25°C              | 0                   | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio           | CMRR   | 25°C              | 45                  | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio          | PSRR   | 25°C              | 60                  | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*7)</sup> | IOH    | 25°C              | 4                   | 8    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*7)</sup>   | IOL    | 25°C              | 6                   | 12   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                             | SR     | 25°C              | -                   | 1.0  | -       | V/μs | CL=25[pF]                                |
| Gain Band width                       | FT     | 25°C              | -                   | 1    | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                          | θ      | 25°C              | -                   | 50   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion             | THD    | 25°C              | -                   | 0.05 | -       | %    | VOUT=0.8[Vp-p],<br>f=1[kHz]              |
| Channel Separation                    | CS     | 25°C              | -                   | 100  | -       | dB   | AV=40[dB]                                |

(\*8) Absolute value

(\*9) Full range: BU7464: Ta=-40[°C] to +85[°C] BU7464S: Ta=-40[°C] to +105[°C]

(\*10) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.

When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

OBU7465 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                             | Symbol | Temperature Range | Limits                  |      |         | Unit | Condition                                |
|---------------------------------------|--------|-------------------|-------------------------|------|---------|------|------------------------------------------|
|                                       |        |                   | BU7465HFV<br>BU7465SHFV |      |         |      |                                          |
|                                       |        |                   | Min.                    | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*)5</sup>  | Vio    | 25°C              | -                       | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*)5</sup>  | Iio    | 25°C              | -                       | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*)5</sup>    | Ib     | 25°C              | -                       | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*)6</sup>        | IDD    | 25°C              | -                       | 120  | 300     | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                       |        | Full range        | -                       | -    | 400     |      |                                          |
| High Level Output Voltage             | VOH    | 25°C              | VDD-0.1                 | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage              | VOL    | 25°C              | -                       | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain             | AV     | 25°C              | 60                      | 100  | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range       | Vicm   | 25°C              | 0                       | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio           | CMRR   | 25°C              | 45                      | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio          | PSRR   | 25°C              | 60                      | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*)7</sup> | IOH    | 25°C              | 4                       | 8    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*)7</sup>   | IOL    | 25°C              | 9                       | 18   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                             | SR     | 25°C              | -                       | 1.0  | -       | V/μs | CL=25[pF]                                |
| Gain Band width                       | FT     | 25°C              | -                       | 1.2  | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                          | θ      | 25°C              | -                       | 60   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion             | THD    | 25°C              | -                       | 0.05 | -       | %    | VOUT=0.8[Vp-p],<br>f=1[kHz]              |

(\*)11) Absolute value

(\*)12) Full range: BU7465: Ta=-40[°C] to +85[°C] BU7465S: Ta=-40[°C] to +105[°C]

(\*)13) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.

When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

OBU7441 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                               | Symbol | Temperature Range | Limits            |      |         | Unit | Condition                                |
|-----------------------------------------|--------|-------------------|-------------------|------|---------|------|------------------------------------------|
|                                         |        |                   | BU7441G, BU7441SG |      |         |      |                                          |
|                                         |        |                   | Min.              | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*)14)</sup>  | Vio    | 25°C              | -                 | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*)14)</sup>  | Iio    | 25°C              | -                 | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*)14)</sup>    | Ib     | 25°C              | -                 | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*)15)</sup>        | IDD    | 25°C              | -                 | 50   | 120     | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                         |        | Full range        | -                 | -    | 240     |      |                                          |
| High Level Output Voltage               | VOH    | 25°C              | VDD-0.1           | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage                | VOL    | 25°C              | -                 | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain               | AV     | 25°C              | 70                | 95   | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range         | Vicm   | 25°C              | 0                 | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio             | CMRR   | 25°C              | 45                | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio            | PSRR   | 25°C              | 60                | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*)16)</sup> | IOH    | 25°C              | 3                 | 6    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*)16)</sup>   | IOL    | 25°C              | 5                 | 10   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                               | SR     | 25°C              | -                 | 0.3  | -       | V/μs | CL=25[pF]                                |
| Gain Band width                         | FT     | 25°C              | -                 | 0.6  | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                            | θ      | 25°C              | -                 | 50   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion               | THD    | 25°C              | -                 | 0.05 | -       | %    | VOUT=1[Vp-p], f=1[kHz]                   |

(\*14) Absolute value

(\*15) Full range: BU7441: Ta=-40[°C] to +85[°C] BU7441S: Ta=-40[°C] to +105[°C]

(\*16) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.

When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

OBU7442 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                              | Symbol | Temperature Range | Limits                               |      |         | Unit | Condition                                |
|----------------------------------------|--------|-------------------|--------------------------------------|------|---------|------|------------------------------------------|
|                                        |        |                   | BU7442F/FVM/NUX<br>BU7442S F/FVM/NUX |      |         |      |                                          |
|                                        |        |                   | Min.                                 | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*17)</sup>  | Vio    | 25°C              | -                                    | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*17)</sup>  | Iio    | 25°C              | -                                    | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*17)</sup>    | Ib     | 25°C              | -                                    | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*18)</sup>        | IDD    | 25°C              | -                                    | 100  | 240     | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                        |        | Full range        | -                                    | -    | 480     |      |                                          |
| High Level Output Voltage              | VOH    | 25°C              | VDD-0.1                              | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage               | VOL    | 25°C              | -                                    | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain              | AV     | 25°C              | 70                                   | 95   | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range        | Vicm   | 25°C              | 0                                    | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio            | CMRR   | 25°C              | 45                                   | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio           | PSRR   | 25°C              | 60                                   | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*19)</sup> | IOH    | 25°C              | 3                                    | 6    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*19)</sup>   | IOL    | 25°C              | 5                                    | 10   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                              | SR     | 25°C              | -                                    | 0.3  | -       | V/μs | CL=25[pF]                                |
| Gain Band width                        | FT     | 25°C              | -                                    | 0.6  | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                           | θ      | 25°C              | -                                    | 50   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion              | THD    | 25°C              | -                                    | 0.05 | -       | %    | VOUT=1[Vp-p], f=1[kHz]                   |
| Channel Separation                     | CS     | 25°C              | -                                    | 100  | -       | dB   | AV=40[dB]                                |

(\*17) Absolute value

(\*18) Full range: BU7442: Ta=-40[°C] to +85[°C] BU7442S: Ta=-40[°C] to +105[°C]

(\*19) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.

When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

OBU7444 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                              | Symbol | Temperature Range | Limits            |      |         | Unit | Condition                                |
|----------------------------------------|--------|-------------------|-------------------|------|---------|------|------------------------------------------|
|                                        |        |                   | BU7444F, BU7444SF |      |         |      |                                          |
|                                        |        |                   | Min.              | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*20)</sup>  | Vio    | 25°C              | -                 | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*20)</sup>  | Iio    | 25°C              | -                 | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*20)</sup>    | Ib     | 25°C              | -                 | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*21)</sup>        | IDD    | 25°C              | -                 | 200  | 480     | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                        |        | Full range        | -                 | -    | 960     |      |                                          |
| High Level Output Voltage              | VOH    | 25°C              | VDD-0.1           | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage               | VOL    | 25°C              | -                 | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain              | AV     | 25°C              | 70                | 95   | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range        | Vicm   | 25°C              | 0                 | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio            | CMRR   | 25°C              | 45                | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio           | PSRR   | 25°C              | 60                | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*22)</sup> | IOH    | 25°C              | 3                 | 6    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*22)</sup>   | IOL    | 25°C              | 5                 | 10   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                              | SR     | 25°C              | -                 | 0.3  | -       | V/μs | CL=25[pF]                                |
| Gain Band width                        | FT     | 25°C              | -                 | 0.6  | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                           | θ      | 25°C              | -                 | 50   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion              | THD    | 25°C              | -                 | 0.05 | -       | %    | VOUT=0.8[Vp-p],<br>f=1[kHz]              |
| Channel Separation                     | CS     | 25°C              | -                 | 100  | -       | dB   | AV=40[dB]                                |

(\*20) Absolute value

(\*21) Full range: BU7444: Ta=-40[°C] to +85[°C] BU7444S: Ta=-40[°C] to +105[°C]

(\*22) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.

When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

OBU7445 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

| Parameter                              | Symbol | Temperature Range | Limits                |      |         | Unit | Condition                                |
|----------------------------------------|--------|-------------------|-----------------------|------|---------|------|------------------------------------------|
|                                        |        |                   | BU7445HFV, BU7445SHFV |      |         |      |                                          |
|                                        |        |                   | Min.                  | Typ. | Max.    |      |                                          |
| Input Offset Voltage <sup>(*23)</sup>  | Vio    | 25°C              | -                     | 1    | 6       | mV   | —                                        |
| Input Offset Current <sup>(*23)</sup>  | Iio    | 25°C              | -                     | 1    | -       | pA   | —                                        |
| Input Bias Current <sup>(*23)</sup>    | Ib     | 25°C              | -                     | 1    | -       | pA   | —                                        |
| Supply Current <sup>(*24)</sup>        | IDD    | 25°C              | -                     | 40   | 90      | μA   | RL=∞ All Op-Amps<br>AV=0[dB], VIN=0.9[V] |
|                                        |        | Full range        | -                     | -    | 120     |      |                                          |
| High Level Output Voltage              | VOH    | 25°C              | VDD-0.1               | -    | -       | V    | RL=10[kΩ]                                |
| Low Level Output Voltage               | VOL    | 25°C              | -                     | -    | VSS+0.1 | V    | RL=10[kΩ]                                |
| Large Signal Voltage Gain              | AV     | 25°C              | 60                    | 100  | -       | dB   | RL=10[kΩ]                                |
| Input Common-mode Voltage Range        | Vicm   | 25°C              | 0                     | -    | 1.8     | V    | VSS ~ VDD-1.2[V]                         |
| Common-mode Rejection Ratio            | CMRR   | 25°C              | 45                    | 60   | -       | dB   | —                                        |
| Power Supply Rejection Ratio           | PSRR   | 25°C              | 60                    | 80   | -       | dB   | —                                        |
| Output Source Current <sup>(*25)</sup> | IOH    | 25°C              | 4                     | 8    | -       | mA   | VDD-0.4[V]                               |
| Output Sink Current <sup>(*25)</sup>   | IOL    | 25°C              | 9                     | 18   | -       | mA   | VSS+0.4[V]                               |
| Slew Rate                              | SR     | 25°C              | -                     | 0.25 | -       | V/μs | CL=25[pF]                                |
| Gain Band width                        | FT     | 25°C              | -                     | 0.4  | -       | MHz  | CL=25[pF], AV=40[dB]                     |
| Phase Margin                           | θ      | 25°C              | -                     | 60   | -       | °    | CL=25[pF], AV=40[dB]                     |
| Total Harmonic Distortion              | THD    | 25°C              | -                     | 0.05 | -       | %    | VOUT=0.8[Vp-p],<br>f=1[kHz]              |

(\*23) Absolute value

(\*24) Full range: BU7445: Ta=-40[°C] to +85[°C] BU7445S: Ta=-40[°C] to +105[°C]

(\*25) Under the high temperature environment, consider the power dissipation of IC when selecting the output current.

When the terminal short circuits are continuously output, the output current is reduced to climb to the temperature inside IC.

●Reference data (BU7461 family)

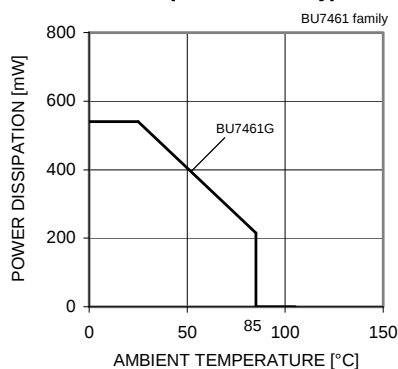


Fig.1  
Derating curve

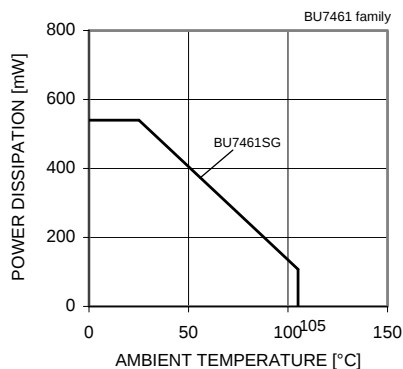


Fig.2  
Derating curve

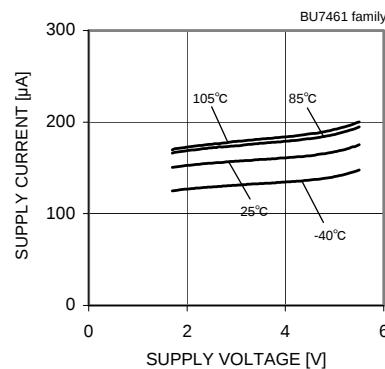


Fig.3  
Supply Current – Supply Voltage

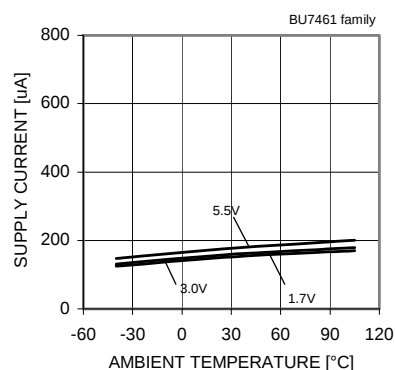


Fig.4  
Supply Current – Ambient Temperature

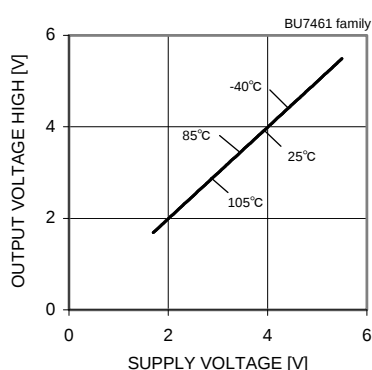


Fig.5  
Output Voltage High – Supply Voltage  
( $R_L=10[k\Omega]$ )

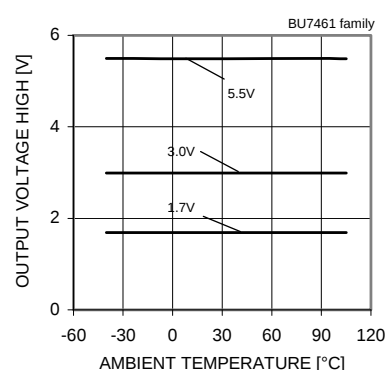


Fig.6  
Output Voltage High – Ambient Temperature  
( $R_L=10[k\Omega]$ )

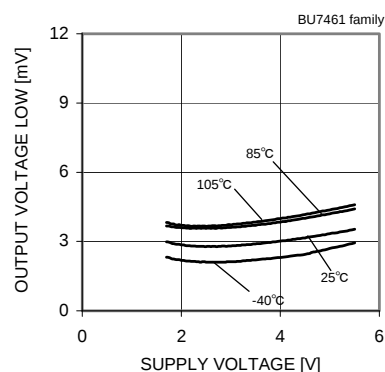


Fig.7  
Output Voltage Low – Supply Voltage  
( $R_L=10[k\Omega]$ )

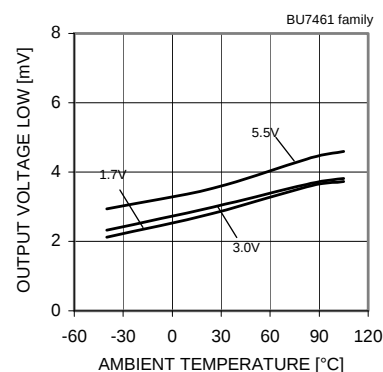


Fig.8  
Output Voltage Low – Ambient Temperature  
( $R_L=10[k\Omega]$ )

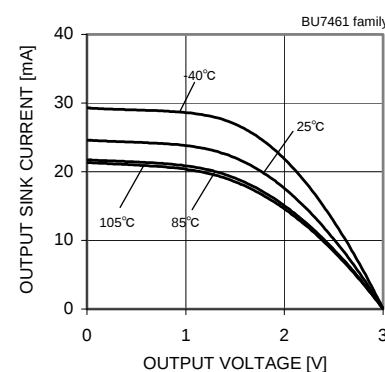


Fig.9  
Output Source Current – Output Voltage  
( $V_{DD}=3.0[V]$ )

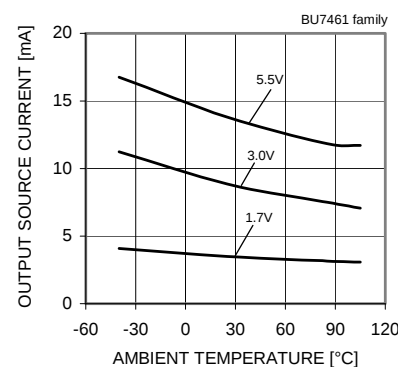


Fig.10  
Output Source Current – Ambient Temperature  
( $V_{OUT}=V_{DD}-0.4[V]$ )

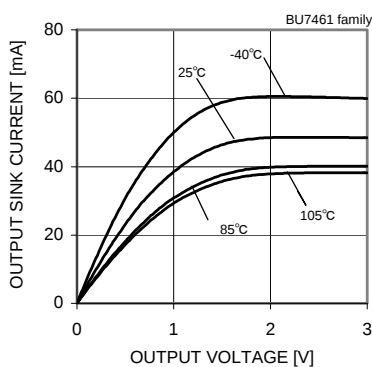


Fig.11  
Output Sink Current – Output Voltage  
( $V_{DD}=3[V]$ )

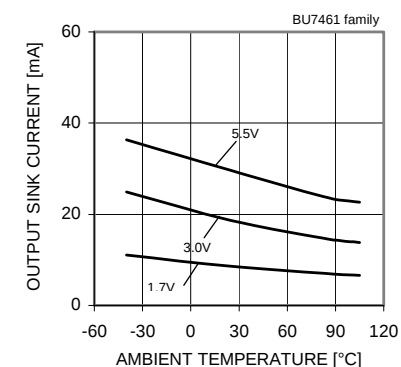


Fig.12  
Output Sink Current – Ambient Temperature  
( $V_{OUT}=V_{SS}+0.4[V]$ )

(\*)The above data is ability value of sample, it is not guaranteed. BU7461G: -40[°C] ~ +85[°C] BU7461SG: -40[°C] ~ +105[°C]

●Reference data (BU7461 family)

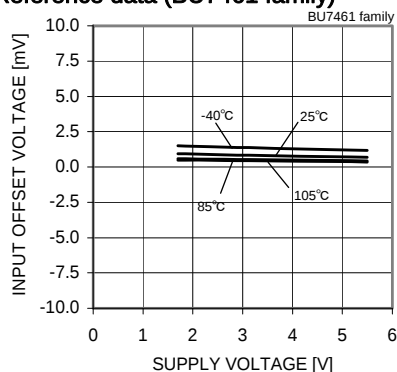


Fig.13

Input Offset Voltage – Supply Voltage  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

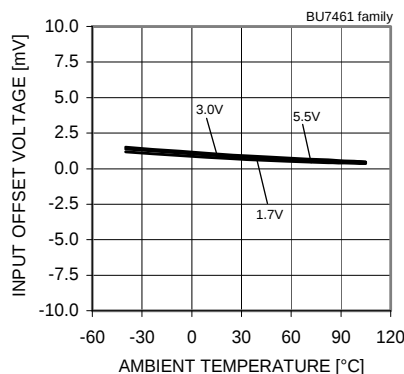


Fig.14

Input Offset Voltage – Ambient Temperature  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

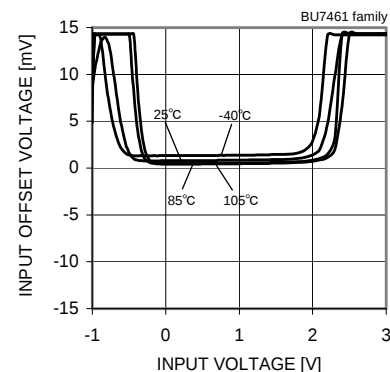


Fig.15

Input Offset Voltage – Input Voltage  
( $V_{DD} = 3[V]$ )

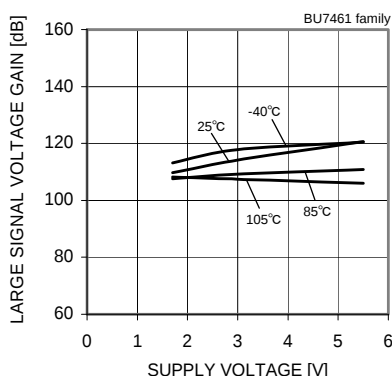


Fig.16

Large Signal Voltage Gain  
– Supply Voltage

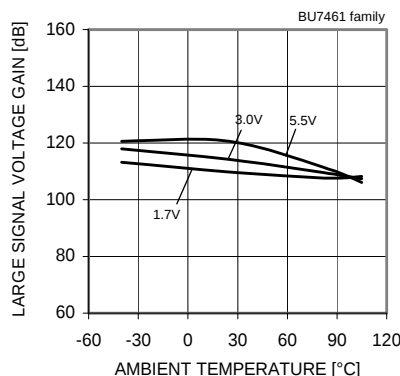


Fig.17

Power Supply Rejection Ratio  
– Ambient Temperature

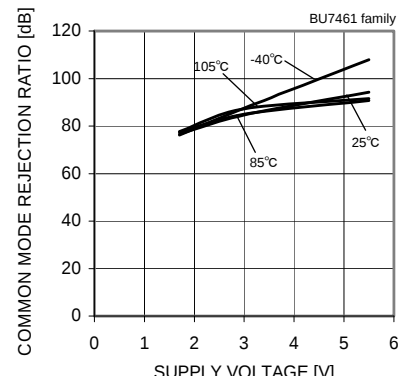


Fig.18

Common Mode Rejection Ratio  
– Supply Voltage

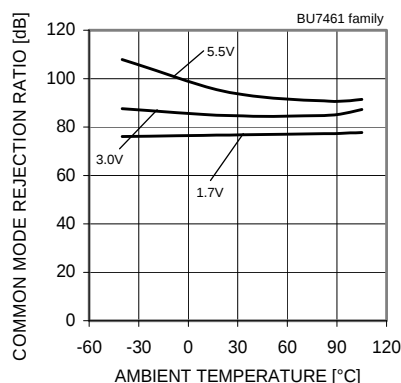


Fig.19

Common Mode Rejection Ratio  
– Ambient Temperature

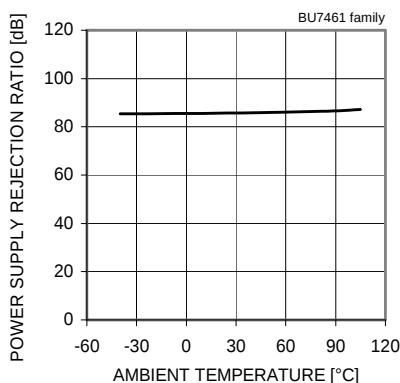


Fig.20

Large Signal Voltage Gain  
– Ambient Temperature

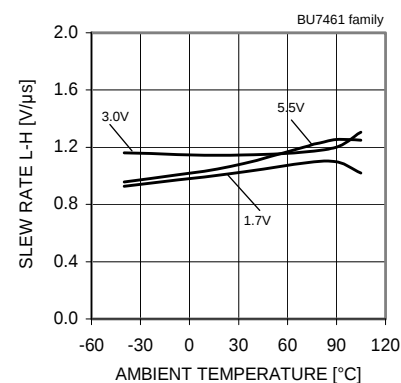


Fig.21

Slew Rate L-H – Ambient Temperature

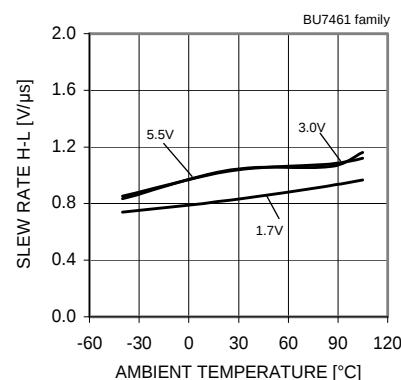


Fig.22

Slew Rate H-L – Ambient Temperature

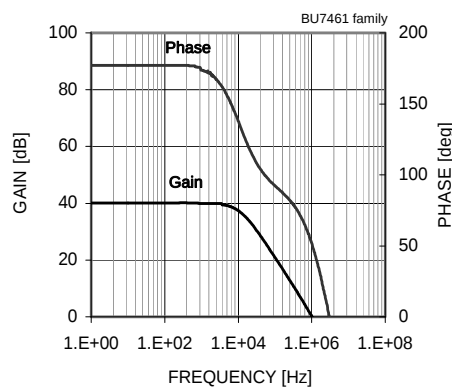


Fig.23

Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7461G: -40[°C] ~ +85[°C] BU7461SG: -40[°C] ~ +105[°C]

●Reference data (BU7462 family)

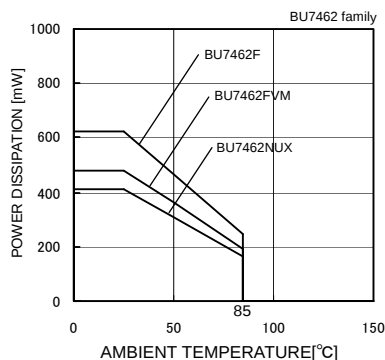


Fig.24  
Derating curve

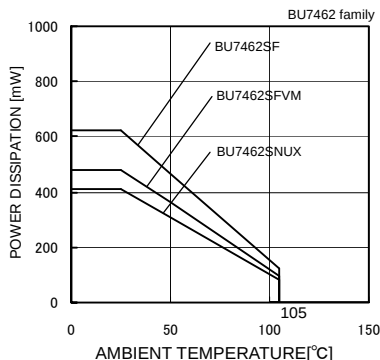


Fig.25  
Derating curve

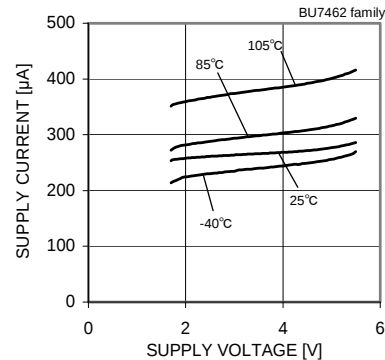


Fig.26  
Supply Current – Supply Voltage

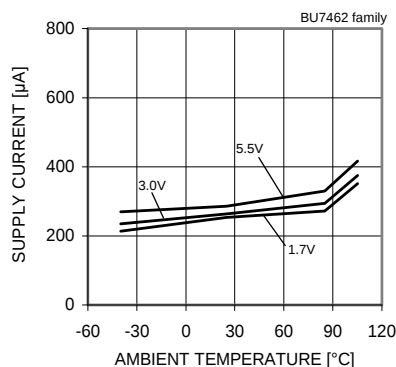


Fig.27  
Supply Current – Ambient Temperature

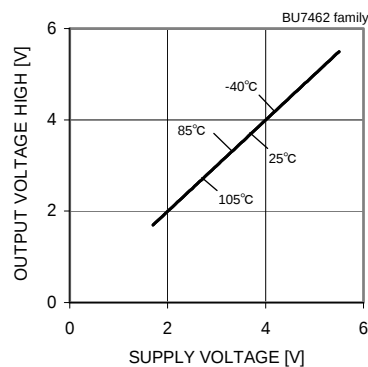


Fig.28  
Output Voltage High – Supply Voltage  
( $R_L=10[k\Omega]$ )

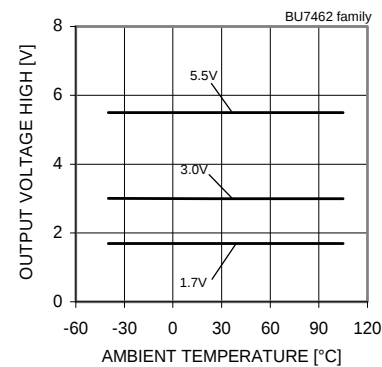


Fig.29  
Output Voltage High – Ambient Temperature  
( $R_L=10[k\Omega]$ )

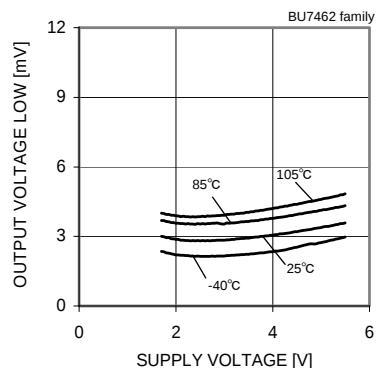


Fig.30  
Output Voltage Low – Supply Voltage  
( $R_L=10[k\Omega]$ )

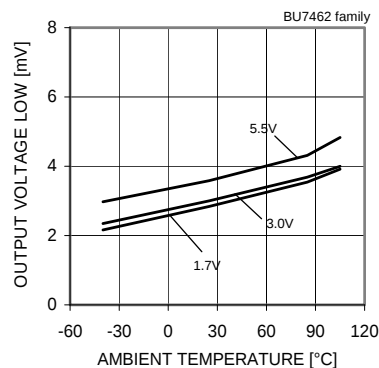


Fig.31  
Output Voltage Low – Ambient Temperature  
( $R_L=10[k\Omega]$ )

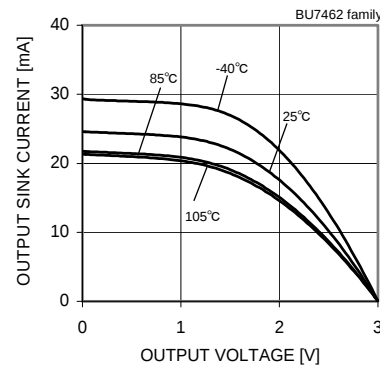


Fig.32  
Output Source Current – Output Voltage  
( $V_{DD}=3.0[V]$ )

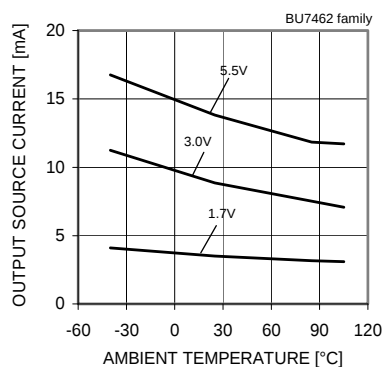


Fig.33  
Output Source Current – Ambient Temperature  
( $V_{OUT}=V_{DD}-0.4[V]$ )

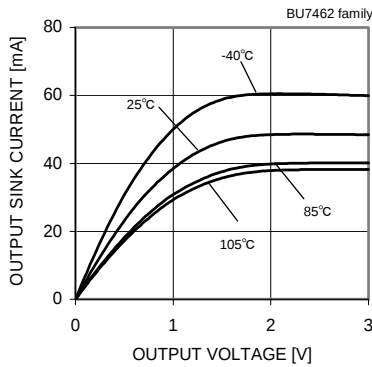


Fig.34  
Output Sink Current – Output Voltage  
( $V_{DD}=3[V]$ )

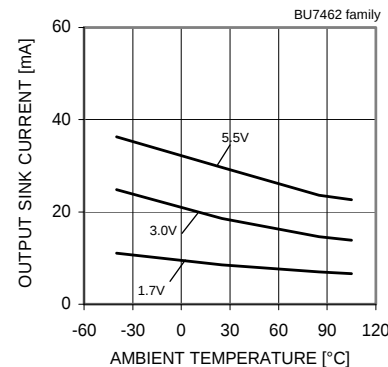


Fig.35  
Output Sink Current – Ambient Temperature  
( $V_{OUT}=V_{SS}+0.4[V]$ )

(\*)The above data is ability value of sample, it is not guaranteed. BU7462F/FVM/NUX: -40[°C] ~ +85[°C] BU7462S F/FVM/NUX: -40[°C] ~ +105[°C]

●Reference data (BU7462 family)

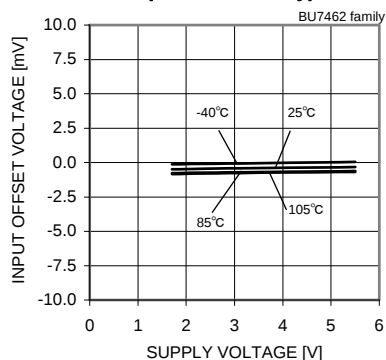


Fig.36

Input Offset Voltage – Supply Voltage  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

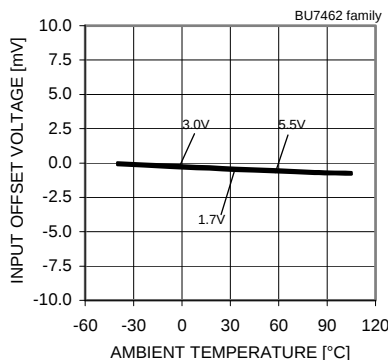


Fig.37

Input Offset Voltage – Ambient Temperature  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

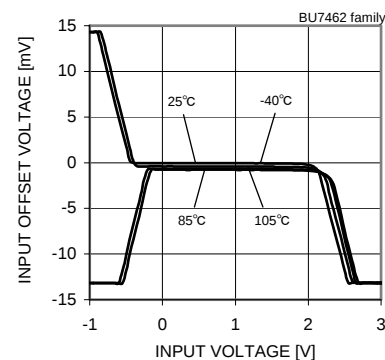


Fig.38

Input Offset Voltage – Input Voltage  
( $V_{DD} = 3[V]$ )

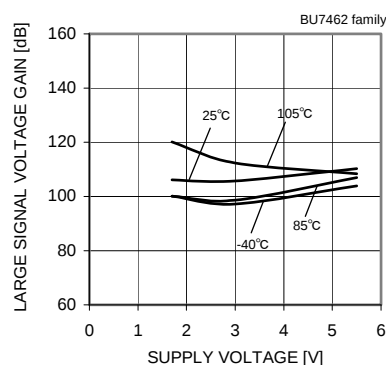


Fig.39

Large Signal Voltage Gain  
– Supply Voltage

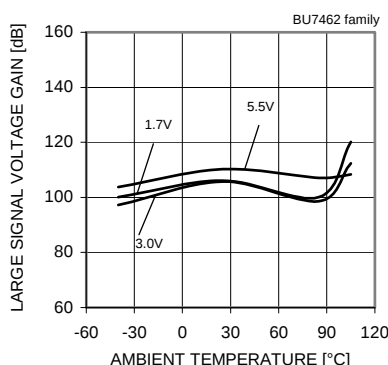


Fig.40

Large Signal Voltage Gain  
– Ambient Temperature

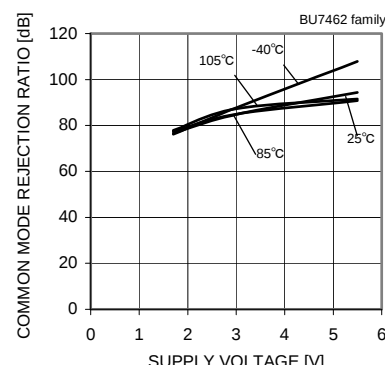


Fig.41

Common Mode Rejection Ratio  
– Supply Voltage

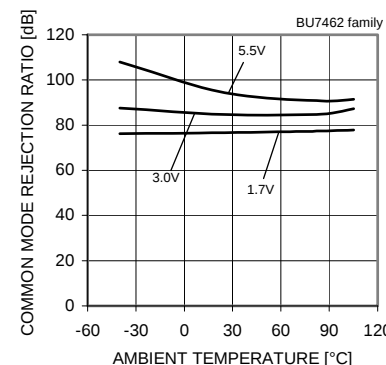


Fig.42

Common Mode Rejection Ratio  
– Ambient Temperature

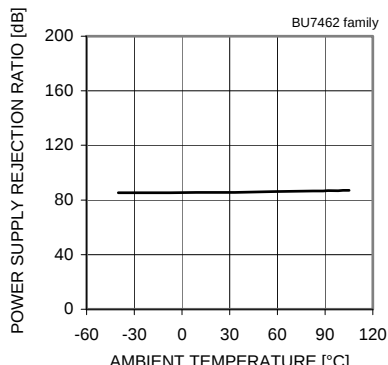


Fig.43

Power Supply Rejection Ratio  
– Ambient Temperature

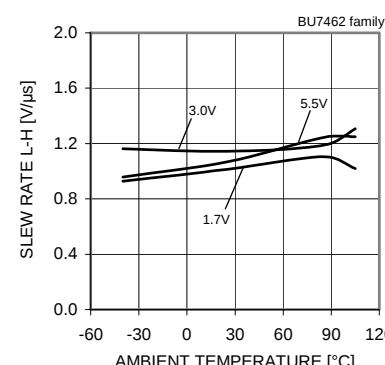


Fig.44

Slew Rate L-H – Ambient Temperature

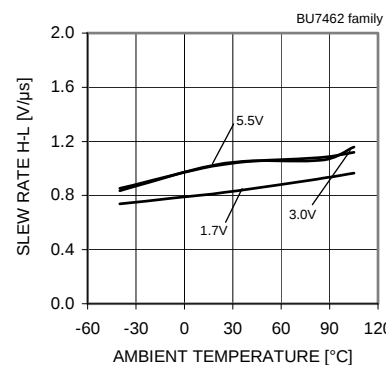


Fig.45

Slew Rate H-L – Ambient Temperature

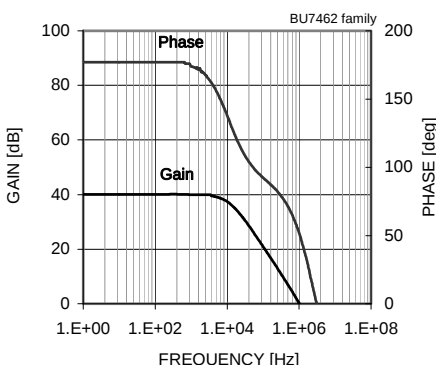


Fig.46

Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7462F/FVM/NUX: -40[°C] ~ +85[°C] BU7462S F/FVM/NUX: -40[°C] ~ +105[°C]

●Reference data (BU7464 family)

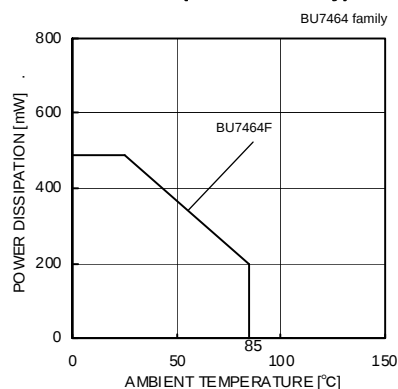


Fig.47

Derating curve

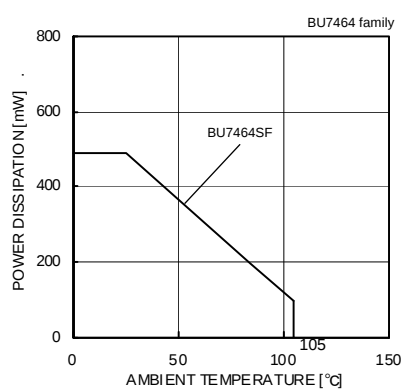


Fig.48

Derating curve

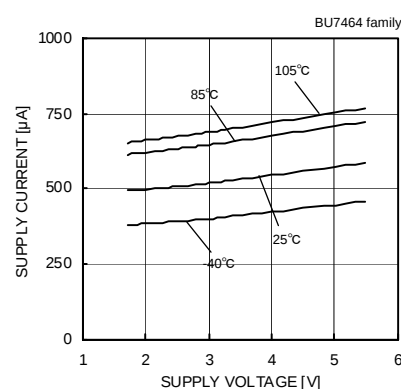


Fig.49

Supply Current – Supply Voltage

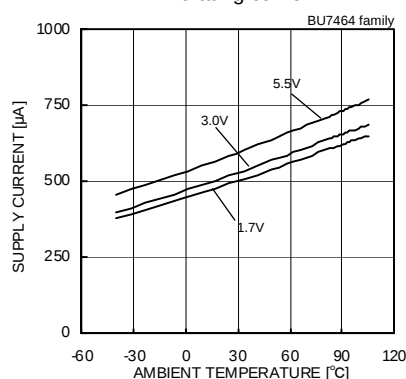


Fig.50

Supply Current – Ambient Temperature

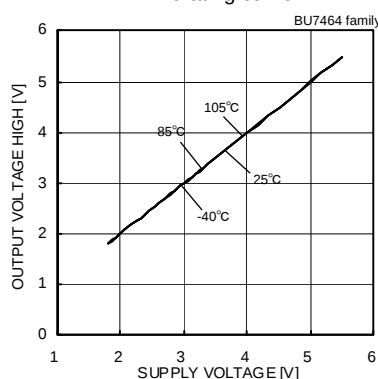


Fig.51

Output Voltage High – Supply Voltage  
( $R_L=10[k\Omega]$ )

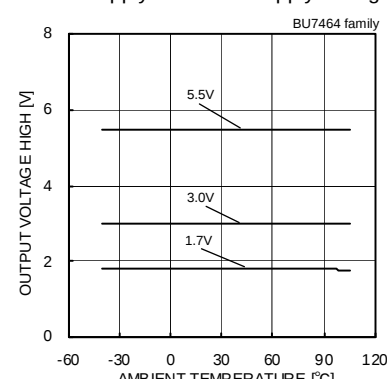


Fig.52

Output Voltage High – Ambient Temperature  
( $R_L=10[k\Omega]$ )

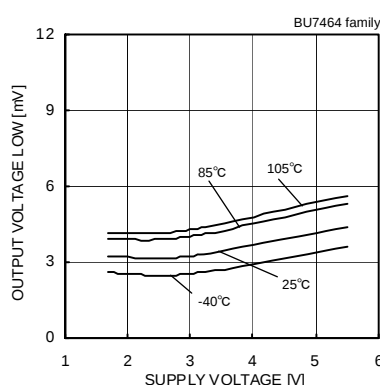


Fig.53

Output Voltage Low – Supply Voltage  
( $R_L=10[k\Omega]$ )

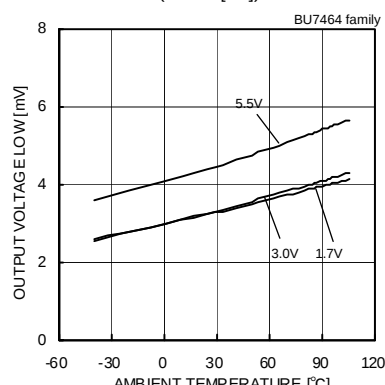


Fig.54

Output Voltage Low – Ambient Temperature  
( $R_L=10[k\Omega]$ )

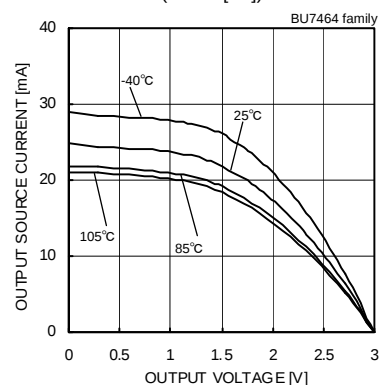


Fig.55

Output Source Current – Output Voltage  
( $V_{DD}=3.0[V]$ )

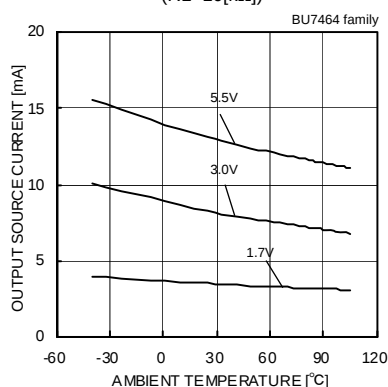


Fig.56

Output Source Current – Ambient Temperature  
( $V_{OUT}=V_{DD}-0.4[V]$ )

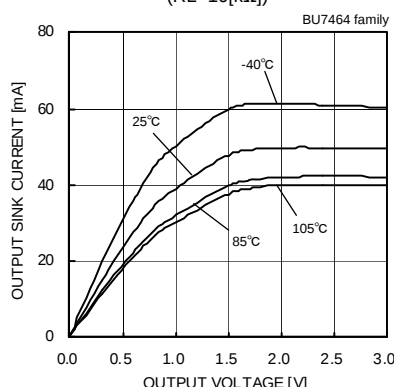


Fig.57

Output Sink Current – Output Voltage  
( $V_{DD}=3[V]$ )

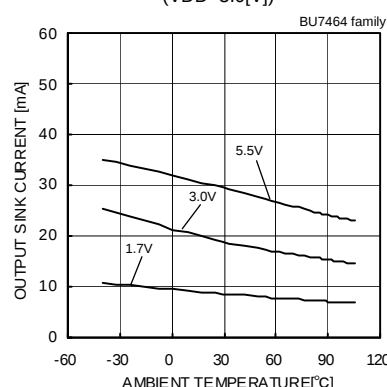


Fig.58

Output Sink Current – Ambient Temperature  
( $V_{OUT}=V_{SS}+0.4[V]$ )

(\*)The above data is ability value of sample, it is not guaranteed. BU7464F:  $-40[^\circ\text{C}] \sim +85[^\circ\text{C}]$  BU7464SF:  $-40[^\circ\text{C}] \sim +105[^\circ\text{C}]$

●Reference data (BU7464 family)

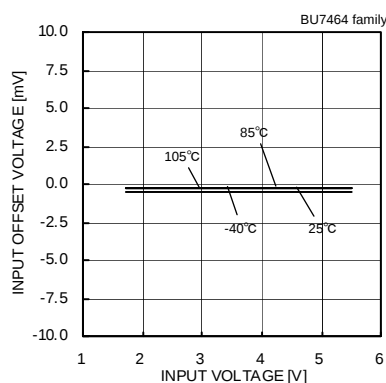


Fig.59

Input Offset Voltage – Supply Voltage  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

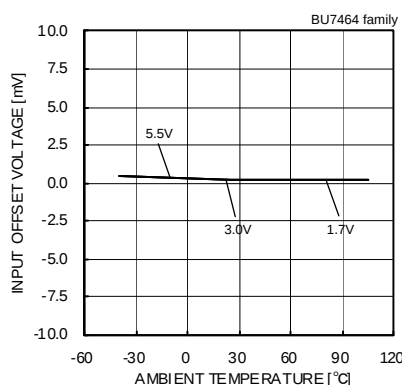


Fig.60

Input Offset Voltage – Ambient Temperature  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

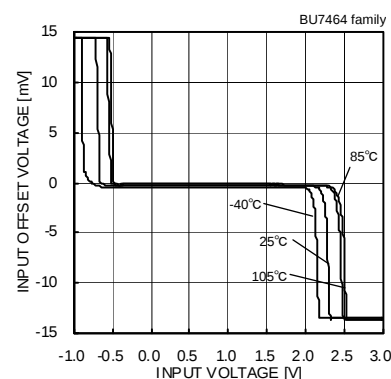


Fig.61

Input Offset Voltage – Input Voltage  
( $V_{DD} = 3[V]$ )

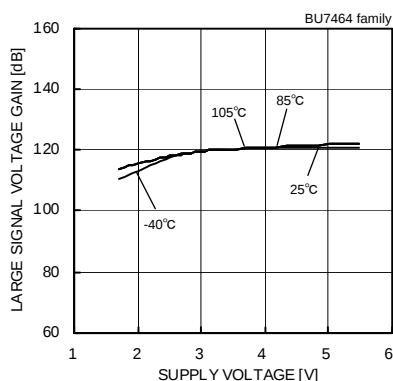


Fig.62

Large Signal Voltage Gain  
– Supply Voltage

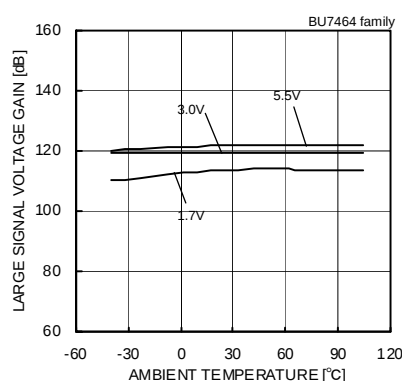


Fig.63

Large Signal Voltage Gain  
– Ambient Temperature

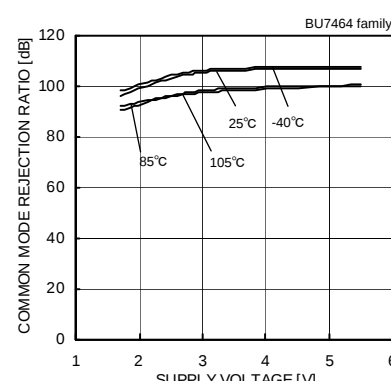


Fig.64

Common Mode Rejection Ratio  
– Supply Voltage

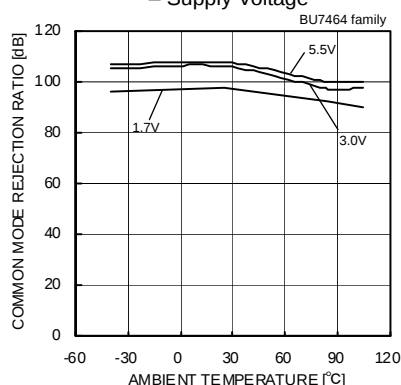


Fig.65

Common Mode Rejection Ratio  
– Ambient Temperature

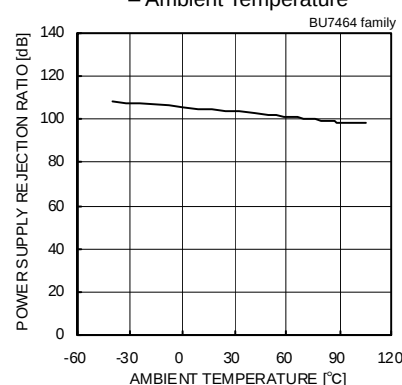


Fig.66

Power Supply Rejection Ratio  
– Ambient Temperature

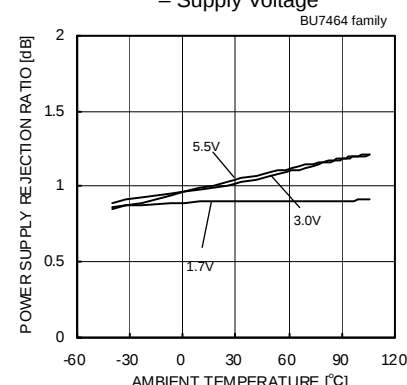


Fig.67

Slew Rate L-H – Ambient Temperature

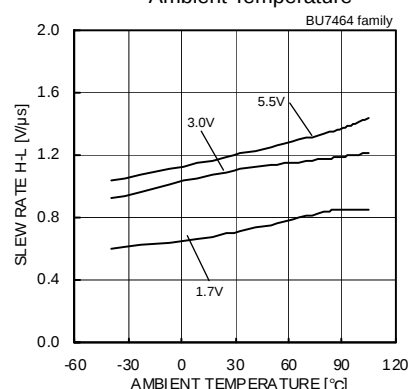


Fig.68

Slew Rate H-L – Ambient Temperature

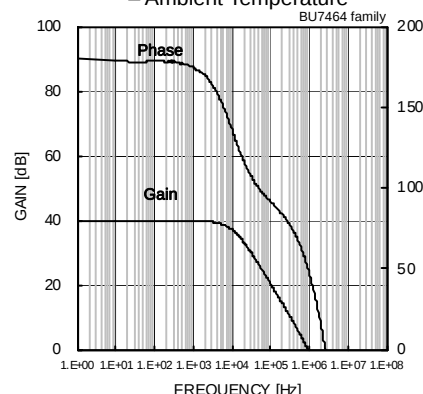


Fig.69

Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7464F: -40[°C] ~ +85[°C] BU7464SF: -40[°C] ~ +105[°C]

●Reference data (BU7465 family)

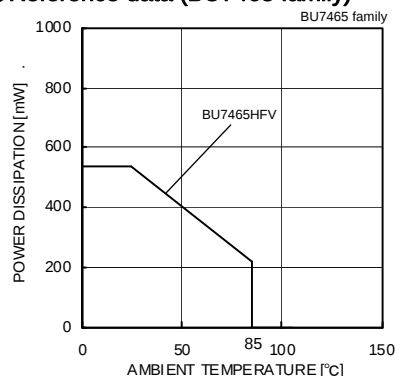


Fig.70

Derating curve

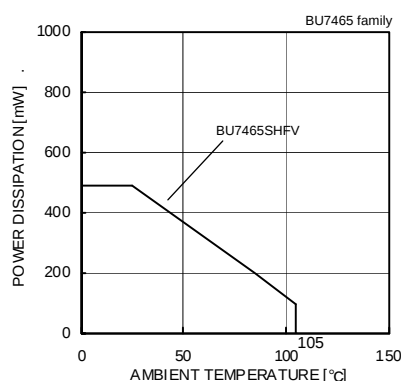


Fig.71

Derating curve

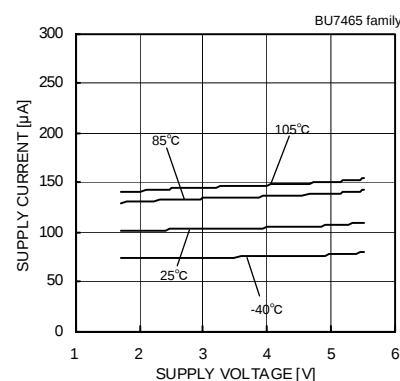


Fig.72

Supply Current – Supply Voltage

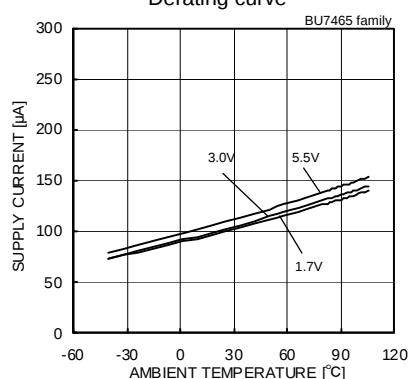


Fig.73

Supply Current – Ambient Temperature

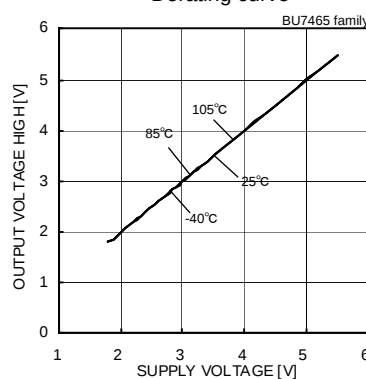


Fig.74

Output Voltage High – Supply Voltage  
( $R_L=10[k\Omega]$ )

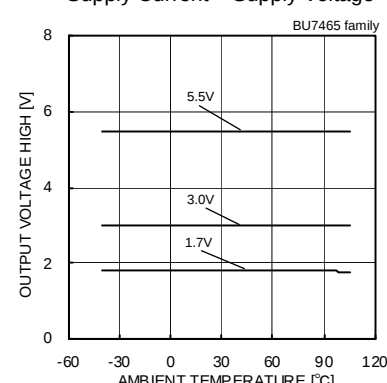


Fig.75

Output Voltage High – Ambient Temperature  
( $R_L=10[k\Omega]$ )

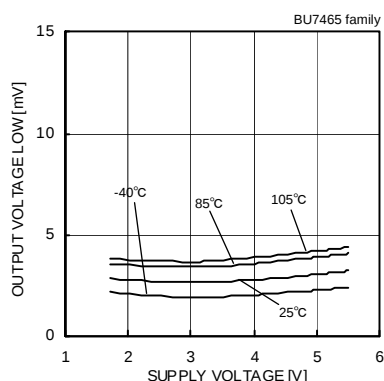


Fig.76

Output Voltage Low – Supply Voltage  
( $R_L=10[k\Omega]$ )

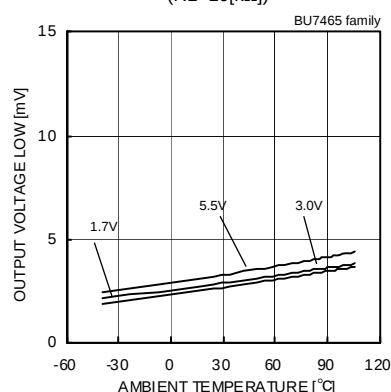


Fig.77

Output Voltage Low – Ambient Temperature  
( $R_L=10[k\Omega]$ )

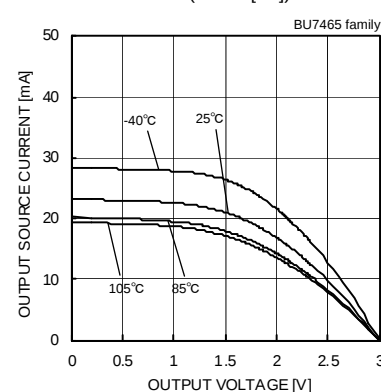


Fig.78

Output Source Current – Output Voltage  
( $V_{DD}=3[V]$ )

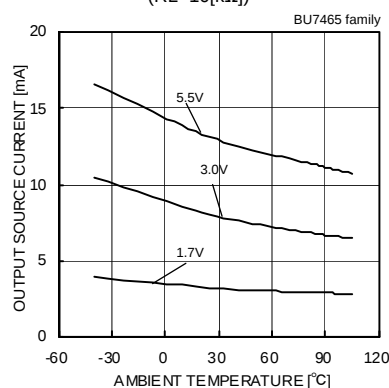


Fig.79

Output Source Current – Ambient Temperature  
( $V_{OUT}=V_{DD}-0.4[V]$ )

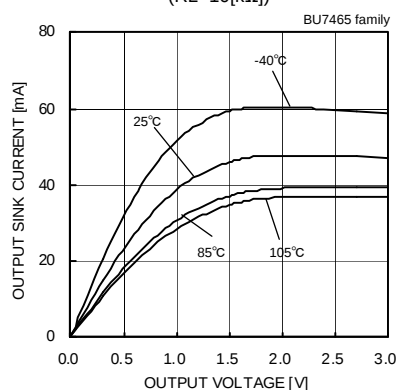


Fig.80

Output Sink Current – Output Voltage  
( $V_{DD}=3[V]$ )

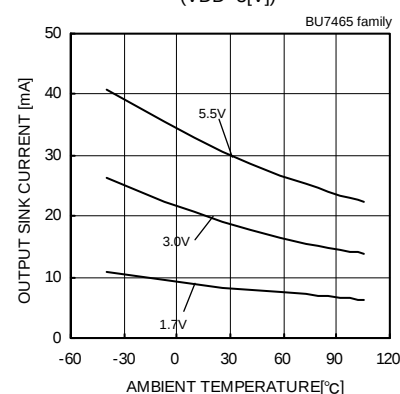


Fig.81

Output Sink Current – Ambient Temperature  
( $V_{OUT}=V_{SS}+0.4[V]$ )

(\*)The above data is ability value of sample, it is not guaranteed. BU7465HfV:  $-40[^\circ\text{C}] \sim +85[^\circ\text{C}]$  BU7465SHfV:  $-40[^\circ\text{C}] \sim +105[^\circ\text{C}]$

●Reference data (BU7465 family)

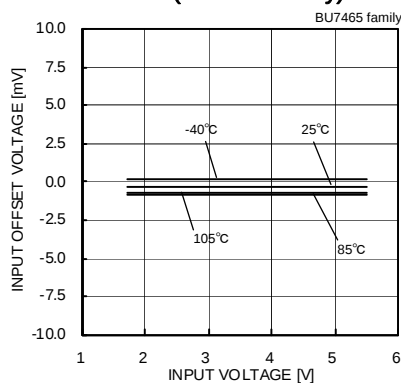


Fig.82

Input Offset Voltage – Supply Voltage  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

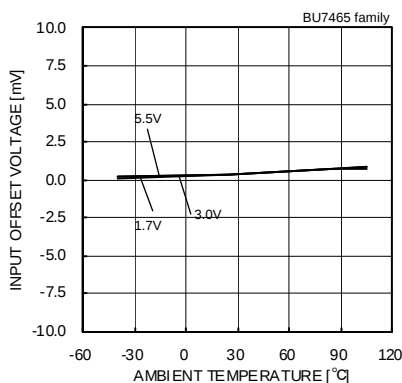


Fig.83

Input Offset Voltage – Ambient Temperature  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

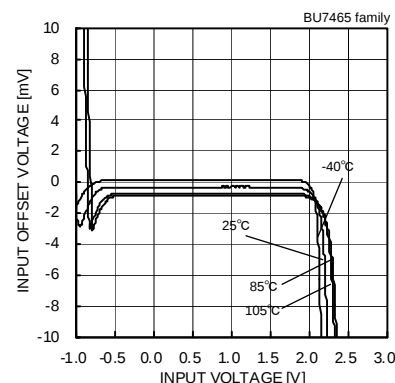


Fig.84

Input Offset Voltage – Input Voltage  
( $V_{DD} = 3[V]$ )

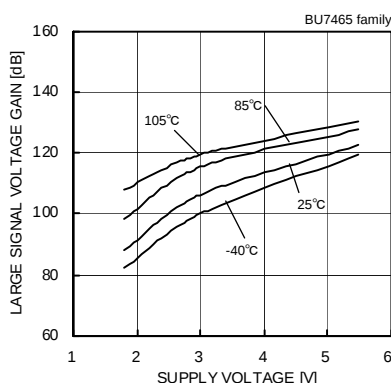


Fig.85

Large Signal Voltage Gain  
– Supply Voltage

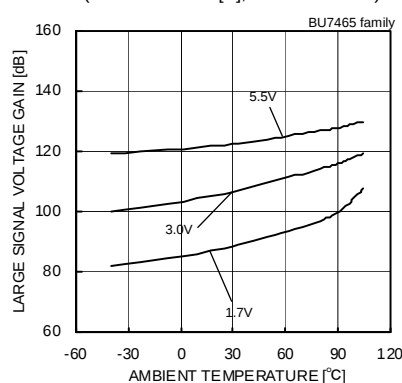


Fig.86

Large Signal Voltage Gain  
– Ambient Temperature

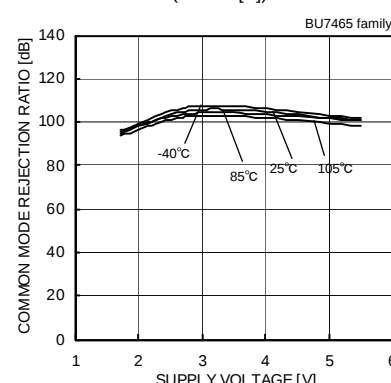


Fig.87

Common Mode Rejection Ratio  
– Supply Voltage

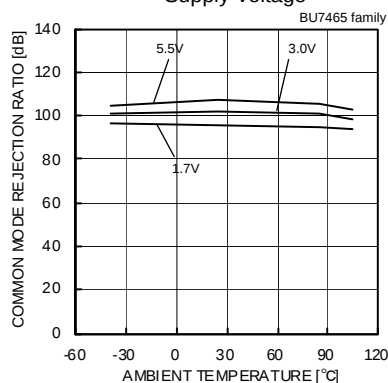


Fig.88

Common Mode Rejection Ratio  
– Ambient Temperature

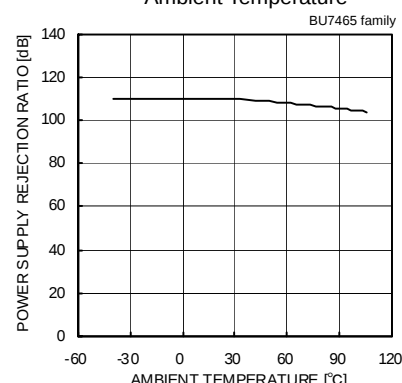


Fig.89

Power Supply Rejection Ratio  
– Ambient Temperature

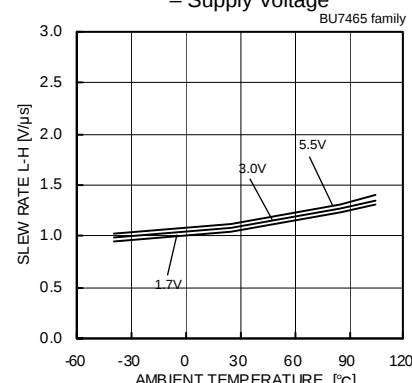


Fig.90

Slew Rate L-H – Ambient Temperature

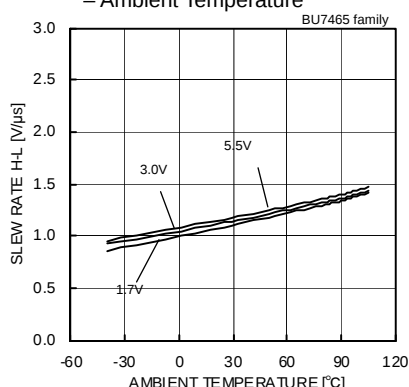


Fig.91

Slew Rate H-L – Ambient Temperature

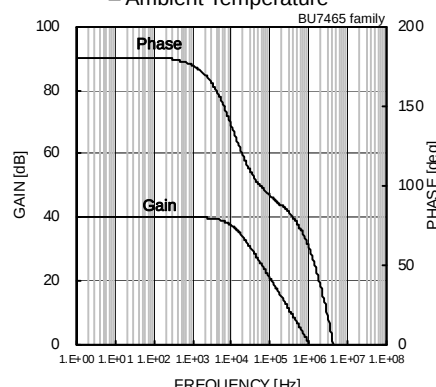


Fig.92

Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7465HFV: -40[°C] ~ +85[°C] BU7465SHFV: -40[°C] ~ +105[°C]

●Reference data (BU7441 family)

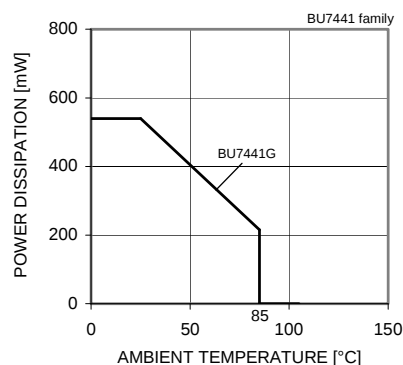


Fig.93

Derating curve

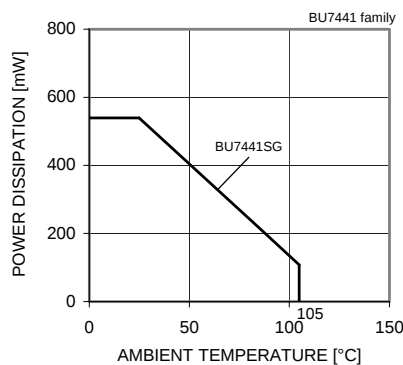


Fig.94

Derating curve

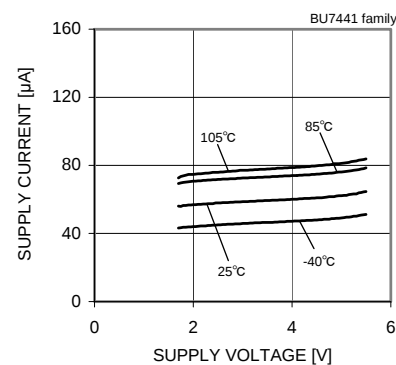


Fig.95

Supply Current – Supply Voltage

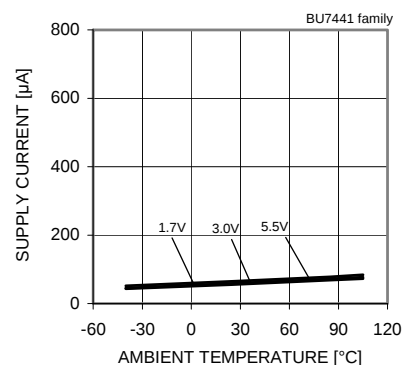


Fig.96

Supply Current – Ambient Temperature

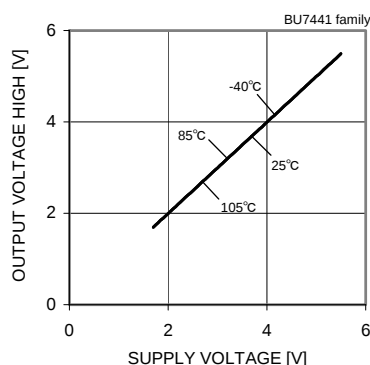


Fig.97

Output Voltage High – Supply Voltage  
( $R_L=10[k\Omega]$ )

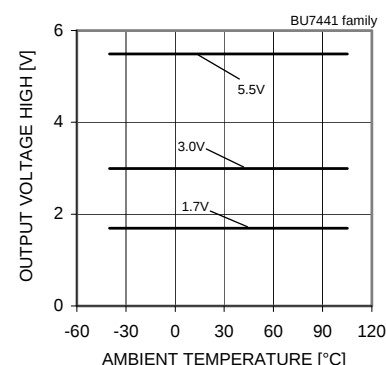


Fig.98

Output Voltage High – Ambient Temperature  
( $R_L=10[k\Omega]$ )

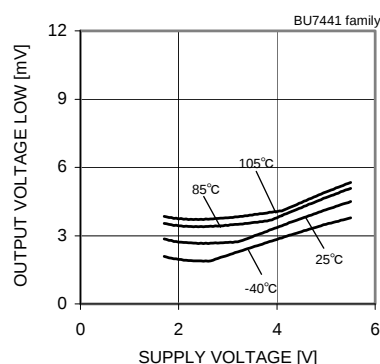


Fig.99

Output Voltage Low – Supply Voltage  
( $R_L=10[k\Omega]$ )

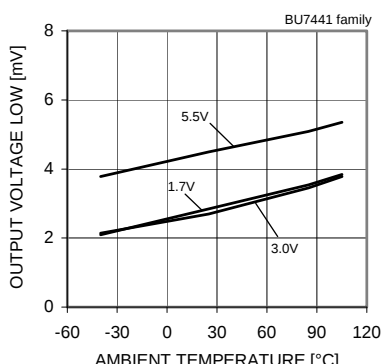


Fig.100

Output Voltage Low – Ambient Temperature  
( $R_L=10[k\Omega]$ )

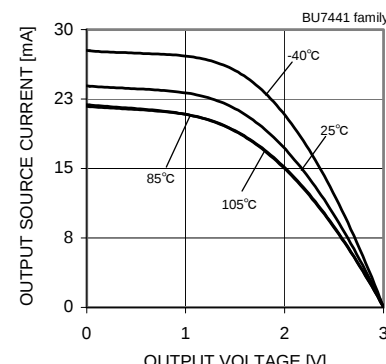


Fig.101

Output Source Current – Output Voltage  
( $V_{DD}=3[V]$ )

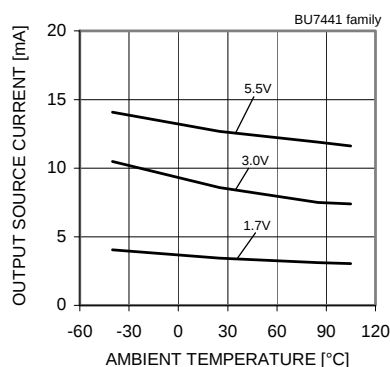


Fig.102

Output Source Current – Ambient Temperature  
( $V_{OUT}=V_{DD}-0.4[V]$ )

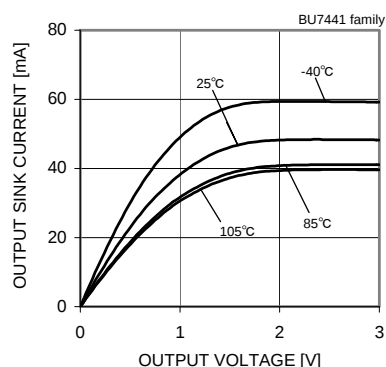


Fig.103

Output Sink Current – Output Voltage  
( $V_{DD}=3[V]$ )

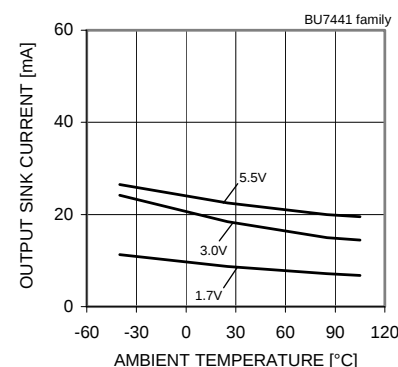


Fig.104

Output Sink Current – Ambient Temperature  
( $V_{OUT}=V_{SS}+0.4[V]$ )

(\*)The above data is ability value of sample, it is not guaranteed. BU7441G: -40[°C] ~ +85[°C] BU7441SG: -40[°C] ~ +105[°C]

●Reference data (BU7441 family)

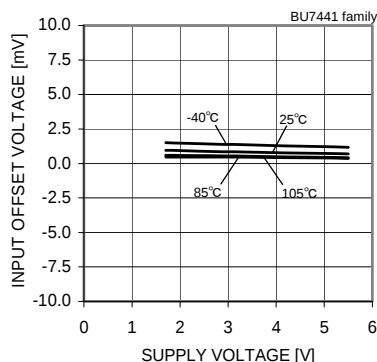


Fig.105

Input Offset Voltage – Supply Voltage  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

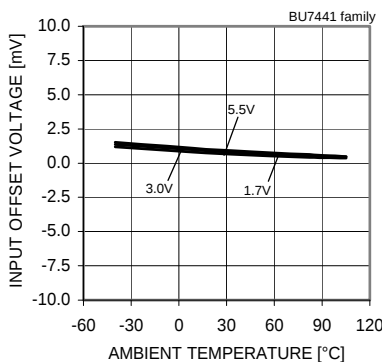


Fig.106

Input Offset Voltage – Ambient Temperature  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

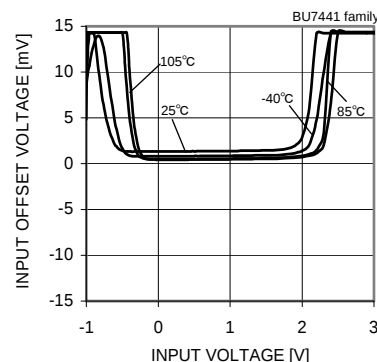


Fig.107

Input Offset Voltage – Input Voltage  
( $V_{DD} = 3[V]$ )

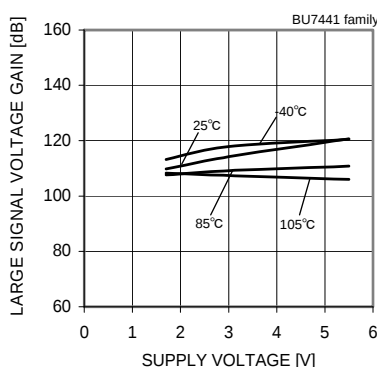


Fig.108

Large Signal Voltage Gain  
– Supply Voltage

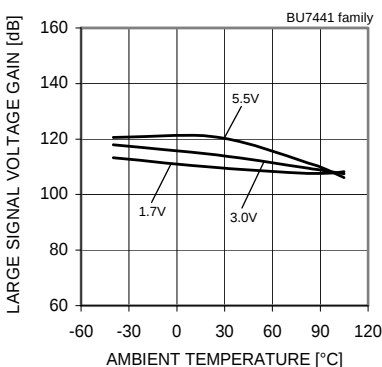


Fig.109

Large Signal Voltage Gain  
– Ambient Temperature

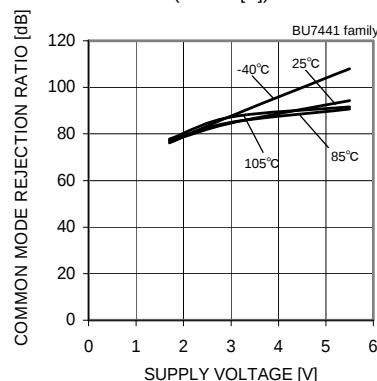


Fig.110

Common Mode Rejection Ratio  
– Supply Voltage

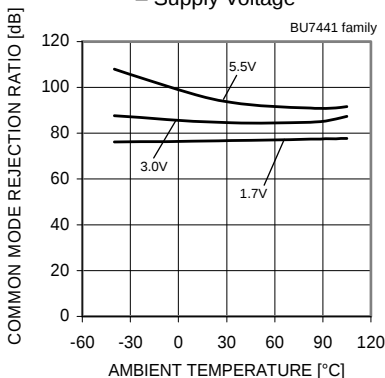


Fig.111

Common Mode Rejection Ratio  
– Ambient Temperature

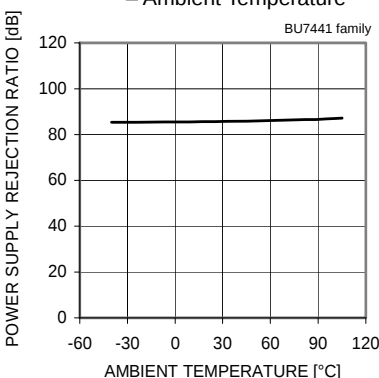


Fig.112

Power Supply Rejection Ratio  
– Ambient Temperature

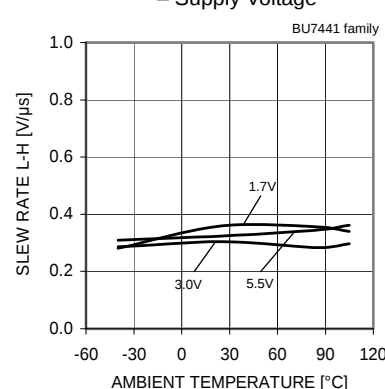


Fig.113

Slew Rate L-H – Ambient Temperature

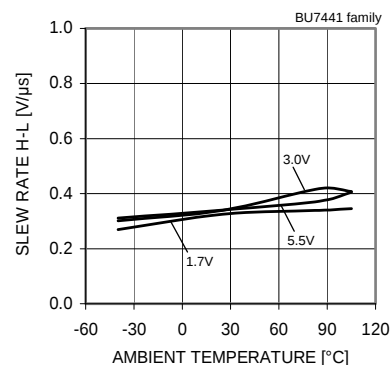


Fig.114

Slew Rate H-L – Ambient Temperature

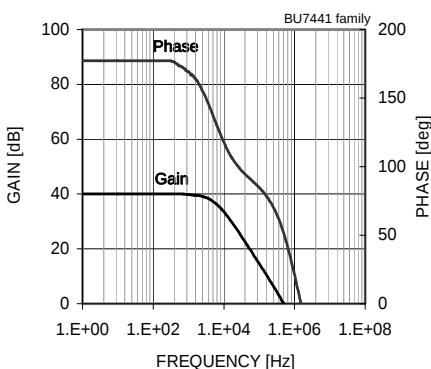


Fig.115

Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7441G: -40[°C] ~ +85[°C] BU7441SG: -40[°C] ~ +105[°C]

●Reference data (BU7442 family)

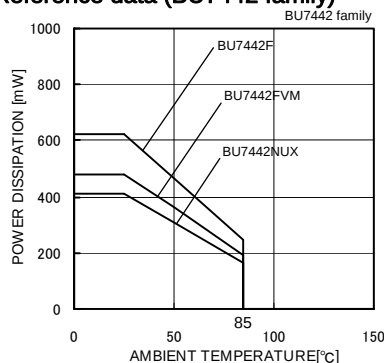


Fig.116

Derating curve

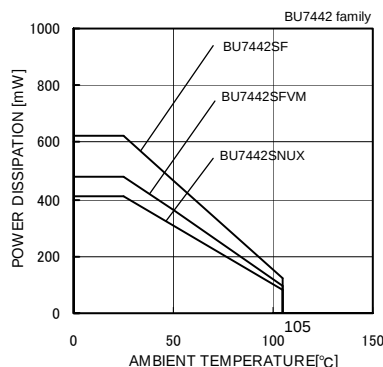


Fig.117

Derating curve

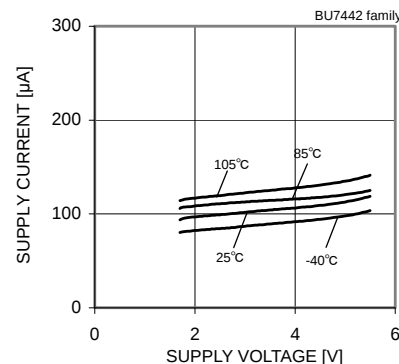


Fig.118

Supply Current – Supply Voltage

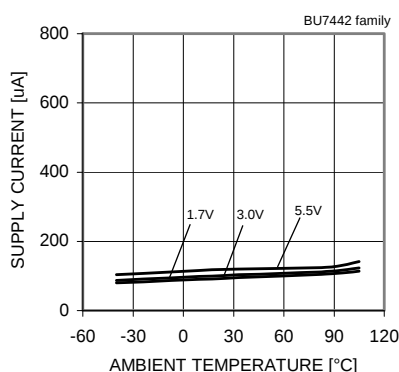


Fig.119

Supply Current – Ambient Temperature

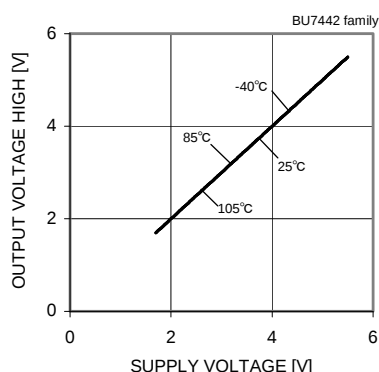


Fig.120

Output Voltage High – Supply Voltage  
 (RL=10[kΩ])

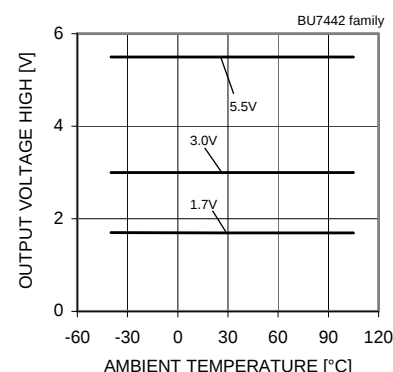


Fig.121

Output Voltage High – Ambient Temperature  
 (RL=10[kΩ])

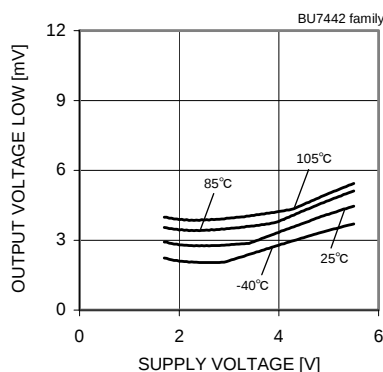


Fig.122

Output Voltage Low – Supply Voltage  
 (RL=10[kΩ])

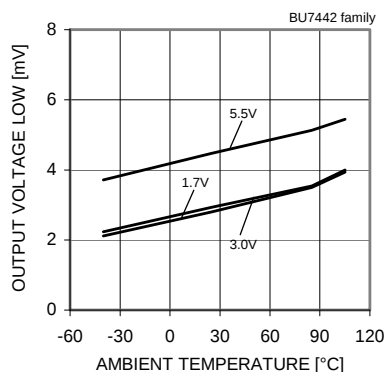


Fig.123

Output Voltage Low – Ambient Temperature  
 (RL=10[kΩ])

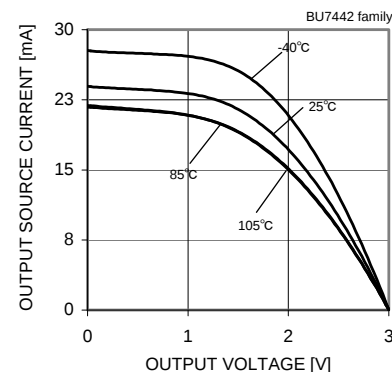


Fig.124

Output Source Current – Output Voltage  
 (VDD=3.0[V])

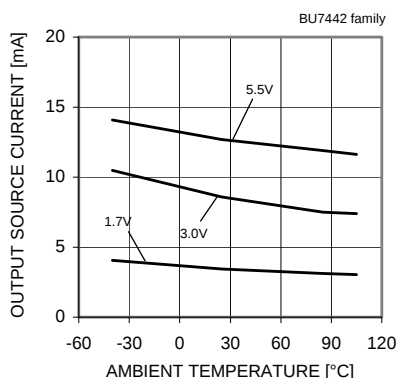


Fig.125

Output Source Current – Ambient Temperature  
 (VOUT=VDD-0.4[V])

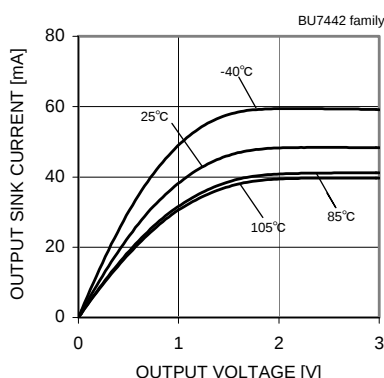


Fig.126

Output Sink Current – Output Voltage  
 (VDD=3[V])

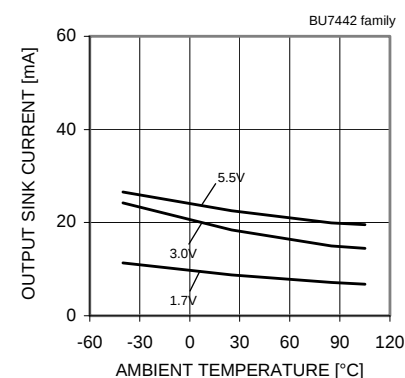


Fig.127

Output Sink Current – Ambient Temperature  
 (VOUT=VSS+0.4[V])

(\*)The above data is ability value of sample, it is not guaranteed. BU7442F/FVM/NUX: -40[°C] ~ +85[°C]

BU7442S F/FVM/NUX: -40[°C] ~ +105[°C]

●Reference data (BU7442 family)

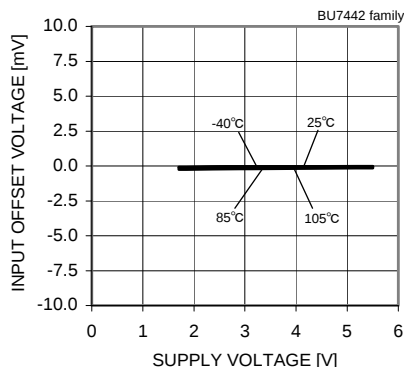


Fig.128

Input Offset Voltage – Supply Voltage  
(Vicm= VDD-1.2[V], VOUT= VDD/2)

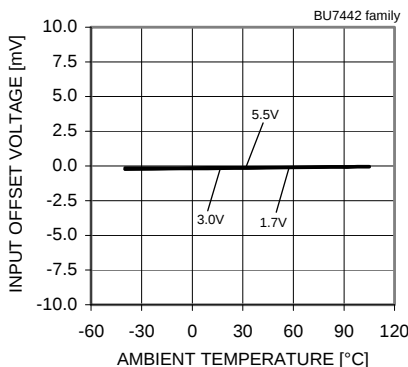


Fig.129

Input Offset Voltage – Ambient Temperature  
(Vicm= VDD-1.2[V], VOUT= VDD/2)

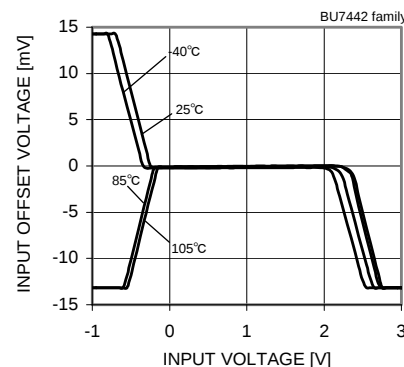


Fig.130

Input Offset Voltage – Input Voltage  
(VDD=3[V])

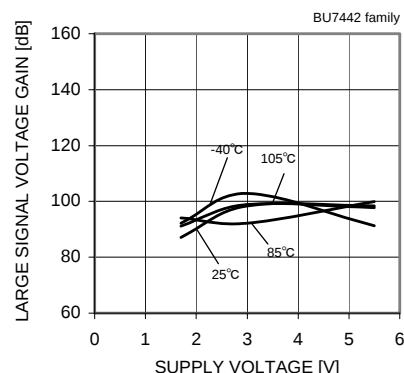


Fig.131

Large Signal Voltage Gain  
– Supply Voltage

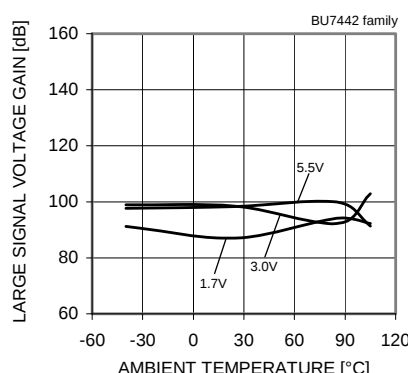


Fig.132

Large Signal Voltage Gain  
– Ambient Temperature

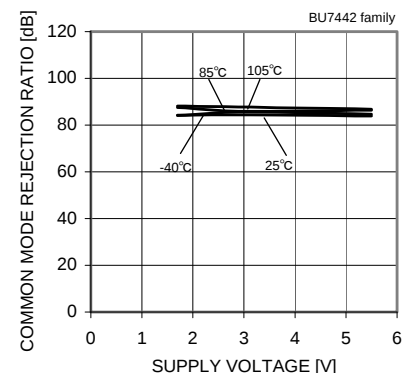


Fig.133

Common Mode Rejection Ratio  
– Supply Voltage

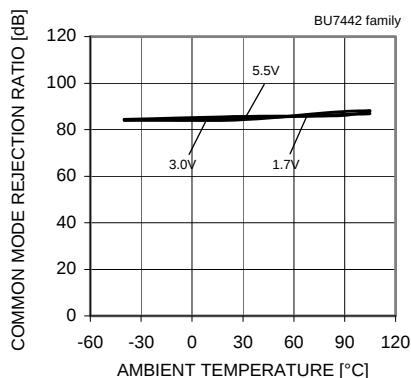


Fig.134

Common Mode Rejection Ratio  
– Ambient Temperature

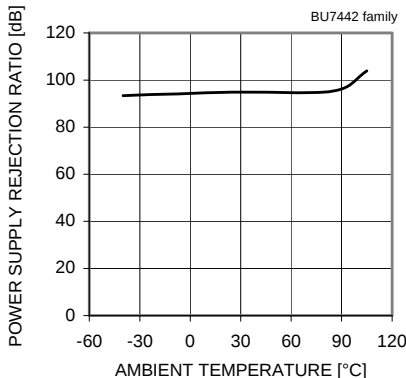


Fig.135

Power Supply Rejection Ratio  
– Ambient Temperature

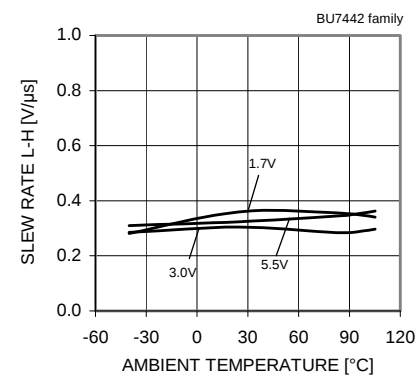


Fig.136

Slew Rate L-H – Ambient Temperature

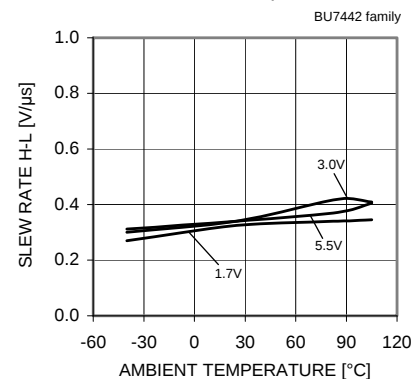


Fig.137

Slew Rate H-L – Ambient Temperature

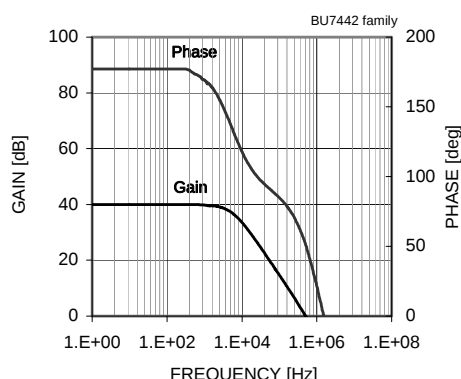


Fig.138

Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7442F/FVM/NUX: -40[°C] ~ +85[°C] BU7442S F/FVM/NUX: -40[°C] ~ +105[°C]

●Reference data (BU7444 family)

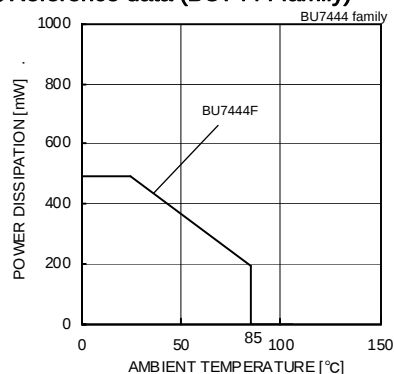


Fig.139  
Derating curve

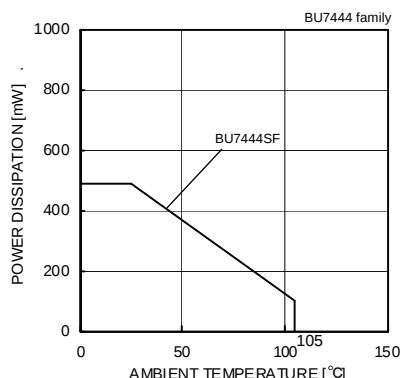


Fig.140  
Derating curve

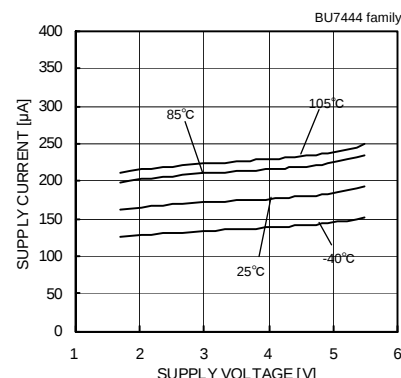


Fig.141  
Supply Current – Supply Voltage

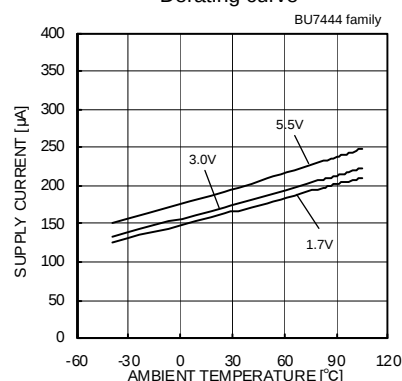


Fig.142  
Supply Current – Ambient Temperature

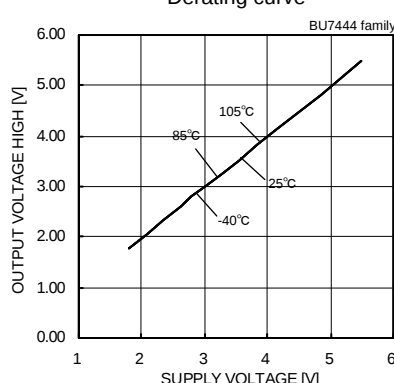


Fig.143  
Output Voltage High – Supply Voltage  
( $R_L=10[k\Omega]$ )

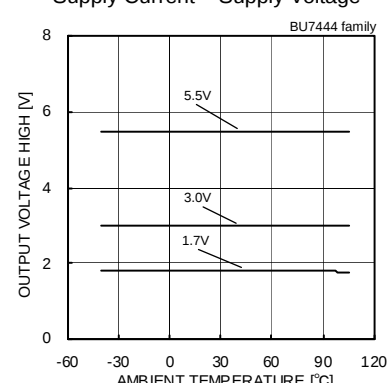


Fig.144  
Output Voltage High – Ambient Temperature  
( $R_L=10[k\Omega]$ )

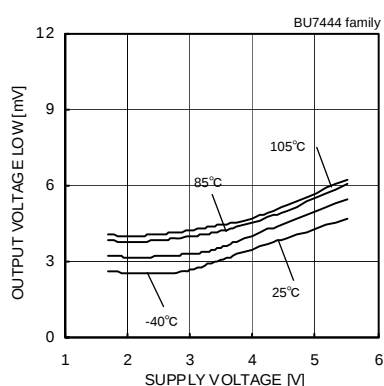


Fig.145  
Output Voltage Low – Supply Voltage  
( $R_L=10[k\Omega]$ )

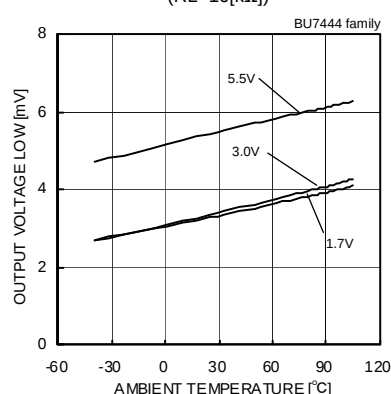


Fig.146  
Output Voltage Low – Ambient Temperature  
( $R_L=10[k\Omega]$ )

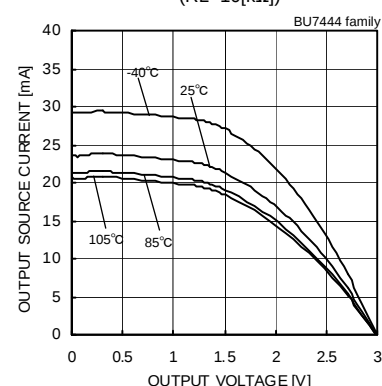


Fig.147  
Output Source Current – Output Voltage  
( $V_{DD}=3.0[V]$ )

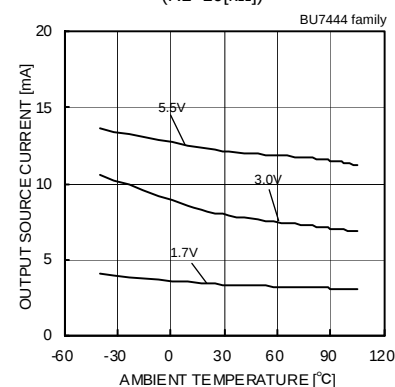


Fig.148  
Output Source Current – Ambient Temperature  
( $V_{OUT}=V_{DD}-0.4[V]$ )

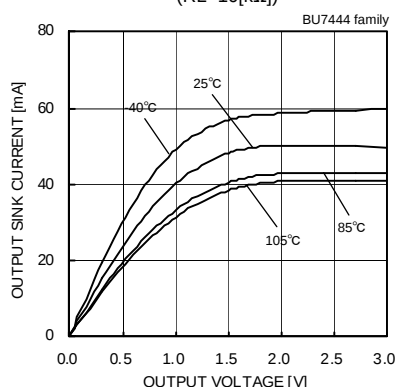


Fig.149  
Output Sink Current – Output Voltage  
( $V_{DD}=3[V]$ )

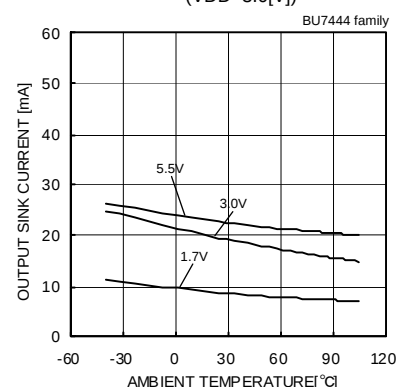


Fig.150  
Output Sink Current – Ambient Temperature  
( $V_{OUT}=V_{SS}+0.4[V]$ )

(\*)The above data is ability value of sample, it is not guaranteed. BU7444F/FVM/NUX: -40[°C] ~ +85[°C] BU7444S F/FVM/NUX: -40[°C] ~ +105[°C]

●Reference data (BU7444 family)

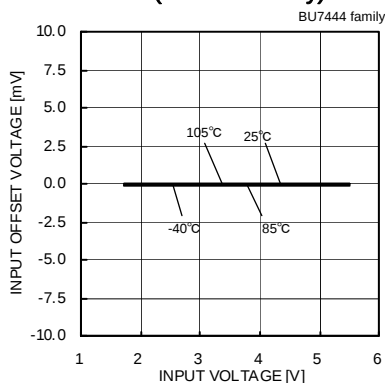


Fig.151  
Input Offset Voltage – Supply Voltage  
( $V_{cm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

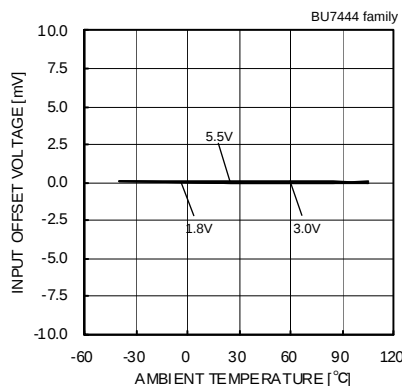


Fig.152  
Input Offset Voltage – Ambient Temperature  
( $V_{cm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

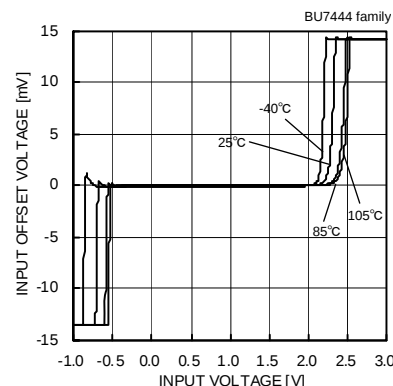


Fig.153  
Input Offset Voltage – Input Voltage  
( $V_{DD} = 3[V]$ )

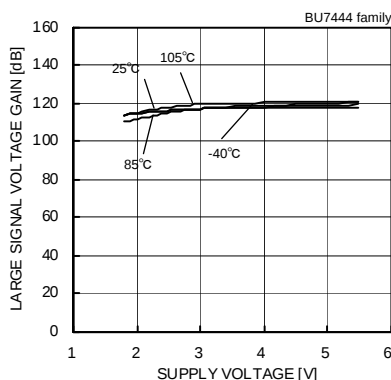


Fig.154  
Large Signal Voltage Gain  
– Supply Voltage

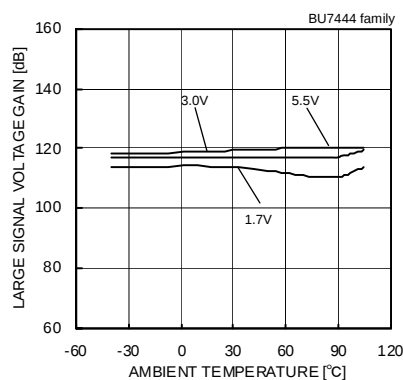


Fig.155  
Large Signal Voltage Gain  
– Ambient Temperature

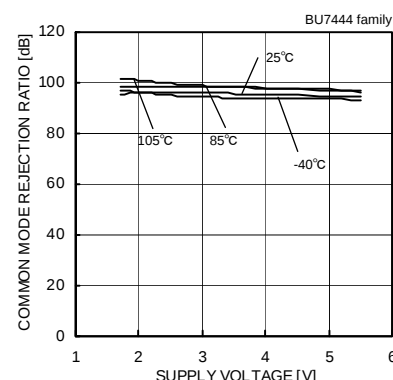


Fig.156  
Common Mode Rejection Ratio  
– Supply Voltage

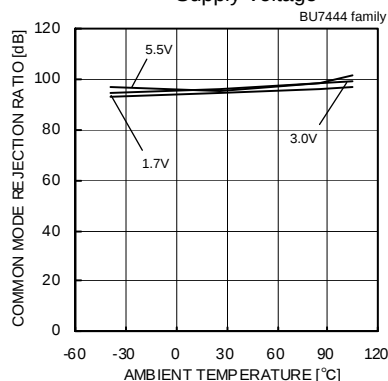


Fig.157  
Common Mode Rejection Ratio  
– Ambient Temperature

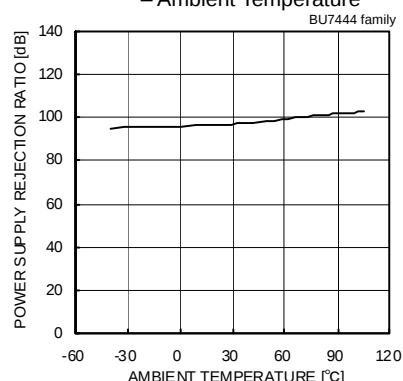


Fig.158  
Power Supply Rejection Ratio  
– Ambient Temperature

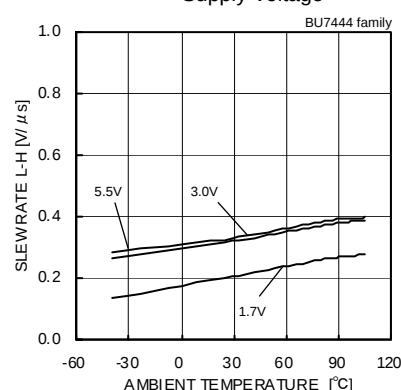


Fig.159  
Slew Rate L-H – Ambient Temperature

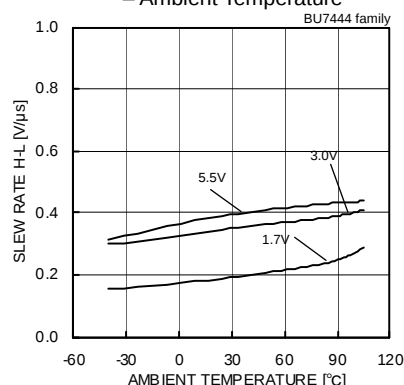


Fig.160  
Slew Rate H-L – Ambient Temperature

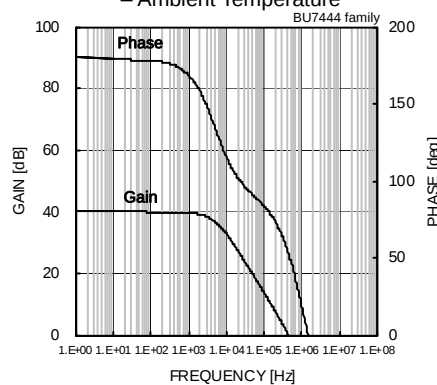


Fig.161  
Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7444F/FVM/NUX: -40[°C] ~ +85[°C] BU7444S F/FVM/NUX: -40[°C] ~ +105[°C]

●Reference data (BU7445 family)

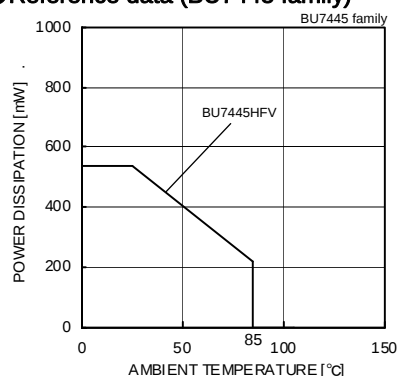


Fig.162  
Derating curve

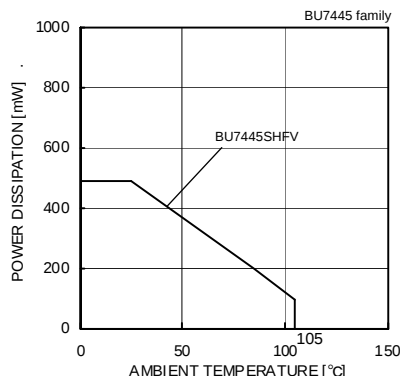


Fig.163  
Derating curve

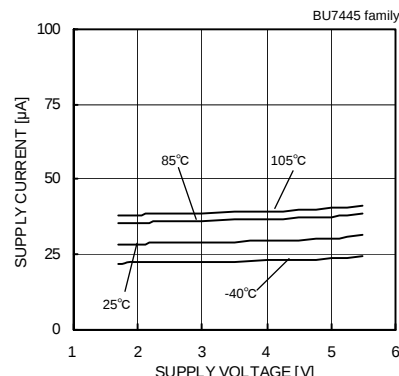


Fig.164  
Supply Current – Supply Voltage

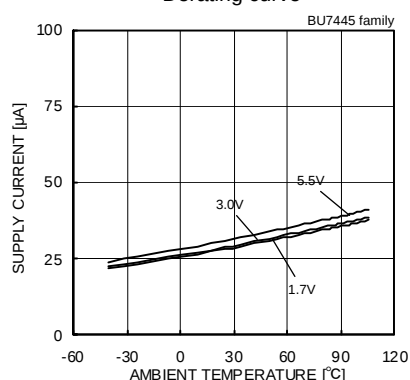


Fig.165  
Supply Current – Ambient Temperature

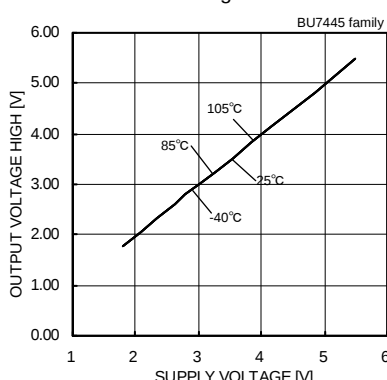


Fig.166  
Output Voltage High – Supply Voltage  
( $R_L=10[k\Omega]$ )

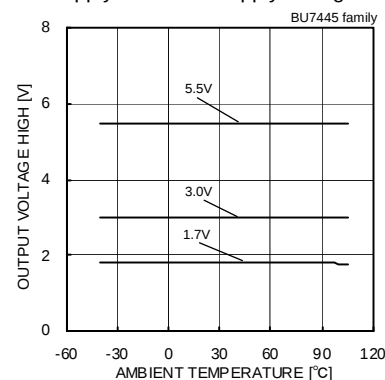


Fig.167  
Output Voltage High – Ambient Temperature  
( $R_L=10[k\Omega]$ )

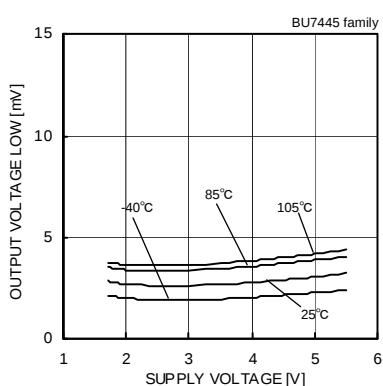


Fig.168  
Output Voltage Low – Supply Voltage  
( $R_L=10[k\Omega]$ )

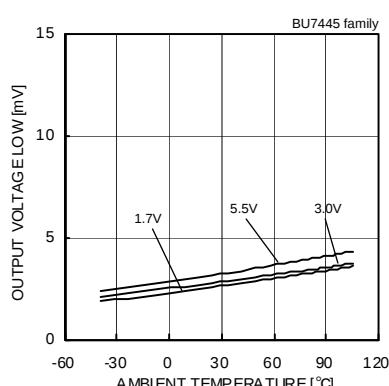


Fig.169  
Output Voltage Low – Ambient Temperature  
( $R_L=10[k\Omega]$ )

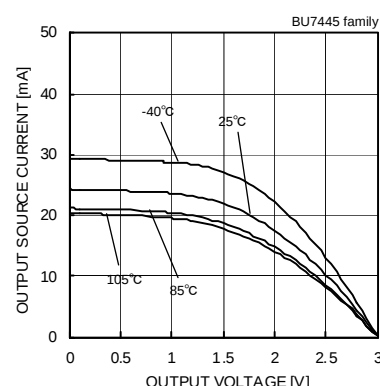


Fig.170  
Output Source Current – Output Voltage  
( $V_{DD}=3.0[V]$ )

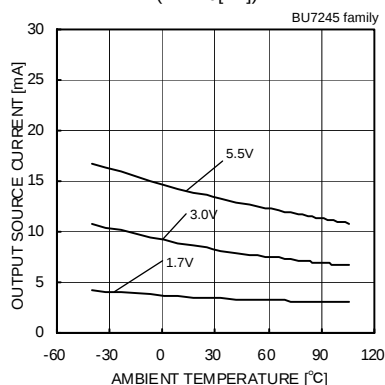


Fig.171  
Output Source Current – Ambient Temperature  
( $V_{OUT}=V_{DD}-0.4[V]$ )

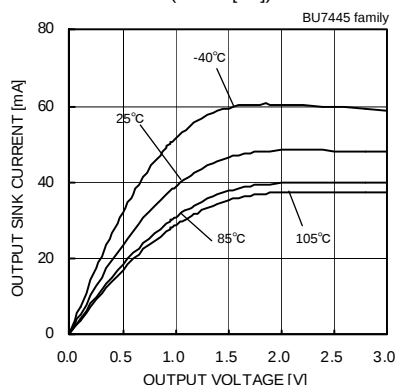


Fig.172  
Output Sink Current – Output Voltage  
( $V_{DD}=3[V]$ )

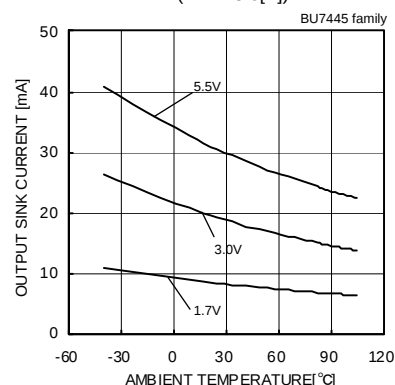


Fig.173  
Output Sink Current – Ambient Temperature  
( $V_{OUT}=V_{SS}+0.4[V]$ )

(\*)The above data is ability value of sample, it is not guaranteed. BU7445HFV: -40[°C] ~ +85[°C] BU7445S HFV: -40[°C] ~ +105[°C]

●Reference data (BU7445 family)

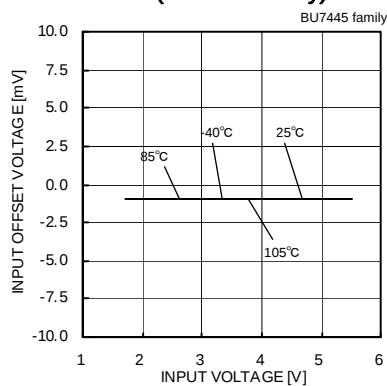


Fig.174  
Input Offset Voltage – Supply Voltage  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

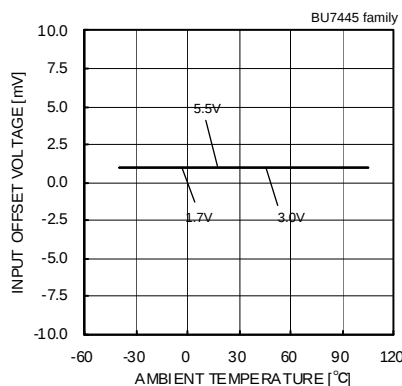


Fig.175  
Input Offset Voltage – Ambient Temperature  
( $V_{icm} = V_{DD} - 1.2[V]$ ,  $V_{OUT} = V_{DD}/2$ )

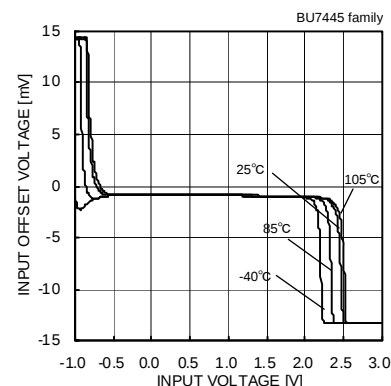


Fig.176  
Input Offset Voltage – Input Voltage  
( $V_{DD} = 3[V]$ )

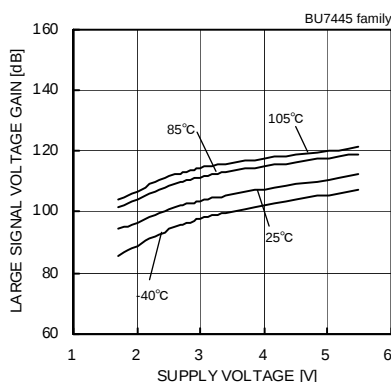


Fig.177  
Large Signal Voltage Gain  
– Supply Voltage

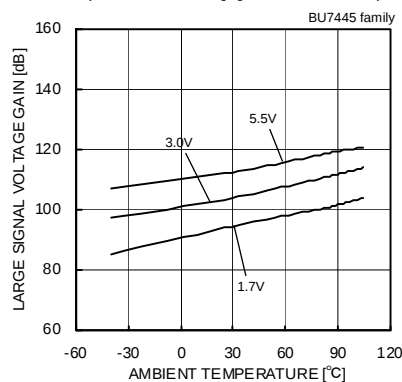


Fig.178  
Large Signal Voltage Gain  
– Ambient Temperature

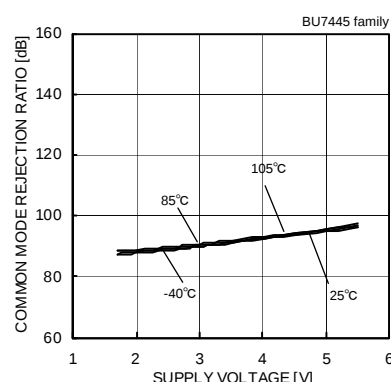


Fig.179  
Common Mode Rejection Ratio  
– Supply Voltage

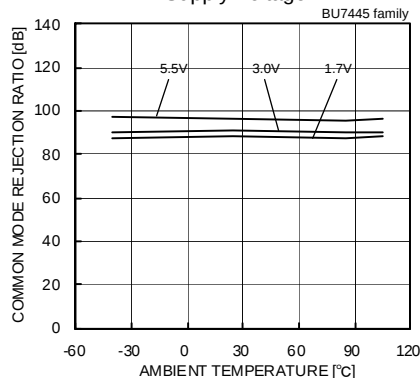


Fig.180  
Common Mode Rejection Ratio  
– Ambient Temperature

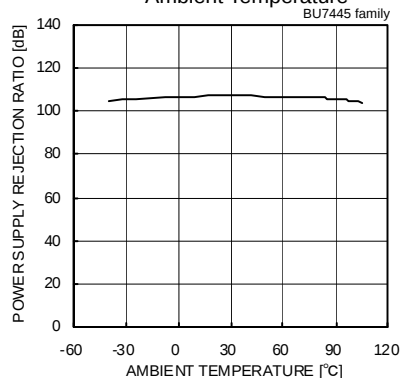


Fig.181  
Power Supply Rejection Ratio  
– Ambient Temperature

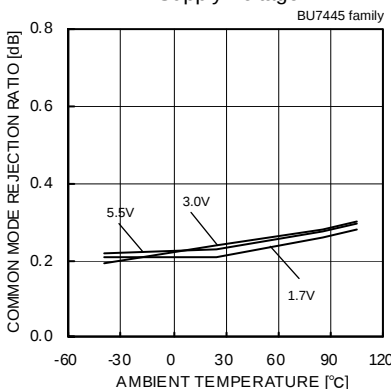


Fig.182  
Slew Rate L-H – Ambient Temperature

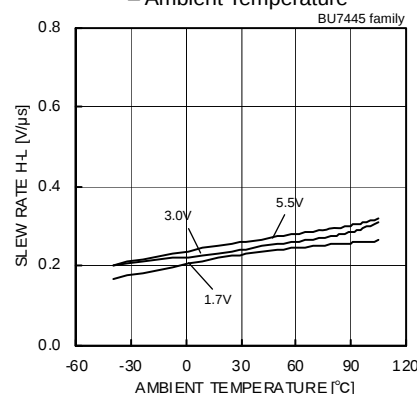


Fig.183  
Slew Rate H-L – Ambient Temperature

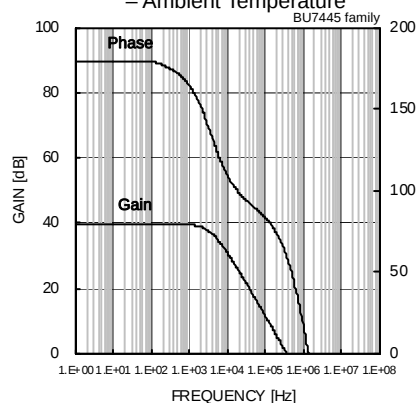


Fig.184  
Gain – Frequency

(\*)The above data is ability value of sample, it is not guaranteed. BU7445HFV: -40[°C] ~ +85[°C] BU7445S HFV: -40[°C] ~ +105[°C]

VDD, VSS, EK, Vicm Unit:[V]

— Calculation —

$$V_{io} = \frac{|VF1|}{1 + R_f/R_s} [V]$$

$$A_v = 20 \log \frac{2 \times (1 + R_f/R_s)}{|V_{F2} - V_{F3}|} \text{ [dB]}$$

$$CMRR = 20 \log \frac{1.8 \times (1 + R_f/R_s)}{|VF_4 - VF_5|} \quad [dB]$$

$$\text{PSRR} = 20 \log \frac{3.8 \times (1 + R_f/R_s)}{|V_{F6} - V_{F7}|} \text{ [dB]}$$

Fig.185 Test circuit 1 (one channel only)

●Test circuit 2 switch condition

| SW No.                               | SW 1 | SW 2 | SW 3 | SW 4 | SW 5 | SW 6 | SW 7 | SW 8 | SW 9 | SW 10 | SW 11 | SW 12 |
|--------------------------------------|------|------|------|------|------|------|------|------|------|-------|-------|-------|
| Supply Current                       | OFF  | OFF  | ON   | OFF  | ON   | OFF  | OFF  | OFF  | OFF  | OFF   | OFF   | OFF   |
| Maximum Output Voltage<br>RL=10 [kΩ] | OFF  | ON   | OFF  | OFF  | ON   | OFF  | OFF  | ON   | OFF  | OFF   | ON    | OFF   |
| Output Current                       | OFF  | ON   | OFF  | OFF  | ON   | OFF  | OFF  | OFF  | OFF  | ON    | OFF   | OFF   |
| Slew Rate                            | OFF  | OFF  | ON   | OFF  | OFF  | OFF  | ON   | OFF  | ON   | OFF   | OFF   | ON    |
| Maximum Frequency                    | ON   | OFF  | OFF  | ON   | ON   | OFF  | OFF  | OFF  | ON   | OFF   | OFF   | ON    |

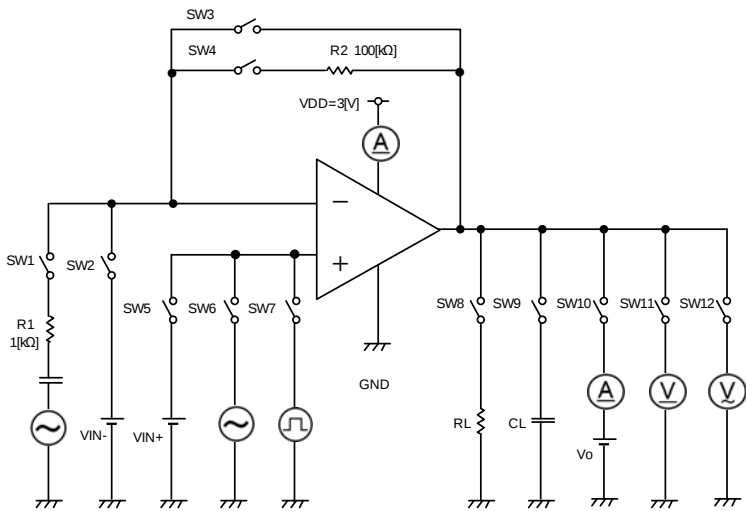


Fig.186 Test circuit 2

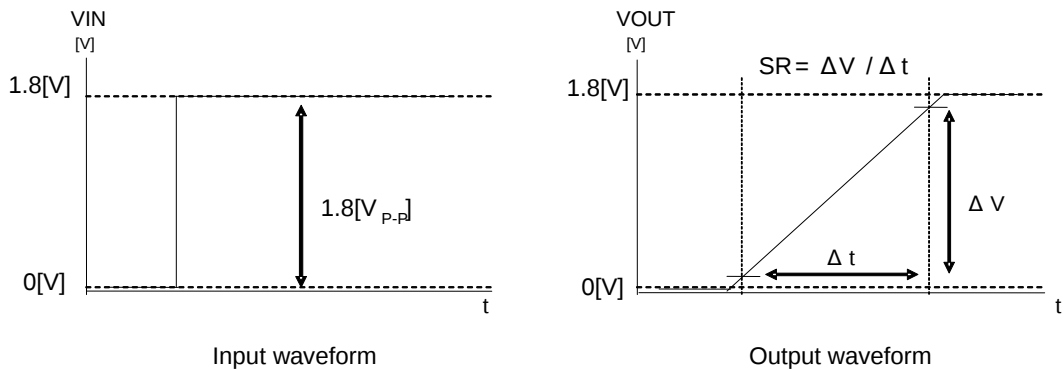


Fig.187 Slew rate input output wave

● Test circuit 3 Channel separation

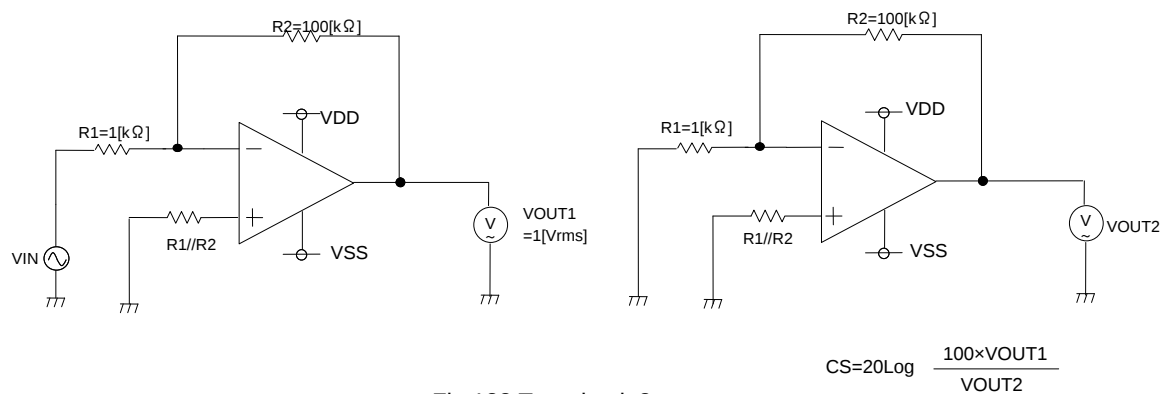


Fig.188 Test circuit 3

● Schematic diagram


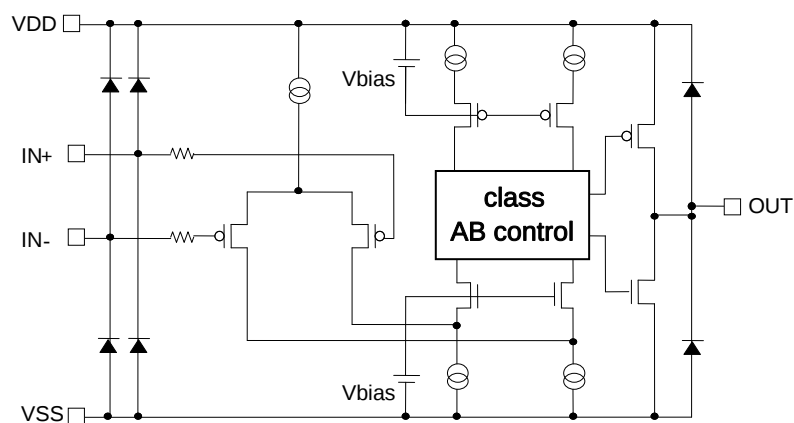


Fig.189 Schematic diagram

## ●Examples of circuit

### ○Voltage follower

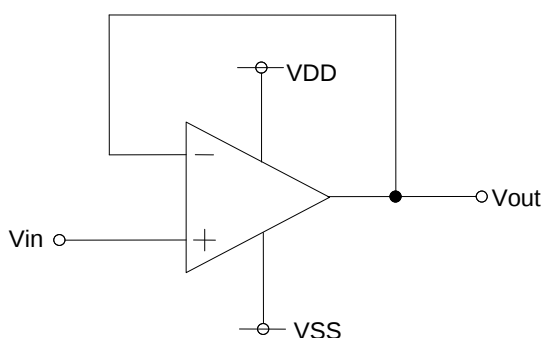


Voltage gain is 0 [dB].

This circuit controls output voltage ( $V_{out}$ ) equal input voltage ( $V_{in}$ ), and keeps  $V_{out}$  with stable because of high input impedance and low output impedance.  $V_{out}$  is shown next formula.

$$V_{out} = V_{in}$$

Fig.190 Voltage follower

### ○Inverting amplifier

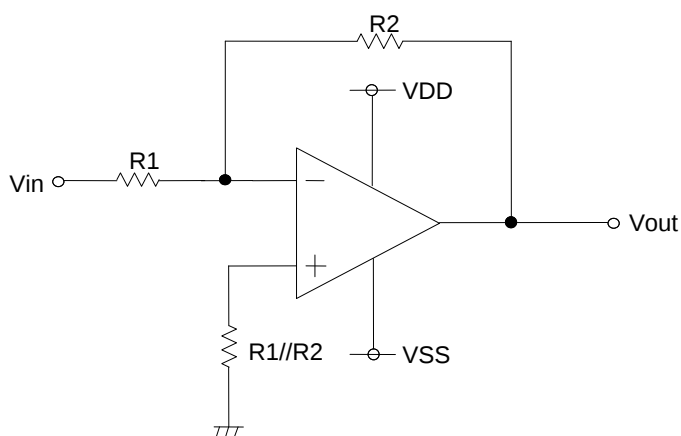

For inverting amplifier,  $V_{in}$  is amplified by voltage gain decided  $R1$  and  $R2$ , and phase reversed voltage is outputted.


$V_{out}$  is shown next formula.

$$V_{out} = -(R2/R1) \cdot V_{in}$$

Input impedance is  $R1$ .

Fig.191 Inverting amplifier

### ○Non-inverting amplifier

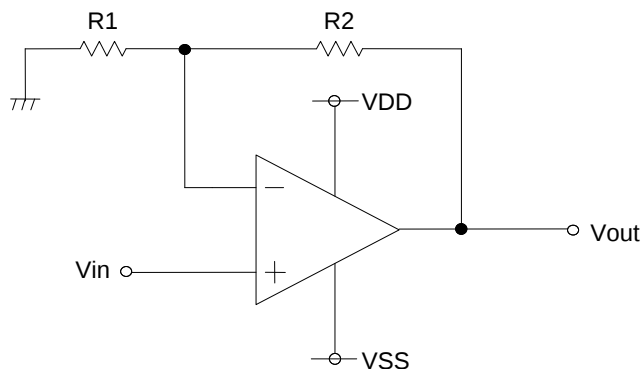

For non-inverting amplifier,  $V_{in}$  is amplified by voltage gain decided  $R1$  and  $R2$ , and phase is same with  $V_{in}$ .  $V_{out}$  is shown next formula.


$$V_{out} = (1 + R2/R1) \cdot V_{in}$$

This circuit realizes high input impedance because Input impedance is operational amplifier's input Impedance.

Fig.192 Non-inverting amplifier

## ● Examples of circuit

### ○ Adder circuit

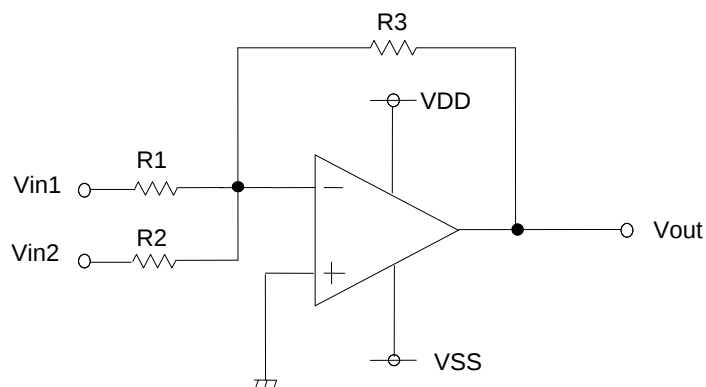


Adder circuit output the voltage that added up Input voltage. A phase of the output voltage turns over, because non-inverting circuit is used. Vout is shown next formula.

$$V_{out} = -R3(V_{in1}/R1 + V_{in2}/R2)$$

When three input voltage is as above, it connects with input through resistance like R1 and R2.

Fig.193 Adder circuit

### ○ Differential amplifier

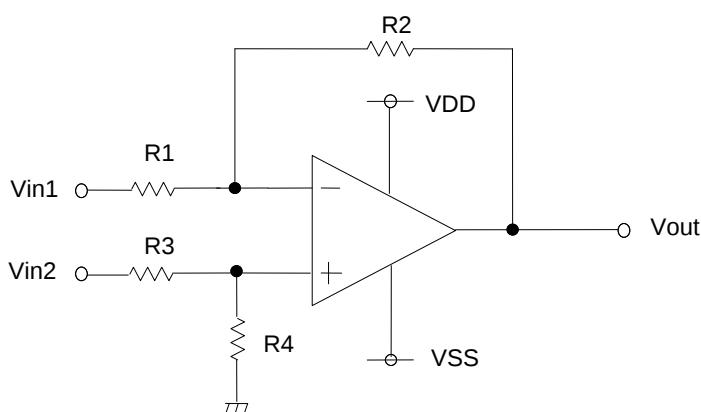

Differential amplifier output the voltage that amplified a difference of input voltage. In the case of  $R1=R3=R_a$ ,  $R2=R4=R_b$  Vout is shown next formula.

$$V_{out} = -R_b/R_a(V_{in1} - V_{in2})$$

Fig.194 Differential amplifier

## ●Description of electrical characteristics

Described here are the terms of electric characteristics used in this technical note. Items and symbols used are also shown. Note that item name and symbol and their meaning may differ from those on another manufacture's document or general document.

### 1. Absolute maximum ratings

Absolute maximum rating item indicates the condition which must not be exceeded. Application of voltage in excess of absolute maximum rating or use out of absolute maximum rated temperature environment may cause deterioration of characteristics.

#### 1.1 Power supply voltage (VDD/VSS)

Indicates the maximum voltage that can be applied between the positive power supply terminal and negative power supply terminal without deterioration or destruction of characteristics of internal circuit.

#### 1.2 Differential input voltage (Vid)

Indicates the maximum voltage that can be applied between non-inverting terminal and inverting terminal without deterioration and destruction of characteristics of IC.

#### 1.3 Input common-mode voltage range (Vicm)

Indicates the maximum voltage that can be applied to non-inverting terminal and inverting terminal without deterioration or destruction of characteristics. Input common-mode voltage range of the maximum ratings not assures normal operation of IC. When normal Operation of IC is desired, the input common-mode voltage of characteristics item must be followed.

#### 1.4 Power dissipation (Pd)

Indicates the power that can be consumed by specified mounted board at the ambient temperature 25°C(normal temperature). As for package product, Pd is determined by the temperature that can be permitted by IC chip in the package (maximum junction temperature) and thermal resistance of the package.

### 2. Electrical characteristics item

#### 2.1 Input offset voltage (Vio)

Indicates the voltage difference between non-inverting terminal and inverting terminal. It can be translated into the input voltage difference required for setting the output voltage at 0 [V].

#### 2.2 Input offset current (Iio)

Indicates the difference of input bias current between non-inverting terminal and inverting terminal.

#### 2.3 Input bias current (Ib)

Indicates the current that flows into or out of the input terminal. It is defined by the average of input bias current at non-inverting terminal and input bias current at inverting terminal.

#### 2.4 Circuit current (ICC)

Indicates the IC current that flows under specified conditions and no-load steady status.

#### 2.5 High level output voltage / Low level output voltage (VOH/VOL)

Indicates the voltage range that can be output by the IC under specified load condition. It is typically divided into high-level output voltage and low-level output voltage. High-level output voltage indicates the upper limit of output voltage. Low-level output voltage indicates the lower limit.

#### 2.6 Large signal voltage gain (AV)

Indicates the amplifying rate (gain) of output voltage against the voltage difference between non-inverting terminal and inverting terminal. It is normally the amplifying rate (gain) with reference to DC voltage.

$$A_v = (\text{Output voltage fluctuation}) / (\text{Input offset fluctuation})$$

#### 2.7 Input common-mode voltage range (Vicm)

Indicates the input voltage range where IC operates normally.

#### 2.8 Common-mode rejection ratio (CMRR)

Indicates the ratio of fluctuation of input offset voltage when in-phase input voltage is changed. It is normally the fluctuation of DC.

$$CMRR = (\text{Change of Input common-mode voltage}) / (\text{Input offset fluctuation})$$

#### 2.9 Power supply rejection ratio (PSRR)

Indicates the ratio of fluctuation of input offset voltage when supply voltage is changed. It is normally the fluctuation of DC.

$$PSRR = (\text{Change of power supply voltage}) / (\text{Input offset fluctuation})$$

#### 2.10 Channel separation (CS)

Indicates the fluctuation of input offset voltage or that of output voltage with reference to the change of output voltage of driven channel.

#### 2.11 Slew rate (SR)

Indicates the time fluctuation ratio of voltage output when step input signal is applied.

#### 2.12 Unity gain frequency (ft)

Indicates a frequency where the voltage gain of Op-Amp is 1.

#### 2.13 Total harmonic distortion + Noise (THD+N)

Indicates the fluctuation of input offset voltage or that of output voltage with reference to the change of output voltage of driven channel.

#### 2.14 Input referred noise voltage (Vn)

Indicates a noise voltage generated inside the operational amplifier equivalent by ideal voltage source connected in series with input terminal.

## Derating curve

Power dissipation (total loss) indicates the power that can be consumed by IC at  $T_a=25^{\circ}\text{C}$  (normal temperature). IC is heated when it consumed power, and the temperature of IC chip becomes higher than ambient temperature. The temperature that can be accepted by IC chip depends on circuit configuration, manufacturing process, and consumable power is limited. Power dissipation is determined by the temperature allowed in IC chip (maximum junction temperature) and thermal resistance of package (heat dissipation capability). The maximum junction temperature is typically equal to the maximum value in the storage package (heat dissipation capability). The maximum junction temperature is typically equal to the maximum value in the storage temperature range. Heat generated by consumed power of IC radiates from the mold resin or lead frame of the package. The parameter which indicates this heat dissipation capability (hardness of heat release) is called thermal resistance, represented by the symbol  $\theta_{ja}$  [ $^{\circ}\text{C}/\text{W}$ ]. The temperature of IC inside the package can be estimated by this thermal resistance. Fig.195 (a) shows the model of thermal resistance of the package. Thermal resistance  $\theta_{ja}$ , ambient temperature  $T_a$ , junction temperature  $T_j$ , and power dissipation  $P_d$  can be calculated by the equation below:

$$\theta_{ja} = (T_j - T_a) / P_d \quad [^{\circ}\text{C}/\text{W}] \quad \dots \dots (1)$$

Derating curve in Fig.195(b) indicates power that can be consumed by IC with reference to ambient temperature. Power that can be consumed by IC begins to attenuate at certain ambient temperature. This gradient is determined by thermal resistance  $\theta_{ja}$ . Thermal resistance  $\theta_{ja}$  depends on chip size, power consumption, package, ambient temperature, package condition, wind velocity, etc even when the same of package is used. Thermal reduction curve indicates a reference value measured at a specified condition. Fig.196 (c)-(h) show a derating curve for an example Ground Sense Low Voltage Operation CMOS Operational Amplifiers series.


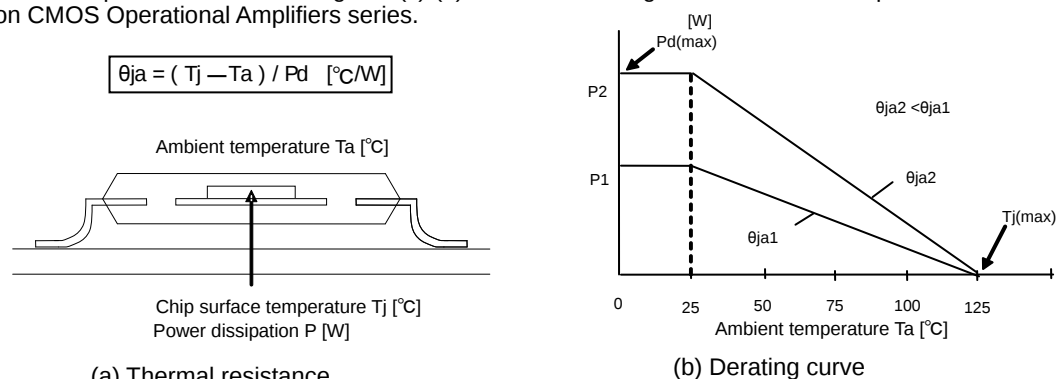


Fig.195 Thermal resistance and derating

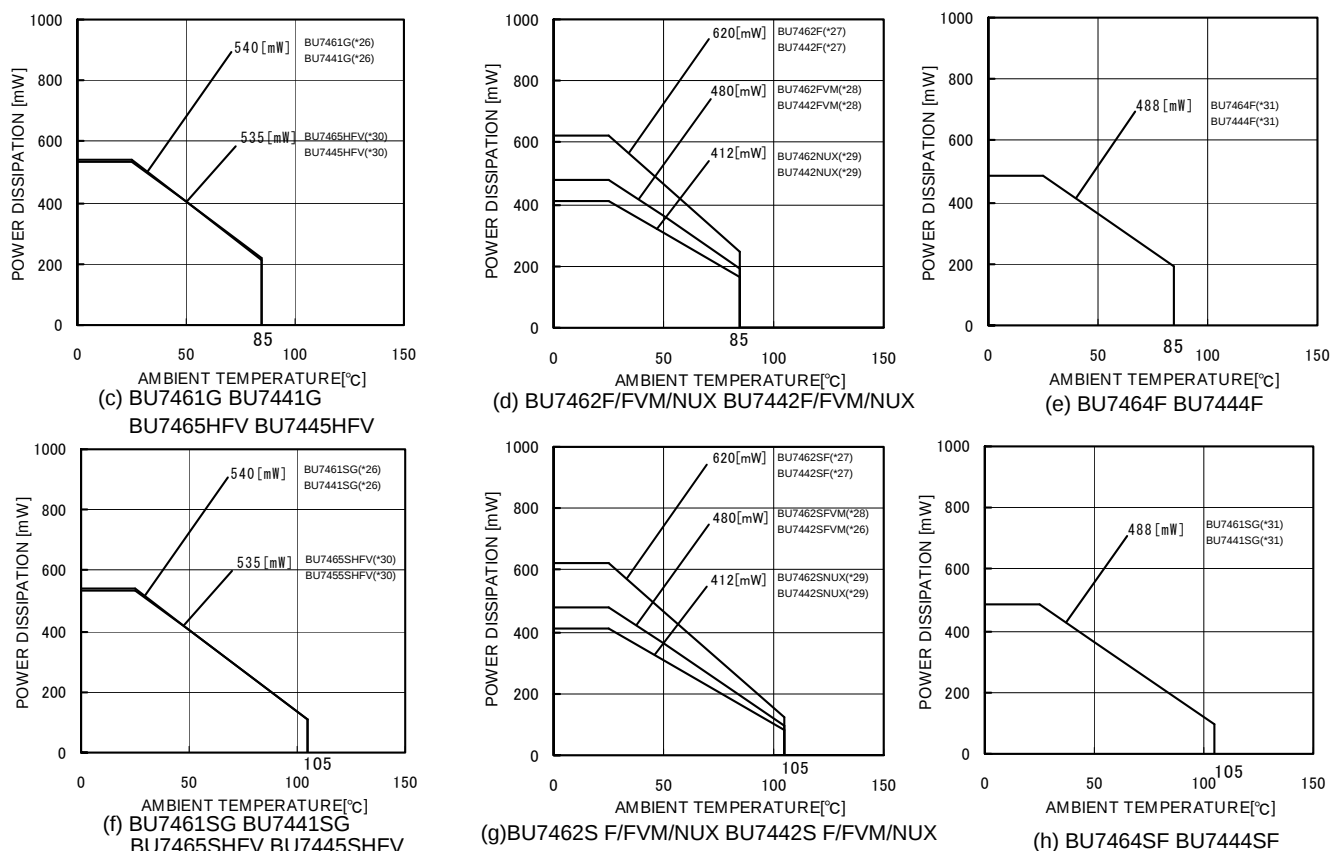

| (*26) | (*27) | (*28) | (*29) | (*30) | (*31) | Unit    |
|-------|-------|-------|-------|-------|-------|---------|
| 5.4   | 6.2   | 4.8   | 4.12  | 5.35  | 4.88  | [mW/°C] |

When using the unit above  $T_a=25^{\circ}\text{C}$ , subtract the value above per degree  $^{\circ}\text{C}$ . Permissible dissipation is the value.

When FR4 glass epoxy board 70[mm]×70[mm]×1.6[mm] (copper foil area below 3[%]) is mounted.

Fig.196 Thermal resistance and derating


## ●Cautions on use

- 1) Absolute maximum ratings  
Absolute maximum ratings are the values which indicate the limits, within which the given voltage range can be safely charged to the terminal. However, it does not guarantee the circuit operation.
- 2) Applied voltage to the input terminal  
For normal circuit operation of voltage comparator, please input voltage for its input terminal within input common mode voltage  $V_{DD} + 0.3[V]$ . Then, regardless of power supply voltage,  $V_{SS}-0.3[V]$  can be applied to input terminals without deterioration or destruction of its characteristics.
- 3) Operating power supply (split power supply/single power supply)  
The voltage comparator operates if a given level of voltage is applied between  $V_{DD}$  and  $V_{SS}$ . Therefore, the operational amplifier can be operated under single power supply or split power supply.
- 4) Power dissipation (pd)  
If the IC is used under excessive power dissipation. An increase in the chip temperature will cause deterioration of the radical characteristics of IC. For example, reduction of current capability. Take consideration of the effective power dissipation and thermal design with a sufficient margin. Pd is reference to the provided power dissipation curve.
- 5) Short circuits between pins and incorrect mounting  
Short circuits between pins and incorrect mounting when mounting the IC on a printed circuits board, take notice of the direction and positioning of the IC. If IC is mounted erroneously, It may be damaged. Also, when a foreign object is inserted between output, between output and  $V_{DD}$  terminal and  $V_{SS}$  terminal which causes short circuit, the IC may be damaged.
- 6) Using under strong electromagnetic field  
Be careful when using the IC under strong electromagnetic field because it may malfunction.
- 7) Usage of IC  
When stress is applied to the IC through warp of the printed circuit board, The characteristics may fluctuate due to the piezo effect. Be careful of the warp of the printed circuit board.
- 8) Testing IC on the set board  
When testing IC on the set board, in cases where the capacitor is connected to the low impedance, make sure to discharge per fabrication because there is a possibility that IC may be damaged by stress. When removing IC from the set board, it is essential to cut supply voltage. As a countermeasure against the static electricity, observe proper grounding during fabrication process and take due care when carrying and storage it.
- 9) The IC destruction caused by capacitive load  
The transistors in circuits may be damaged when  $V_{DD}$  terminal and  $V_{SS}$  terminal is shorted with the charged output terminal capacitor. When IC is used as a operational amplifier or as an application circuit, where oscillation is not activated by an output capacitor, the output capacitor must be kept below  $0.1[\mu F]$  in order to prevent the damage mentioned above.
- 10) Latch up  
Be careful of input voltage that exceed the  $V_{DD}$  and  $V_{SS}$ . When CMOS device have sometimes occur latch up operation. And protect the IC from abnormaly noise
- 11) Decoupling capacitor  
Insert the decoupling capacitance between  $V_{DD}$  and  $V_{SS}$ , for stable operation of operational amplifier.

●Ordering part number


|          |          |                                                                                                                  |          |          |          |          |                                                                                   |          |          |   |                                                                                                               |          |
|----------|----------|------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|-----------------------------------------------------------------------------------|----------|----------|---|---------------------------------------------------------------------------------------------------------------|----------|
| <b>B</b> | <b>U</b> | <b>7</b>                                                                                                         | <b>4</b> | <b>6</b> | <b>2</b> | <b>S</b> | <b>F</b>                                                                          | <b>V</b> | <b>M</b> | - | <b>T</b>                                                                                                      | <b>R</b> |
| Part No. |          | Part No.                                                                                                         |          |          |          |          | Package                                                                           |          |          |   | Packaging and forming specification                                                                           |          |
|          |          | • 7461 7461S • 7464 7464S<br>• 7441 7441S • 7444 7444S<br>• 7462 7462S • 7465 7465S<br>• 7442 7442S • 7445 7445S |          |          |          |          | G : SSOP5<br>F : SOP8, SOP14<br>FVM : MSOP8<br>NUX : VSON008X2030<br>HFV : HVSOF5 |          |          |   | E2: Embossed tape and reel<br>(SOP8/SOP14)<br>TR: Embossed tape and reel<br>(SSOP5/MSOP8/VSON008X2030/HVSOF5) |          |

SOP8

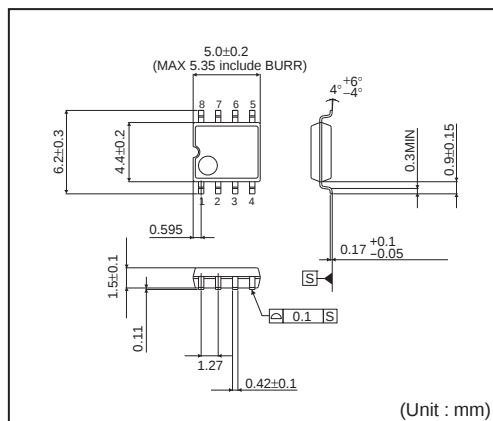


<Tape and Reel information>

|                   |                                                                                                                                                   |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                             |
| Quantity          | 2500pcs                                                                                                                                           |
| Direction of feed | E2<br>(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

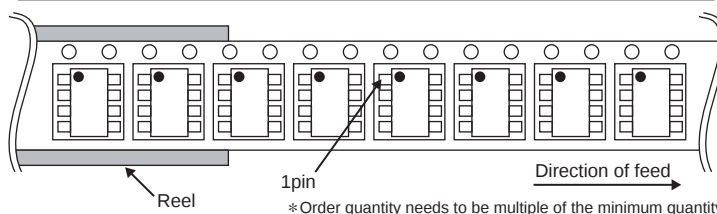


SOP14

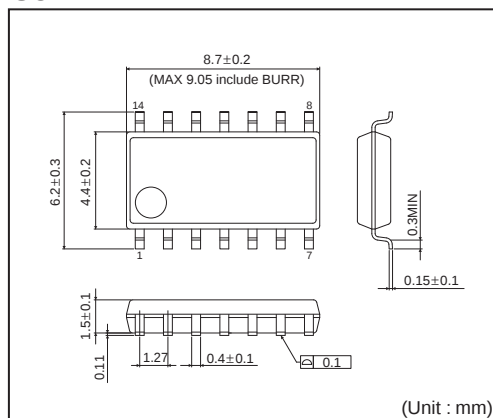


<Tape and Reel information>

|                   |                                                                                                                                                   |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                             |
| Quantity          | 2500pcs                                                                                                                                           |
| Direction of feed | E2<br>(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

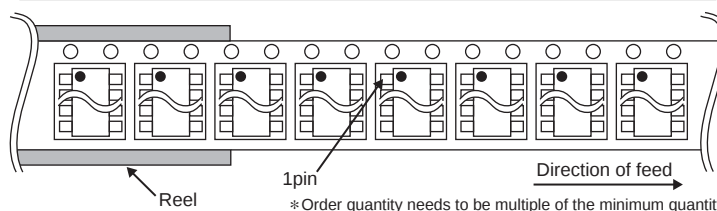


SSOP5

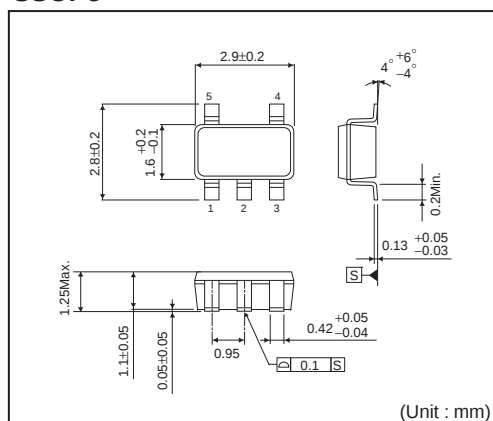

<Tape and Reel information>

|                   |                                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                              |
| Quantity          | 3000pcs                                                                                                                                            |
| Direction of feed | TR<br>(The direction is the 1pin of product is at the upper right when you hold reel on the left hand and you pull out the tape on the right hand) |

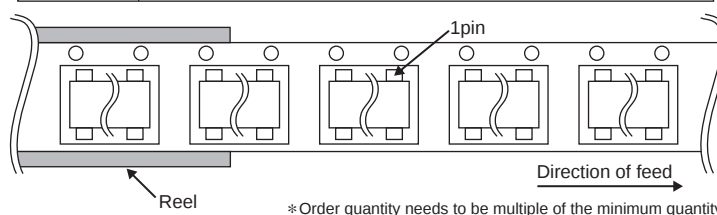

Technical drawing of a 1-pin connector showing dimensions in mm.

**Top View:**

- Overall width:  $2.9 \pm 0.1$  (MAX 3.25 include BURR)
- Overall height:  $4.0 \pm 0.2$
- Pin pitch (between pins 1-4):  $2.8 \pm 0.1$
- Pin pitch (between pins 5-8):  $2.8 \pm 0.1$
- Pin 1 position:  $0.475$
- Pin 2 position:  $0.65$
- Pin 3 position:  $0.22 \pm 0.05$  /  $-0.04$
- Pin 4 position:  $0.08 \pm 0.05$
- Pin 5 position:  $0.08 \pm 0.05$
- Pin 6 position:  $0.08 \pm 0.05$
- Pin 7 position:  $0.08 \pm 0.05$
- Pin 8 position:  $0.08 \pm 0.05$
- Pin 1 label: 1PIN MARK

**Side View:**


- Pin height:  $0.29 \pm 0.15$
- Pin thickness:  $0.145 \pm 0.05$  /  $-0.03$
- Pin angle:  $4^\circ$  /  $-4^\circ$
- Pin width:  $0.6 \pm 0.2$

**Detail View:**


- Pin height:  $0.9 \text{ MAX}$
- Pin thickness:  $0.75 \pm 0.05$
- Pin width:  $0.08 \pm 0.05$
- Pin angle:  $4^\circ$  /  $-4^\circ$
- Pin width:  $0.6 \pm 0.2$

(Unit : mm)

|                   |                                                                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                               |
| Quantity          | 3000pcs                                                                                                                                             |
| Direction of feed | TR<br>(The direction is the 1pin of product is at the upper right when you hold reel on the left hand and you pull out the tape on the right hand ) |

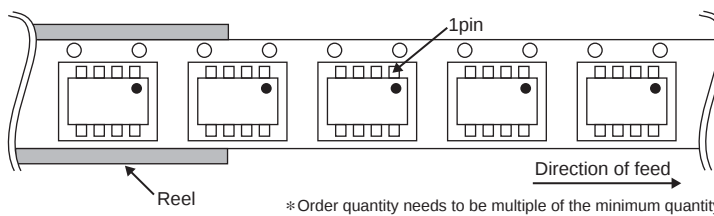
[illegible]

|                   |                                                                                                                                                      |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                                |
| Quantity          | 3000pcs                                                                                                                                              |
| Direction of feed | TR<br>( The direction is the 1pin of product is at the upper right when you hold reel on the left hand and you pull out the tape on the right hand ) |

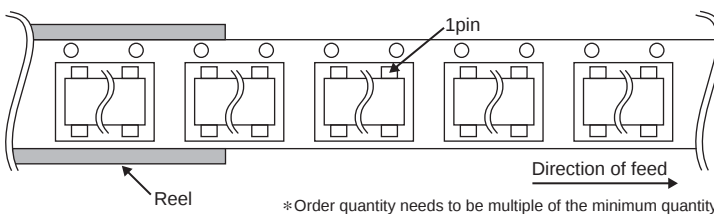

Technical drawing of a mechanical part with dimensions and tolerances. The drawing includes a top view and a side view. The top view shows a rectangular part with a width of  $2.0 \pm 0.1$  and a height of  $3.0 \pm 0.1$ . A feature labeled '1PIN MARK' is indicated. The side view shows a profile with a maximum width of 0.6 MAX, a width of  $1.5 \pm 0.1$ , and a height of  $0.3 \pm 0.1$ . The bottom view shows a profile with a width of  $0.25$ , a height of  $0.25$ , and a width of  $1.4 \pm 0.1$ . The drawing also includes a section line labeled 'S' and a dimension of  $0.08$ . The unit is specified as (Unit : mm).

|                   |                                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                              |
| Quantity          | 4000pcs                                                                                                                                            |
| Direction of feed | TR<br>(The direction is the 1pin of product is at the upper right when you hold reel on the left hand and you pull out the tape on the right hand) |

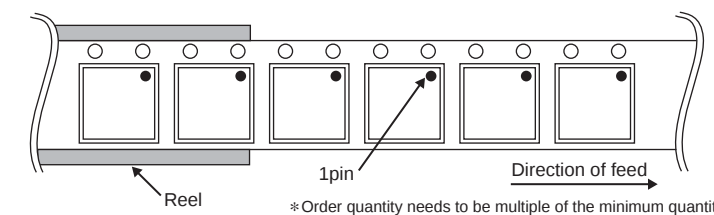

## Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

<http://www.rohm.com/contact/>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.