

LTM8003 40V_{IN}, 3.5A Step-Down µModule Regulator

DESCRIPTION

Demonstration circuit 2416A features the [LTM®8003](#), a 40V, 3.5A step-down µModule® Regulator. This demo circuit is configured to deliver a 5.0V output from an input voltage between 6.0V to 40V at a switching frequency of 2MHz. The wide input range of the LTM8003 allows a variety of input sources such as automotive batteries and industrial supplies. Under light load conditions, the available Burst Mode® operation supports high efficiency with low output ripple.

The demo board has an EMI filter installed. The EMI performance of the board is shown in Figure 3.

The LTM8003 data sheet gives complete description of the device, operation and application information. The data sheet must be read in conjunction with this demo manual prior to working on or modifying demo circuit 2416A.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2416A>


LT, LT, LTC, LTM, Linear Technology, the Linear logo, µModule and Burst Mode are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY

Specifications are at T_A = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		6		40	V
V _{OUT}	Output Voltage		4.75	5	5.25	V
I _{OUT}	Output Current	V _{IN} = 12V	3.5			A
f _{SW}	Switching Frequency	V _{IN} = 12V, I _{OUT} = 3.5A		2		MHz
V _{OUT(AC)}	Output Ripple	V _{IN} = 12V, I _{OUT} = 3.5A		20		mV
η	Efficiency	V _{IN} = 12V, I _{OUT} = 3.5A		91.6		%

BOARD PHOTO

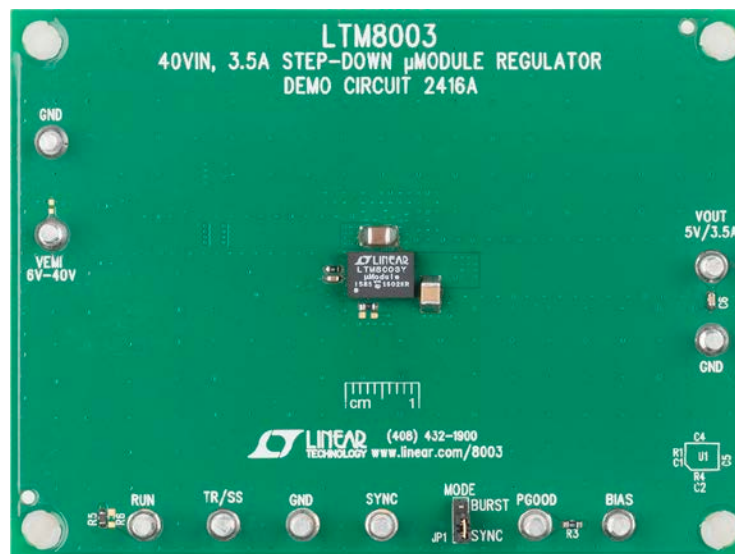

dc2416afa

QUICK START PROCEDURE

DC2416A is an easy way to evaluate the performance of the LTM8003. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 2 for proper scope probe technique.

1. Place JP1 in Burst position.
2. With power off, connect the input power supply to VEMI and GND.
3. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 40V.

4. Check for the proper output voltage between V_{OUT} and GND ($V_{OUT} = 5V$).

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltage is established, adjust the load within the operating range and measure the output voltage regulation, ripple voltage, efficiency and other parameters.
6. An external clock can be added to the SYNC terminal when SYNC function is used (JP1 on the SYNC position). Make sure that R1 be chosen to set the switching frequency equal to or below the lowest SYNC frequency. JP1 can also set the regulator in pulse-skipping mode (Floating JP1) or spread spectrum mode (JP1 on SYNC, and set it high between 3.2V and 4.2V).

QUICK START PROCEDURE

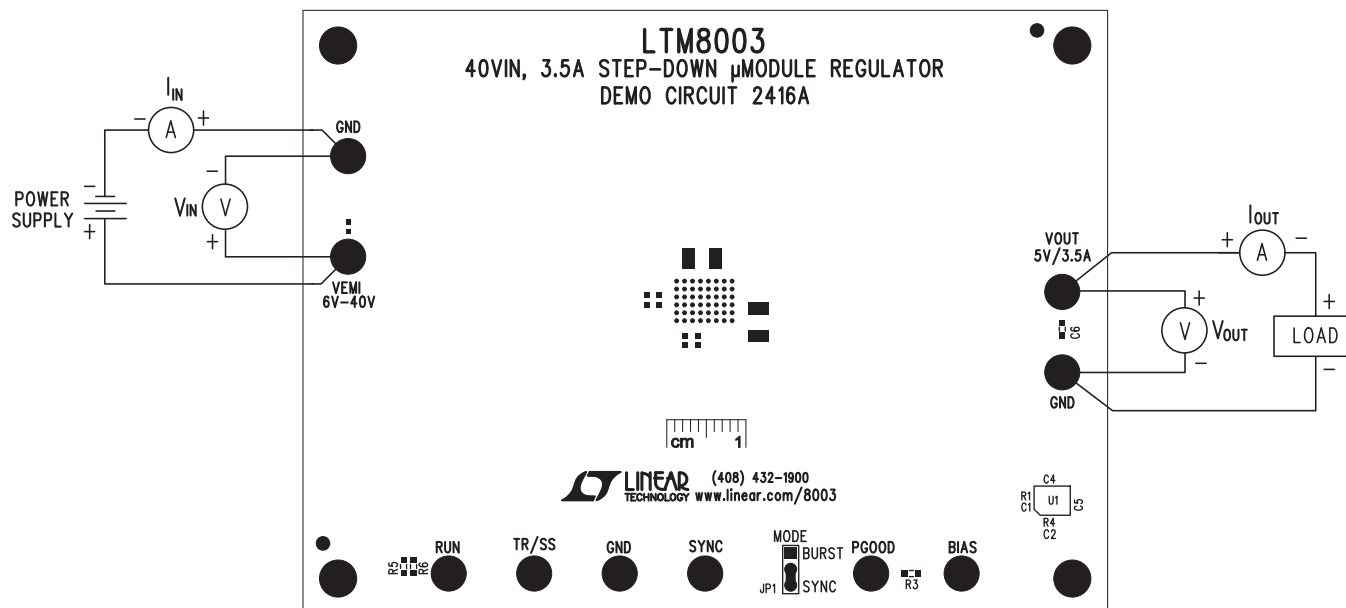


Figure 1. DC2416A Proper Equipment Setup



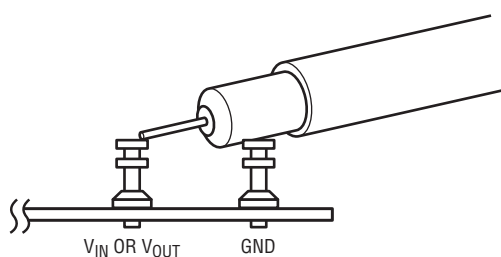


Figure 2. Measuring Input or Output Ripple


QUICK START PROCEDURE

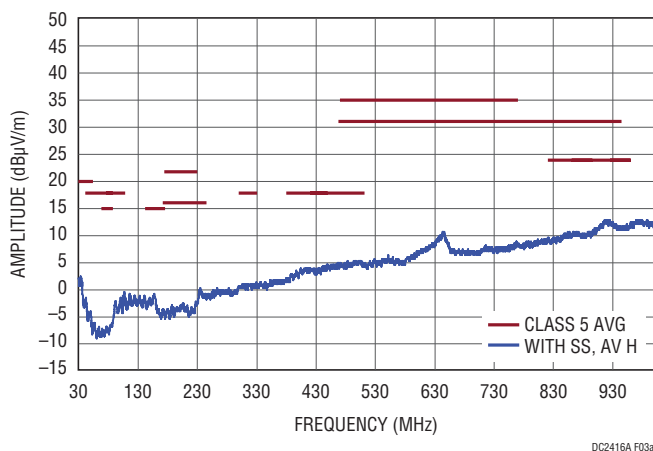


(3a) Horizontal Polarization, Average, with Spread Spectrum

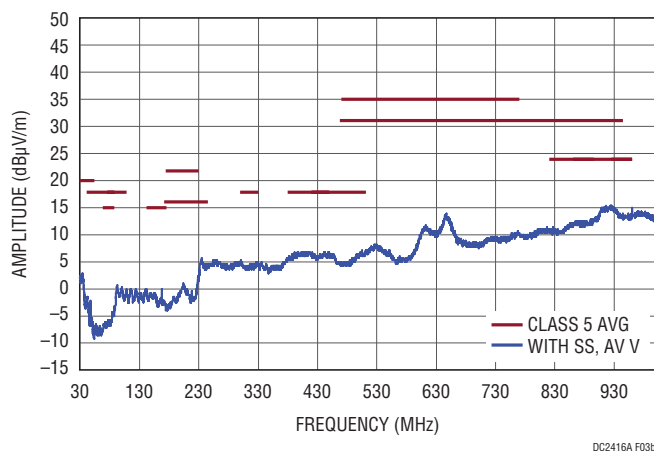

(3b) Vertical Polarization, Average, with Spread Spectrum

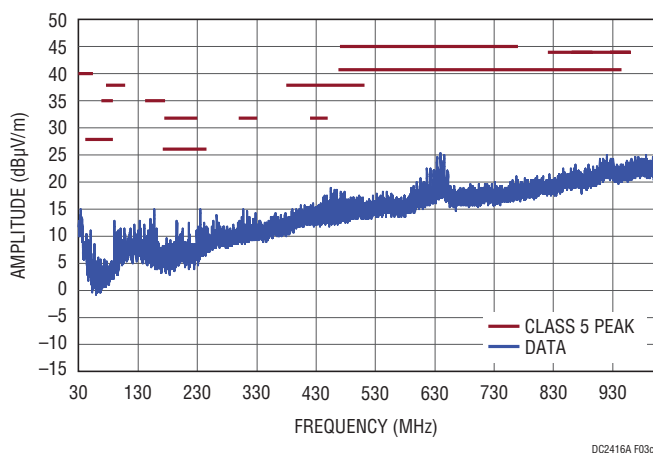


(3c) Horizontal Polarization, Peak, without Spread Spectrum

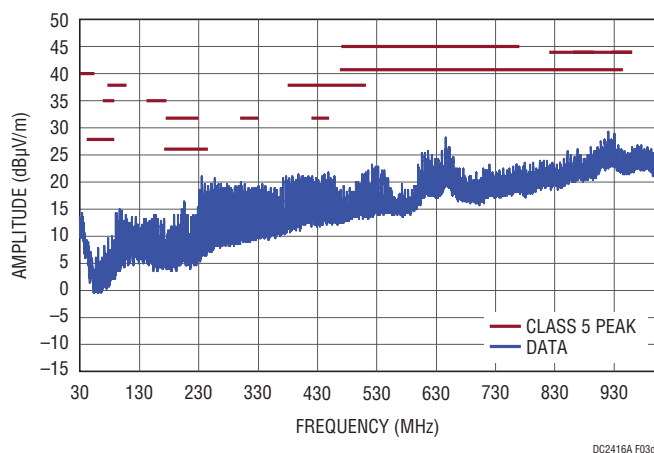


(3d) Vertical Polarization, Peak, without Spread Spectrum

Figure 3. DC2416A EMI Performance in CISPR25 Radiated Emission Test with and without Spread Spectrum ($14V_{IN}$, $I_{OUT} = 3.5A$)

QUICK START PROCEDURE

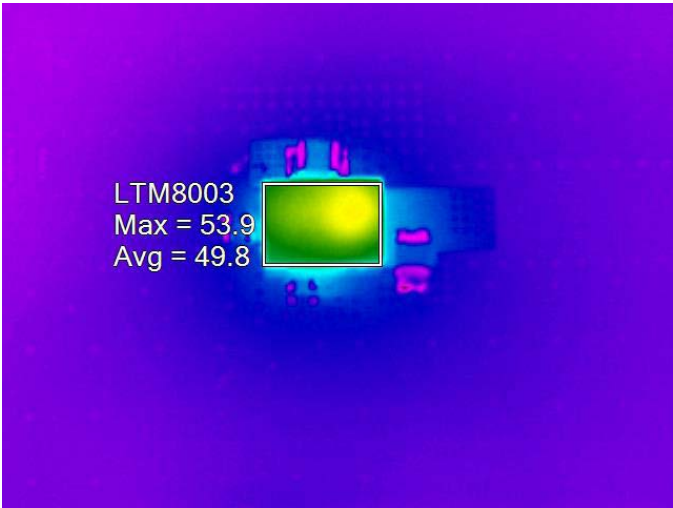

(4a) $V_{IN} = 12V$

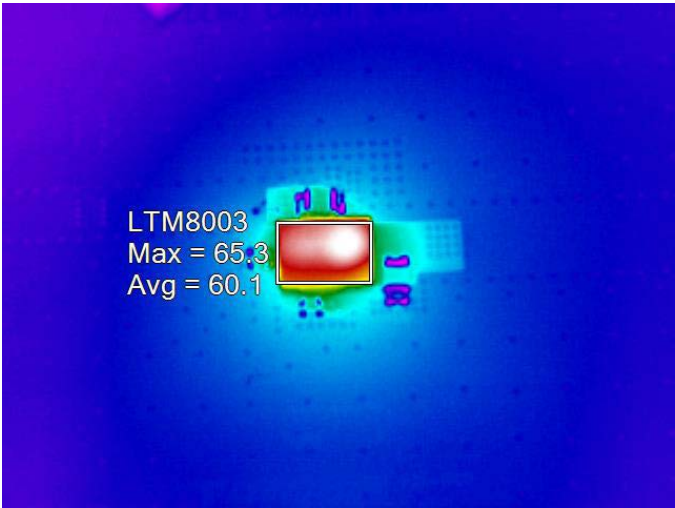

(4b) $V_{IN} = 24V$

Figure 4. DC2416A Thermal Performance ($12V_{IN}$, $I_{OUT} = 3.5A$, $T_A = 25^\circ C$)

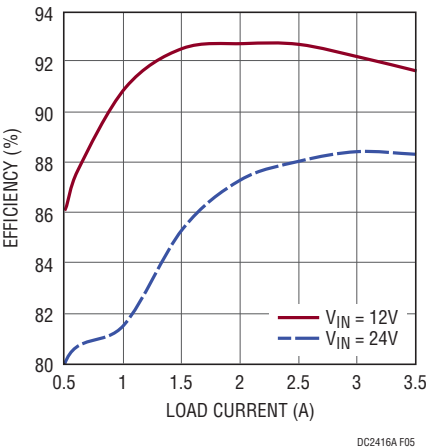


Figure 5. DC2416A Efficiency vs Load Current ($T_A = 25^\circ C$)

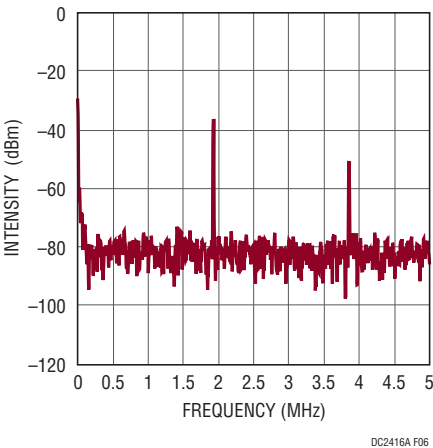


Figure 6. Output Noise Spectrum with 3.5A Load Current ($V_{IN} = 12V$)

DEMO MANUAL DC2416A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	C1	CAP, CER., X7R, 0.1 μ F, 25V, 10% 0603	MURATA, GRM188R71E104KA01D
2	1	C3	CAP, ALUM., 56 μ F, 50V	SUN ELECTRONIC INDUSTRIES CORP., 50HVT56M
3	2	C4, C8	CAP, CER., X7R, 10 μ F, 50V, 10% 1210	MURATA, GRM32ER71H106KA12L
4	1	C5	CAP, CER., X7S, 100 μ F, 6.3V, 20% 1210	MURATA, GRM32EC70J107ME15L
5	1	C6	CAP, CER., X7R, 1 μ F, 10V, 10%, 0603	MURATA, GRM188R71A105KA61D
6	1	C7	CAP, CER., X7R, 4.7 μ F, 50V, 20% 1206	MURATA, GRM31CR71H475KA12L
7	1	C10	CAP, CER., X7R, 0.1 μ F, 50V, 10% 0402	TDK, C1005X7R1H104K050BB
8	2	C11, C12	CAP, CER., X7R, 0.1 μ F, 50V, 10% 0603	AVX, 06035C104KAT2A
9	1	R1	RES., CHIP, 18.2k, 1/10W, 1% 0603	VISHAY, CRCW060318K2FKEA
10	1	R2	RES., CHIP, 0 Ω , 1/10W, 1% 1206	VISHAY, CRCW12060000Z0EA
11	2	R3, R5	RES., CHIP, 100k, 1/10W, 1% 0603	VISHAY, CRCW0603100KFKEA
12	1	FB1	CHIP BEAD IND., 0805	TDK, MPZ2012S300AT000
13	1	R4	RES., CHIP, 24.3k, 1/10W, 1% 0603	VISHAY, CRCW060324K3FKEA
14	1	U1	IC., BGA, LTM8003, 48PIN	LINEAR TECH., LTM8003HY#PBF
Additional Demo Board Circuit Components				
1	0	C2, C9 (OPT)	CAP, 0603	
2	0	R6 (OPT)	RES., 0603	
Hardware: For Demo Board Only				
1	10	E1-E10	TESTPOINT, TURRET, .094" PBF	MILL-MAX, 2501-2-00-80-00-00-07-0
2	1	JP1	HEADER 3 PIN 0.079 SINGLE ROW	WURTH ELEKTRONIK, 62000311121
3	1	XJP1	SHUNT, .079" CENTER	WURTH ELEKTRONIK, 60800213421
4	4	MH1-MH4	STAND-OFF, NYLON 0.50"	WURTH ELEKTRONIK, 702935000



COGNITIVE LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

LINEAR
TECHNOLOGY

1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408) 342-1900 www.linear.com
Fax: (408) 334-0507
LTC Confidential-For Customer Use Only

TITLE: SCHEMATIC

10V IN 3.5A STEP DOWN 11MOD II E REG II ATOR

40VIN, 3.5A STEP-DOWN μ MODULE REGULATOR

S7F	IC NO	REV.
		1 TM000031V

SIZE	N/A	REV. 0
IC NO.	LTM8003HY	

NA	DEMO CIRCUIT 2416A	3
----	--------------------	---

DATE: Monday, April 11, 2016

DATE:	Monday, April 11, 2010	SHEET	1
-------	------------------------	-------	---

NOTE: UNLESS OTHERWISE SPECIFIED

1. ALL RESISTORS ARE 0603.
ALL CAPACITORS ARE 0603.

DEMO MANUAL DC2416A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.