



SAW Filters for Mobile Communications

Series/Type: B9012

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39901B9012K210	B39901B9431M410	2009-12-18	2010-06-30	2010-09-30

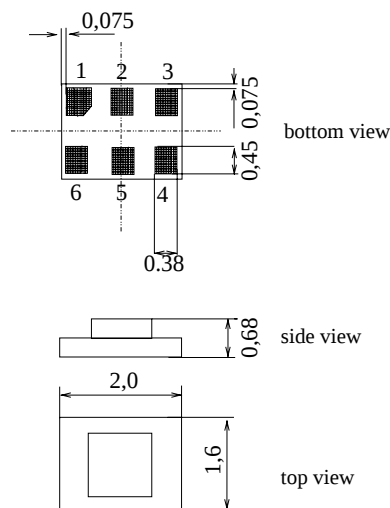
For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.

Features

- Low-loss RF filter for mobile telephone EGSM system, transmit path
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced operation
- Impedance transformation from 100 Ω to 50 Ω
- Suitable for GPRS class 1 to 12
- Ceramic package for Surface Mounted Technology (SMT)
- Pb-free

Terminals


- Ni, gold-plated

Chip sized SAW package DCS6S


Dimensions in mm, approx. weight 0,010 g

Pin configuration

- | | |
|---------|-------------------|
| 4, 6 | Balanced inputs |
| 2 | Unbalanced output |
| 1, 3 | Output ground |
| 1, 3, 5 | To be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B9012	B39901-B9012-K210	C61157-A7-A115	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)
Maximum ratings

Operable temperature range	T	- 30 / + 85	$^{\circ}\text{C}$	Machine Model, 10 pulses peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}^{*}	100*	V	
Input power at	P_{IN}	13	dBm	
GSM850, GSM900 GSM1800 and GSM1900 Tx bands				

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses

SAW Components
B9012
Low-Loss Filter for Mobile Communication
897,5 MHz
Data Sheet

Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 100 \text{ } \Omega$ (balanced) || 82 nH
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	897,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	2,4	2,9	dB
880,0 ... 915,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,5	dB
880,0 ... 915,0 MHz					
Input VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	—	10	degree
880,0 ... 915,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-1,0	—	1,0	dB
880,0 ... 915,0 MHz					
Diff. to common mode suppression	S_{sc12}	18	26	—	dB
880,0 ... 915,0 MHz					
1760,0 ... 1830,0 MHz		18	41	—	dB
2640,0 ... 2745,0 MHz		18	32	—	dB
Attenuation	α	45	56	—	dB
0,0 ... 800,0 MHz					
800,0 ... 860,0 MHz		25	42	—	dB
860,0 ... 870,0 MHz		13	26	—	dB
925,0 ... 935,0 MHz		9	15	—	dB
935,0 ... 1805,0 MHz		25	31	—	dB
1805,0 ... 3660,0 MHz		30	36	—	dB
3660,0 ... 6000,0 MHz		15	30	—	dB

SAW Components
B9012
Low-Loss Filter for Mobile Communication
897,5 MHz
Data Sheet

Characteristics

Operating temperature range: $T = -10 \dots +80 \text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 100 \text{ } \Omega$ (balanced) || 82 nH
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

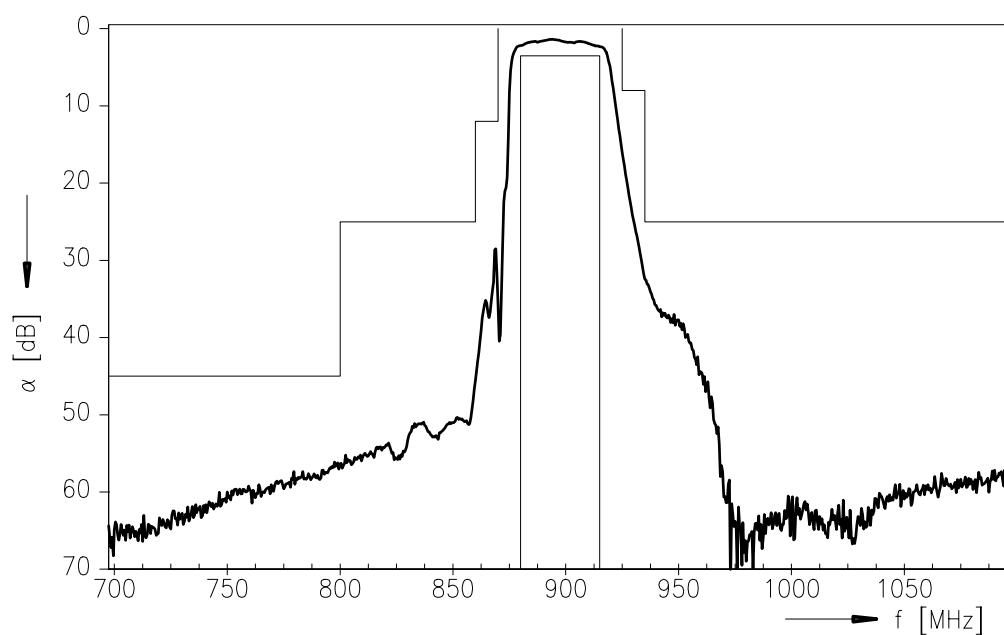
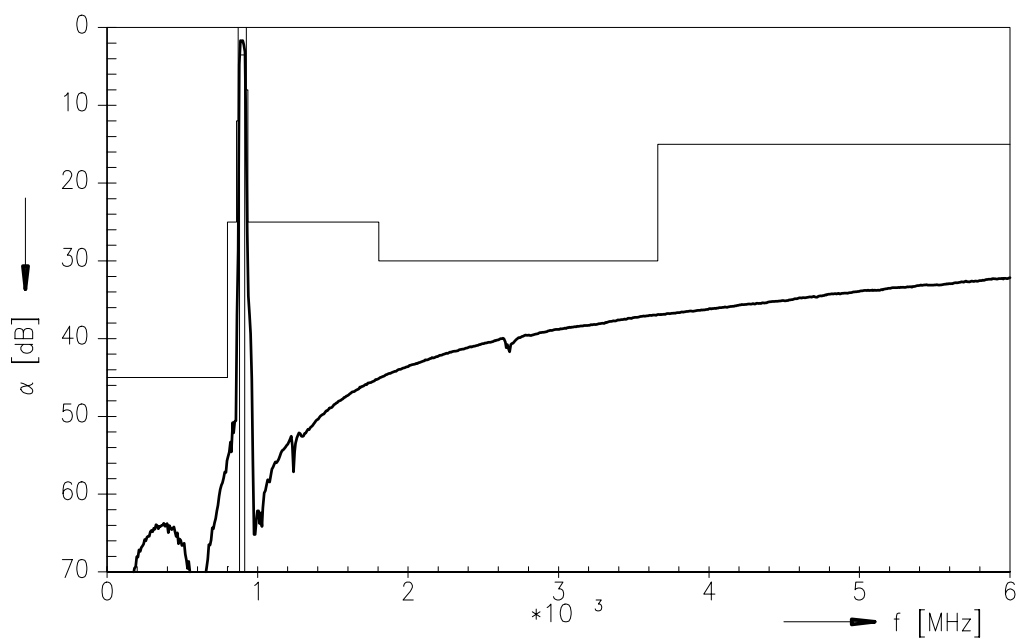
		min.	typ.	max.	
Center frequency	f_C	—	897,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	2,6	3,0	dB
880,0 ... 915,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,0	1,5	dB
880,0 ... 915,0 MHz					
Input VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	—	10	degree
880,0 ... 915,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-1,0	—	1,0	dB
880,0 ... 915,0 MHz					
Diff. to common mode suppression	S_{sc12}				
880,0 ... 915,0 MHz		18	26	—	dB
1760,0 ... 1830,0 MHz		18	41	—	dB
2640,0 ... 2745,0 MHz		18	32	—	dB
Attenuation	α				
0,0 ... 800,0 MHz		45	56	—	dB
800,0 ... 860,0 MHz		25	42	—	dB
860,0 ... 870,0 MHz		12	26	—	dB
925,0 ... 935,0 MHz		8	15	—	dB
935,0 ... 1805,0 MHz		25	31	—	dB
1805,0 ... 3660,0 MHz		30	36	—	dB
3660,0 ... 6000,0 MHz		15	30	—	dB

SAW Components
B9012
Low-Loss Filter for Mobile Communication
897,5 MHz
Data Sheet

Characteristics

Operating temperature range: $T = -30 \dots +85 \text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 100 \text{ } \Omega$ (balanced) || 82 nH
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	897,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	880,0 ... 915,0 MHz		—	2,7	3,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	880,0 ... 915,0 MHz		—	1,2	2,2	dB
Input VSWR						
	880,0 ... 915,0 MHz		—	1,8	2,0	
Output VSWR						
	880,0 ... 915,0 MHz		—	1,8	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)						
	880,0 ... 915,0 MHz		-10	—	10	degree
Output amplitude balance ($ S_{31}/S_{21} $)						
	880,0 ... 915,0 MHz		-1,0	—	1,0	dB
Diff. to common mode suppression	S_{sc12}					
	880,0 ... 915,0 MHz		18	26	—	dB
	1760,0 ... 1830,0 MHz		18	41	—	dB
	2640,0 ... 2745,0 MHz		18	32	—	dB
Attenuation	α					
	0,0 ... 800,0 MHz		45	56	—	dB
	800,0 ... 860,0 MHz		25	42	—	dB
	860,0 ... 870,0 MHz		12	26	—	dB
	925,0 ... 935,0 MHz		8	13	—	dB
	935,0 ... 1805,0 MHz		25	30	—	dB
	1805,0 ... 3660,0 MHz		30	36	—	dB
	3660,0 ... 6000,0 MHz		15	30	—	dB

Transfer function (measurement)

Transfer function (wideband measurement)


**Published by EPCOS AG****Surface Acoustic Wave Components Division, SAW MC WT****P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EPCOS:](#)

[B39901B9012K210](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.