LDO with Reverse Current Protection / Soft Start / Discharge Function

■ GENERAL DESCRIPTION

The NJM12884 is a low dropout regulator which achieves high ripple rejection, low noise and high speed response with the bipolar technology.

Adjustable soft-start function is useful for reducing inrush current and controlling power-on sequence. Moreover the discharge function makes effective sequence control with the soft-start function.

In addition, the reverse current protection makes external SBD unnecessary.

■ PACKAGE OUTLINE



NJM12884U2



NJM12884DL3

■ FEATURE

- Operating Voltage Range 2.3V to 6.5V
- Output Voltage Accuracy V_O ±1.0%
- Output Current I_O(min.)=500mA
- Reverse Current Protection
- Adjustable soft-start Function
- Discharge Function
- ON/OFF Control
- Correspond to Low ESR capacitor (MLCC)
- Thermal Shutdown Circuit
- Over Current Protection Circuit
- Package Outline SOT-89-5, TO-252-5

■ PIN CONFIGRATION



NJM12884U2

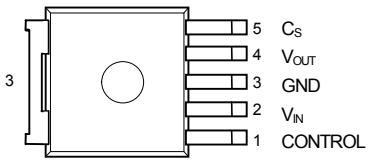

NJM12884DL3

■ BLOCK DIAGRAM

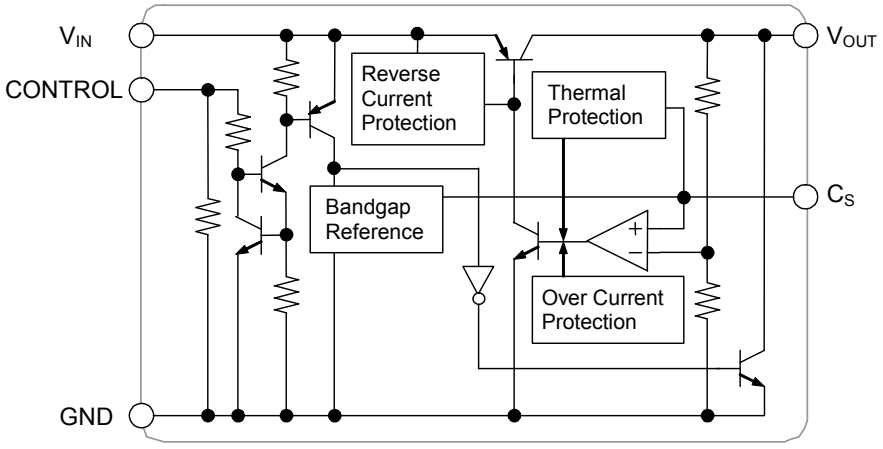

■ OUTPUT VOLTAGE RANK LIST

SOT-89-5 TO-252-5

Device Name	Output Voltage	Device Name	Output Voltage
NJM12884U2-15	1.5V	NJM12884DL3-15	1.5V
NJM12884U2-18	1.8V	NJM12884DL3-18	1.8V
NJM12884U2-25	2.5V	NJM12884DL3-25	2.5V
NJM12884U2-33	3.3V	NJM12884DL3-33	3.3V
NJM12884U2-05	5.0V	NJM12884DL3-05	5.0V

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATING		UNIT
Input Voltage	V_{IN}	-0.3 ~ +7		V
Control Pin Voltage	V_{CONT}	-0.3 ~ +7		V
Output Voltage	V_{OUT}	Vo≤1.8V	-0.3 ~ +5.5	V
		Vo>1.8V	-0.3 ~ +7	V
Soft start Pin Voltage	V_{CS}	-0.3 ~ +4		V
Power Dissipation	P_D	SOT-89-5	625(*1)	mW
			2400(*2)	
		TO-252-5	1190(*1)	
			3125(*2)	
Junction Temperature Range	Tj	-40 ~ +150		°C
Operating Temperature Range	Topr	-40 ~ +125		°C
Storage Temperature Range	Tstg	-50 ~ +150		°C

(*1): Mounted on glass epoxy board. (76.2 × 114.3 × 1.6mm:based on EIA/JDEC standard size, 2Layers, Cu area 100mm^2)

(*2): Mounted on glass epoxy board. (76.2 × 114.3 × 1.6mm:based on EIA/JDEC standard, 4Layers)

(For 4Layers: Applying 74.2 × 74.2mm inner Cu area and a thermal via hole to a board based on JEDEC standard JESD51-5)

■ Operating Voltage Range : V_{IN}=2.3V~6.5V

■ ELECTRICAL CHARACTERISTICS

(Unless other noted,

V_{IN} = V_O + 1V, C_{IN} = 0.33µF, C_O =0.33 µF(Co=0.47µF :2.9V<Vo≤3.4V, Co=2.2µF : 1.7V<Vo≤2.9V, Co=4.7µF Vo≤1.7V), Cs=0.01µF, T_a = 25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V_O	I_O=100mA		-1.0%	-	+1.0%	V
Quiescent Current	I_Q	I_O = 0mA, except I_{CONT}		-	200	280	µA
Quiescent Current at OFF-state	$I_{Q(OFF)}$	V_{CONT} = 0V		-	-	10	µA
Output Current	I_O	$V_O \times 0.9$		500	-	-	mA
Line Regulation	$\Delta V_O/\Delta V_{IN}$	V_{IN} = V_O + 1V ~ 6.5V, Io=100mA		-	-	0.1	%/V
Load Regulation	$\Delta V_O/\Delta I_O$	I_O = 0 ~ 500mA		-	-	0.005	%/mA
Dropout Voltage (*3)	ΔV_{IO}	I_O=300mA		-	0.18	0.25	V
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta Ta$	Ta= -40 ~ +125°C, I_O=100mA		-	±50	-	ppm/°C
Ripple Rejection	RR	ein=200mVrms, f=1kHz, Io=10mA	Vo=1.5V	-	76	-	dB
			Vo=1.8V	-	74	-	
			Vo=2.5V	-	71	-	
			Vo=3.3V	-	68	-	
			Vo=5.0V	-	64	-	
Output Noise Voltage	V_{NO}	f=10Hz ~ 80kHz, Io=10mA	Vo=1.5V	-	15	-	µVrms
			Vo=1.8V	-	19	-	
			Vo=2.5V	-	24	-	
			Vo=3.3V	-	28	-	
			Vo=5.0V	-	40	-	
Control Current	I_{CONT}	V_{CONT} =1.6V		-	3	12	µA
Control Voltage at ON-state	$V_{CONT(ON)}$			1.6	-	-	V
Control Voltage at OFF-state	$V_{CONT(OFF)}$			-	-	0.6	V
Soft Start Time	$t_{S(ON)}$	V_{CONT}=L→H, Io=100mA, Cs=0.022µF		-	1.2	-	msec
Discharge Current at OFF-state	I_{DIS}	V_{IN}=2.3V, V_{CONT}=0V, V_O =0.5V		2	9	-	mA
		V_{IN}=6.5V, V_{CONT}=0V, V_O =0.5V		15	25	-	

(*3): Except Output Voltage Rank less than 2.1V

The above specification is a common specification for all output voltages.

Therefore, it may be different from the individual specification for a specific output voltage.

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

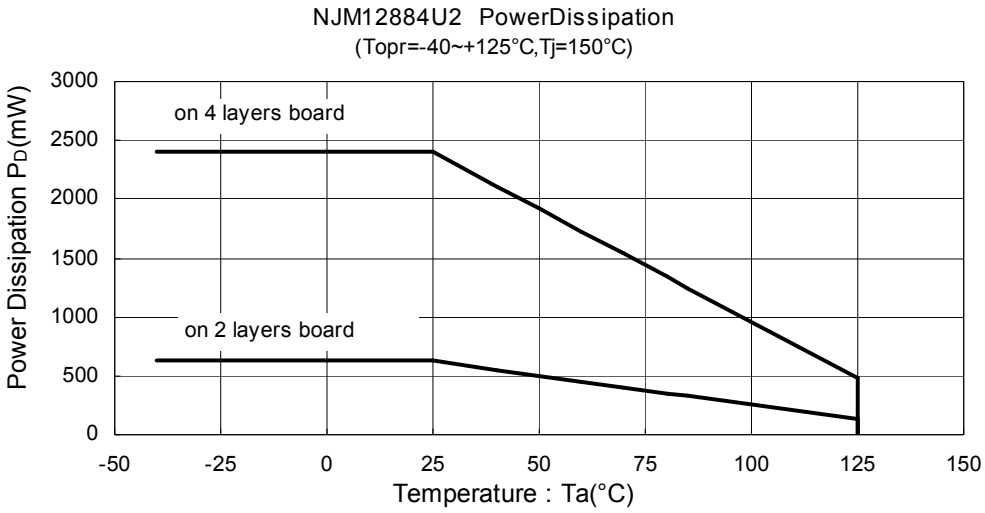

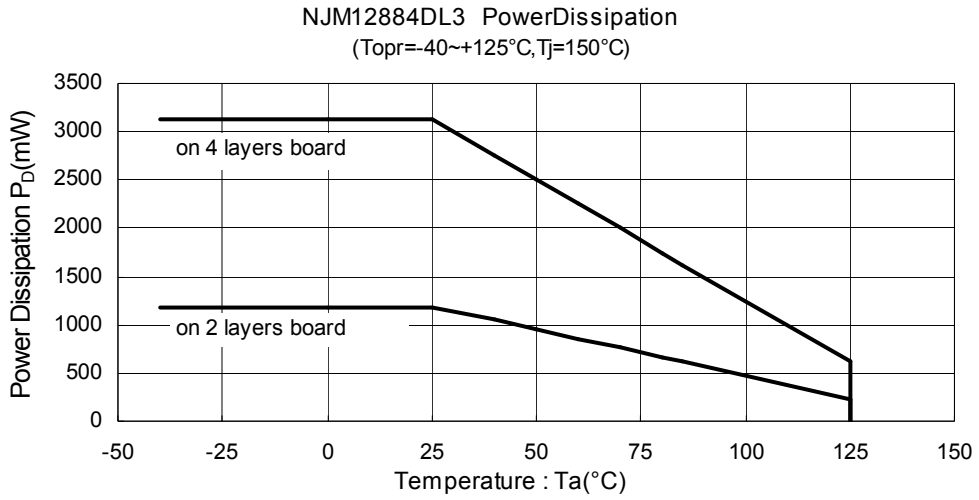

■ TEST CIRCUIT

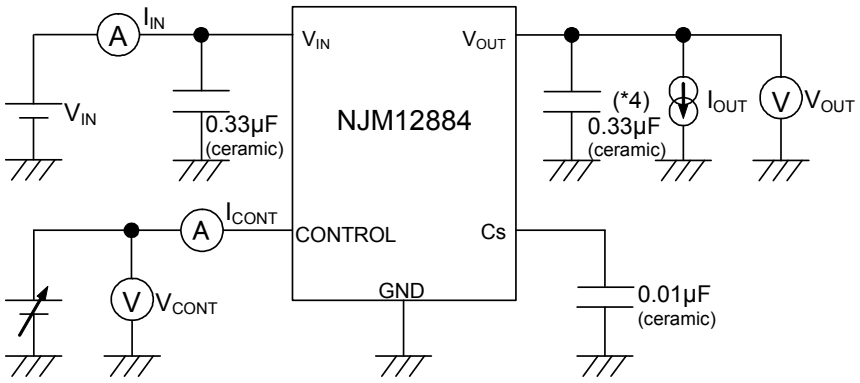

*4: 2.9V<Vo≤3.4V version :Co=0.47μF(Ceramic)
1.7V<Vo≤2.9V version :Co=2.2μF(Ceramic)
Vo≤1.7V version :Co=4.7μF(Ceramic)

■ TYPICAL APPLICATION

1. In the case where ON/OFF Control is not required

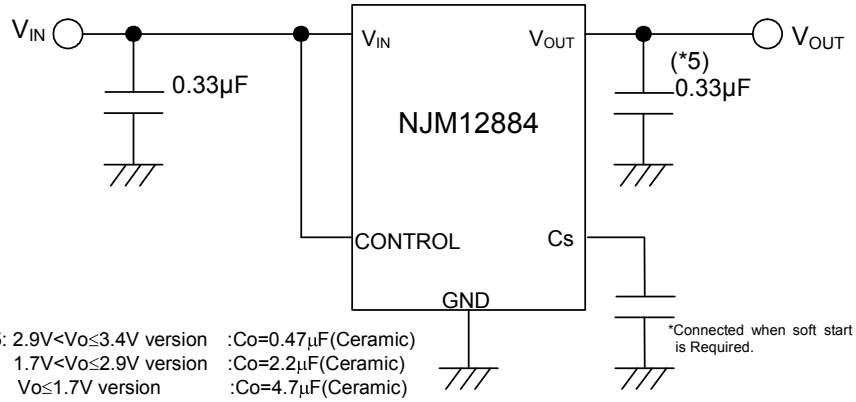

*5: 2.9V<Vo≤3.4V version :Co=0.47μF(Ceramic)
1.7V<Vo≤2.9V version :Co=2.2μF(Ceramic)
Vo≤1.7V version :Co=4.7μF(Ceramic)

Connect CONTROL Pin to V_{IN} Pin

2. In use of ON/OFF CONTROL

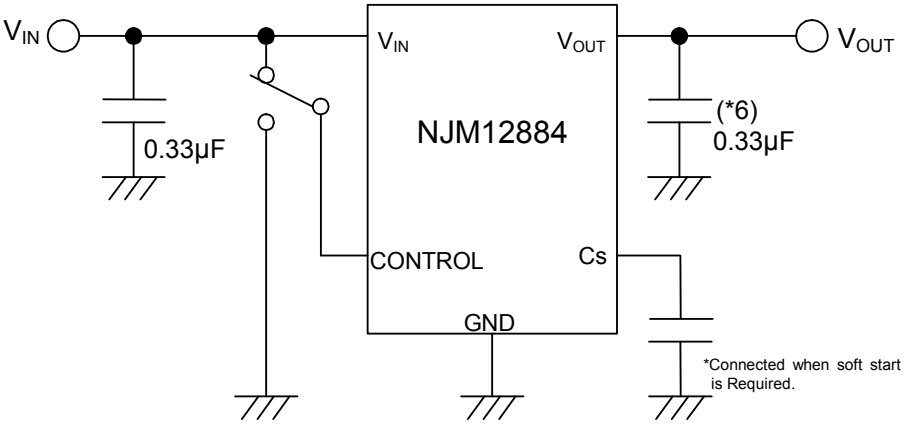

*6: 2.9V<Vo≤3.4V version :Co=0.47μF(Ceramic)
1.7V<Vo≤2.9V version :Co=2.2μF(Ceramic)
Vo≤1.7V version :Co=4.7μF(Ceramic)

State of CONTROL Pin:
"H" → output is enabled.
"L" or "open" → output is disabled

*Reverse Current Protection

The NJM12884 has built-in Reverse Current Protection circuit.

This circuit prevents the large reverse current when output voltage is higher than input voltage.

Therefore external schottky-barrier diode(SBD) is not required

*Soft Start capacitor Cs

The Soft Start function can control the rise time of Output Voltage and reduce the inrush current by connecting the Cs capacitor.

The Soft Start time is defined as 10% to 90% of the Output Voltage.

The Cs capacitor is not essential, but it used for noise bypass of bandgap reference either. Therefore Output Noise Voltage increases when the capacitor isn't connected.

If the Cs capacitor is not used, the Cs Pin should be OPEN.

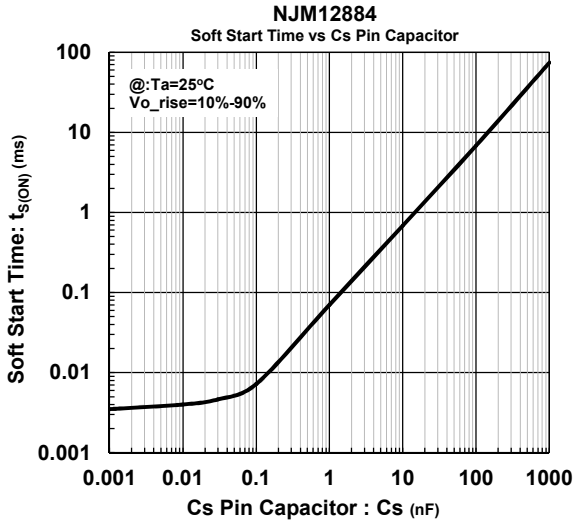

Soft-Start Time vs. Cs Pin Capacitor

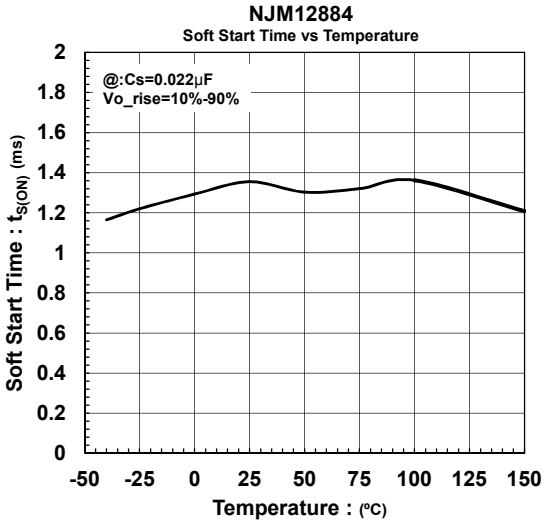

Soft-Start Time (0.022µF) vs. Temperature

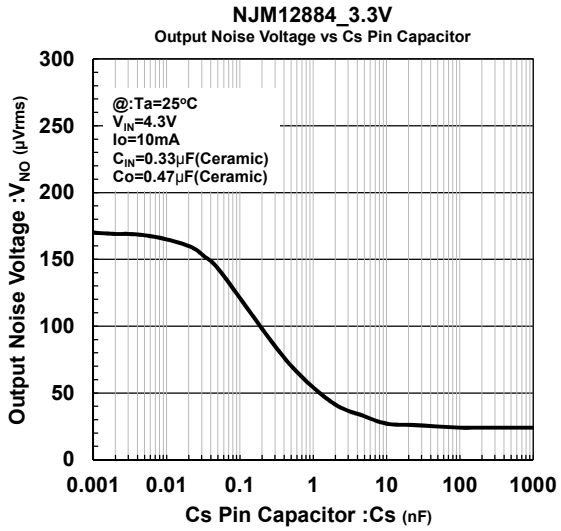

Output Noise Voltage vs. Cs Pin Capacitor

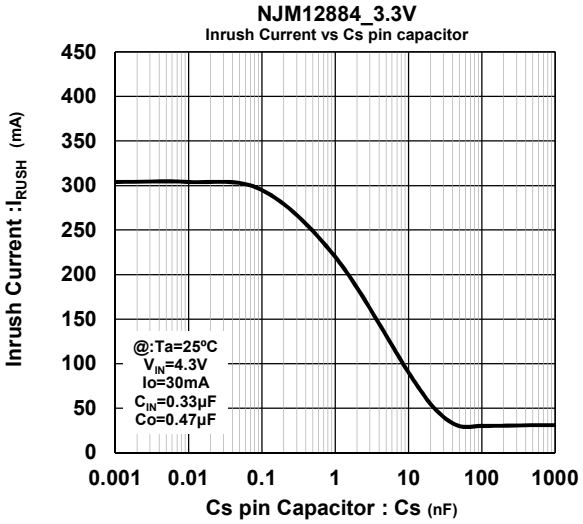

Inrush Current vs. Cs Pin Capacitor

*Discharge Function

The NJM12884 has a built-in discharge circuit to discharge the charged output capacitors.

Discharge circuit operates when the CONTROL Pin is set in LOW level. The circuit discharges the charged output capacitors rapidly.

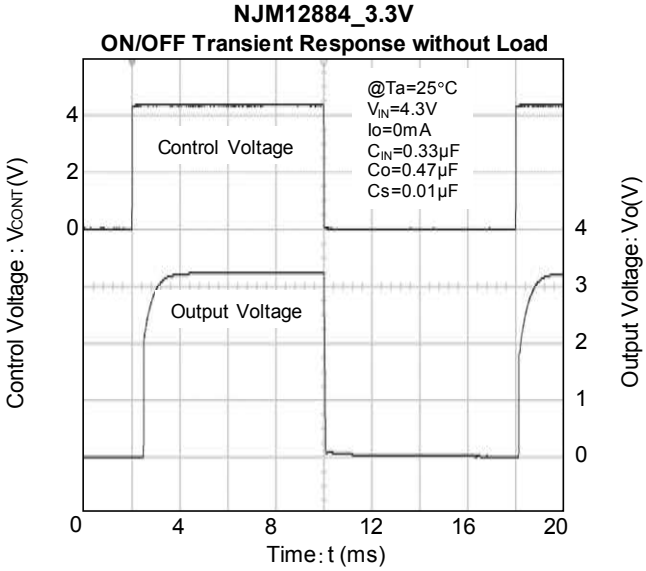

*Input Capacitor C_{IN}

The input capacitor C_{IN} is required to prevent oscillation and reduce power supply ripple for applications when high power supply impedance or a long power supply line.

Therefore, use the recommended C_{IN} value (refer to conditions of ELECTRIC CHARACTERISTIC) or larger and should connect between GND and V_{IN} as shortest path as possible to avoid the problem.

*Output Capacitor C_O

The output capacitor C_O will be required for a phase compensation of the internal error amplifier.

The capacitance and the equivalent series resistance (ESR) influence to stable operation of the regulator.

Use of a smaller C_O may cause excess an output noise or an oscillation of the regulator due to lack of the phase compensation.

On the other hand, use of a larger C_O reduces an output noise and a ripple output, and also improves an output transient response when a load rapidly changes.

Therefore, use the recommended C_O value (refer to conditions of ELECTRIC CHARACTERISTIC) or larger and should connect between GND and V_{OUT} as shortest path as possible for stable operation

The recommended capacitance depends on the output voltage rank. Especially, a low voltage regulator requires larger C_O value.

In addition, you should consider varied characteristics of capacitor (a frequency characteristic, a temperature characteristic, a DC bias characteristic and so on) and unevenness peculiar to a capacitor supplier enough.

When selecting C_O, recommend that have withstand voltage margin against an output voltage and superior temperature characteristics though this product is designed stability works with wide range ESR of capacitor including low ESR products.

■ TYPICAL CHARACTERISTICS

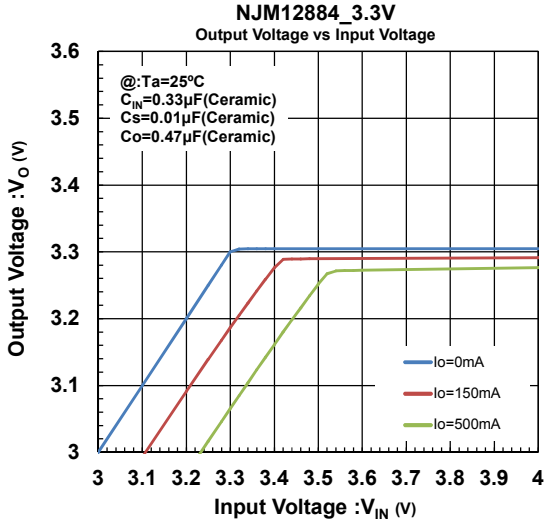

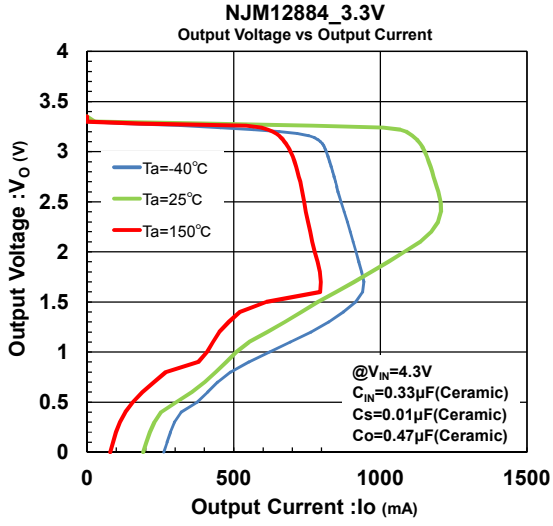

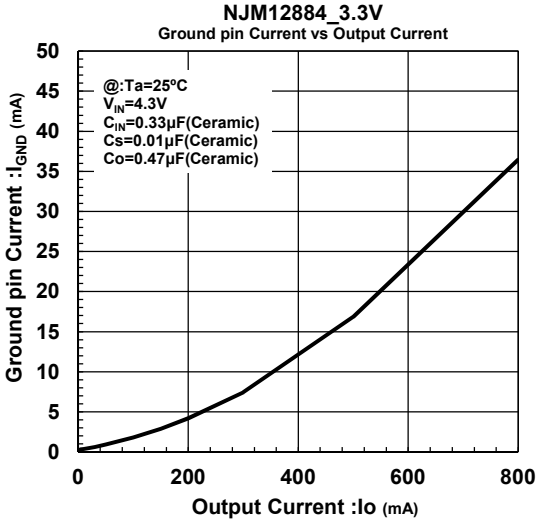

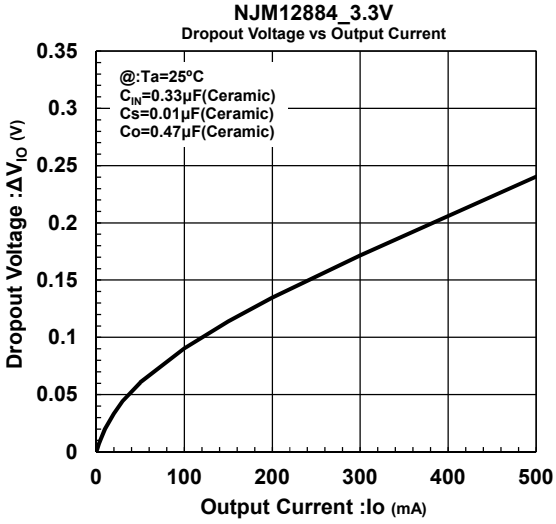

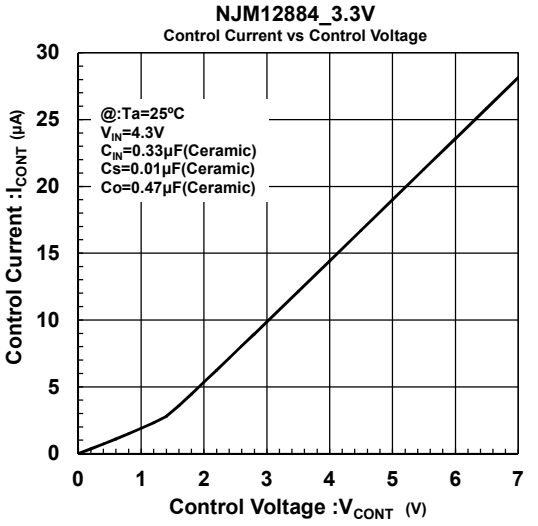

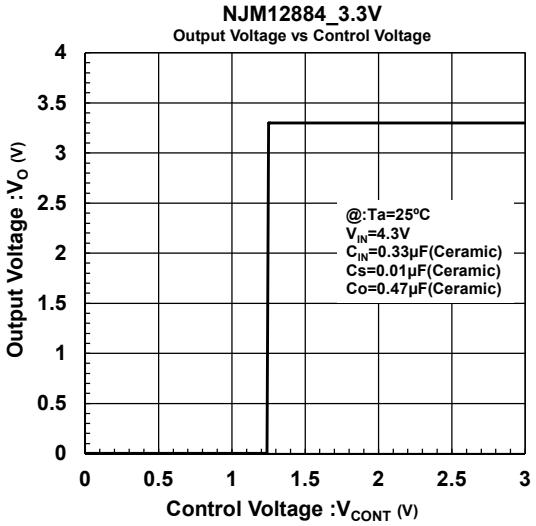

NJM12884_3.3V
Load Regulation vs Output Current

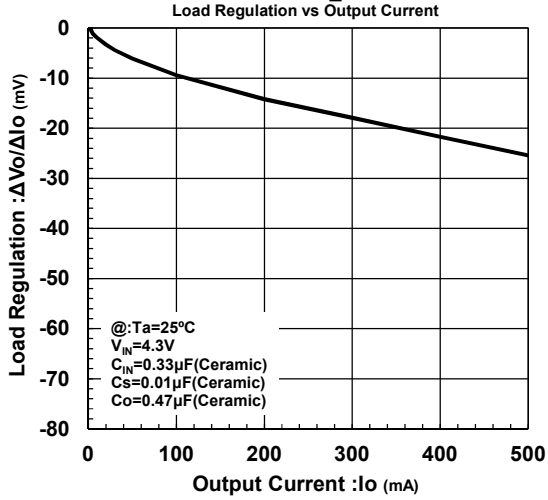

NJM12884_3.3V
Quiescent Current vs Input Voltage

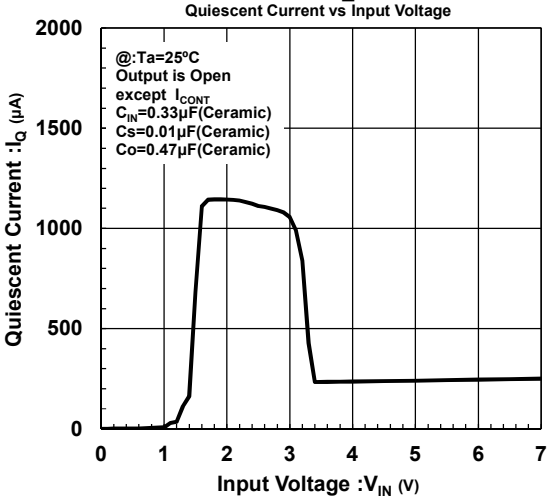

NJM12884_3.3V
Peak Output Current vs Input Voltae

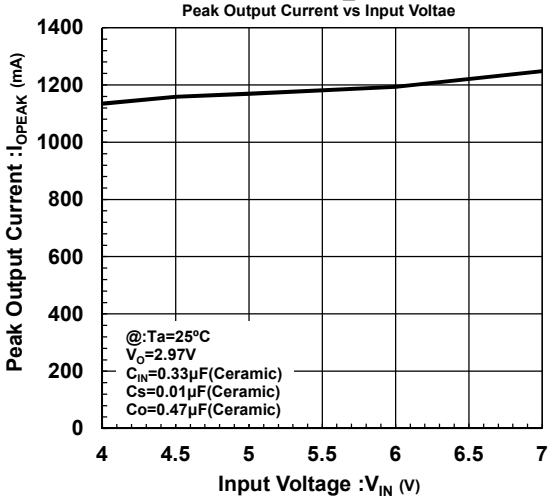

NJM12884_3.3V
Short Circuit Current vs Input Voltage

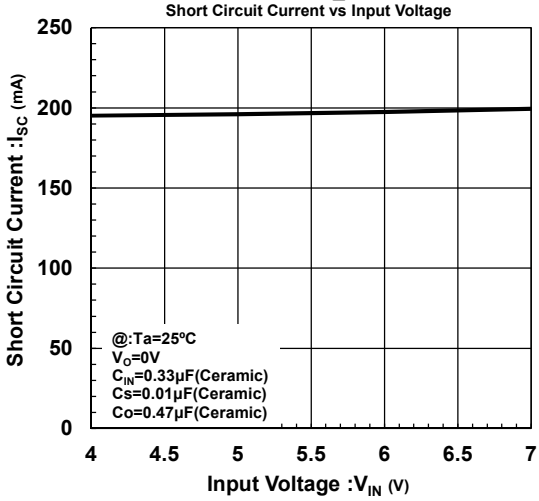

NJM12884_3.3V
Discharge Current vs Output Voltage

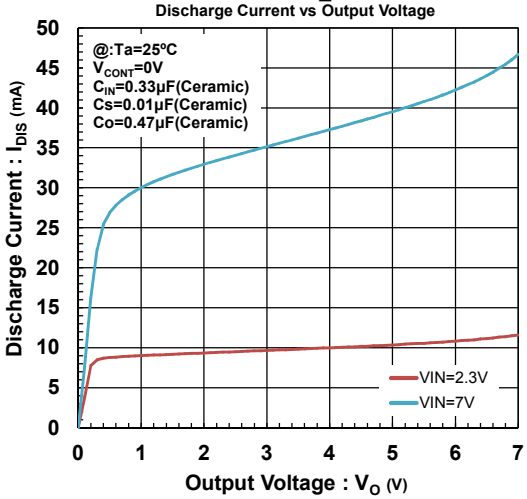

NJM12884_3.3V
Reverse Current vs Input Voltage

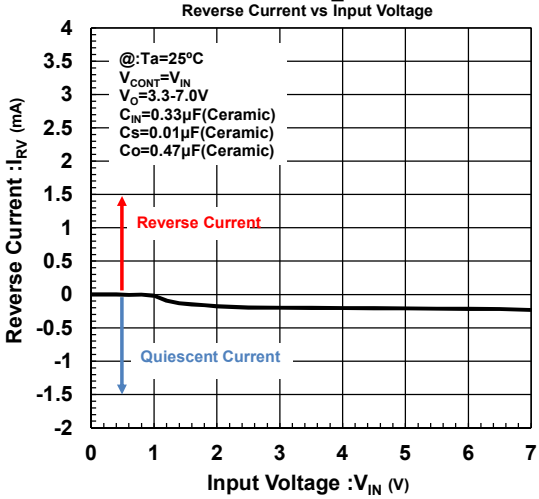

NJM12884_3.3V
Output Noise Voltage vs Output Current

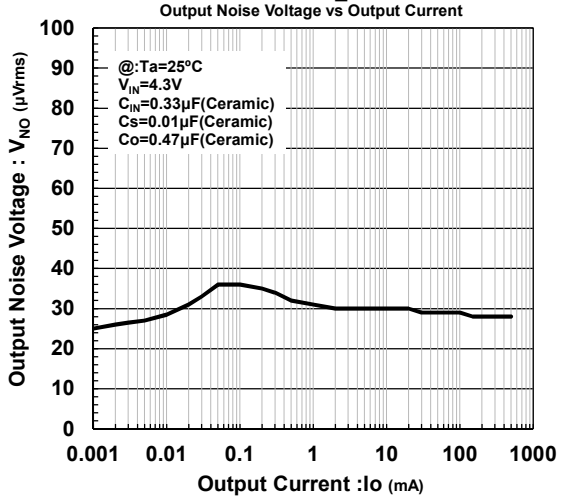

NJM12884_3.3V
Equivalent Series Resistance vs Output Current

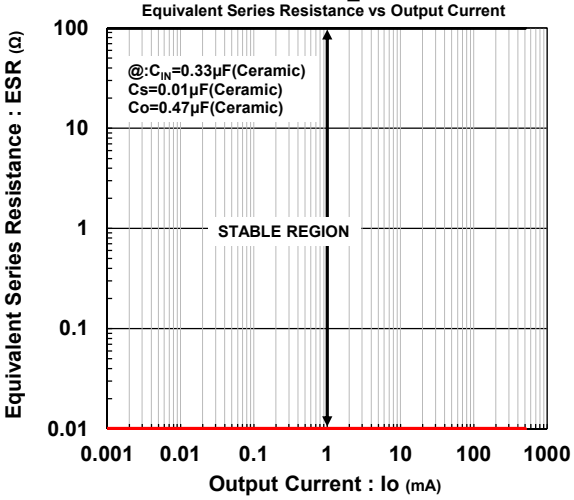

NJM12884_3.3V
Ripple Rejection vs Frequency

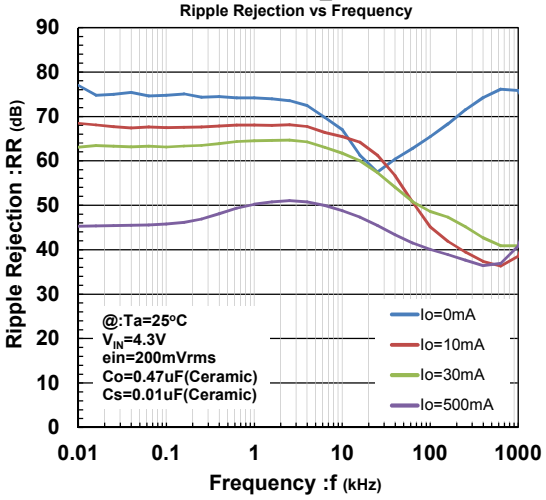

NJM12884_3.3V
Ripple Rejection vs Output Current

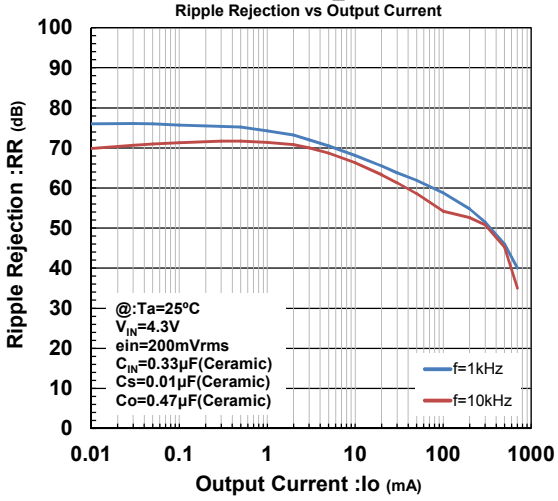

NJM12884_3.3V
Output Voltage vs Temperature

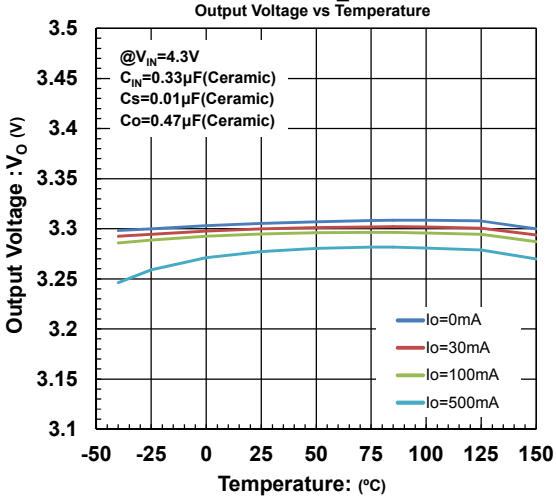

NJM12884_3.3V
Dropout Voltage vs Temperature

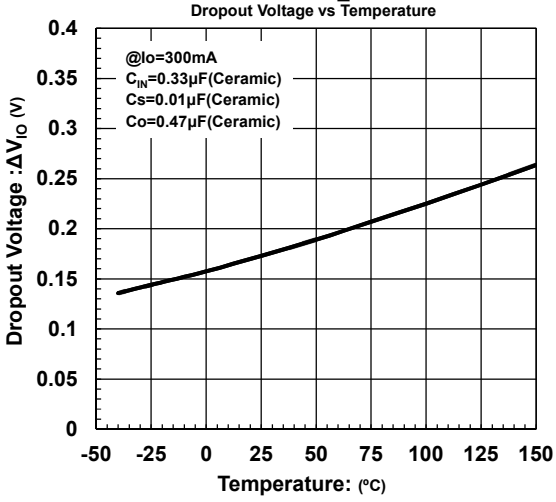

NJM12884_3.3V
Control Voltage vs Temperature

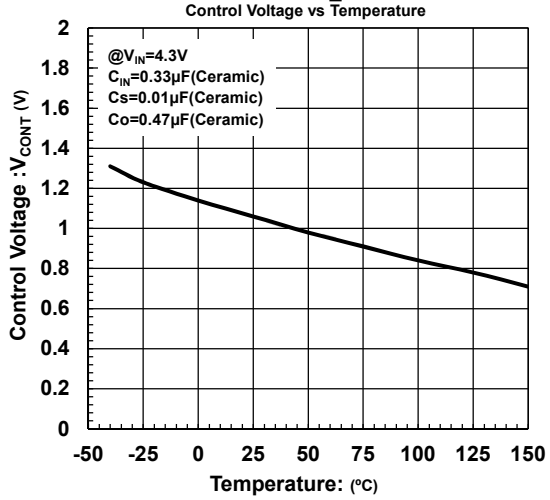

NJM12884_3.3V
Control Current vs Temperature

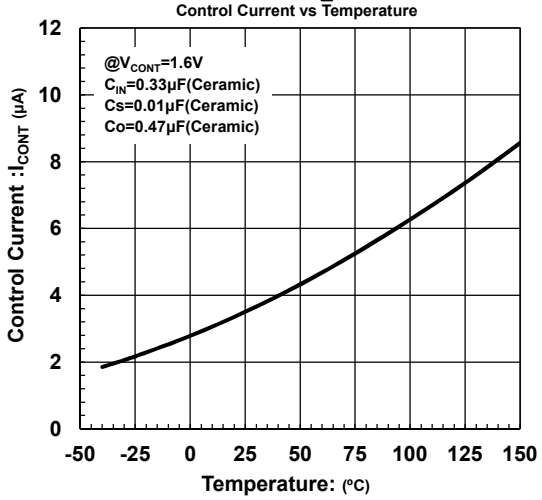

NJM12884_3.3V
Quiescent Current vs Temperature

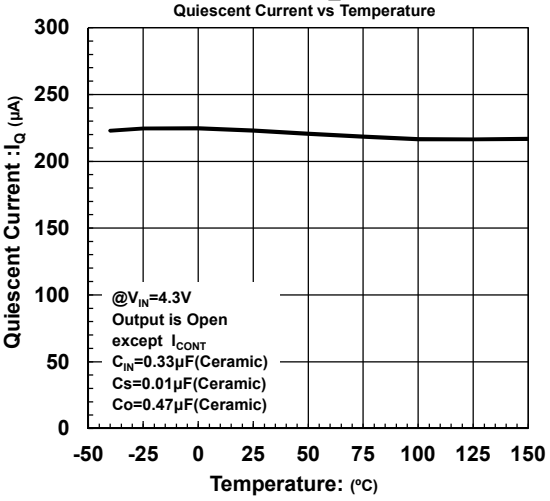

NJM12884_3.3V
Discharge Current vs Temperature

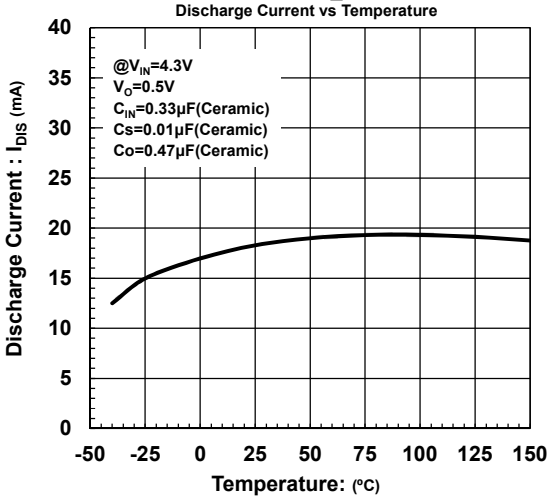

NJM12884_3.3V
Line Regulation vs Temperature

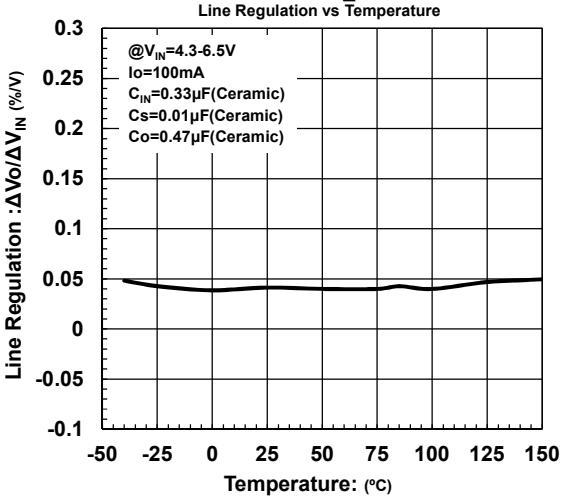

NJM12884_3.3V
Load Regulation vs Temperature

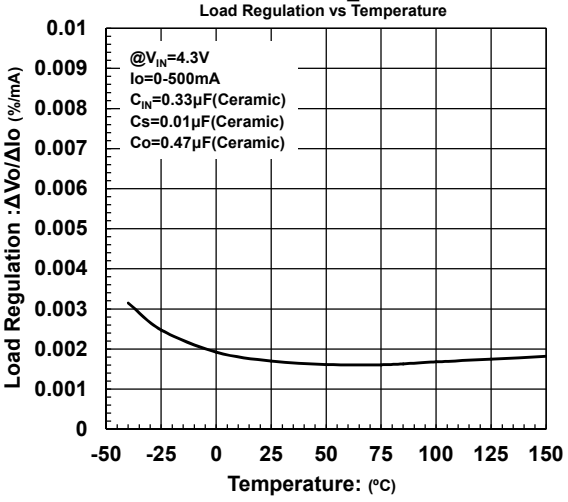

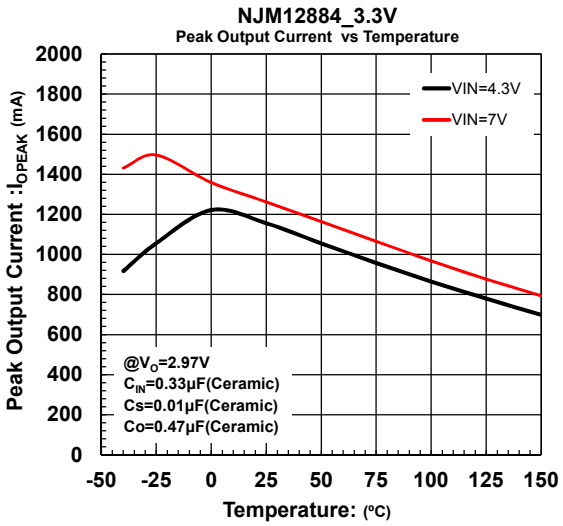
NJM12884_3.3V
Peak Output Current vs Temperature
Peak Output Current :I_{OPEAK} (mA)
2000
1800
1600
1400
1200
1000
800
600
400
200
0
-50 -25 0 25 50 75 100 125 150
Temperature: (°C)
VIN=4.3V
VIN=7V
@V_O=2.97V
C_{IN}=0.33µF(Ceramic)
Cs=0.01µF(Ceramic)
Co=0.47µF(Ceramic)

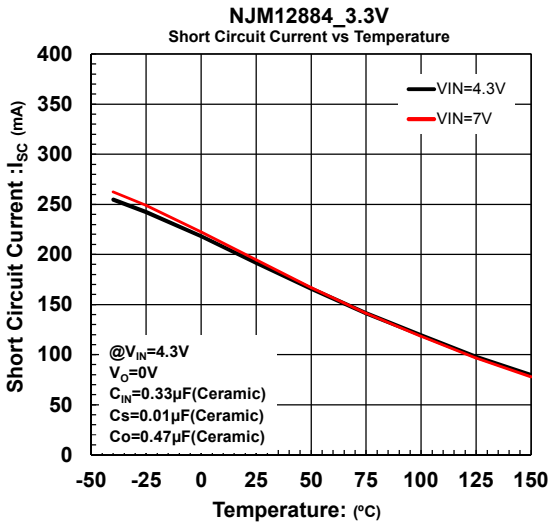
NJM12884_3.3V
Short Circuit Current vs Temperature
Short Circuit Current :I_{SC} (mA)
400
350
300
250
200
150
100
50
0
-50 -25 0 25 50 75 100 125 150
Temperature: (°C)
VIN=4.3V
VIN=7V
@V_{IN}=4.3V
V_O=0V
C_{IN}=0.33µF(Ceramic)
Cs=0.01µF(Ceramic)
Co=0.47µF(Ceramic)

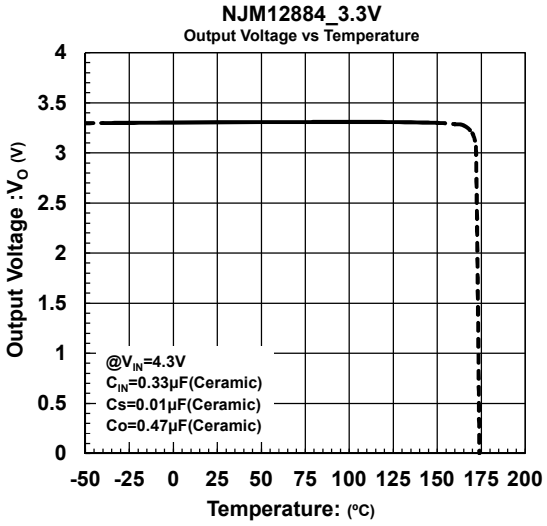
NJM12884_3.3V
Output Voltage vs Temperature
Output Voltage :V_O (V)
4
3.5
3
2.5
2
1.5
1
0.5
0
-50 -25 0 25 50 75 100 125 150 175 200
Temperature: (°C)
@V_{IN}=4.3V
C_{IN}=0.33µF(Ceramic)
Cs=0.01µF(Ceramic)
Co=0.47µF(Ceramic)

NJM12884_3.3V
Load Transient Response

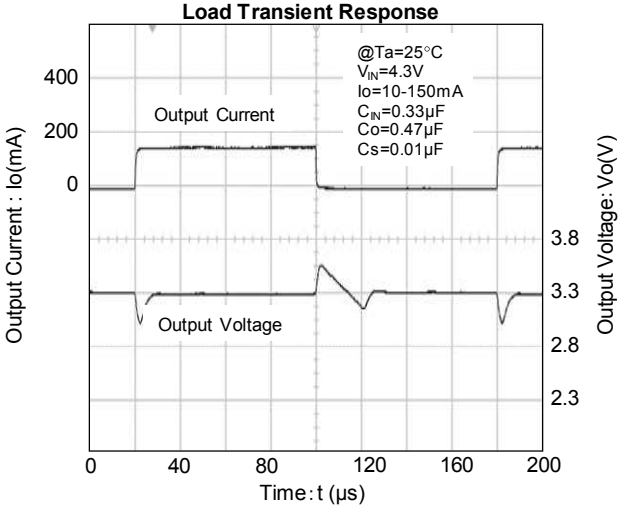

NJM12884_3.3V
Load Transient Response

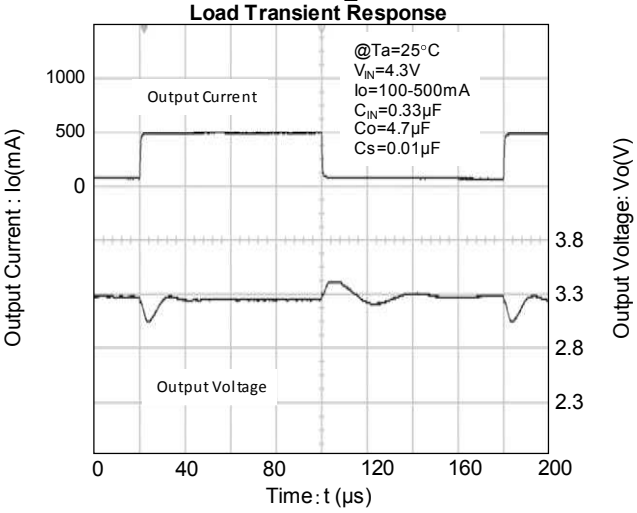

NJM12884_3.3V
Input Transient Response

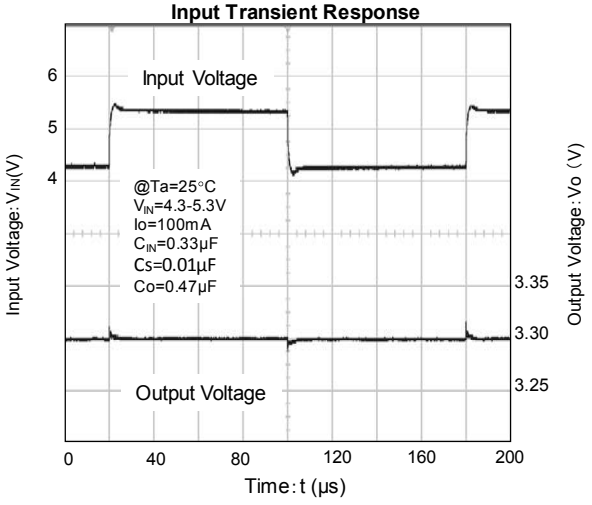

NJM12884_3.3V
ON/OFF Transient Response

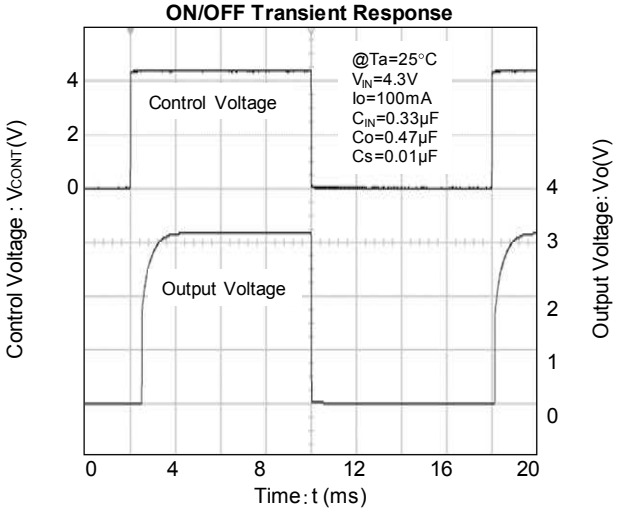

NJM12884_3.3V
CONTROL_ON Delay Time

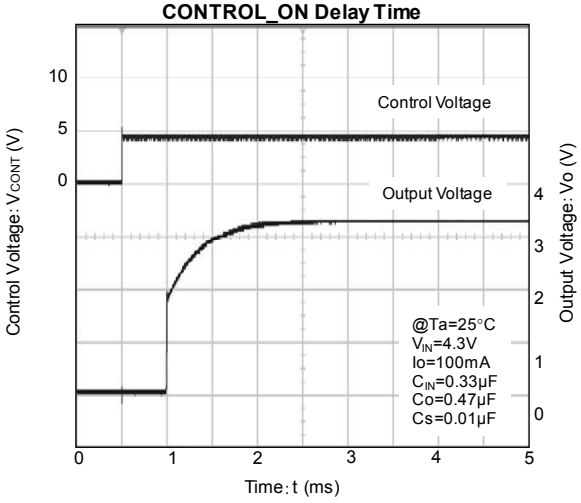

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

NJM12884U2-05-TE1 NJM12884DL3-25-TE1 NJM12884U2-25-TE1 NJM12884U2-15-TE1 NJM12884DL3-15-TE1
NJM12884DL3-05-TE1 NJM12884DL3-18-TE1 NJM12884U2-33-TE1 NJM12884U2-18-TE1 NJM12884DL3-33-TE1

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.