

MAXIM

Ultra-Small, Hex Voltage, Microprocessor Supervisor

MAX16055

General Description

The MAX16055 precision hex voltage microprocessor (μ P) supervisory circuit monitors up to six system-supply voltages and asserts a single reset when any one supply voltage drops below its preset threshold. The device significantly reduces system size and component count while improving reliability compared to multiple ICs or discrete components.

A variety of factory-trimmed threshold voltages are available to accommodate different supply voltages and tolerance with minimal external components. The MAX16055 includes internally fixed threshold options for monitoring 3.3V, 3.0V, 2.5V, 1.8V, 1.5V, 1.2V, 1.1V, 1.0V, and 0.9V supplies with -5% or -10% tolerance. The MAX16055 is also available with one to five adjustable threshold inputs to monitor voltages down to 0.5V.


A single active-low, open-drain output asserts when any monitored input falls below its associated threshold. The reset output features a weak internal pullup (typically 70 μ A) to supply input IN1. The reset output remains low for the reset timeout period (140ms, min) after all voltages rise above the selected thresholds. The reset output remains valid as long as either IN1 or IN2 input voltage is above 1V. The MAX16055 is available in a small 10-pin μ MAX® (3mm x 3mm) package. The MAX16055 operates over the -40°C to +125°C automotive temperature range.

Applications

Telecommunications	Networking Equipment
High-End Printers	Industrial Equipment
Desktop and Notebook Computers	Set-Top Boxes
Data Storage Equipment	Servers/Workstations

μ MAX is a registered trademark of Maxim Integrated Products, Inc.

Pin Configuration

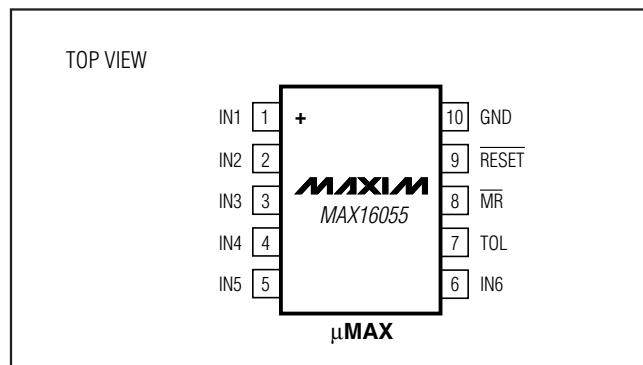

- ## **Features**
- ◆ Precision Factory-Set Reset Threshold Options
3.3V, 3.0V, 2.5V, 1.8V, 1.5V, 1.2V, 1.1V, 1.0V, and
0.9V
 - ◆ Adjustable Voltage Threshold Monitors Down to
0.5V with 1.5% Accuracy
 - ◆ Open-Drain RESET Output with 70 μ A Internal
Pullup
 - ◆ Fixed 140ms (min) Reset Timeout Period
 - ◆ Manual Reset Input
 - ◆ Reset Valid for IN1 \geq 1V or IN2 \geq 1V
 - ◆ Tolerance Select (5%/10%) Input
 - ◆ Immune to Short Supply Transients


Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX16055_AUB+*	-40°C to +125°C	10 μ MAX

+Denotes a lead(Pb)-free/RoHS-compliant package.

*Insert the desired threshold option letter from the Selector Guide into the blank to complete the part number. Contact factory for availability.

Typical Operating Circuit

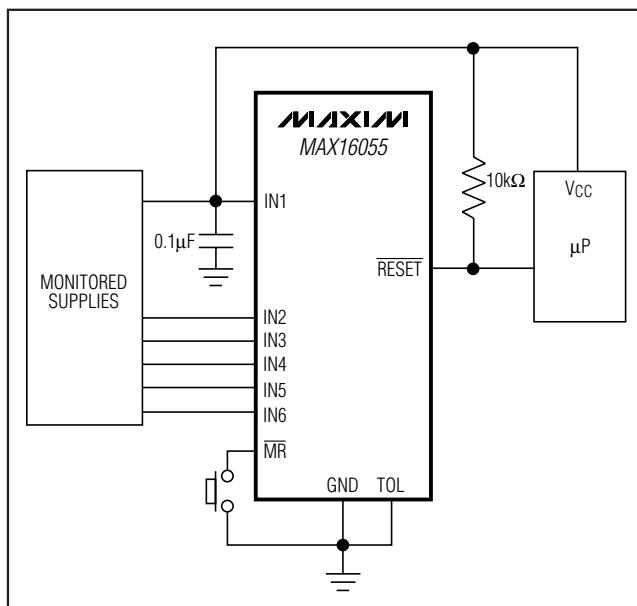**MAXIM**

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Ultra-Small, Hex Voltage, Microprocessor Supervisor

ABSOLUTE MAXIMUM RATINGS

RESET, TOL, \overline{MR} , IN_ to GND	-0.3V to +6V
Input/Output Current (all pins)	20mA
Continuous Power Dissipation ($T_A = +70^\circ C$)	444mW
10-Pin μ MAX (derate 5.6mW/ $^\circ C$ above $+70^\circ C$)	444mW

Operating Temperature Range	-40°C to +125°C
Storage Temperature Range	-65°C to +150°C
Junction Temperature	+150°C
Lead Temperature (soldering, 10s)	+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_{IN1} = 1V$ to $5.5V$, $T_A = -40^\circ C$ to $+125^\circ C$, unless otherwise noted. Typical values are at $V_{IN1} = 3.3V$, $T_A = +25^\circ C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Voltage Range	V_{IN1}	(Note 2)	1.0	5.5		V
Input Current (Note 3)	$I_{IN_}$	$V_{IN_}$ = nominal input voltage (for $IN2-IN6$; 3.3V, 3.0V, 2.5V, 1.8V, 1.5V, 1.2V, 1.1V, 1.0V, 0.9V supplies)		25	40	μA
		V_{IN1} = nominal input voltage (for +3.3V $IN1$ supply)		55	115	
		$V_{IN_} = 0$ to $0.5V$ or V_{ADJ} (for adjustable thresholds)	-0.1		+0.1	
Threshold Voltage	V_{TH}	$V_{IN_}$ decreasing	3.3V, TOL = GND	3.00	3.08	3.15
			3.3V, TOL = V_{IN1}	2.85	2.93	3.00
			3.0V, TOL = GND	2.70	2.78	2.85
			3.0V, TOL = V_{IN1}	2.55	2.63	2.70
			2.5V, TOL = GND	2.25	2.32	2.38
			2.5V, TOL = V_{IN1}	2.13	2.19	2.25
			1.8V, TOL = GND	1.62	1.67	1.71
			1.8V, TOL = V_{IN1}	1.53	1.58	1.62
			1.5V, TOL = GND	1.355	1.389	1.425
			1.5V, TOL = V_{IN1}	1.283	1.316	1.350
			1.2V, TOL = GND	1.084	1.112	1.140
			1.2V, TOL = V_{IN1}	1.027	1.053	1.08
			1.1V, TOL = GND	0.993	1.019	1.045
			1.1V, TOL = V_{IN1}	0.941	0.965	0.99
			1.0V, TOL = GND	0.903	0.926	0.95
			1.0V, TOL = V_{IN1}	0.856	0.878	0.90
			0.9V, TOL = GND	0.813	0.834	0.855
			0.9V, TOL = V_{IN1}	0.770	0.790	0.810

Ultra-Small, Hex Voltage, Microprocessor Supervisor

ELECTRICAL CHARACTERISTICS (continued)

(V_{IN1} = 1V to 5.5V, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at V_{IN1} = 3.3V, T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT		
Adjustable Threshold	V_{TH}	$V_{IN_}$ decreasing	0.491	0.5	0.506	V		
			0.465	0.472	0.479			
Reset Threshold Hysteresis	V_{HYST}	$V_{IN_}$ increasing relative to $V_{IN_}$ decreasing	0.3		% V_{TH}			
Reset Threshold Temperature Coefficient			60		ppm/°C			
IN ₁ to Reset Delay	t_{RD}	$V_{IN_}$ falling at 10mV/μs from ($V_{TH} + 50mV$) to ($V_{TH} - 50mV$)	20		μs			
Reset Timeout Period	t_{RP}		140	200	280	ms		
RESET Output Low (Note 4)	V_{OL}	$V_{IN1} = 5V$, $I_{SINK} = 2mA$	0.3		V			
		$V_{IN1} = 2.5V$, $I_{SINK} = 1.2mA$	0.4					
		$V_{IN1} = 1.0V$, $I_{SINK} = 50μA$	0.3					
RESET Output High	V_{OH}	$V_{IN1} > 2.55V$, $I_{SOURCE} = 6μA$ (min), RESET not asserted	0.8 x V_{IN1}	V				
RESET Output High Source Current	I_{OH}	$V_{IN1} > 2.55V$, RESET not asserted	70		μA			
TOL Input Current		$TOL = V_{IN1}$	100		nA			
MR, TOL Input Voltage Low	V_{IL}		0.3 x V_{IN1}		V			
MR, TOL Input Voltage High	V_{IH}		0.7 x V_{IN1}	V				
MR Minimum Pulse Width			1		μs			
MR Glitch Rejection			100		ns			
MR-to-RESET Delay			200		ns			
MR Pullup Resistance			10	20	33	kΩ		

Note 1: 100% production tested at T_A = +25°C. Limits over temperature guaranteed by design.

Note 2: The devices are powered from IN1.

Note 3: Monitored IN1 voltage is also the device power supply.

Note 4: RESET output is guaranteed to be in the correct state for IN1 or IN2 falling down to 1V.

MAX16055


Ultra-Small, Hex Voltage, Microprocessor Supervisor

MAX16055


Typical Operating Characteristics

($V_{IN1} = 3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)


**IN1 INPUT CURRENT
vs. TEMPERATURE**

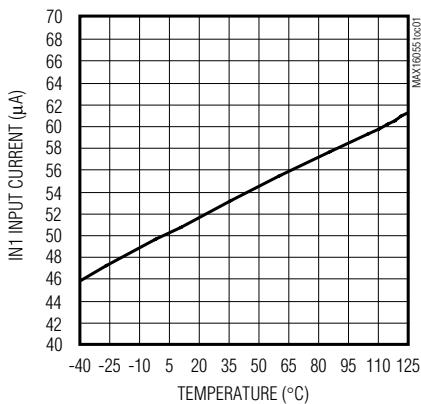


**IN1 INPUT CURRENT
vs. IN1 VOLTAGE**

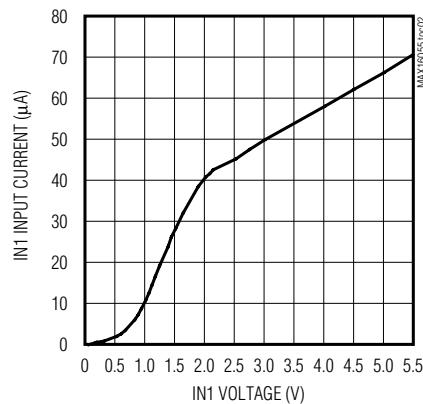


**NORMALIZED THRESHOLD ERROR
vs. TEMPERATURE**

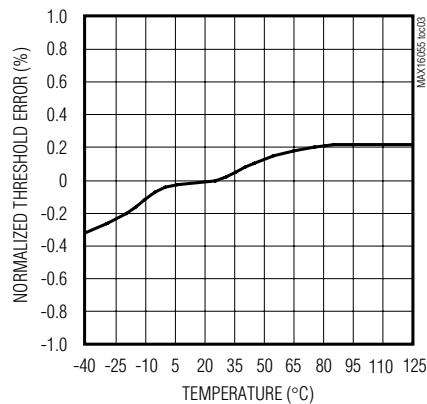


**MAXIMUM IN_ TRANSIENT DURATION
vs. RESET THRESHOLD OVERDRIVE**

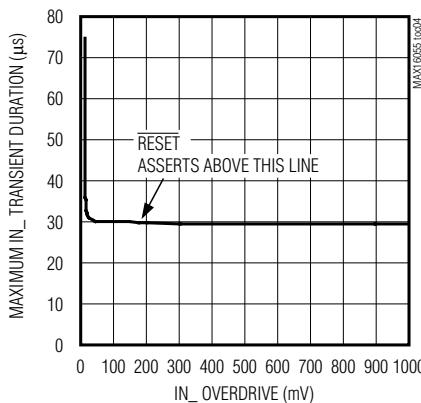


**RESET PROPAGATION DELAY
vs. RESET THRESHOLD OVERDRIVE
(IN_ DECREASING)**

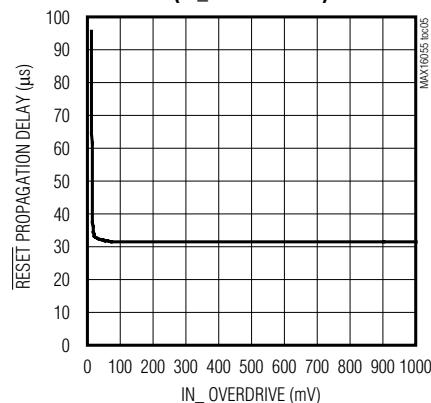


**RESET PULLUP AND PULLDOWN
RESPONSE ($C_L = 47\text{pF}$)**

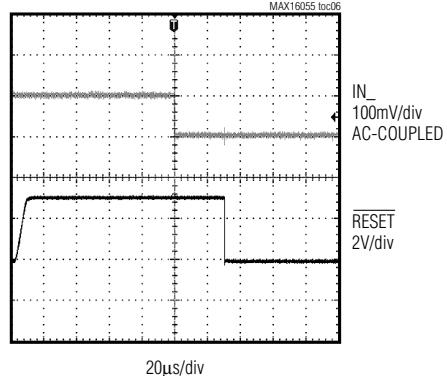

**RESET TIMEOUT PERIOD
vs. TEMPERATURE**

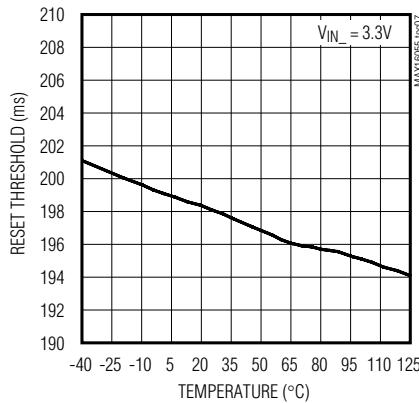



**MR-TO-RESET PROPAGATION DELAY
vs. TEMPERATURE**

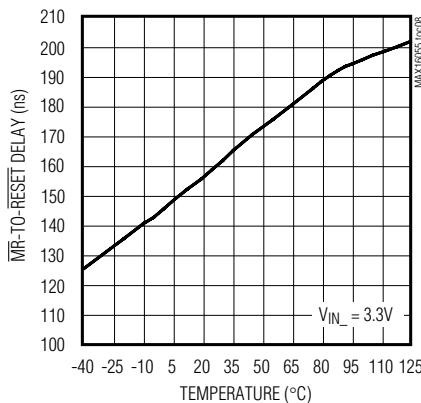

Ultra-Small, Hex Voltage, Microprocessor Supervisor

Typical Operating Characteristics (continued)

($V_{IN1} = 3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)

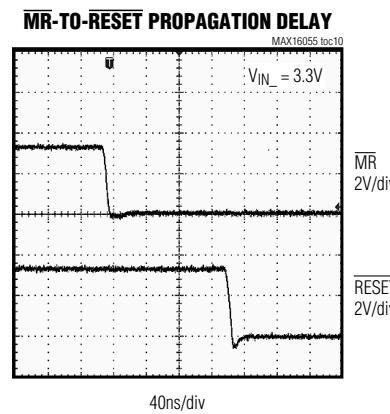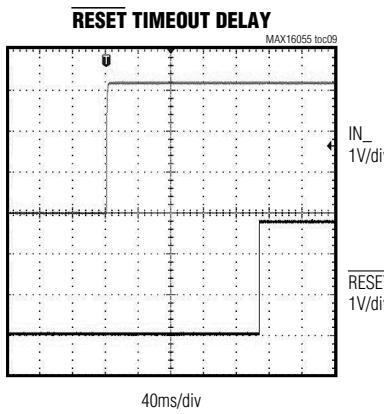

MAX16055

Pin Description

PIN	NAME	FUNCTION
1	IN1	Voltage Input 1. IN1 is the power-supply input and voltage monitoring input for the device. Connect a $0.1\mu F$ bypass capacitor from IN1 to GND. Keep IN1 or IN2 > 1V to ensure $\overline{\text{RESET}}$ is valid.
2	IN2	Voltage Input 2. See the <i>Selector Guide</i> for voltage threshold. Keep IN1 or IN2 > 1V to ensure $\overline{\text{RESET}}$ is valid.
3	IN3	Voltage Input 3. See the <i>Selector Guide</i> for voltage threshold.
4	IN4	Voltage Input 4. See the <i>Selector Guide</i> for voltage threshold.
5	IN5	Voltage Input 5. See the <i>Selector Guide</i> for voltage threshold.
6	IN6	Voltage Input 6. See the <i>Selector Guide</i> for voltage threshold.
7	TOL	Threshold Tolerance Input. Connect TOL to GND to select thresholds 5% below nominal. Connect TOL to IN1 to select thresholds 10% below nominal.
8	$\overline{\text{MR}}$	Active-Low Manual-Reset Input. When $\overline{\text{MR}}$ is low, $\overline{\text{RESET}}$ goes low and remains asserted for the reset timeout period after $\overline{\text{MR}}$ is pulled high. $\overline{\text{MR}}$ is internally pulled high by a $20k\Omega$ pullup resistor to IN1.
9	$\overline{\text{RESET}}$	Active-Low Reset Output. $\overline{\text{RESET}}$ goes low when any input (IN_) goes below the specified threshold. After all inputs rise above the specified threshold voltages, $\overline{\text{RESET}}$ remains low for 140ms (min) before going high. The open-drain $\overline{\text{RESET}}$ output features a weak ($70\mu A$) internal pullup to IN1.
10	GND	Ground

Ultra-Small, Hex Voltage, Microprocessor Supervisor

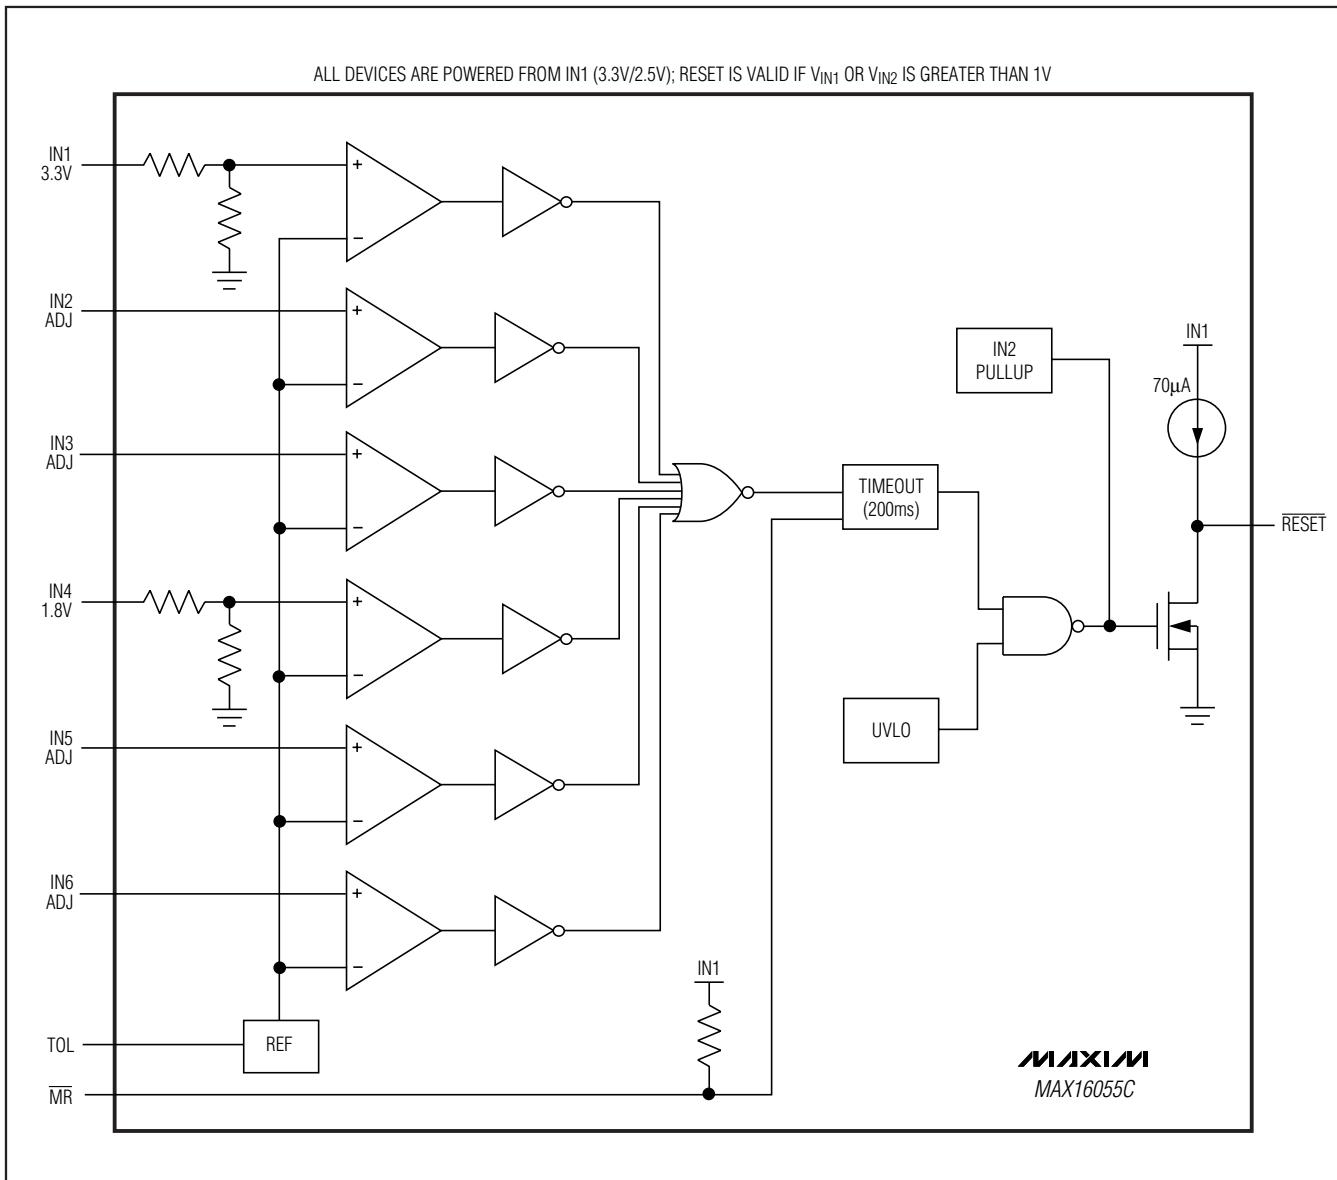


Figure 1. Functional Diagram

Detailed Description

The MAX16055 hex voltage µP supervisory circuit maintains system integrity in multisupply systems (Figure 1). The MAX16055 offers accurate, factory-fixed undervoltage threshold options for monitoring very low voltages. The MAX16055 also offers one to five adjustable thresholds for monitoring voltages down to 0.5V. See the *Selector Guide* for the available threshold options.

The MAX16055 includes an accurate voltage reference, precision comparators, and a series of accurate internal resistor-divider networks to set the factory-fixed reset threshold options for monitoring 3.3V, 3.0V, 2.5V, 1.8V, 1.5V, 1.2V, 1.1V, 1.0V, or 0.9V supplies. The resistor networks scale the specified IN₁ threshold voltages to match the internal reference voltage. Adjustable threshold options allow the monitored voltage to be connected to the input of the internal comparator. Use an external voltage-divider to set the threshold voltage.

Ultra-Small, Hex Voltage, Microprocessor Supervisor

The MAX16055 is immune to short IN_{_} transients. Each of the internal comparators provides a typical hysteresis of 0.3% with respect to the reset threshold. This built-in hysteresis improves the monitor's immunity to ambient noise without significantly reducing threshold accuracy. See the *Typical Operating Characteristics* for a glitch immunity graph labeled Maximum IN_{_} Transient Duration vs. Reset Threshold Overdrive.

Reset Output

The MAX16055 RESET output asserts low when any monitored IN_{_} voltage drops below the specified reset threshold. RESET remains low for the reset timeout period of 140ms (min) after all inputs rise above the respective thresholds (Figure 2). The RESET output is open drain with a weak internal pullup to the monitored IN1 supply (70µA typ). For many applications, no external pullup resistor is required to interface with other logic devices. Apply an external pullup resistor to any voltage from 0 to 5.5V when interfacing to different logic-supply voltages (Figure 3). Internal circuitry prevents reverse current flow from the external pullup voltage into the RESET output when RESET is not asserted. RESET asserts low upon power-up. After all IN_{_} inputs rise above the respective threshold voltages, RESET

remains low for the reset timeout period (Figure 4) before going high.

IN1 powers the MAX16055 and is also a monitored voltage. When any monitored supply drops below the threshold voltage, RESET asserts low and remains low while either IN1 or IN2 is above 1.0V.

Adjustable Thresholds

The MAX16055 includes monitor options with adjustable reset thresholds. The threshold voltage at each adjustable IN_{_} input is typically 0.5V. To monitor a voltage higher than 0.5V, connect a resistor-divider network to the circuit as shown in Figure 5:

$$V_{INTH} = 0.5V \times (R1 + R2)/R2$$

Therefore:

$$R1 = R2 ((V_{INTH}/0.5V) - 1)$$

Use high valued resistors (~ 100kΩ) to minimize current through the external resistors. Use lower valued resistors for greater accuracy. The MAX16055 includes an internal voltage clamp (1.5V typ) at each of the adjustable voltage inputs. An input voltage higher than 1.5V induces a higher input current.

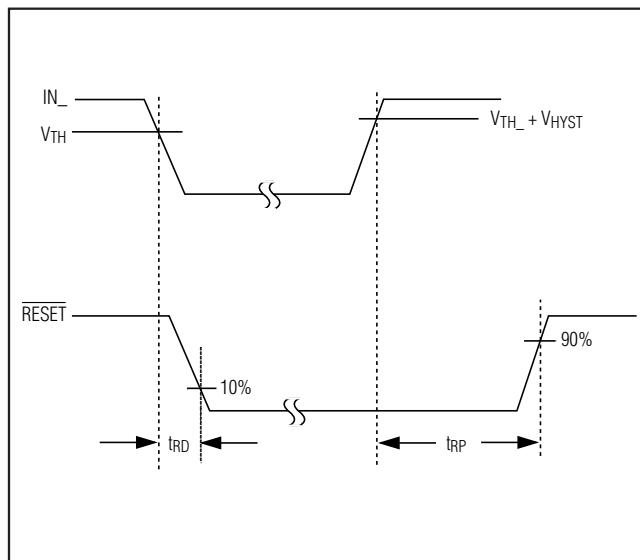


Figure 2. RESET Output Timing Diagram

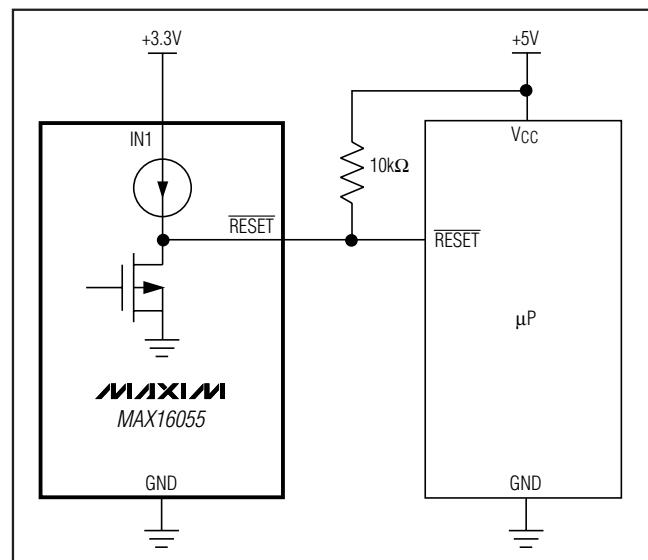


Figure 3. Interfacing with External Logic-Supply Voltage

Ultra-Small, Hex Voltage, Microprocessor Supervisor

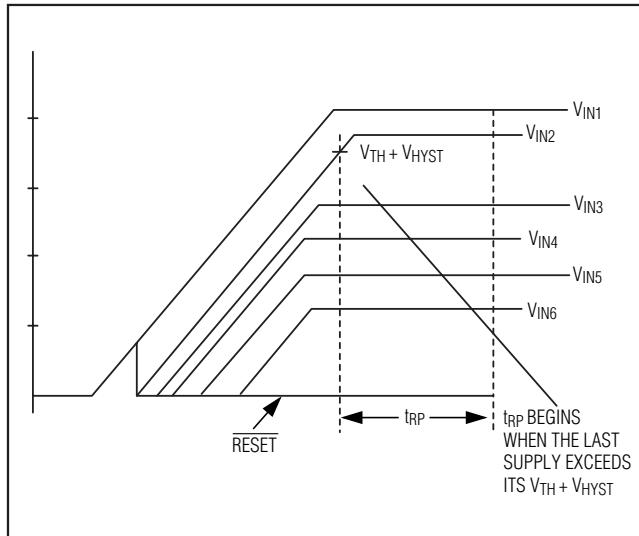


Figure 4. *RESET* Output with Various Input Voltages

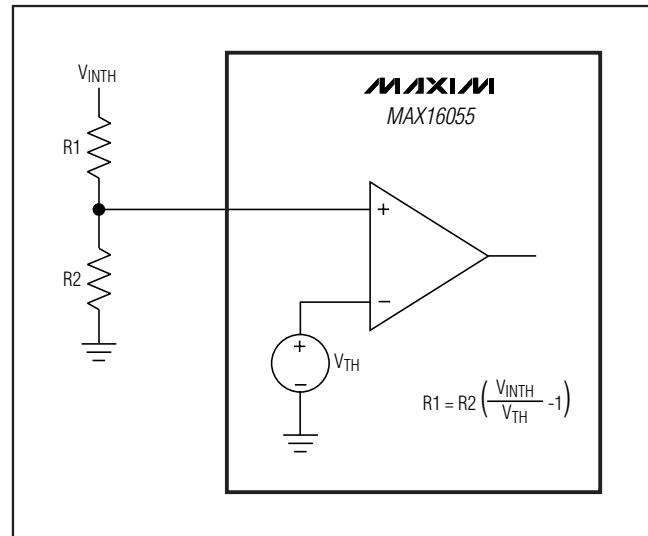


Figure 5. Setting the Adjustable Threshold

Manual-Reset Input (MR)

Many µP-based products require manual-reset capability. A logic-low on MR asserts RESET low. RESET remains asserted while MR is low, and during the reset timeout period (140ms, min) after MR returns high. The MR input has an internal 20kΩ pullup resistor to IN1. Connect a normally open momentary switch from MR to GND to create a manual-reset function. Connect a 0.1µF capacitor from MR to GND to provide additional noise immunity when driving MR from long cables or when the device is used in a noisy environment.

Tolerance (TOL)

The MAX16055 features an adjustable threshold tolerance. Connect TOL to GND to set the threshold voltages 5% below the nominal value. Connect TOL to IN1 to set the threshold voltages 10% below the nominal value. See the *Electrical Characteristics* table. Do not leave TOL unconnected.

Applications Information

Unused Inputs

Connect unused monitor inputs to a supply voltage higher than the specified threshold voltage. Connect a 100kΩ resistor between an unused adjustable input and IN1 to limit the bias current. Use IN1 for normal operation (device power supply). Do not connect unused monitor inputs to ground. Do not leave unused monitor inputs unconnected.

Reset Output Pullup Resistor

When connecting a pullup resistor from RESET to a voltage rail lower than the voltage on IN1, the internal 70µA pullup current flows through the pullup resistor, causing the voltage at RESET to be higher than the voltage rail when RESET is deasserted. Ensure that the value of the pullup resistor is low enough that the voltage rise does not cause problems.

Power-Supply Bypassing and Grounding

IN1 powers the MAX16055. Connect a 0.1µF bypass capacitor from IN1 to ground. All monitored inputs are immune to short supply transients. Add bypass capacitors from IN2–IN6 to GND to improve noise immunity.

Ultra-Small, Hex Voltage, Microprocessor Supervisor

Selector Guide

MAX16055

PART* (SUFFIX IN BOLD)	NOMINAL INPUT VOLTAGE (V)					
	IN1	IN2	IN3	IN4	IN5	IN6
MAX16055 A	3.3	2.5	1.5	1.8	1.2	0.9
MAX16055 B	3.3	3.0	1.8	1.5	1.1	1.0
MAX16055 C	3.3	ADJ	ADJ	1.8	ADJ	ADJ
MAX16055 D	3.3	ADJ	1.5	ADJ	ADJ	ADJ
MAX16055 E	3.3	2.5	ADJ	1.8	ADJ	ADJ
MAX16055 F	3.3	2.5	1.5	ADJ	ADJ	ADJ
MAX16055 G	3.3	2.5	ADJ	ADJ	ADJ	ADJ
MAX16055 H	3.3	ADJ	ADJ	ADJ	ADJ	ADJ
MAX16055 I	2.5	ADJ	ADJ	ADJ	ADJ	ADJ
MAX16055 J	3.3	3.3	2.5	1.2	1.5	1.2

*Adjustable voltage is based on the 0.5V internal threshold. External threshold voltage can be set using an external resistor-divider.
($V_{ADJ} = 0.500V$ typ).

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
10 µMAX	U10+2	21-0061

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

9

© 2009 Maxim Integrated Products

MAXIM is a registered trademark of Maxim Integrated Products, Inc.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.