# ISP1303o1

# High Performance Bluetooth V4.2 & ANT(1) Low Energy Module with MCU and Antenna

**This tiny LGA module, 8 x 11 x 1.2 mm, is based on the nRF51 series Chip. Its powerful Cortex™ M0 CPU, flash and RAM memory combined with an optimized antenna offers the perfect solution for Bluetooth connectivity. The solution is best in class for RF performance and low power consumption. All chip digital and analogue interfaces are available and give optimum capabilities for sensor integration.**

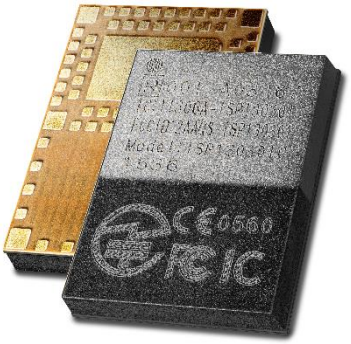

## Key Features

- Single Mode BLE V4.2 Compliant
- (1) ANT+ protocol in option
- IPv6 Connectivity
- ECDH Encryption
- Based on Nordic Semiconductor nRF51
- 2.4GHz low energy RF Transceiver
- 32bit ARM Cortex M0 CPU
- 256 kB Flash
- 16 kB or 32 kB SRAM in option
- 30 GPIOs including 6 ADC inputs and / or 2 ADC reference
- Ultra Low Power Consumption
- Single 1.8 to 3.6 V supply
- Very small size 8.0 x 11.0 x 1.2 mm
- Temperature -40 to +85 °C
- Fully integrated RF matching and Antenna
- Integrated 16 MHz Clock
- Integrated 32.768 kHz Synchronization
- DC-DC loading circuit fully integrated

## Applications

- Connected sensors for medical devices, healthcare, sport, fitness, industrial …
- IoT applications, connected objects
- Wearable technology
- Home automation
- Beacons

ANT+ Bluetooth® SMART

## Certifications

- Bluetooth SIG certified QDL listing
- Fully CE certified module
- Fully FCC certified module
- Fully IC certified module
- Fully IMOC certified module
- Fully TELEC certified module
- RoHS compliant


Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## Contents

**1. Block Diagram ..... 3**

**2. Specifications ..... 4**
2.1. Absolute Maximum Ratings ..... 4
2.2. Operating Conditions ..... 4
2.3. Power Consumption ..... 5
2.4. Clock Sources ..... 5
2.5. Radio Specifications ..... 5
2.6. Electrical Schematic ..... 8

**3. Pin Description ..... 9**

**4. Mechanical Outlines ..... 11**
4.1. Mechanical Dimensions ..... 11
4.2. SMT Assembly Guidelines ..... 12
4.3. Antenna Keep-Out Zone ..... 13

**5. Product Development Tools ..... 14**
5.1. Hardware ..... 14
5.2. Firmware ..... 14
5.3. Development Tools ..... 15

**6. Reference Designs ..... 16**
6.1. Sensor Board Design ..... 16
6.2. Beacon Design ..... 17

**7. Packaging & Ordering information ..... 18**
7.1. Marking ..... 18
7.2. Prototype Packaging ..... 18
7.3. Jedec Trays ..... 18
7.4. Tape and Reel ..... 19
7.5. Ordering Information ..... 20

**8. Storage & Soldering information ..... 21**
8.1. Storage and Handling ..... 21
8.2. Moisture Sensitivity ..... 21
8.3. Soldering information ..... 22

**9. Quality & User information ..... 23**
9.1. Certifications ..... 23
9.2. USA – User information ..... 23
9.3. Canada – User information ..... 23
9.4. Discontinuity ..... 24
9.5. Disclaimer ..... 24


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 1. Block Diagram

This module is based on nRF51 Nordic Semiconductor 2.4GHz wireless System on Chip (SoC) integrating a 2.4 GHz transceiver, a 32-bit ARM Cortex™-M0 CPU, a flash memory, a RAM and analog and digital peripherals.

It can support Bluetooth® Low Energy and 2.4GHz proprietary ultra low-power wireless protocols, such as Gazell from Nordic Semiconductor. The ANT / ANT+™ protocol can be handled in option.

Fully qualified BLE stacks for nRF51 are implemented in the S100 series of SoftDevices which can be freely downloaded. ISP130301 can then be used in Central, Peripheral or both roles for BLE and for both ends of other proprietary protocols. nRF51 platform also provides extensive software support for ANT applications with S210 SoftDevices and dual ANT/BLE stack S310 SoftDevices.

Ultra low power consumption and advanced power management enables battery lifetimes up to several years on a coin cell battery. Even though its very small size 8 x 11 x 1.2 mm, the module integrates decoupling capacitors, 16 MHz and 32.768 kHz crystals, load capacitors, DC-DC converter, RF matching circuit and antenna in addition to the wireless SoC.

Only the addition of a suitable DC power source is necessary for BLE and/or ANT connectivity. Sensor applications require the further addition of appropriate sensors. The antenna was designed to be optimized with several standard ground plane sizes.

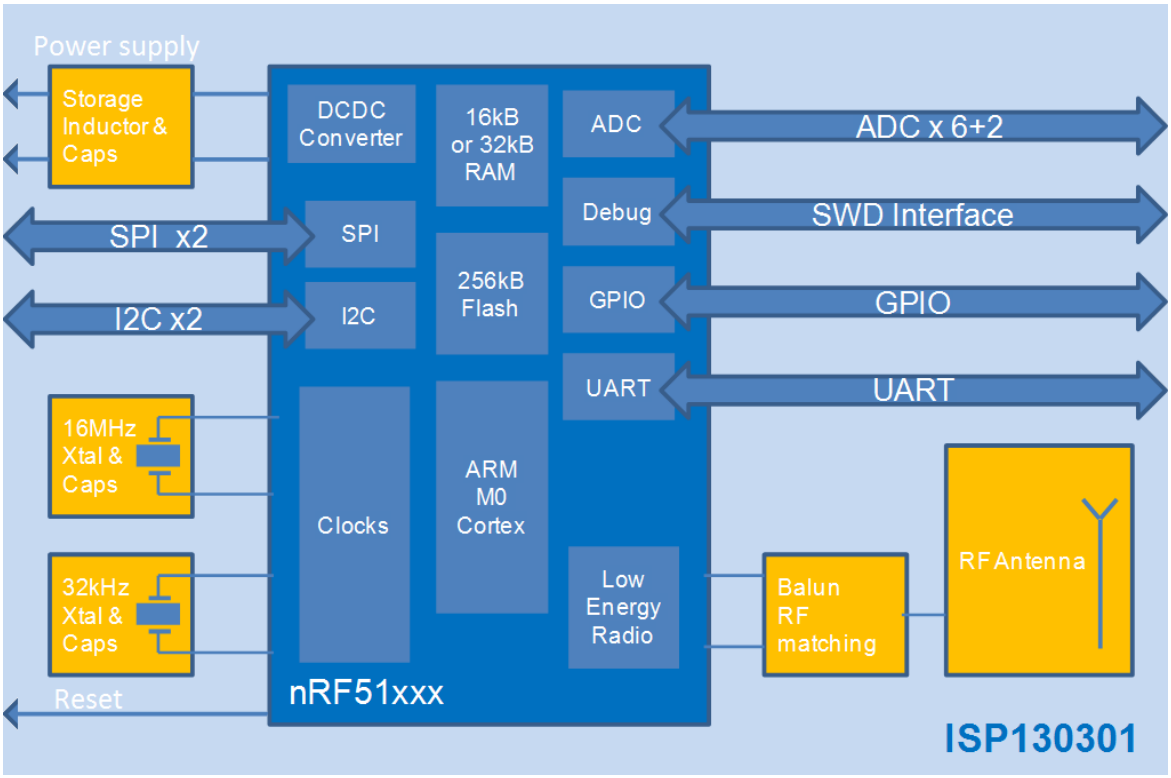



The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

# 2. Specifications

The specifications of the module follow those of the nRF51. The following high level parameters are given for the module.

## 2.1. Absolute Maximum Ratings

| Parameter | Min | Typ | Max | Unit |
|---|---|---|---|---|
| Supply Voltage respect to ground - VCC | -0.3 | | 3.9 | V |
| IO Pin Voltage | -0.3 | | VCC + 0.3 | V |
| Storage Temperature | -40 | | +125 | °C |
| Moisture Sensitivity Level | | | 5 | - |
| ESD Human Body Model | | | 4000 | V |
| ESD Charged Device Model | | | 500 | V |
| Flash Endurance | | | 20000 | cycles |

**ATTENTION**

CONSERVE PRECAUTION FOR HANDLING
ELECTROSTATIC SENSITIVE DEVICES

## 2.2. Operating Conditions

| Parameter | Min | Typ | Max | Unit |
|---|---|---|---|---|
| Operating Supply Voltage, internal LDO setup | 1.8 (1)<br>1.9 (2) | 3.0 | 3.6 | V |
| Operating Supply Voltage, DCDC converter setup | 2.1 | 3.0 | 3.6 | V |
| Extended Industrial Operating Temperature Range | -40 | +25 | +85 | °C |

(1) Minimum Supply Voltage Specification for Standard Operating Temperature Range -25°C to +75°C only
(2) Minimum Supply Voltage Specification for Extended Industrial Operating Temperature Range -40°C to +85°C


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 2.3. Power Consumption

| Parameter | Min | Typ | Max | Unit |
|---|---|---|---|---|
| Peak current, Receiver active (supply at 2.1V) | | 12.6 | | mA |
| Peak current, Transmitter active +4 dBm Output Power | | 16 | | mA |
| Peak current, Transmitter active 0 dBm Output Power | | 10.5 | | mA |
| Current drain, Connection-less state, no RAM retention | | 0.6 | | µA |
| Current drain, Between connection events | | 2.6 | | µA |

## 2.4. Clock Sources

| Parameter | Min | Typ | Max | Unit |
|---|---|---|---|---|
| Internal High Frequency Clock for RF Stability:<br>16 MHz Crystal Frequency Tolerance (1) | | | +/- 40 | ppm |
| Internal Low Frequency Clock for BLE Synchronization:<br>32.768 kHz Crystal Frequency Tolerance (1) | | | +/- 40 | ppm |
| Internal Low Frequency Clock for BLE Synchronization:<br>RC Oscillator (2) | | | +/- 250 | ppm |
| RF Frequency tolerance:<br>For BLE operation Channels 0 to 39 | | | +/- 40 | ppm |

(1) including initial tolerance, drift, aging, and frequency pulling
(2) with calibration interval of 4 sec

## 2.5. Radio Specifications

| Parameter | Min | Typ | Max | Unit |
|---|---|---|---|---|
| Frequency Range | 2402 | | 2480 | Mhz |
| Channel 0 to 39 Spacing | | 2 | | Mhz |
| Output Power Channels 0 to 39 | -20 | | +4 | dBm |
| Rx sensitivity Level for BER <0,1% ideal Tx | -93 | | | dBm |
| Antenna Gain | | 0.6 | | dBi |
| EIRP | -19.4 | | 4.6 | dBm |
| Range Open field @1m height | | 100 | | m |
| Data Rate | 250 / 1000 / 2000 | | | kbps |


Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

### Typical Antenna Return Loss

Module mounted on a USB dongle ground plane

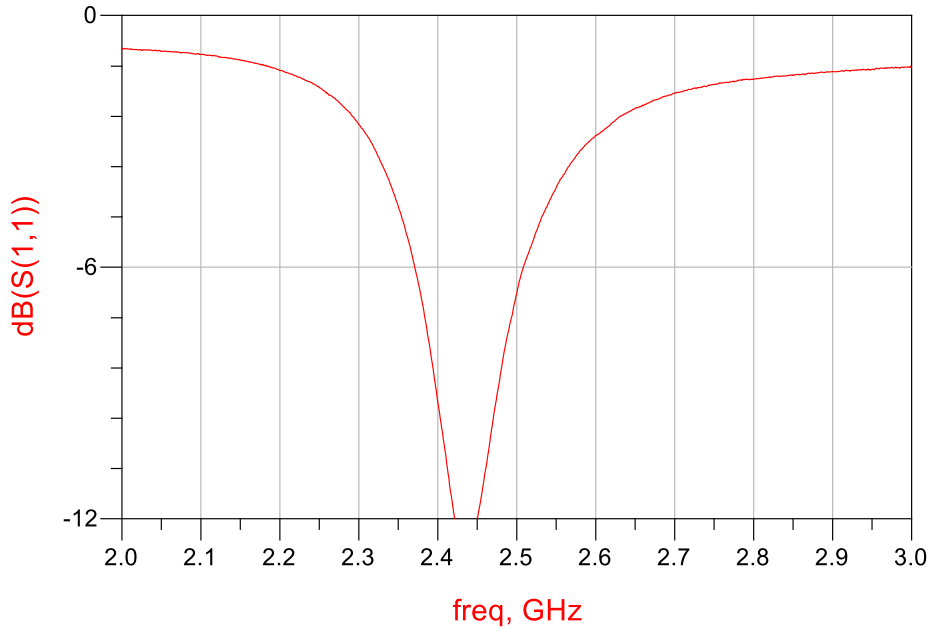


### Radiation Pattern in 3 planes

Module mounted on a USB dongle ground plane




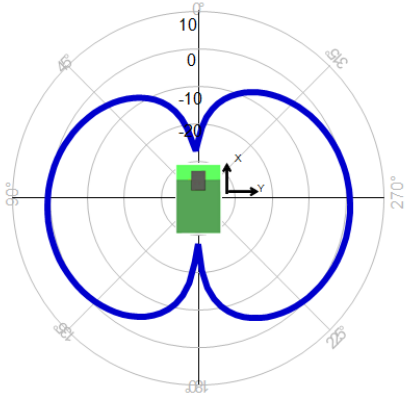


Phi (0.000 to 360.000)

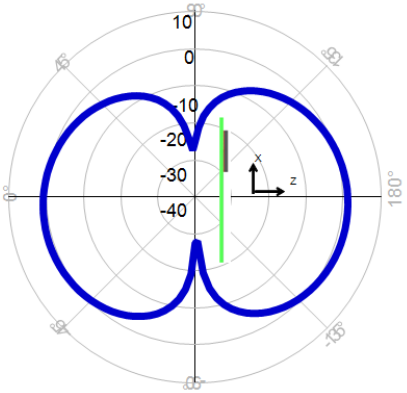


Thêta (-180.000 to 180.000)

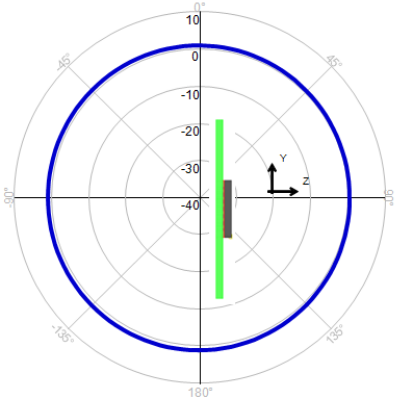


Thêta (-180.000 to 180.000)

Gain measurement in dBi @ 2.45 GHz


Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## Ground Plane Effect Simulation



USB dongle
ground plane
(size : 18 x 30 mm²)

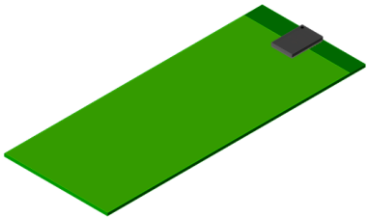

Cell phone config 1
ground plane
(size : 40 x 100 mm²)

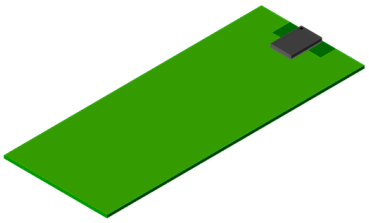

Cell phone config 1 with
side ground plane
(size : 40 x 100 mm²)

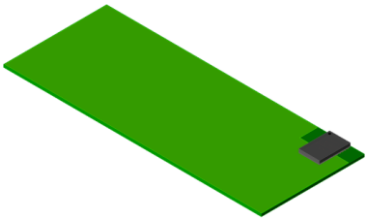

Cell phone config 2 with
side ground plane
(size : 40 x 100 mm²)

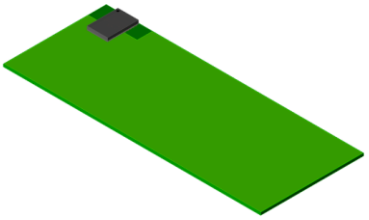

Cell phone config 3 with
side ground plane
(size : 40 x 100 mm²)

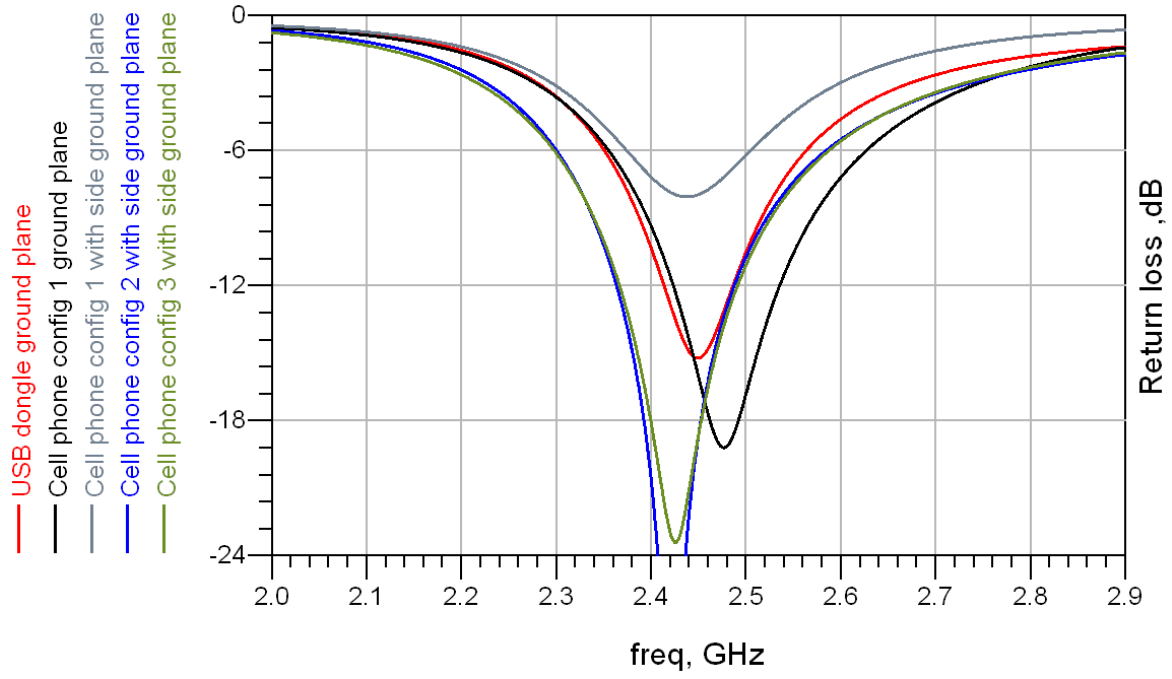



Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 2.6. Electrical Schematic

Electrical schematic showing ISP130301 module connections

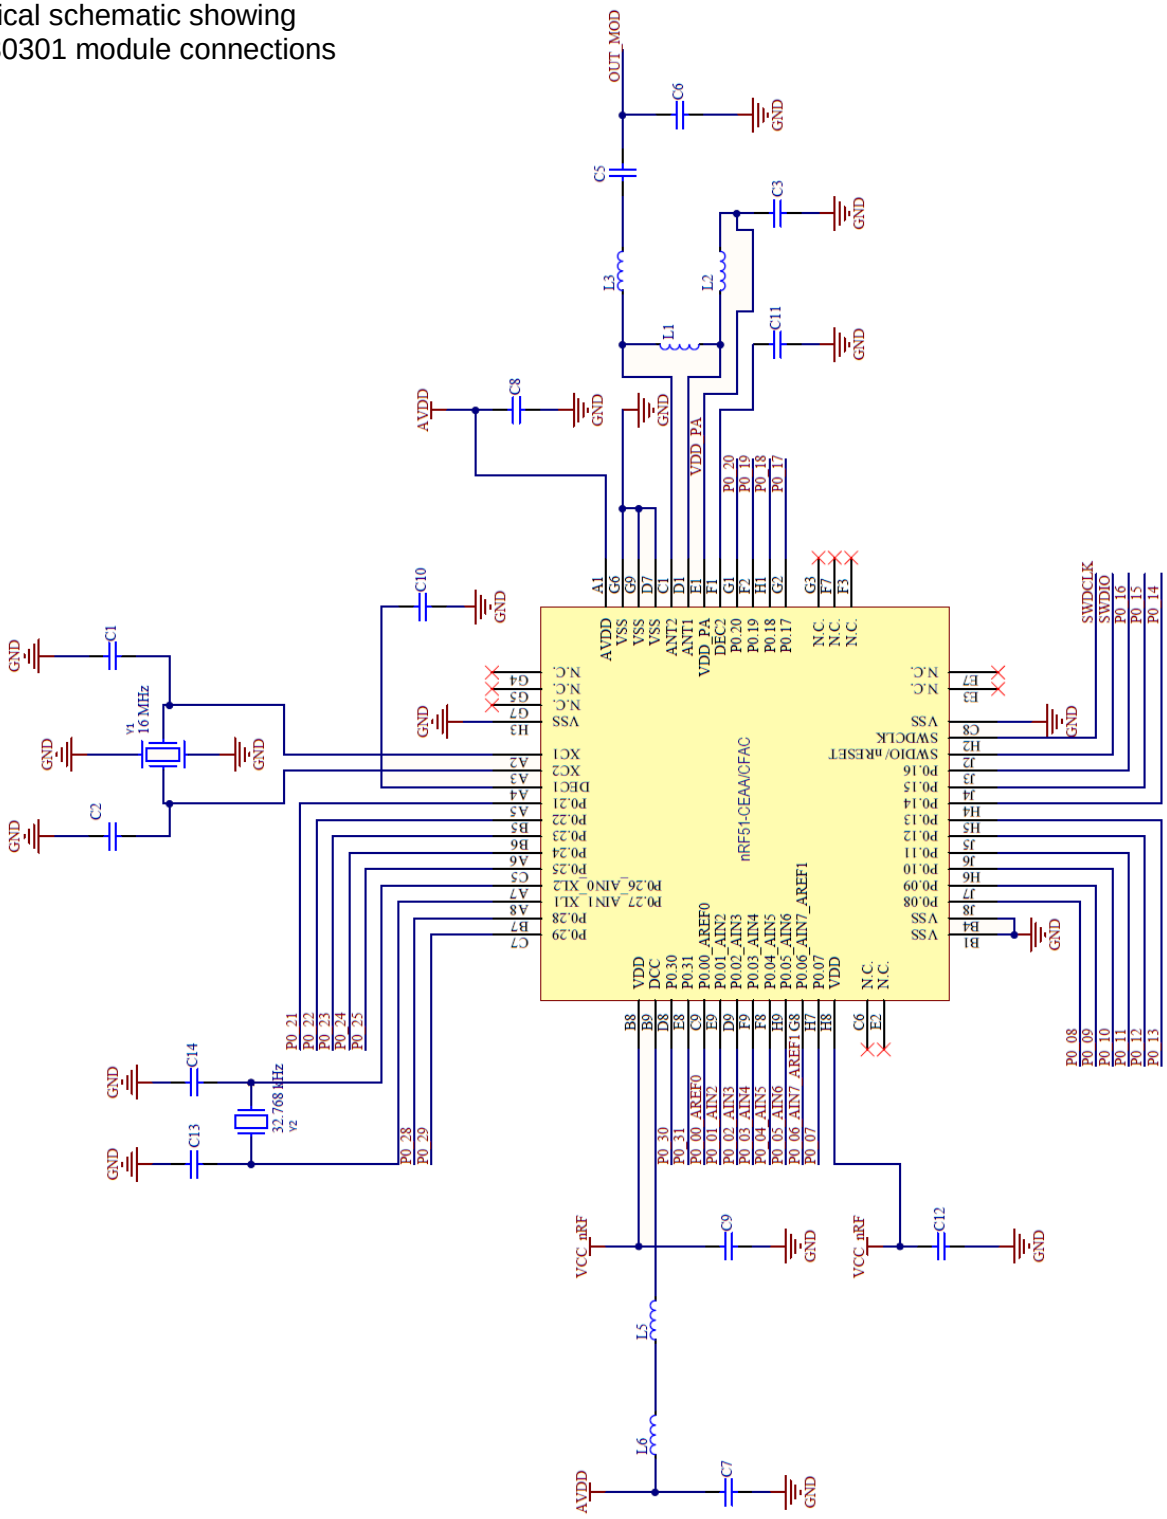



**Insight SiP** – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 3. Pin Description

The module uses an LGA format with a double row of pads on a 0.65 mm pitch. The pad layout follows the QFN Jedec standard for 2 row LGA parts. The NC pads are to be connected to isolated metal pads on the application PCB for mechanical stability and reliability (drop test).

| Pin | Name | Pin function | Description |
|---|---|---|---|
| 1 | P0_07 | Digital I/O | General purpose I/O pin |
| 2 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 3 | P0_09 | Digital I/O | General purpose I/O pin |
| 4 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 5 | P0_13 | Digital I/O | General purpose I/O pin |
| 6 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 7 | P0_19 | Digital I/O | General purpose I/O pin |
| 8 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 9 | P0_17 | Digital I/O | General purpose I/O pin |
| 10 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 11 | P0_20 | Digital I/O | General purpose I/O pin |
| 12 | VSS | Ground | Should be connected to ground plane on application PCB |
| 13 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 14 | VSS | Ground | Should be connected to ground plane on application PCB |
| 15 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 16 | VSS | Ground | Should be connected to ground plane on application PCB |
| 17 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 18 | VSS | Ground | Should be connected to ground plane on application PCB |
| 19 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 20 | VSS | Ground | Should be connected to ground plane on application PCB |
| 21 | NC | Not Connected | Isolated pad on application PCB for mechanical stability |
| 22 | VSS | Ground | Should be connected to ground plane on application PCB |
| 23 | VSS | Ground | Should be connected to ground plane on application PCB |
| 24 | OUT_MOD | Antenna I/O | This pin is the RF I/O pin of the BLE module<br>It should be connected to Pin 26 OUT_ANT for normal operation |
| 25 | VDD_PA | PA supply | PA supply indicates Transmit mode (Active High)<br>Warning: Leave Floating |
| 26 | OUT_ANT | Antenna I/O | This pin is connected to the internal antenna<br>It should be connected to Pin 24 OUT_MOD for normal operation |
| 27 | VSS | Ground | Should be connected to ground plane on application PCB |
| 28 | VSS | Ground | Should be connected to ground plane on application PCB |
| 29 | VCC_nRF | Power | Power supply (1.8 – 3.6V) |
| 30 | VSS | Ground | Should be connected to ground plane on application PCB |
| 31 | SWDCLK | Digital Output | HW debug and flash programming I/O |
| 32 | P0_18 | Digital I/O | General purpose I/O pin |
| 33 | SWDIO-nRESET | Digital I/O | System reset (active low). Also HW debug and flash programming I/O |
| 34 | P0_16 | Digital I/O | General purpose I/O pin |
| 35 | P0_15 | Digital I/O | General purpose I/O pin |
| 36 | P0_14 | Digital I/O | General purpose I/O pin |
| 37 | P0_12 | Digital I/O | General purpose I/O pin |
| 38 | P0_10 | Digital I/O | General purpose I/O pin |


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

| | | | |
|---|---|---|---|
| 39 | P0_11 | Digital I/O | General purpose I/O pin |
| 40 | P0_05<br>AIN6 | Digital I/O<br>Analog input | General purpose I/O pin<br>ADC input 6 |
| 41 | P0_06<br>AIN7<br>AREF1 | Digital I/O<br>Analog input<br>Analog input | General purpose I/O pin<br>ADC input 7<br>ADC Reference voltage |
| 42 | P0_03<br>AIN4 | Digital I/O<br>Analog input | General purpose I/O pin<br>ADC input 4 |
| 43 | P0_04<br>AIN5 | Digital I/O<br>Analog input | General purpose I/O pin<br>ADC input 5 |
| 44 | P0_01<br>AIN2 | Digital I/O<br>Analog input | General purpose I/O pin<br>ADC input 2 |
| 45 | P0_31 | Digital I/O | General purpose I/O pin |
| 46 | P0_02<br>AIN3 | Digital I/O<br>Analog input | General purpose I/O pin<br>ADC input 3 |
| 47 | P0_30 | Digital I/O | General purpose I/O pin |
| 48 | P0_00<br>AREF0 | Digital I/O<br>Analog input | General purpose I/O pin<br>ADC Reference voltage |
| 49 | P0_29 | Digital I/O | General purpose I/O pin |
| 50 | P0_28 | Digital I/O | General purpose I/O pin |
| 51 | P0_24 | Digital I/O | General purpose I/O pin |
| 52 | P0_23 | Digital I/O | General purpose I/O pin |
| 53 | P0_21 | Digital I/O | General purpose I/O pin |
| 54 | P0_22 | Digital I/O | General purpose I/O pin |
| 55 | P0_25 | Digital I/O | General purpose I/O pin |
| 56 | P0_08 | Digital I/O | General purpose I/O pin |
| 57 | GND_EP | Ground | Should be connected to ground plane on application PCB |

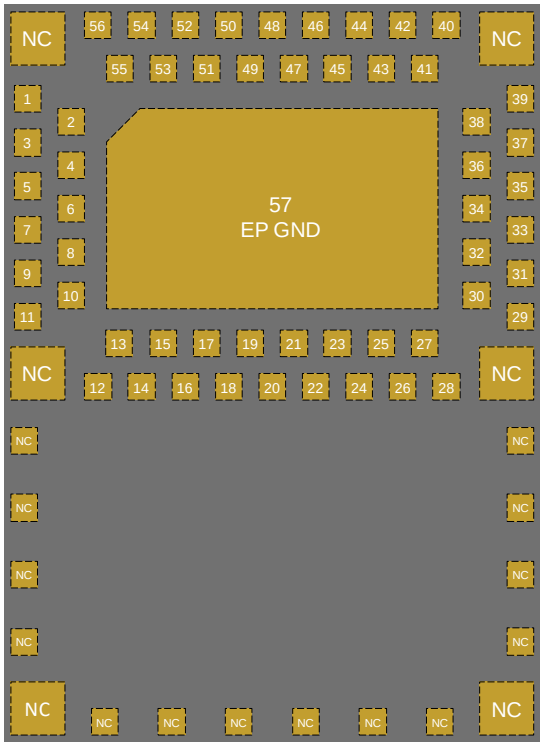


ISP130301
pad placement and pin assignment
for the LGA QFN package

TOP VIEW


**Insight SiP** – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

# 4. Mechanical Outlines

## 4.1. Mechanical Dimensions

Dimensional drawing for 8 x 11 x 1.2 mm, 57-Pad LGA Package

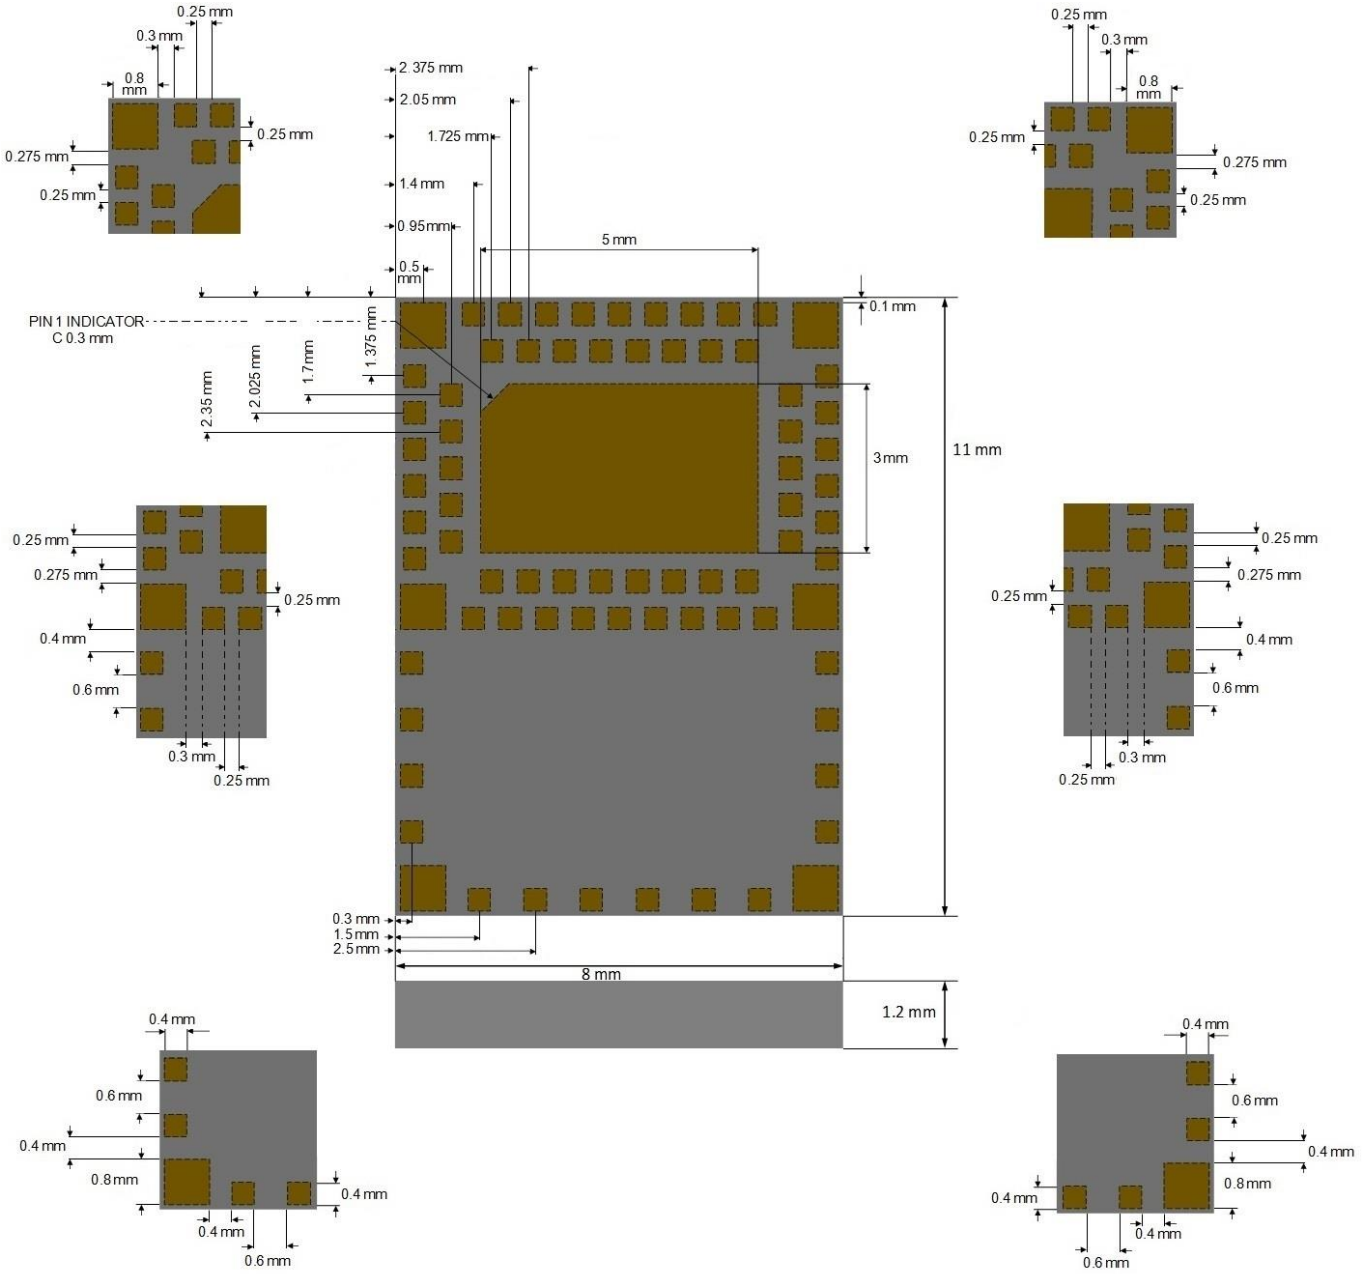



**Insight SiP** – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 4.2. SMT Assembly Guidelines

Recommended PCB Land Pattern and Solder Mask layout. Complete information is available on request.

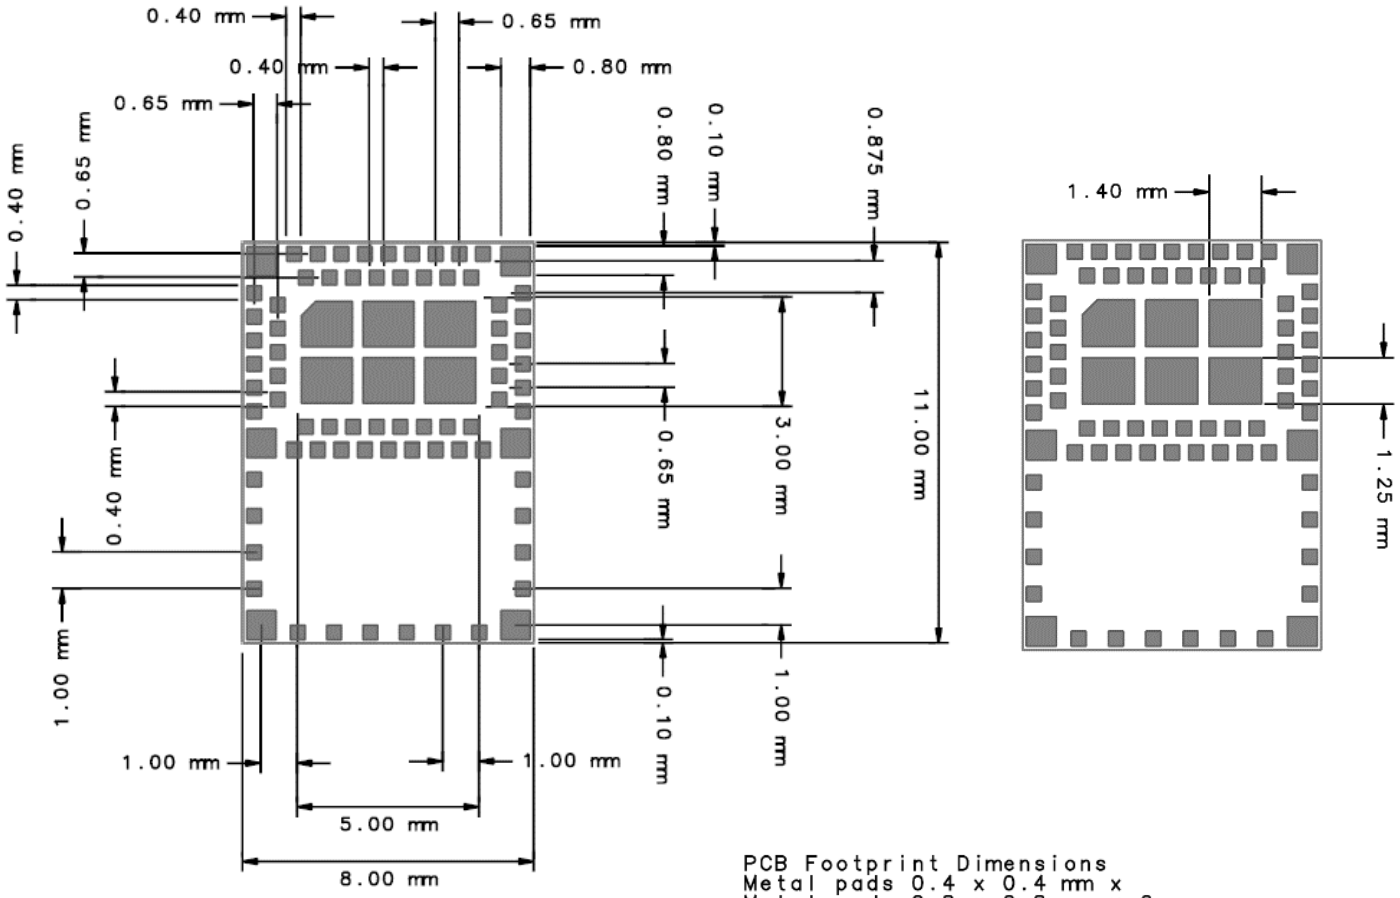



**Insight SiP** – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

### 4.3. Antenna Keep-Out Zone

For optimal antenna performance, it is recommended to respect a metal exclusion zone to the edge of the board: no metal, no traces and no components on any application PCB layer except mechanical LGA pads.

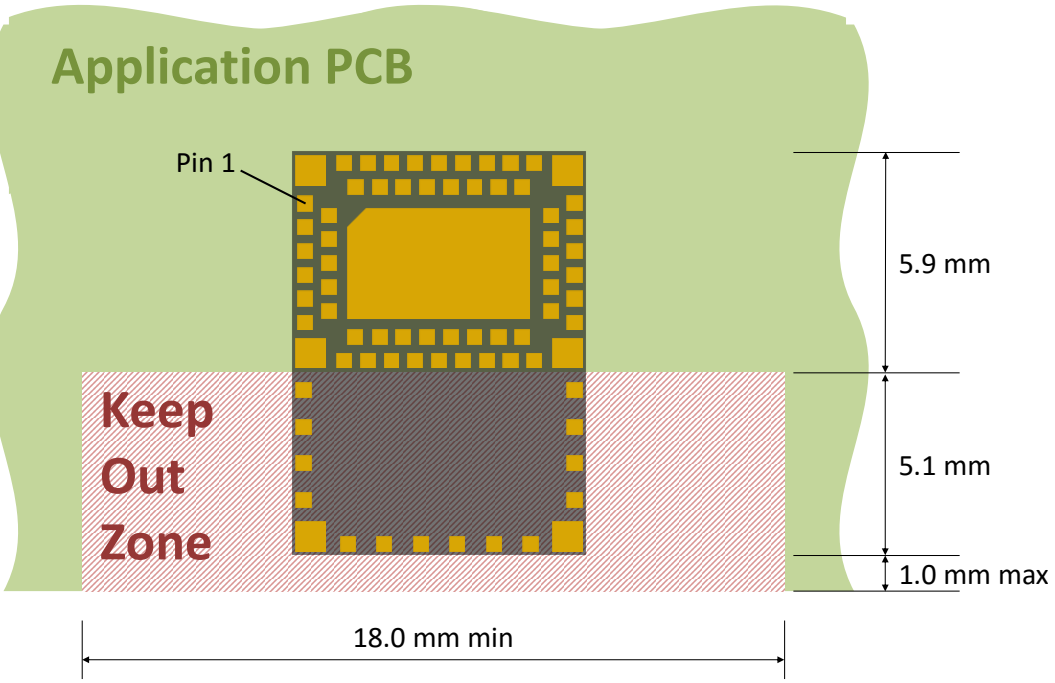



Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

# 5. Product Development Tools

## 5.1. Hardware

In order to assist clients in developing their Bluetooth Smart solutions based on the ISP130301, Insight SIP offers a Sensor Development Kit containing:

- One Interface Board
- J-Link Lite CortexM-9 JTAG/SWD Emulator
- One Test Board
- One Sensors Board
- A Development Dongle
- 5 ISP130301 module samples
- Cables, power supply and coin battery holder

Using this development kit, product developers can use a working solution as starting point to develop their own products. Time to market is saved by avoiding starting from a blank sheet of paper. In addition, there may be some applications that use the hardware as is.

Please refer to the documentation for more information:
http://www.insightsip.com/fichiers_insightsip/pdf/ble/ISP130301/isp_ble_PS130301_DK.pdf
http://www.insightsip.com/fichiers_insightsip/pdf/ble/ISP130301/isp_ble_AN140101.pdf

## 5.2. Firmware

ISP130301 supports Bluetooth Low Energy protocol stacks as well as 2.4 GHz protocol stacks, including Gazell, both available as downloads. If ANT protocol is selected as an option, specific ANT protocol stacks are also available as download at www.nordicsemi.com.

- The S110 SoftDevice is a Bluetooth Low Energy peripheral / broadcaster protocol stack solution. It integrates a Bluetooth Smart controller and host, and provides a full and flexible API for building Bluetooth Smart solutions:

- The S120 SoftDevice is a Bluetooth low energy central protocol stack solution supporting up to eight simultaneous Central role connections. It integrates a Bluetooth controller and host, and provides a full and flexible API for building Bluetooth Smart solutions.

- The S130 SoftDevice is a Bluetooth low energy concurrent multi-link protocol stack solution supporting simultaneous Central / Peripheral / Broadcaster / Observer role connections. It integrates a Bluetooth Smart controller and host, and provides a full and flexible API for building Bluetooth Smart solutions.

- The S210 SoftDevice is an ANT protocol stack solution that provides a full, flexible application programming interface (API) for building ANT solutions for Nordic Semiconductor nRF51 ICs. S210 SoftDevice reduces the need for a secondary application host MCU to ANT solutions.


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

The S310 SoftDevice is an ANT and Bluetooth low energy peripheral controller and hosts a multiprotocol stack that provides a full, flexible application programming interface (API) for building concurrent ANT and Bluetooth Smart solutions for the nRF51422 IC. The S310 SoftDevice reduces the need for a secondary application host MCU as well as the need for an added device to support concurrent multiprotocol.

### 5.3. Development Tools

The following development tools and software are recommended for using and testing ISP130301 module:

- Nordic Semiconductor nRFgo Studio:
  Downloadable after registering at www.nordicsemi.com.

- Nordic Semiconductor Master Control Panel:
  Downloadable after registering at www.nordicsemi.com.

- Keil MDK-ARM Lite:
  Downloadable from https://www.keil.com/demo/eval/arm.htm.

- Segger J-Link Lite:
  Downloadable from http://www.segger.com/jlink-software.html.

- nRF51 Software Development Kit (SDK):
  nRF51 SDK can be downloaded after registering at www.nordicsemi.com. It contains example of source codes applications (C language):
  - Precompiled HEX files
  - Source code
  - Keil ARM project files
  - IAR project files
  - GCC project files


**Insight SiP** – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

# 6. Reference Designs

## 6.1. Sensor Board Design

ISP131001 is an autonomous low-power device for wireless acceleration, temperature and barometer detection and transmission. The complete device makes use of Insight SiP ISP130301 BLE module together with low power 3-axis accelerometer and temperature/barometer sensors connected to a primary button cell battery CR2032.

The Freescale FXOS8700CQ 3-axis linear accelerometer and 3-axis magnetometer is used to detect acceleration and is combined with ST Micro LPS331AP temperature and barometer sensor. A Rohm SML-P11MTT86 mini-LED is also part of the board and is available to be controlled by software. Data are transmitted via GPIO processor port.

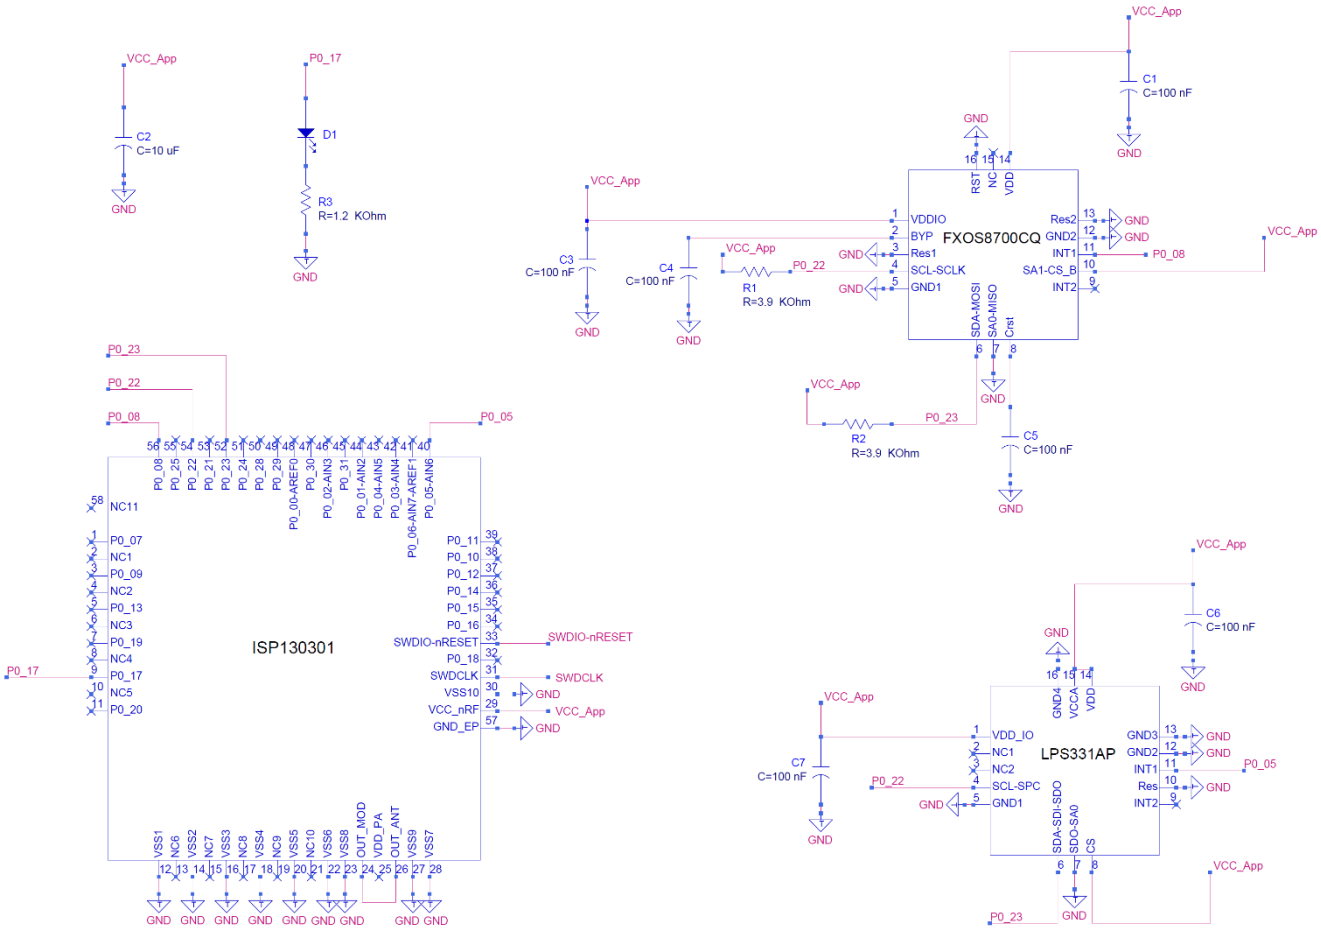



**Insight SiP** – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 6.2. Beacon Design

ISP140501 is an autonomous low-power device for wireless detection and transmission. The complete device makes use of Insight SiP ISP130301 BLE module together with low power host processor and small primary button cell battery CR2450. It has been developed to explore the full range of development possibilities for beacons using Bluetooth Smart technology. They allow indoor positioning, letting your phone know that you are in range of a beacon. As the “beacon” name suggests, they transmit packets of data in regular intervals, and this data can be then picked up by devices like smartphones.

The two buttons can be programmed to enable easy switching between modes and/or functionality. As well an RGB-LED can be configured to indicate different events.

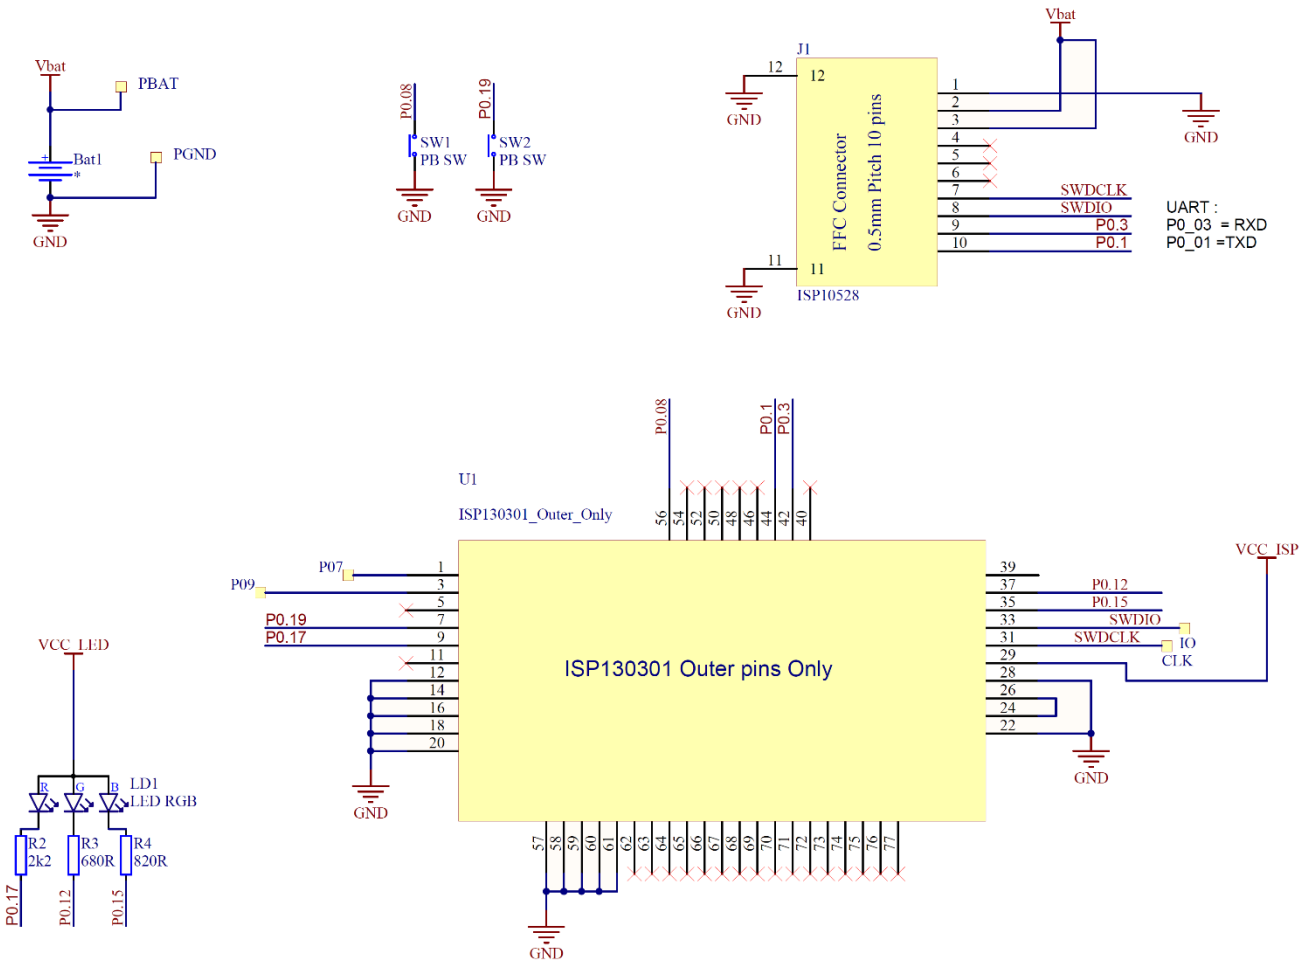



**Insight SiP** – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

# 7. Packaging & Ordering information

## 7.1. Marking

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| I | S | P | 1 | 3 | 0 | 3 | 0 | 1 |
| T | T | | Y | Y | W | W | R | |

| | |
|---|---|
| ISP130301 | Part Number |
| TT | 2 letters Module Type (see section 7.5) |
| YY | Two digits year number |
| WW | Two digits week number |
| R | 1 letter Hardware revision |

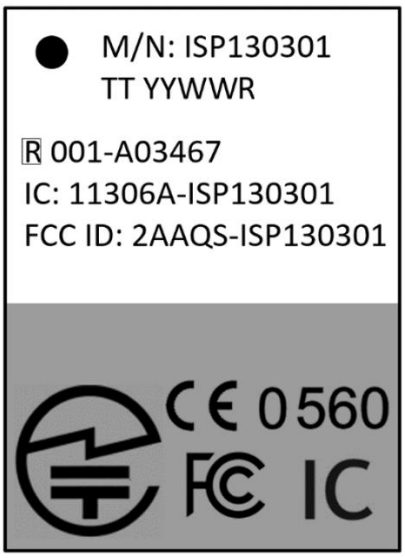


## 7.2. Prototype Packaging

For engineering samples and prototype quantities up to 99 units, deliveries are provided in thermoformed trays or cut tapes. Please order with “ST” code packaging suffix.

These parts must be backed prior to assembly (see section 8.2)

## 7.3. Jedec Trays

For higher quantities and volume production, ISP130301 are available in Jedec trays. They are delivered in sealed pack with desiccant pack and humidity sensors. These Jedec trays are also suitable for further baking. Please see section 8.2 for more information on moisture sensitivity. Please order with “JT” code packaging suffix.

Refer to tray sizes and module positioning below. Complete information on Jedec trays is available on request.


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

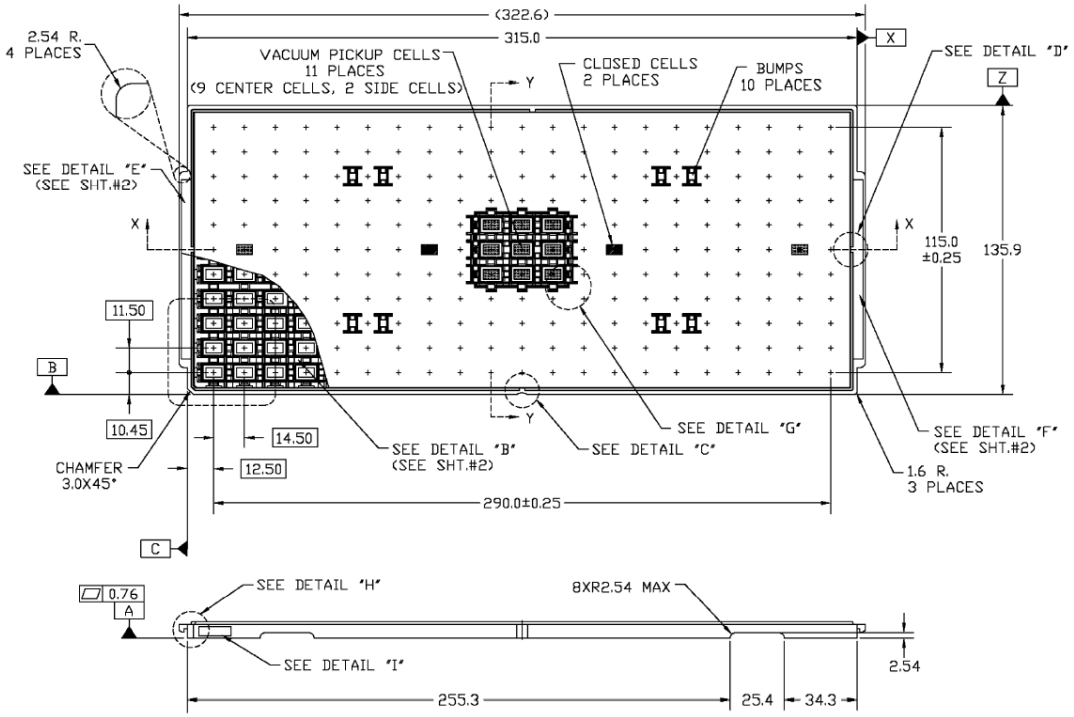


## 7.4. Tape and Reel

ISP130301 are also available in Tape & Reel. They are delivered in sealed pack with desiccant pack and humidity sensors. Reels are proposed in standard quantities of 500 units (180mm / 7" reel) or 2000 units (330mm / 13" reel) only. Please order with "RS" code packaging suffix for 500-unit reels and "R2" for 2000-unit reels.

Please refer to tape size below. Complete information is available on request.

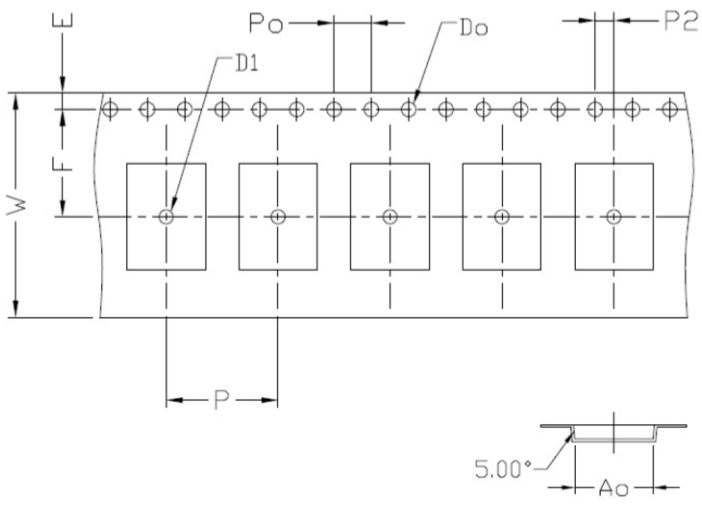


| ITEM | DIM |
|---|---|
| W | 24.00 +0.30 −0.30 |
| E | 1.75 +0.10 −0.10 |
| F | 11.50 +0.10 −0.10 |
| P | 12.00 +0.10 −0.10 |
| Po | 4.00 +0.10 −0.10 |
| P2 | 2.00 +0.10 −0.10 |
| Do | ø1.50 MIN −0.00 |
| D1 | ø1.50 MIN −0.00 |
| T | 0.30 +0.05 −0.05 |
| Ao | 8.40 +0.10 −0.10 |
| Bo | 11.40 +0.10 −0.10 |
| Ko | 1.55 +0.10 −0.10 |


Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 7.5. Ordering Information

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| I | S | P | 1 | 3 | 0 | 3 | 0 | 1 | - | T | T | - | Z | Z | |
| I | S | P | 1 | 3 | 0 | 3 | 0 | 1 | | | | | | | Part Number |
| | | | | | | | | | - | A | | | | | ANT & BLE protocol type |
| | | | | | | | | | - | B | | | | | BLE protocol type |
| | | | | | | | | | - | | M | | | | 256 kB Flash / 16 kB RAM memory type |
| | | | | | | | | | - | | L | | | | 256 kB Flash / 32 kB RAM memory type (1) |
| | | | | | | | | | | | | - | D | K | Development kit (2) |
| | | | | | | | | | | | | - | T | B | Test board (2) |
| | | | | | | | | | | | | - | S | T | Unsealed Tray or Cut Tape |
| | | | | | | | | | | | | - | J | T | Jedec Tray Packaging |
| | | | | | | | | | | | | - | R | S | Reel of 500 units |
| | | | | | | | | | | | | - | R | 2 | Reel of 2000 units |

(1) Option available with BLE protocol type only.
Type TT = “AL” is not part of standard production.

(2) Please see §5.1 and refer to the following documentation for more information on development kit and test board:
http://www.insightsip.com/fichiers_insightsip/pdf/ble/ISP130301/isp_ble_PS130301_DK.pdf
http://www.insightsip.com/fichiers_insightsip/pdf/ble/ISP130301/isp_ble_AN140101.pdf


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

# 8. Storage & Soldering information

## 8.1. Storage and Handling

- Keep this product away from other high frequency devices which may interfere with operation such as other transmitters and devices generating high frequencies.

- Do not expose the module to the following conditions:
  - Corrosive gasses such as Cl2, H2S, NH3, SO2, or NOX
  - Extreme humidity or salty air
  - Prolonged exposure to direct Sunlight
  - Temperatures beyond those specified for storage

- Do not apply mechanical stress

- Do not drop or shock the module

- Avoid static electricity, ESD and high voltage as these may damage the module

**ATTENTION**

CONSERVE PRECAUTION FOR HANDLING
ELECTROSTATIC SENSITIVE DEVICES

## 8.2. Moisture Sensitivity

All plastic packages absorb moisture. During typical solder reflow operations when SMDs are mounted onto a PCB, the entire PCB and device population are exposed to a rapid change in ambient temperature. Any absorbed moisture is quickly turned into superheated steam. This sudden change in vapor pressure can cause the package to swell. If the pressure exerted exceeds the flexural strength of the plastic mold compound, then it is possible to crack the package. Even if the package does not crack, interfacial delamination can occur.

Since the device package is sensitive to moisture absorption, it is recommended to bake the product before assembly. The baking process for dry packing is 24 hours at 125°C.

ISP130301 has been tested MSL-5 according to standards. After baking, modules can be exposed to ambient room conditions (approximately 30 °C/60%RH) during 48 hours before assembly on the PCB.

**CAUTION**

MOISTURE
SENSITIVE DEVICES

LEVEL
5


Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

## 8.3. Soldering information

Recommendation for RoHS reflow process is according to Jedec J–STD-020 and 033 standard profiles.

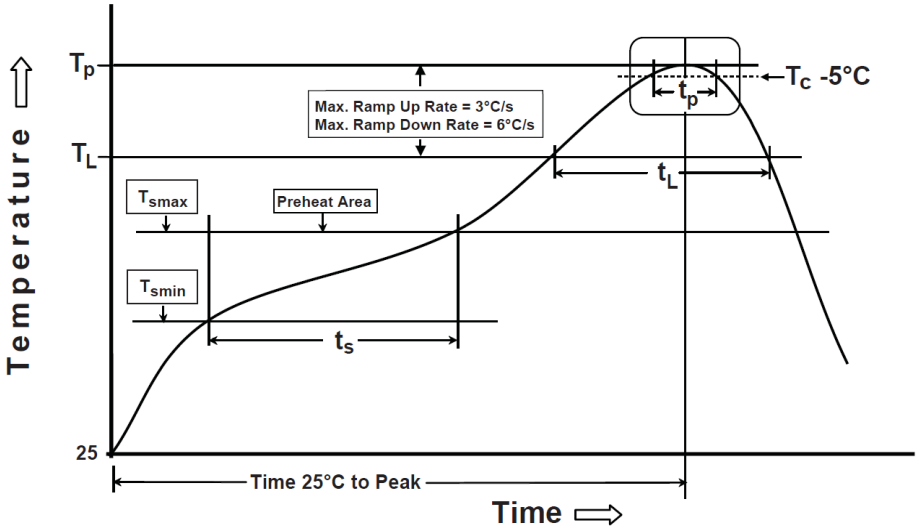


| | |
|---|---|
| Preheat/Soak<br>Temperature Min ($T_{smin}$)<br>Temperature Max ($T_{smax}$)<br>Time ($t_s$) from ($T_{smin}$ to $T_{smax}$) | <br>150 °C<br>200 °C<br>60-120 sec |
| Ramp-up rate ($T_L$ to $T_p$) | 3 °C/sec max |
| Liquidous temperature ($T_L$)<br>Time ($t_L$) maintained above $T_L$ | 217 °C<br>60-150 sec |

| | |
|---|---|
| Peak package body temperature ($T_p$) | 260°C<br>(+0/-5°C) |
| Classification Temperature ($T_c$)<br>Time ($t_p$) maintained above $T_C$-5 °C | 260 °C<br>30 sec |
| Ramp-down rate ($T_p$ to $T_L$) | 6 °C/sec max |
| Time 25 °C to peak temperature | 8 mn max |


Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

# 9. Quality & User information

## 9.1. Certifications

- FCC Identifier 2AAQS-ISP130301 – Certificate N° 142180643/AA/00
- CE: Complies with 1999/5/EC, EN300328 V1.8.1, Statement N° 142140199/AA/00
- IC Certification N° 11306A-ISP130301 – Telefication N° 142170180/AA/00
- TELEC certification N° 001 – A03467
- Bluetooth SIG certified N° D024444
- RoHS compliant

## 9.2. USA – User information

This intends to inform how to specify the FCC ID of our module "ISP130301" on the product. Based on the Public Notice from FCC, the host device should have a label which indicates that it contains our module. The label should use wording such as:

| "Contains FCC ID: 2AAQS-ISP130301" |
|---|

Any similar wording that expresses the same meaning may be used.

The label of the host device should also include the below FCC Statement. When it is not possible, this information should be included in the User Manual of the host device:

| *"This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions.*<br>*(1) This device may not cause harmful interference*<br>*(2) This device must accept any interference received, including interference that may cause undesired operation.*<br>*Caution: Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment."* |
|---|

## 9.3. Canada – User information

This intends to inform how to specify the IC ID of our module "ISP130301" on the product. According to Canadian standards "RSS-210" and "RSS-Gen", the host device should have a label which indicates that it contains our module. The label should use wording such as:

| *"Contains IC: 11306A-ISP130301"* |
|---|

Any similar wording that expresses the same meaning may be used.

The label of the host device should also include the below IC Statement. When it is not possible, this information should be included in the User Manual of the host device:


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

*"This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.*

*Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."*

## 9.4. Discontinuity

Normally a product will continue to be manufactured as long as all of the following are true:
- The manufacturing method is still available.
- There are no replacement products.
- There is demand for it in the market.

In case of obsolescence, Insight SiP will follow Jedec Standard JSD-48. A Product Discontinuation Notice (PDN) will be sent to all distributors and made available on our website. After this, the procedure goes as follows:
- Last Order Date will be 6 months after the PDN was published.
- Last Shipment Date will be 6 months after Last Order Date, i.e. 12 months after PDN.

## 9.5. Disclaimer

Insight SiP's products are designed and manufactured for general consumer applications, so testing and use of the product shall be conducted at customer's own risk and responsibility. Please conduct validation and verification and sufficient reliability evaluation of the products in actual condition of mounting and operating environment before commercial shipment of the equipment. Please also pay attention (i) to apply soldering method that don't deteriorate reliability, (ii) to minimize any mechanical vibration, shock, exposure to any static electricity, (iii) not to overstress the product during and after the soldering process.

The products are not designed for use in any application which requires especially high reliability where malfunction of these products can reasonably be expected to result in personal injury or damage to the third party's life, body or property, including and not limited to (i) aircraft equipment, (ii) aerospace equipment, (iii) undersea equipment, (iv) power plant control equipment, (v) medical equipment, (vi) transportation equipment, (vii) traffic signal equipment, (viii) disaster prevention / crime prevention equipment.

The only warranty that Insight SiP provides regarding the products is its conformance to specifications provided in datasheets. Insight SiP hereby disclaims all other warranties regarding the products, express or implied, including without limitation any warranty of fitness for a particular purpose, that they are defect-free, or against infringement of intellectual property rights. Insight SiP customers agree to indemnify and defend Insight SiP against all claims, damages, costs and expenses that may be incurred, including without any limitation, attorney fees and costs, due to the use of products.


The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission.
Specification subject to change without notice.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.




**Как с нами связаться**

**Телефон:** 8 (812) 309 58 32 (многоканальный)
**Факс:** 8 (812) 320-02-42
**Электронная почта:** org@eplast1.ru
**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.