

| PART NUMBER | DESCRIPTION                                 |
|-------------|---|
| CCR-40K     | Commercial Failsafe SPDT, DC-40GHz, 2.92mm. |
| CR-40K      | Elite Failsafe SPDT, DC-40GHz, 2.92mm.      |

The CCR-40K/CR-40K is a broadband, SPDT, electromechanical, coaxial switch designed to switch a microwave signal from a common input to either of two outputs. The characteristic impedance is 50 Ohms. These switches incorporate 2.92mm high performance connectors. The CCR-40K/CR-40K series switch is offered with a failsafe actuator. The CCR-40K/CR-40K series is compatible with the two most common mounting hole patterns making it interchangeable with a variety of switches.




| ENVIRONMENTAL AND PHYSICAL CHARACTERISTICS                     |                          |
|--|--------------------------|
| Operating Temperature  |                          |
| Commercial Model, CCR-40K                                      | -25°C to 65°C            |
| Elite Model, CR-40K  | -55°C to 85°C            |
| Vibration (MIL-STD-202 Method 214, Condition D, non-operating) | 10 g's RMS               |
| Shock (MIL-STD-202 Method 213, Condition D, non-operating)     | 500 g's                  |
| Standard Actuator Life   | 5,000,000 cycles         |
| Actuator Life w/ Additional Features                           | 1,000,000 cycles         |
| Connector Type   | 2.92mm                   |
| Humidity (Moisture Seal)                                       | Available                |
| Weight   | 1.65 oz. (46.78g) (max.) |

| ELECTRICAL CHARACTERISTICS              |                         |
|---|-------------------------|
| Form Factor                             | SPDT, break before make |
| Frequency Range                         | DC-40 GHz               |
| Characteristic Impedance                | 50 Ohms                 |
| Operate Time                            | 10 ms (max.)            |
| Release Time                            | 10 ms (max.)            |
| Actuation Voltage Available             | 12 15 24 28 V           |
| Actuation Current, max. @ ambient temp. | 200 250 120 90 mA       |

| TYPICAL PERFORMANCE CHARACTERISTICS |          |          |           |           |           |           |
|-------------------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Frequency                           | DC-6 GHz | 6-12 GHz | 12-18 GHz | 18-27 GHz | 27-34 GHz | 34-40 GHz |
| Insertion Loss, dB, max.            | 0.2      | 0.4      | 0.5       | 0.6       | 0.7       | 0.8       |
| Isolation, dB, min.                 | 70       | 60       | 60        | 50        | 50        | 50        |
| VSWR , max.                         | 1.25:1   | 1.40:1   | 1.50:1    | 1.60:1    | 1.80:1    | 1.80:1    |

For maximum limits, please see charts on page 3

**PART NUMBERING SYSTEM**

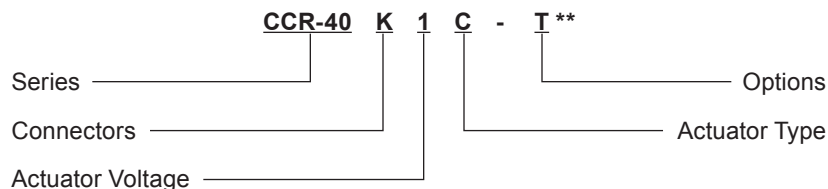

**Connector**  
K: 2.92mm Female

**Actuator Voltage**  
1: 28 Vdc Failsafe  
2: 15 Vdc Failsafe  
3: 12 Vdc Failsafe  
4: 24 Vdc Failsafe

**Actuator Type**  
0: Standard Contacts  
C: Indicator Contacts\*\*\*

**Options**  
T: TTL Drivers with Diodes  
D: Transient Suppression Diodes  
N: Narrow Body  
M: Moisture Seal  
S: 9-Pin D-Sub Connector

\*\*SEE PARTS LIST ON PAGE 7

\*\*\* Indicator Contacts Operating Temperature  
-50°C to 85°C (Elite Model Only)

For other options, contact factory.

**SCHEMATICS AND MECHANICAL OUTLINE**



| 9 PIN D-SUB PINOUT FOR FAILSAFE SPDT |       |            |        |                  |
|--------------------------------------|-------|------------|--------|------------------|
| OPTIONS                              |       |            |        |                  |
| Pin No.                              | Basic | Indicators | TTL    | Indicators & TTL |
| 1                                    | +     | +          |        |                  |
| 2                                    | -     | -          |        |                  |
| 3                                    |       |            | Common | Common           |
| 4                                    |       |            | 1      | 1                |
| 5                                    |       |            |        |                  |
| 6                                    |       |            | Vsw    | Vsw              |
| 7                                    |       | A          |        | A                |
| 8                                    |       | B          |        | B                |
| 9                                    |       | C          |        | C                |


| TRUTH TABLE (with TTL option) |         |         |                           |
|-------------------------------|---------|---------|---------------------------|
| Logic Input                   | RF Path |         | Indicator (if applicable) |
| 1                             | IN to 1 | IN to 2 | A B                       |
| 0                             | On      | Off     | C 0                       |
| 1                             | Off     | On      | 0 C                       |

**TYPICAL NARROWBAND RF INSERTION LOSS PERFORMANCE CURVES**



**Insertion Loss ( DC-40 GHz )**



**Isolation ( DC-40 GHz )**

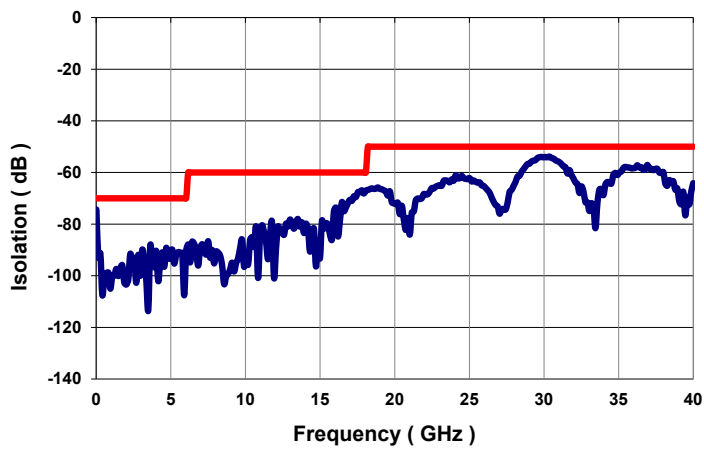

**VSWR ( DC-40 GHz )**

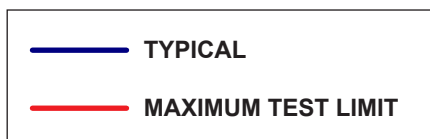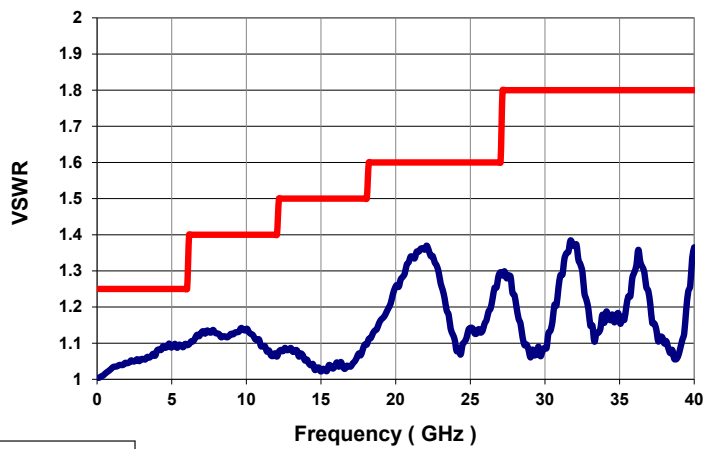

**GLOSSARY**

**Actuator**

An actuator is the electromechanical mechanism that transfers the RF contacts from one position to another upon DC command.

**Arc Suppression Diode**

A diode is connected in parallel with the coil. This diode limits the “reverse EMF spike” generated when the coil de-energizes to 0.7 volts. The diode cathode is connected to the positive side of the coil and the anode is connected to the negative side.

**Date Code**

All switches are marked with either a unique serial number or a date code. Date codes are in accordance with MIL-STD-1285 Paragraph 5.2.5 and consist of four digits. The first two digits define the year and the last two digits define the week of the year (YYWW). Thus, 1032 identifies switches that passed through final inspection during the 32nd week of 2010.

**Failsafe**

A failsafe switch reverts to the default or failsafe position when actuating voltage is removed. This is realized by a return spring within the drive mechanism. This type of switch requires the continuous application of operating voltage to select and hold any position. (Multi-position switches are normally open with no voltage applied).

**Indicator**

Indicators tell the system which position the switch is in. Other names for indicators are telemetry contacts or tellback circuit. Indicators are usually a set of internally mounted DC contacts linked to the actuator. They can be wired to digital input lines, status lights, or interlocks. Unless otherwise specified, the maximum indicator contact rating is 30 Vdc, 50 mA, or 1.5 Watts into a resistive load.

**Isolation**

Isolation is the measure of the power level at the output connector of an unconnected RF channel as referenced to the power at the input connector. It is specified in dB below the input power level.

**SPDT Switch**

A single-pole double-throw, bi-directional switch that can be used as having one input and two outputs or two inputs and one output.

**Switching Time**

Switching time is the total interval beginning with the arrival of the leading edge of the command pulse at the switch DC input and ending with the completion of the switch transfer, including contact bounce. It consists of three parts: (1) inductive delay in the coil, (2) transfer time of the physical movement of the contacts, and (3) the bounce time of the RF contacts.

**TTL Switch Driver Option**

As a special option, switch drivers can be provided for both failsafe and latching switches, which are compatible with industry-standard low-power Schottky TTL circuits.

**Performance Parameters vs Frequency**

Generally speaking, the RF performance of coaxial switches is frequency dependent. With increasing frequency, VSWR and insertion loss increase while isolation decreases. All data sheets specify these three parameters as “worst case” at the highest operating frequency. If the switch is to be used over a narrow frequency band, better performance can be achieved.

**Actuator Current vs Temperature**

The resistance of the actuator coil varies as a function of temperature. There is an inverse relationship between the operating temperature of the switch and the actuator drive current. For switches operating at 28 VDC, the approximate actuator drive current at temperature, T, can be calculated using the equation:

$$I_T = \frac{I_A}{[1 + .00385 (T-20)]}$$

Where:

$I_T$  = Actuator current at temperature, T

$I_A$  = Room temperature actuator current – see data sheet

T = Temperature of interest in °C

**Magnetic Sensitivity**

An electro-mechanical switch can be sensitive to ferrous materials and external magnetic fields. Neighboring ferrous materials should be permitted no closer than 0.5 inches and adjacent external magnetic fields should be limited to a flux density of less than 5 Gauss.

**SPECIAL FEATURE**

**Switching High-Power or Highly Sensitive Signals**

Ensure the most linear response with the best galvanically matched contact system in the industry. Extremely low passive intermodulation is standard on all of our switches.

| Carrier Frequency 1 | Carrier Frequency 2 | PIM 3rd Order Frequency | PIM 5th Order Frequency |
|---------------------|---------------------|-------------------------|-------------------------|
| 870 MHz             | 893 MHz             | 847 MHz                 | 824 MHz                 |

|      | 3rd Order Intermodulation | 5th Order Intermodulation |
|------|---------------------------|---------------------------|
| SPDT | -91 dBm                   | -110 dBm                  |
|      | -134 dBc                  | -153 dBc                  |

**FAILSAFE CCR-40K/CR-40K PART NUMBER LIST**

|    | PART No.       |    | PART No.       |    | PART No.      |
|----|----------------|----|----------------|----|---------------|
| 1  | CCR-40KXC      | 43 | CCR-40KX0-TMS  | 85 | CR-40KX0-NM   |
| 2  | CCR-40KXC-D    | 44 | CCR-40KX0-TN   | 86 | CR-40KX0-NMS  |
| 3  | CCR-40KXC-DM   | 45 | CCR-40KX0-TNM  | 87 | CR-40KX0-NS   |
| 4  | CCR-40KXC-DMS  | 46 | CCR-40KX0-TNMS | 88 | CR-40KX0-S    |
| 5  | CCR-40KXC-DN   | 47 | CCR-40KX0-TNS  | 89 | CR-40KX0-T    |
| 6  | CCR-40KXC-DNM  | 48 | CCR-40KX0-TS   | 90 | CR-40KX0-TM   |
| 7  | CCR-40KXC-DNMS | 49 | CR-40KXC       | 91 | CR-40KX0-TMS  |
| 8  | CCR-40KXC-DNS  | 50 | CR-40KXC-D     | 92 | CR-40KX0-TN   |
| 9  | CCR-40KXC-DS   | 51 | CR-40KXC-DM    | 93 | CR-40KX0-TNM  |
| 10 | CCR-40KXC-M    | 52 | CR-40KXC-DMS   | 94 | CR-40KX0-TNMS |
| 11 | CCR-40KXC-MS   | 53 | CR-40KXC-DN    | 95 | CR-40KX0-TNS  |
| 12 | CCR-40KXC-N    | 54 | CR-40KXC-DNM   | 96 | CR-40KX0-TS   |
| 13 | CCR-40KXC-NM   | 55 | CR-40KXC-DNMS  |    |               |
| 14 | CCR-40KXC-NMS  | 56 | CR-40KXC-DNS   |    |               |
| 15 | CCR-40KXC-NS   | 57 | CR-40KXC-DS    |    |               |
| 16 | CCR-40KXC-S    | 58 | CR-40KXC-M     |    |               |
| 17 | CCR-40KXC-T    | 59 | CR-40KXC-MS    |    |               |
| 18 | CCR-40KXC-TM   | 60 | CR-40KXC-N     |    |               |
| 19 | CCR-40KXC-TMS  | 61 | CR-40KXC-NM    |    |               |
| 20 | CCR-40KXC-TN   | 62 | CR-40KXC-NMS   |    |               |
| 21 | CCR-40KXC-TNM  | 63 | CR-40KXC-NS    |    |               |
| 22 | CCR-40KXC-TNMS | 64 | CR-40KXC-S     |    |               |
| 23 | CCR-40KXC-TNS  | 65 | CR-40KXC-T     |    |               |
| 24 | CCR-40KXC-TS   | 66 | CR-40KXC-TM    |    |               |
| 25 | CCR-40KX0      | 67 | CR-40KXC-TMS   |    |               |
| 26 | CCR-40KX0-D    | 68 | CR-40KXC-TN    |    |               |
| 27 | CCR-40KX0-DM   | 69 | CR-40KXC-TNM   |    |               |
| 28 | CCR-40KX0-DMS  | 70 | CR-40KXC-TNMS  |    |               |
| 29 | CCR-40KX0-DN   | 71 | CR-40KXC-TNS   |    |               |
| 30 | CCR-40KX0-DNM  | 72 | CR-40KXC-TS    |    |               |
| 31 | CCR-40KX0-DNMS | 73 | CR-40KX0       |    |               |
| 32 | CCR-40KX0-DNS  | 74 | CR-40KX0-D     |    |               |
| 33 | CCR-40KX0-DS   | 75 | CR-40KX0-DM    |    |               |
| 34 | CCR-40KX0-M    | 76 | CR-40KX0-DMS   |    |               |
| 35 | CCR-40KX0-MS   | 77 | CR-40KX0-DN    |    |               |
| 36 | CCR-40KX0-N    | 78 | CR-40KX0-DNM   |    |               |
| 37 | CCR-40KX0-NM   | 79 | CR-40KX0-DNMS  |    |               |
| 38 | CCR-40KX0-NMS  | 80 | CR-40KX0-DNS   |    |               |
| 39 | CCR-40KX0-NS   | 81 | CR-40KX0-DS    |    |               |
| 40 | CCR-40KX0-S    | 82 | CR-40KX0-M     |    |               |
| 41 | CCR-40KX0-T    | 83 | CR-40KX0-MS    |    |               |
| 42 | CCR-40KX0-TM   | 84 | CR-40KX0-N     |    |               |

\* X = 1 (28Vdc), 2 (15Vdc), 3 (12Vdc) and 4 (24Vdc)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.