

FLORENCE-ZT25

Double asymmetric beam for aisle and shelf lighting

TECHNICAL SPECIFICATIONS:

Dimensions	286.0 x 61.0 mm
Height	11 mm
Fastening	screw
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
FLORENCE-ZT25	Linear lens	PMMA	clear	


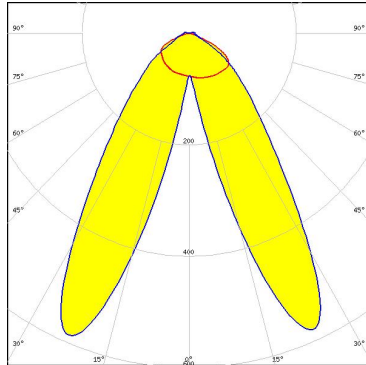
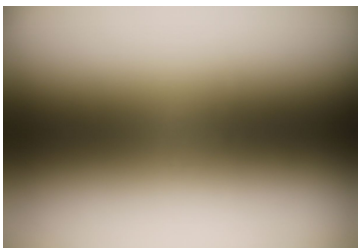
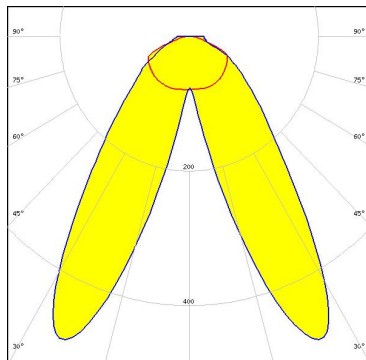

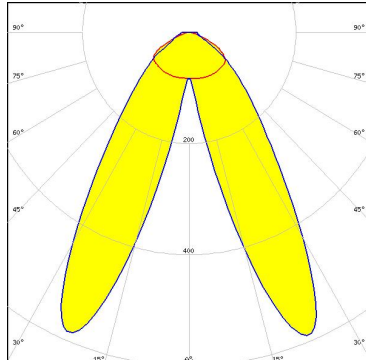
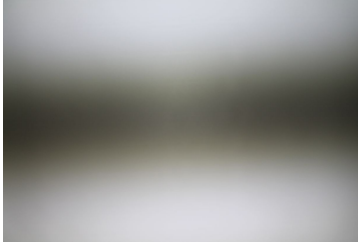
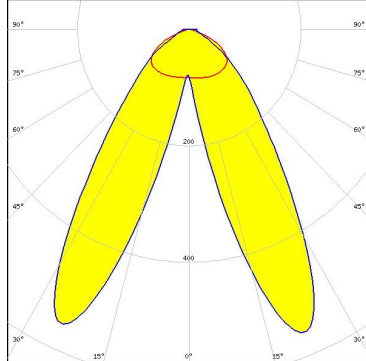


ORDERING INFORMATION:





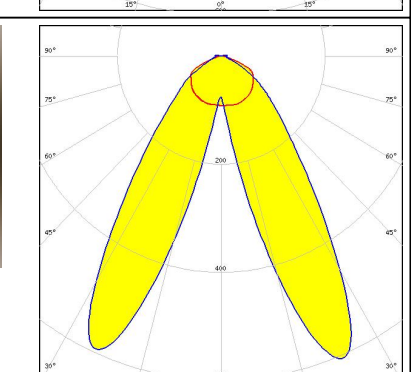
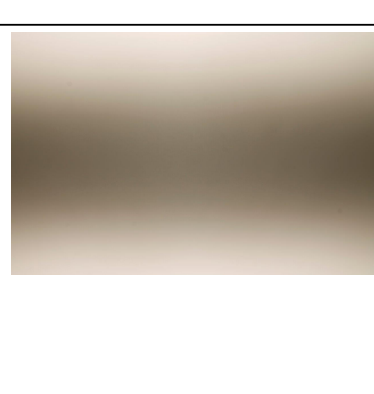
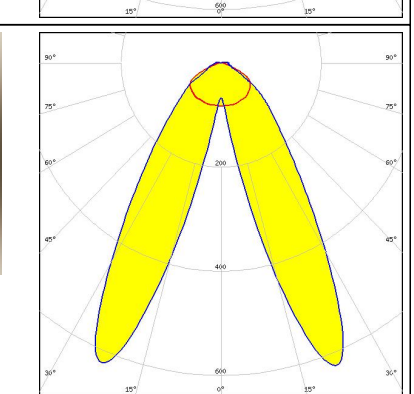
Component	Qty in box	MOQ	MPQ	Box weight (kg)
F14170_FLORENCE-ZT25 » Box size: 398 x 298 x 140 mm	60	18	6	5.8

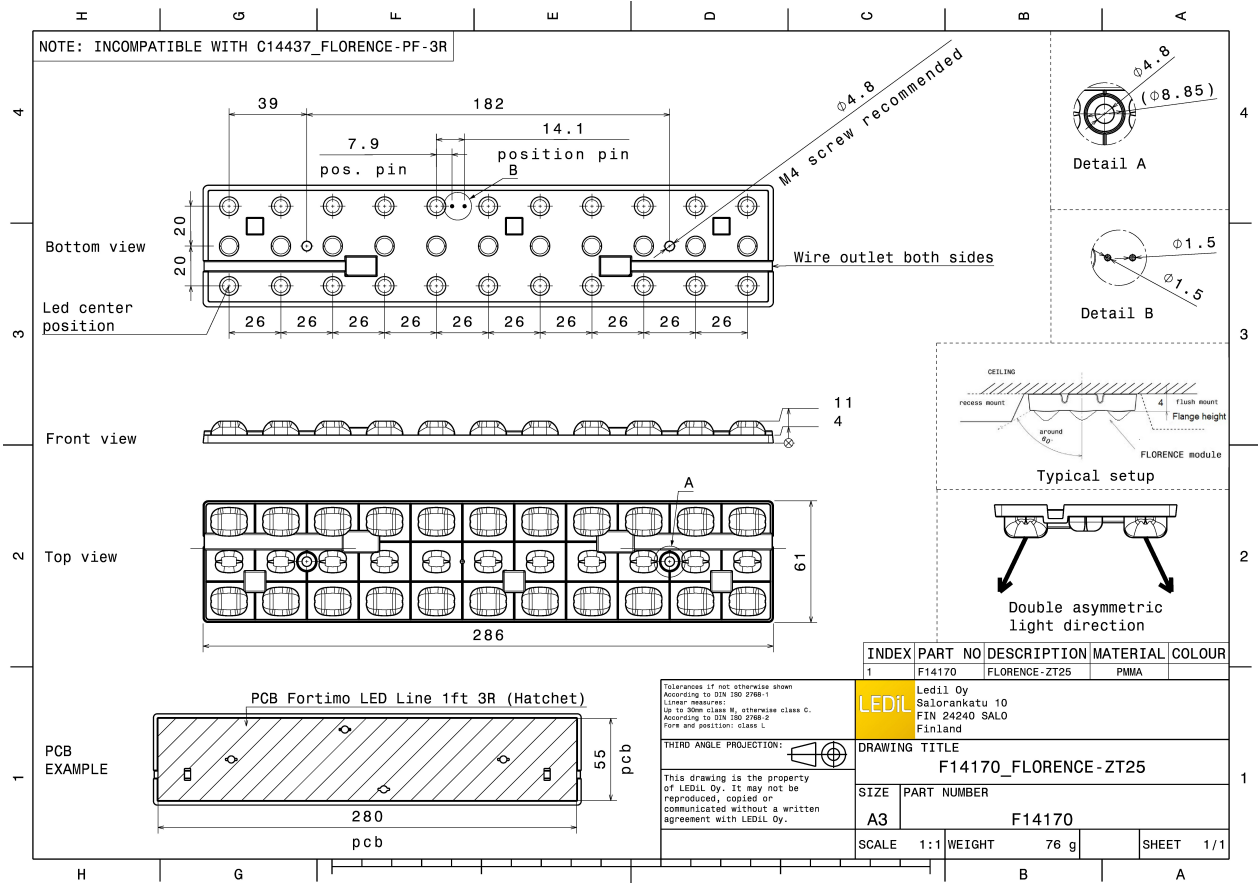

PHOTOMETRIC DATA (MEASURED):

<p>COMET ELECTRONICS</p> <p>LED TRIDINO R3 8x0 1100 1ft HV FWHM Asymmetric Efficiency 94 % Peak intensity 0.590 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE</p> <p>LED XH-B/G FWHM Asymmetric Efficiency 93 % Peak intensity 0.500 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>LG Innotek</p> <p>LED LG 5630 FWHM Asymmetric Efficiency 94 % Peak intensity cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>LG Innotek</p> <p>LED LG 6030 FWHM Asymmetric Efficiency 94 % Peak intensity 0.600 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		



PHOTOMETRIC DATA (MEASURED):
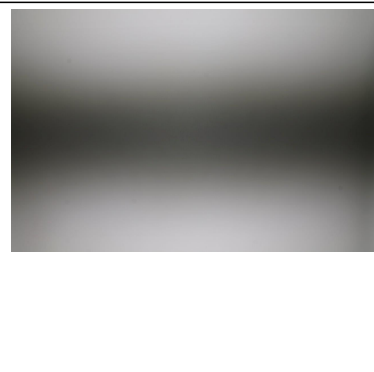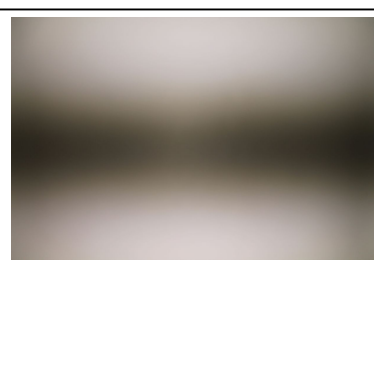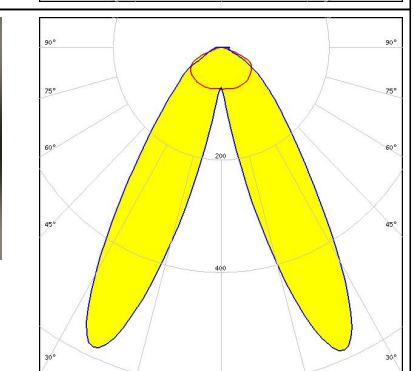
<p>LUMILEDS</p> <p>LED LUXEON 3030 2D (Round LES)</p> <p>FWHM Asymmetric</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.560 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON 3535 2D</p> <p>FWHM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.600 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON XR-3535L (L202 - xxxx033C30001)</p> <p>FWHM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.610 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>LUMINUS</p> <p>LED MP-2016</p> <p>FWHM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.630 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		


PHOTOMETRIC DATA (MEASURED):




LED NF2x757D
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

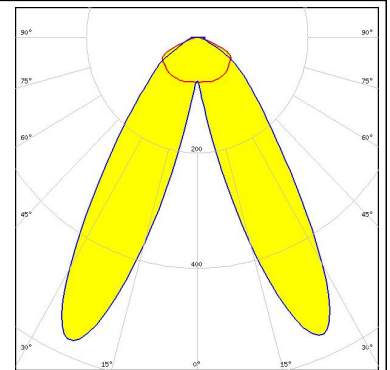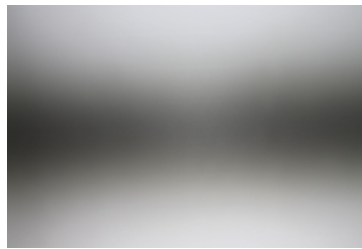



LED NF2x757G
 FWHM Asymmetric
 Efficiency %
 Peak intensity cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

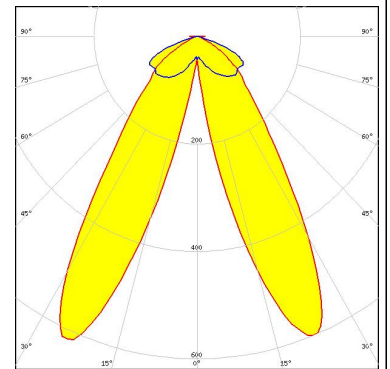

LED NFSW757H
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.591 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

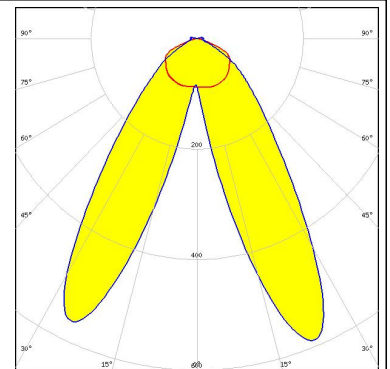



LED PL-BAR-G3 1100 280x55
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.590 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

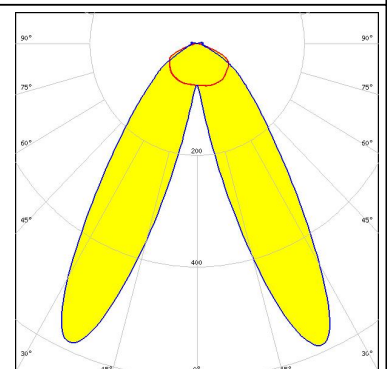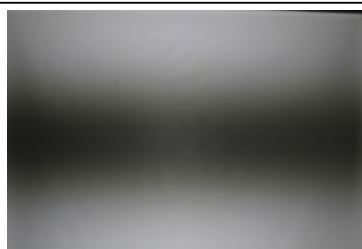

PHOTOMETRIC DATA (MEASURED):

OSRAM



LED PLG2-BAR-1100-xxx-280x55-DC
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

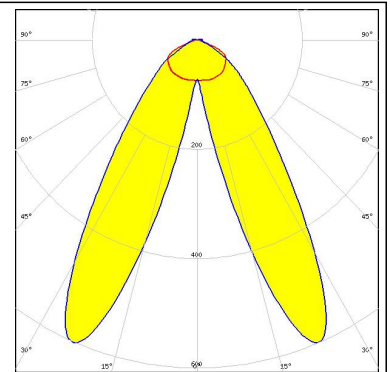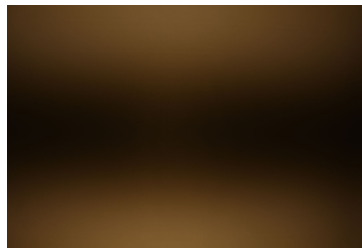

OSRAM

Opto Semiconductors



LED Duris E5
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

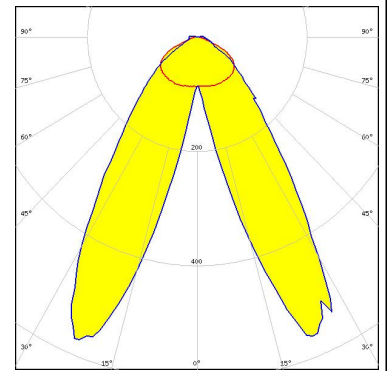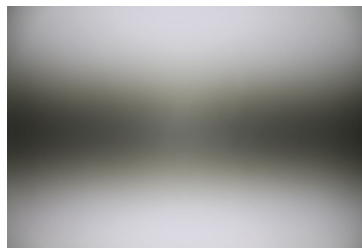

OSRAM

Opto Semiconductors



LED Duris S2
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.510 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

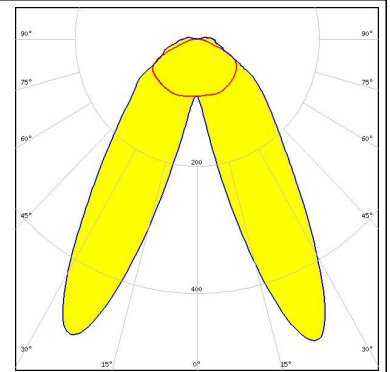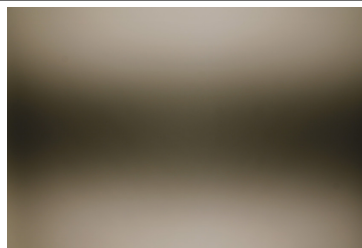

OSRAM

Opto Semiconductors

LED Duris S5 (Single chip)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

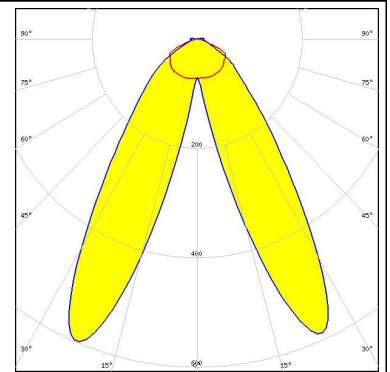
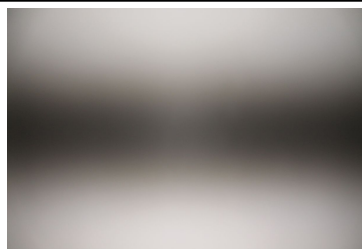


PHOTOMETRIC DATA (MEASURED):

OSRAM

Opto Semiconductors



LED OSCONIQ P 2226
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

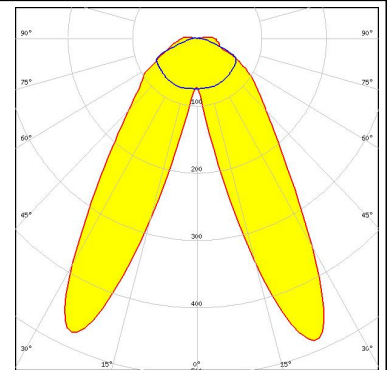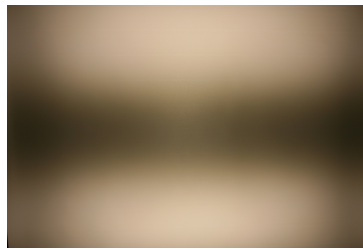

OSRAM


Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.580 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

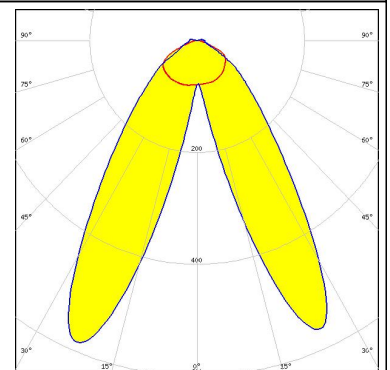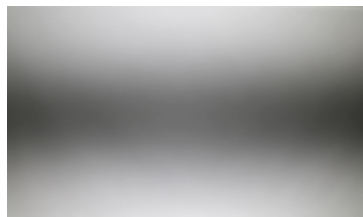



PHILIPS

LED Fortimo LED Line 1ft 650lm 3R HV4 & LV4
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.590 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

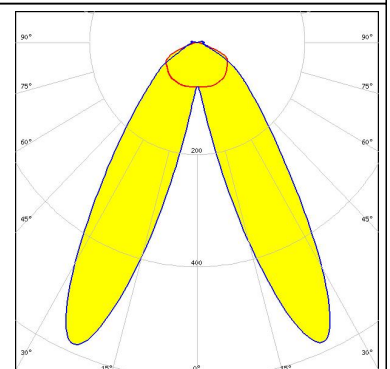

SAMSUNG



LED LM231 A/B
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

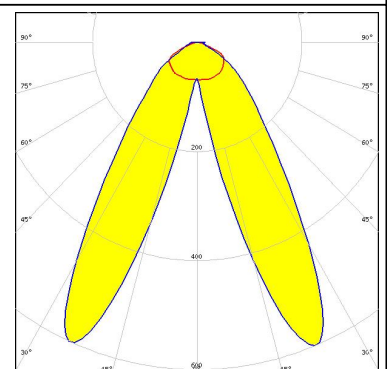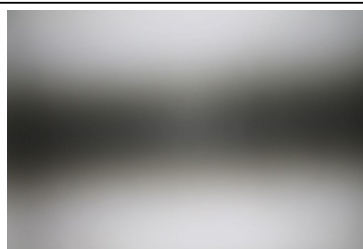

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED LM561B
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

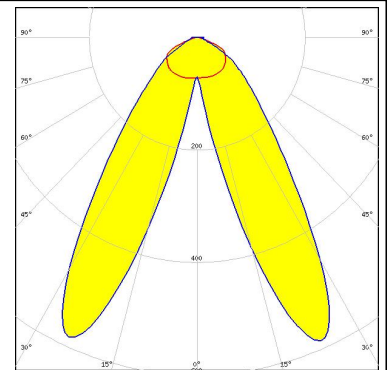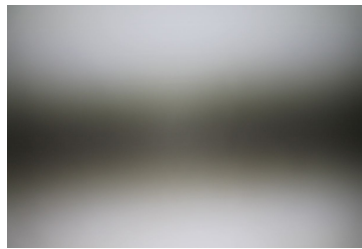



SAMSUNG

LED LM561B Plus
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.590 cd/lm
LEDs/each optic 1
Light colour White
Required components:

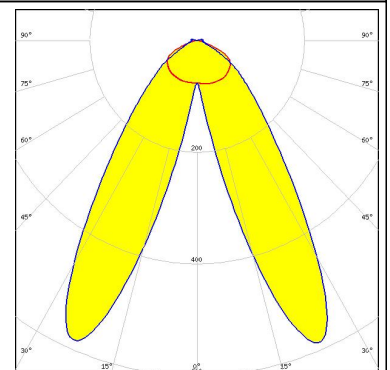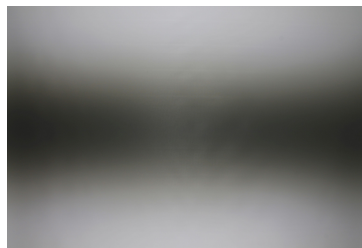


SAMSUNG

LED LT-R286A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.590 cd/lm
LEDs/each optic 1
Light colour White
Required components:

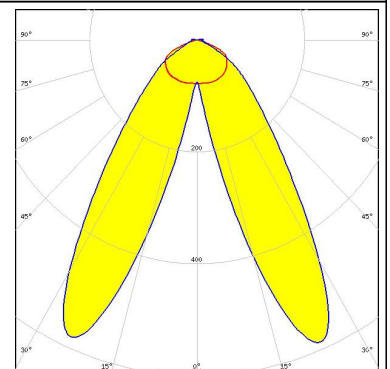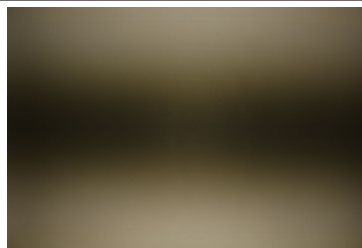
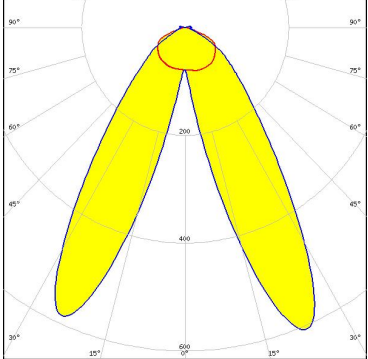

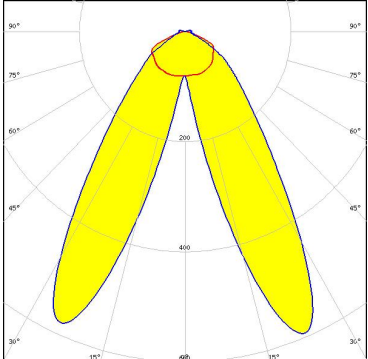

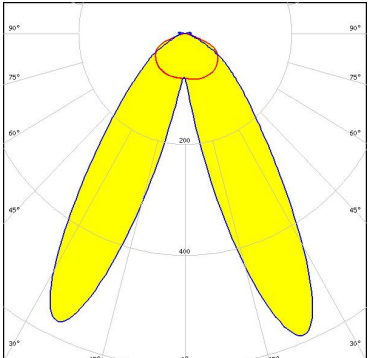


SEOUL SEMICONDUCTOR

LED SEOUL 3030
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.590 cd/lm
LEDs/each optic 1
Light colour White
Required components:

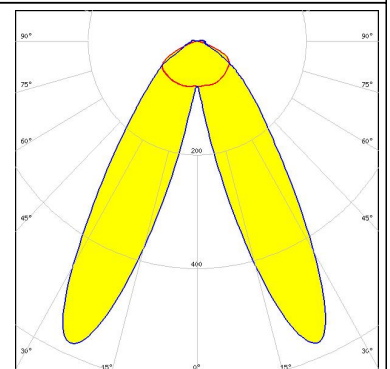


PHOTOMETRIC DATA (MEASURED):

<p> SEOUL SEMICONDUCTOR</p> <p>LED: SEOUL 5630C FWHM: Asymmetric Efficiency: 94 % Peak intensity: 0.610 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED: SEOUL DC 3030 FWHM: Asymmetric Efficiency: 94 % Peak intensity: 0.590 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>TRIDONIC</p> <p>LED: LLE G2 55x280mm 2000lm FWHM: Asymmetric Efficiency: 94 % Peak intensity: 0.590 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		


PHOTOMETRIC DATA (SIMULATED):




LED XP-G
FWHM Asymmetric
Efficiency 94 %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

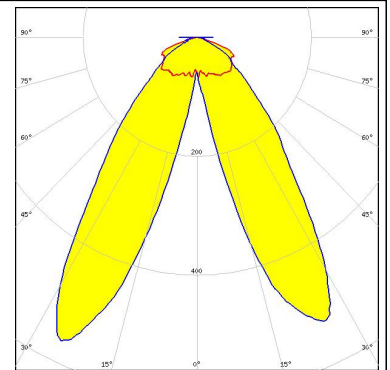


LED LUXEON 5050 Round LES
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.540 cd/lm
LEDs/each optic 1
Light colour White
Required components:

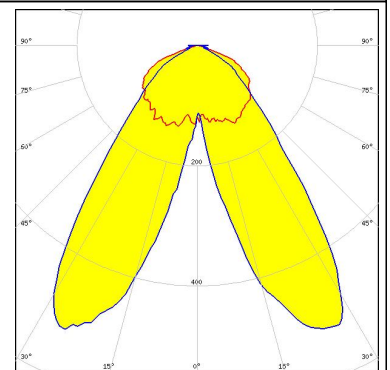

LED NFSx757G
FWHM 131.0 + 72.0°
Efficiency 96 %
Peak intensity 0.606 cd/lm
LEDs/each optic 2
Light colour White
Required components:

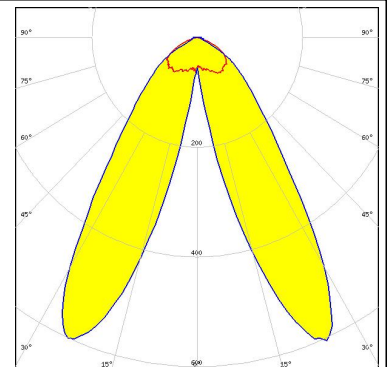

LED NFSx757G
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.610 cd/lm
LEDs/each optic 1
Light colour White
Required components:

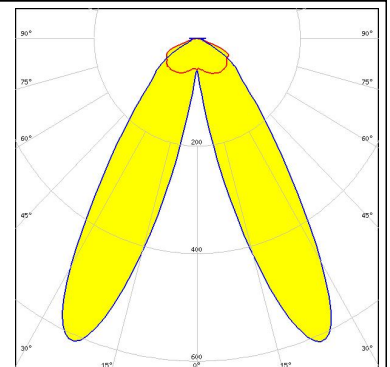


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED Duris E 2835
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.610 cd/lm
LEDs/each optic 1
Light colour White
Required components:

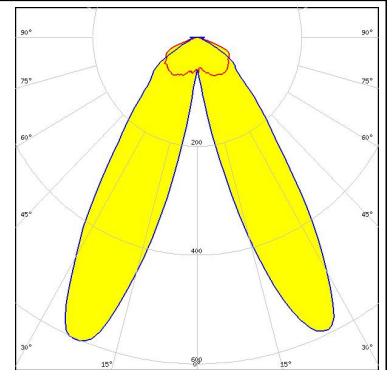

OSRAM


Opto Semiconductors

LED Duris E 2835
FWHM Asymmetric
Efficiency 96 %
Peak intensity 0.609 cd/lm
LEDs/each optic 2
Light colour White
Required components:

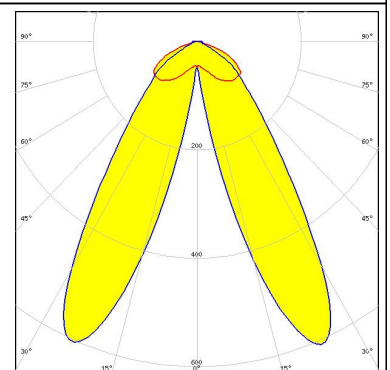


SAMSUNG

LED LM28xB Series
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.640 cd/lm
LEDs/each optic 1
Light colour White
Required components:

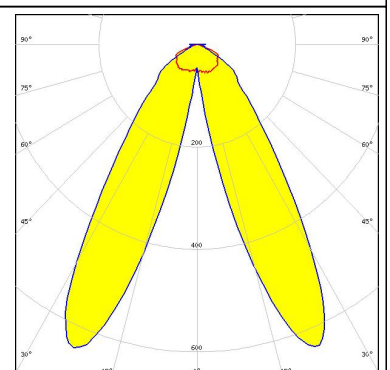

SEOUL SEMICONDUCTOR

LED SEOUL 5630D
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.620 cd/lm
LEDs/each optic 1
Light colour White
Required components:

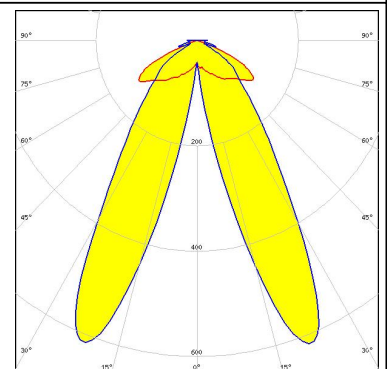

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.