


# G3VM-21BR/ER

MOS FET Relays

Higher power, 4-A switching with a 20-V load voltage, DIP package.

Low 20 mΩ ON Resistance.

- Continuous load current of 4 A. (Connection C: 8 A)
- Switches minute analog signals.
- Dielectric strength of 2,500 Vrms between I/O.

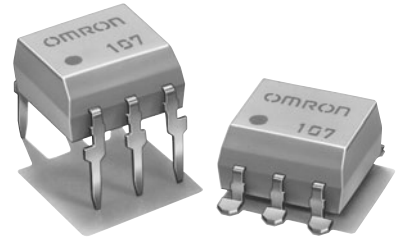

**NEW**

Note: The actual product is marked differently from the image shown here.

RoHS compliant

## Application Examples

- Communication equipment
- Test & Measurement equipment
- Security equipment
- Factory Automation equipment
- Power circuit

## List of Models

| Package type | Contact form | Terminals                  | Load voltage (peak value) * | Model          | Minimum package quantity |                          |
|--------------|--------------|----------------------------|-----------------------------|----------------|--------------------------|--------------------------|
|              |              |                            |                             |                | Number per stick         | Number per tape and reel |
| DIP6         | 1a (SPST-NO) | PCB terminals              | 20 V                        | G3VM-21BR      | 50                       | ---                      |
|              |              | Surface-mounting terminals |                             | G3VM-21ER      |                          |                          |
|              |              |                            |                             | G3VM-21ER (TR) | ---                      | 1,500                    |


\* The AC peak and DC value are given for the load voltage.

## Absolute Maximum Ratings (Ta = 25°C)

| Item  | Symbol                              | Rating           | Unit | Measurement conditions        |  |
|---|-------------------------------------|------------------|------|-------------------------------|--|
| Input   | LED forward current                 | IF               | 30   | mA                            |  |
|   | Repetitive peak LED forward current | IFP              | 1    | A                             | 100 μs pulses, 100 pps                             |
|   | LED forward current reduction rate  | ΔIF/°C           | -0.3 | mA/°C                         | Ta ≥ 25°C  |
|   | LED reverse voltage                 | VR               | 5    | V                             |  |
|   | Connection temperature              | TJ               | 125  | °C                            |  |
| Output  | Load voltage (AC peak/DC)           | V <sub>OFF</sub> | 20   | V                             |  |
|   | Continuous load current             | Io               | 4    | A                             | Connection A: AC peak/DC<br>Connection B and C: DC |
|   |                                     |                  | 4    |                               |  |
|   |                                     |                  | 8    |                               |  |
|   | ON current reduction rate           | ΔIo/°C           | -40  | mA/°C                         | Ta ≥ 25°C  |
|   |                                     |                  | -40  |                               |  |
|   |                                     |                  | -80  |                               |  |
| Pulse ON current                              | I <sub>op</sub>                     | 12               | A    | t = 100 ms, Duty = 1/10       |  |
| Connection temperature                        | TJ                                  | 125              | °C   |                               |  |
| Dielectric strength between I/O (See note 1.) | V <sub>I-O</sub>                    | 2500             | Vrms | AC for 1 min                  |  |
| Operating temperature                         | Ta                                  | -40 to +85       | °C   | With no icing or condensation |  |
| Storage temperature                           | T <sub>stg</sub>                    | -55 to +125      | °C   | With no icing or condensation |  |
| Soldering temperature                         | ---                                 | 260              | °C   | 10 s                          |  |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


### Connection Diagram

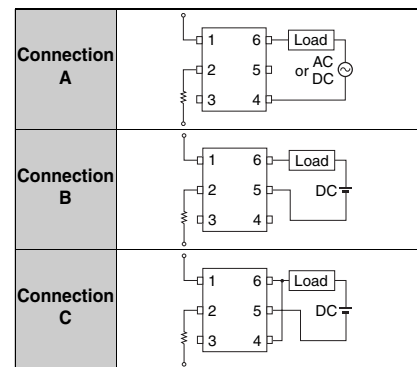

## Electrical Characteristics (Ta = 25°C)

| Item  | Symbol                                 | Minimum           | Typical | Maximum | Unit | Measurement conditions                                      |                              |
|---|--|-------------------|---------|---------|------|---|------------------------------|
| Input                                       | LED forward voltage                    | V <sub>F</sub>    | 1.18    | 1.33    | 1.48 | V   | IF = 10 mA                   |
|   | Reverse current                        | I <sub>R</sub>    | ---     | ---     | 10   | μA  | VR = 5 V                     |
|   | Capacity between terminals             | C <sub>T</sub>    | ---     | 70      | ---  | pF  | V = 0, f = 1 MHz             |
| Output                                      | Trigger LED forward current            | I <sub>FT</sub>   | ---     | 0.5     | 3    | mA  | Io = 1 A                     |
|   | Maximum resistance with output ON      | RON               | ---     | 20      | 50   | mΩ  | IF = 5 mA, Io = 2 A, t < 1 s |
|   |  |                   | ---     | 10      | ---  | mΩ  | IF = 5 mA, Io = 2 A, t < 1 s |
|   |  |                   | ---     | 5       | ---  | mΩ  | IF = 5 mA, Io = 4 A, t < 1 s |
|   | Current leakage when the relay is open | I <sub>LEAK</sub> | ---     | ---     | 1.0  | μA  | V <sub>OFF</sub> = 20 V      |
| Capacity between terminals                  | C <sub>OFF</sub>                       | ---               | 1000    | ---     | pF   | V = 0, f = 1 MHz  |                              |
| Capacity between I/O terminals              | C <sub>I-O</sub>                       | ---               | 0.8     | ---     | pF   | f = 1 MHz, Vs = 0 V   |                              |
| Insulation resistance between I/O terminals | RI-O                                   | 1000              | ---     | ---     | MΩ   | V <sub>I-O</sub> = 500 VDC, RoH = 60%                       |                              |
| Turn-ON time                                | t <sub>ON</sub>                        | ---               | 2.5     | 5       | ms   | IF = 5 mA, RL = 200 Ω, V <sub>DD</sub> = 20 V (See note 2.) |                              |
| Turn-OFF time                               | t <sub>OFF</sub>                       | ---               | 0.1     | 1       | ms   |   |                              |

Note: 2. Turn-ON and Turn-OFF Times




## Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


| Item                                 | Symbol   | Minimum | Typical | Maximum | Unit |
|--------------------------------------|----------|---------|---------|---------|------|
| Load voltage (AC peak/DC)            | $V_{DD}$ | ---     | ---     | 16      | V    |
| Operating LED forward current        | $I_F$    | 5       | 10      | 25      | mA   |
| Continuous load current (AC peak/DC) | $I_O$    | ---     | ---     | 4       | A    |
| Operating temperature                | $T_a$    | -20     | ---     | 65      | °C   |

## Engineering Data


LED forward current vs. Ambient temperature

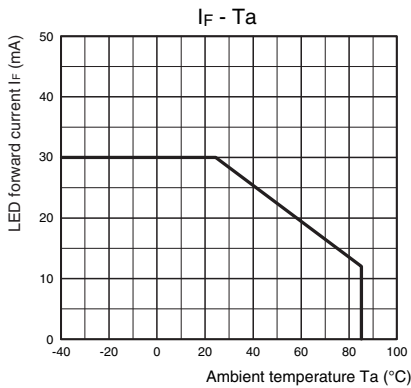


Continuous load current vs. Ambient temperature

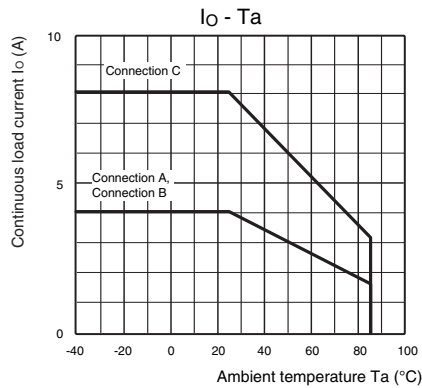


LED forward current vs. LED forward voltage

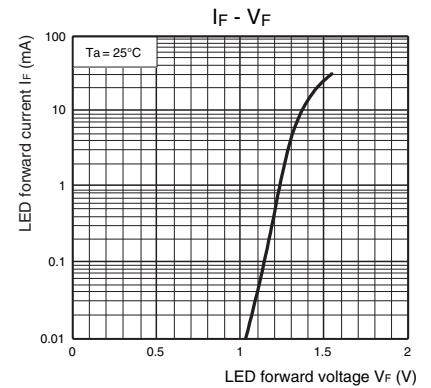


Continuous load current vs. On-state voltage

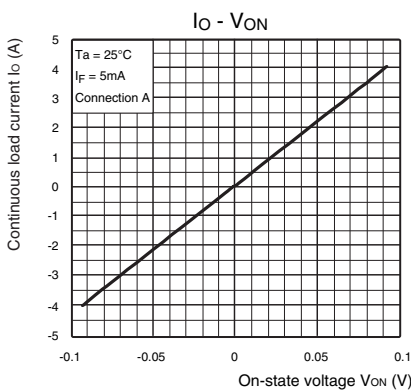


On-state resistance vs. Ambient temperature

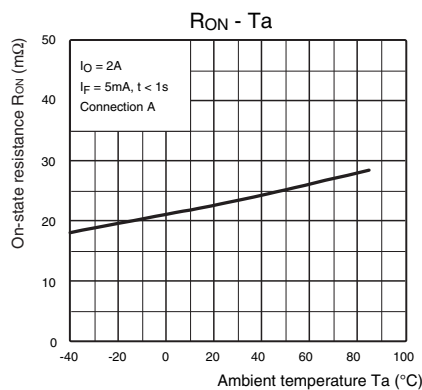


Trigger LED forward current vs. Ambient temperature

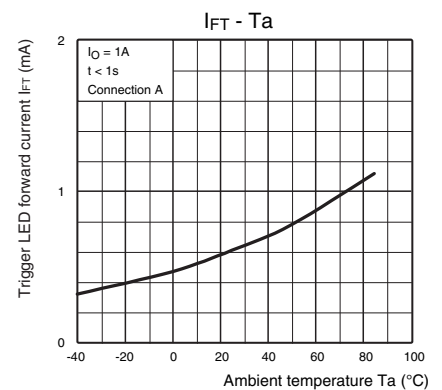


Turn ON, Turn OFF time vs. LED forward current

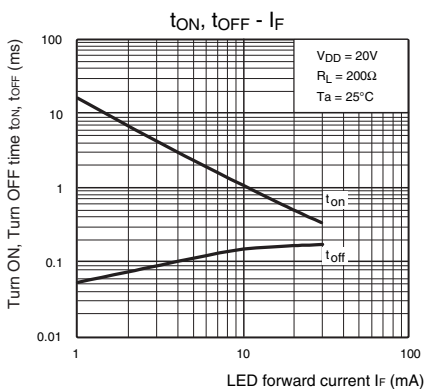

Turn ON, Turn OFF time vs. Ambient temperature

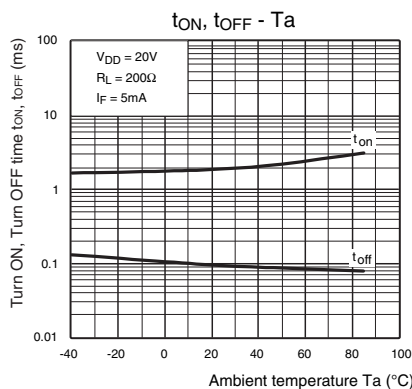

Current leakage vs. Ambient temperature

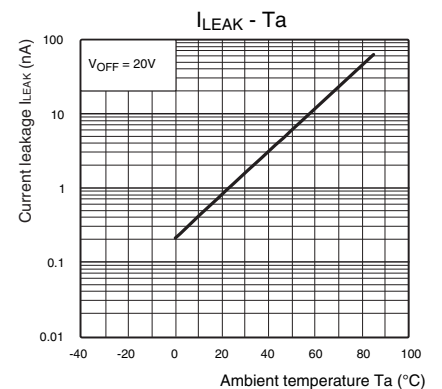


## Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

## ■ Appearance

### DIP (Dual In-line Package)


DIP6

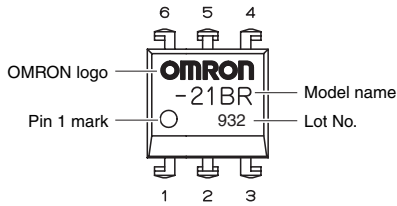

**Note:** The actual product is marked differently from the image shown here.



## ■ Dimensions

(Unit: mm)




### PCB Terminals

Weight: 0.4 g

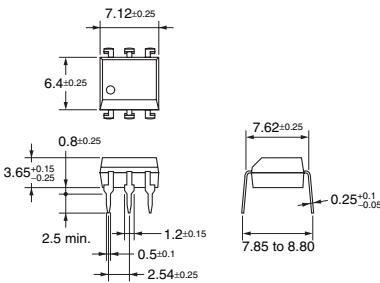


### Surface-mounting Terminals

Weight: 0.4 g

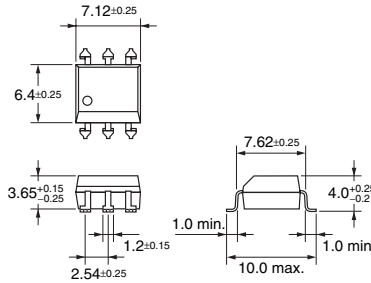


### PCB Dimensions (Bottom View)



### Actual Mounting Pad Dimensions

(Recommended Value, Top View)



**Note:** The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note:** Do not use this document to operate the Unit.

**OMRON Corporation**

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)

Cat. No. **K136-E1-02**

0412(0412)(O)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.