


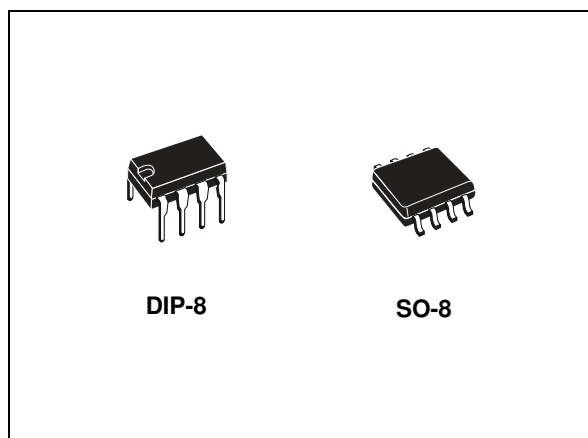

### Description

The MC34063A/E series is a monolithic control circuit which delivers the main functions for DC-DC voltage converting.

The device contains an internal temperature compensated reference, comparator, duty cycle controlled oscillator with an active current limit circuit, driver and high current output switch. Output voltage is adjustable through two external resistors with a 2% reference accuracy.

Employing a minimum number of external components, the MC34063A/E device series is designed for step-down, step-up and voltage-inverting applications.

### Features

- Output switch current in excess of 1.5 A
- 2 % reference accuracy
- Low quiescent current: 2.5 mA (typ.)
- Operating from 3 V to 40 V
- Frequency operation to 100 kHz
- Active current limiting

Table 1. Device summary

| Order codes |               |
|-------------|---------------|
| DIP-8       | SO-8          |
| MC34063ABN  | MC34063ABD-TR |
| MC34063ACN  | MC34063ACD-TR |
| MC34063EBN  | MC34063EBD-TR |
| MC34063ECN  | MC34063ECD-TR |

Contents

1      **Diagram ..... 3**

2      **Pin configuration ..... 4**

3      **Maximum ratings ..... 5**

4      **Electrical characteristics ..... 6**

5      **Typical performance characteristics ..... 8**

6      **Typical application circuit ..... 10**


7      **Package mechanical data ..... 18**

8      **Revision history ..... 22**



## 1 Diagram

**Figure 1. Block diagram**

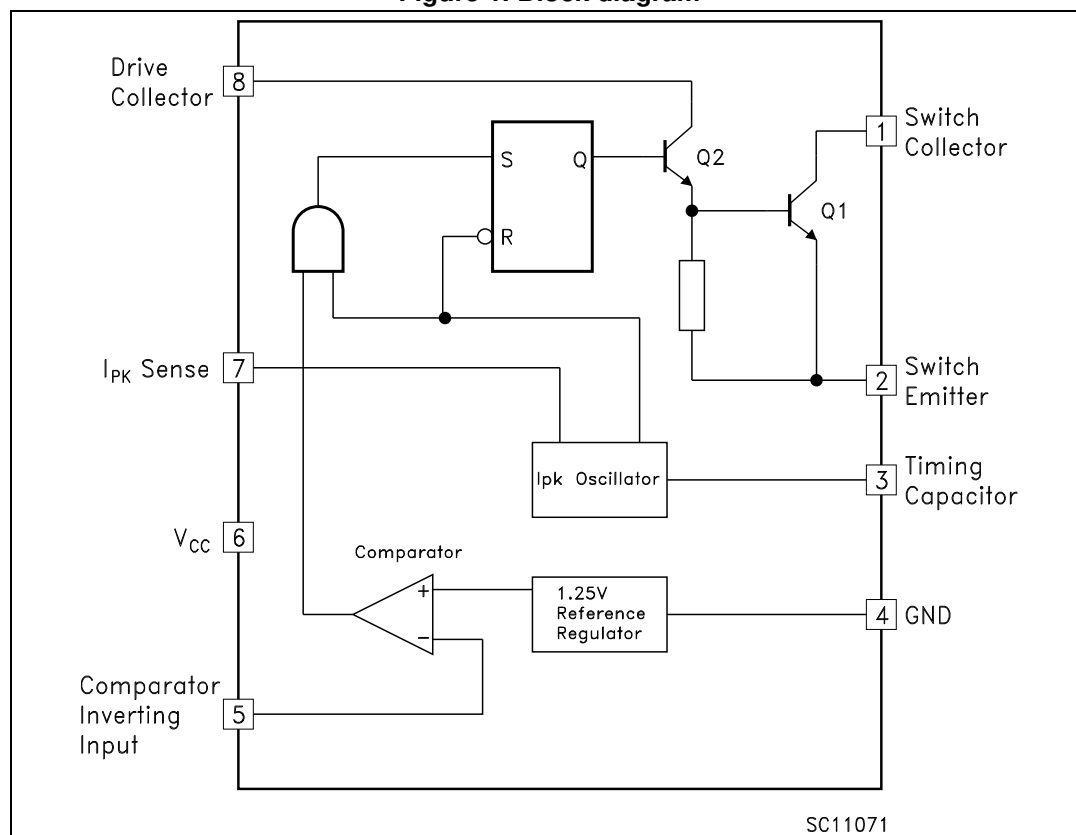

## 2 Pin configuration

Figure 2. Pin connections

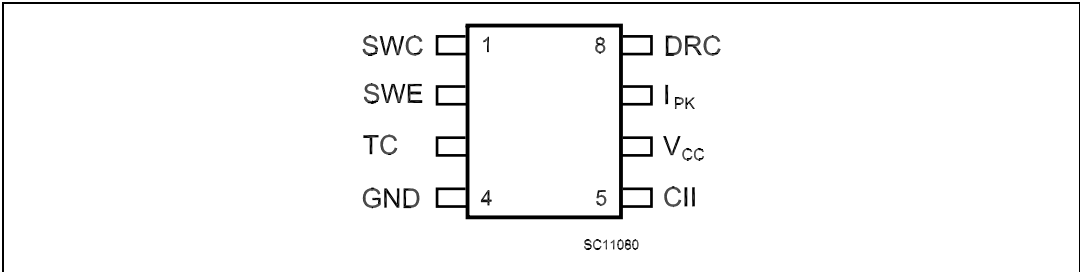


Table 2. Pin description

| Pin n° | Symbol          | Name and function          |
|--------|-----------------|----------------------------|
| 1      | SWC             | Switch collector           |
| 2      | SWE             | Switch emitter             |
| 3      | TC              | Timing capacitor           |
| 4      | GND             | Ground                     |
| 5      | CII             | Comparator inverting input |
| 6      | V <sub>CC</sub> | Voltage supply             |
| 7      | I <sub>PK</sub> | I <sub>PK</sub> sense      |
| 8      | DRC             | Voltage driver collector   |

### 3 Maximum ratings

**Table 3. Absolute maximum ratings**

| Symbol    | Parameter                                  |                      | Value      | Unit       |
|-----------|--------------------------------------------|----------------------|------------|------------|
| $V_{CC}$  | Power supply voltage                       |                      | 50         | V          |
| $V_{IR}$  | Comparator input voltage range             |                      | -0.3 to 40 | V          |
| $V_{SWC}$ | Switch collector voltage                   |                      | 40         | V          |
| $V_{SWE}$ | Switch emitter voltage ( $V_{SWC} = 40V$ ) |                      | 40         | V          |
| $V_{CE}$  | Switch collector to emitter voltage        |                      | 40         | V          |
| $V_{DC}$  | Driver collector voltage                   |                      | 40         | V          |
| $I_{DC}$  | Driver collector current                   |                      | 100        | mA         |
| $I_{SW}$  | Switch current                             |                      | 1.5        | A          |
| $P_{TOT}$ | Power dissipation at $T_A = 25^\circ C$    | for DIP-8            | 1.25       | W          |
|           |                                            | for SO-8             | 0.625      |            |
| $T_J$     | Operating junction temperature             |                      | 150        | $^\circ C$ |
| $T_{STG}$ | Storage temperature range                  |                      | -40 to 150 | $^\circ C$ |
| $T_{OP}$  | Operating ambient temperature range        | for AC and EC series | 0 to 70    | $^\circ C$ |
|           |                                            | for AB series        | -40 to 85  |            |
|           |                                            | for EB series        | -40 to 125 |            |

**Note:** *Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.*

**Table 4. Thermal data**

| Symbol     | Parameter                                          | DIP-8 | SO-8 | Unit         |
|------------|----------------------------------------------------|-------|------|--------------|
| $R_{thJA}$ | Thermal resistance junction-ambient <sup>(1)</sup> | 100   | 160  | $^\circ C/W$ |
| $R_{thJC}$ | Thermal resistance junction-case                   | 42    | 20   | $^\circ C/W$ |

1. This value depends from thermal design of PCB on which the device is mounted.

## 4 Electrical characteristics

Refer to the test circuits,  $V_{CC} = 5\text{ V}$ ,  $T_A = T_{LOW}$  to  $T_{HIGH}$ , unless otherwise specified. <sup>(a)</sup>

**Table 5. Oscillator**

| Symbol               | Parameter                         | Test conditions                                                          | Min. | Typ. | Max. | Unit          |
|----------------------|-----------------------------------|--------------------------------------------------------------------------|------|------|------|---------------|
| $f_{OSC}$            | Frequency                         | $V_{PIN5} = 0\text{ V}$ , $C_T = 1\text{ nF}$ , $T_A = 25^\circ\text{C}$ | 24   | 33   | 42   | kHz           |
| $I_{CHG}$            | Charge current                    | $V_{CC} = 5\text{ to }40\text{ V}$ , $T_A = 25^\circ\text{C}$            | 24   | 33   | 42   | $\mu\text{A}$ |
| $I_{DISCHG}$         | Discharge current                 | $V_{CC} = 5\text{ to }40\text{ V}$ , $T_A = 25^\circ\text{C}$            | 140  | 200  | 260  | $\mu\text{A}$ |
| $I_{DISCHG}/I_{CHG}$ | Discharge to charge current ratio | $PIN\ 7 = V_{CC}$ , $T_A = 25^\circ\text{C}$                             | 5.2  | 6.2  | 7.5  | $\mu\text{A}$ |
| $V_{IPK(sense)}$     | Current limit sense voltage       | $I_{CHG} = I_{DISCHG}$ , $T_A = 25^\circ\text{C}$                        | 250  | 300  | 350  | mV            |

**Table 6. Output switch**

| Symbol        | Parameter                                 | Test conditions                                                                       | Min. | Typ. | Max. | Unit          |
|---------------|-------------------------------------------|---------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_{CE(sat)}$ | Saturation voltage, Darlington connection | $I_{SW} = 1\text{ A}$ , $PIN\ 1, 8$ connected                                         |      | 1    | 1.3  | V             |
| $V_{CE(sat)}$ | Saturation voltage                        | $I_{SW} = 1\text{ A}$ , $R_{PIN8} = 82\ \Omega$ to $V_{CC}$<br>Forced $\beta \sim 20$ |      | 0.45 | 0.7  | V             |
| $h_{FE}$      | DC current gain                           | $I_{SW} = 1\text{ A}$ , $V_{CE} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$              | 50   | 120  |      |               |
| $I_{C(off)}$  | Collector off-state current               | $V_{CE} = 40\text{ V}$                                                                |      | 0.01 | 100  | $\mu\text{A}$ |

**Table 7. Comparator**

| Symbol       | Parameter                         | Test conditions                    | Min.  | Typ. | Max.  | Unit |
|--------------|-----------------------------------|------------------------------------|-------|------|-------|------|
| $V_{TH}$     | Threshold voltage                 | $T_A = 25^\circ\text{C}$           | 1.225 | 1.25 | 1.275 | V    |
|              |                                   | $T_A = T_{LOW}$ to $T_{HIGH}$      | 1.21  |      | 1.29  |      |
| $Reg_{line}$ | Threshold voltage line regulation | $V_{CC} = 3\text{ to }40\text{ V}$ |       | 1    | 10    | mV   |
| $I_{IB}$     | Input bias current                | $V_{IN} = 0\text{ V}$              |       | -5   | -400  | nA   |

a.  $T_{LOW} = 0^\circ\text{C}$ ,  $T_{HIGH} = 70^\circ\text{C}$  (AC and EC series);  $T_{LOW} = -40^\circ\text{C}$ ,  $T_{HIGH} = 85^\circ\text{C}$  (AB series);  $T_{LOW} = -40^\circ\text{C}$ ,  $T_{HIGH} = 125^\circ\text{C}$  (EB series)

Table 8. Total device

| Symbol         | Parameter                       | Test conditions                                                                                                                                  |              | Min. | Typ. | Max. | Unit |
|----------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|------|------|------|
| $I_{CC}$       | Supply current                  | $V_{CC} = 5 \text{ to } 40 \text{ V}$<br>$C_T = 1 \text{ nF}$<br>$PIN 7 = V_{CC}$<br>$V_{PIN5} > V_{TH}$<br>$PIN 2 = GND$<br>Remaining pins open | for MC34063A |      | 2.5  | 4    | mA   |
|                |                                 |                                                                                                                                                  | for MC34063E |      | 1.5  | 4    |      |
| $V_{START-UP}$ | Start-up voltage <sup>(1)</sup> | $T_A = 25^\circ\text{C}$<br>$C_T = 1 \mu\text{F}, PIN 5 = 0$                                                                                     | for MC34063A |      | 2.1  |      | V    |
|                |                                 |                                                                                                                                                  | for MC34063E |      | 1.5  |      |      |

1. Start-up voltage is the minimum power supply voltage at which the internal oscillator begins to work.

**Note:** Maximum package power dissipation limit must be observed.

If Darlington configuration is not used, care must be taken to avoid deep saturation of output switch. The resulting switch-off time may be adversely affected. In a Darlington configuration the following output driver condition is suggested:

$$\text{Forced } \beta \text{ of output current switch} = I_{COUTPUT} / (I_{CDRIVER} - 1 \text{ mA}) \geq 10$$

## 5 Typical performance characteristics

Figure 3. Emitter follower configuration output saturation voltage vs. emitter current

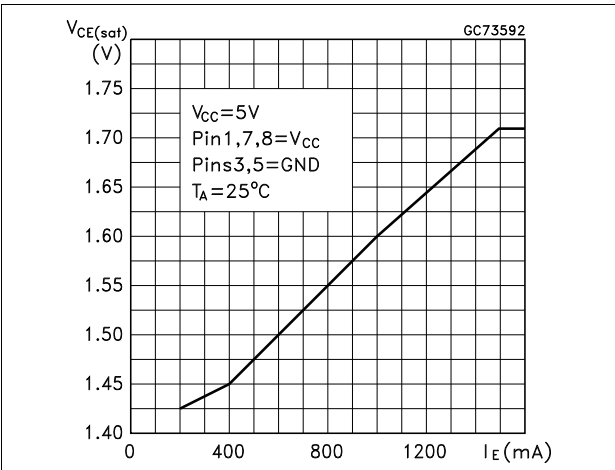


Figure 4. Output switch ON-OFF time vs. oscillator timing capacitor

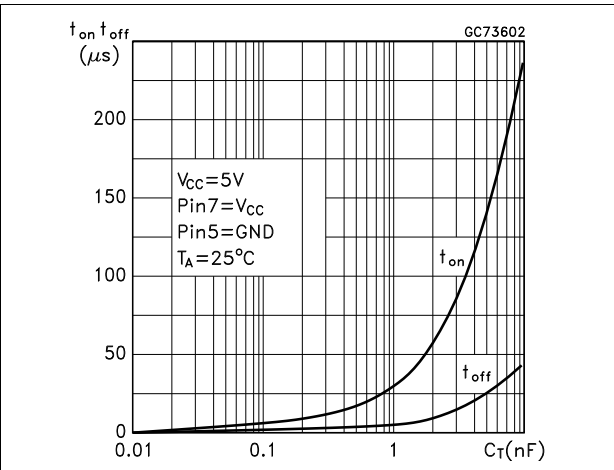


Figure 5. Common emitter configuration output switch saturation voltage vs. collector current

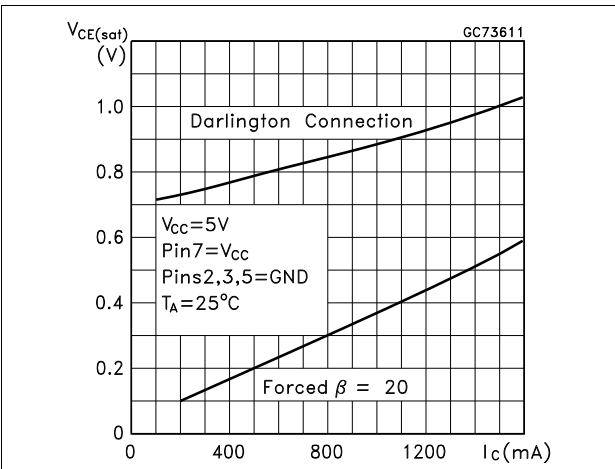
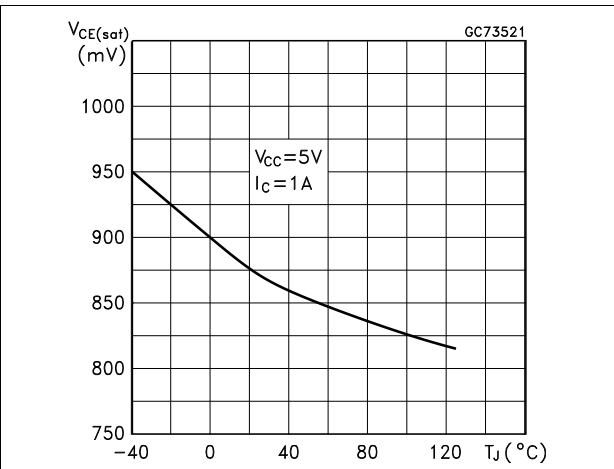
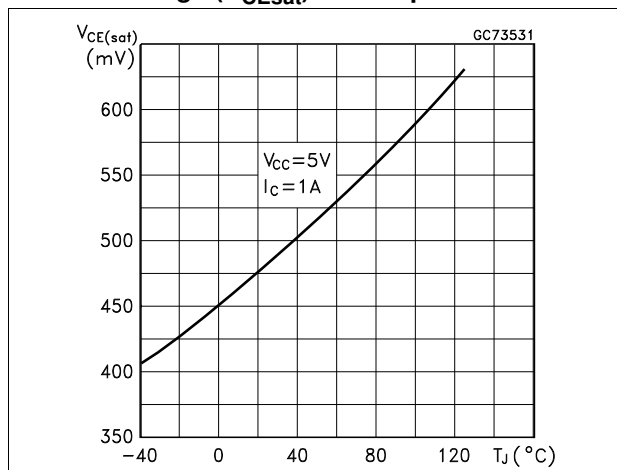
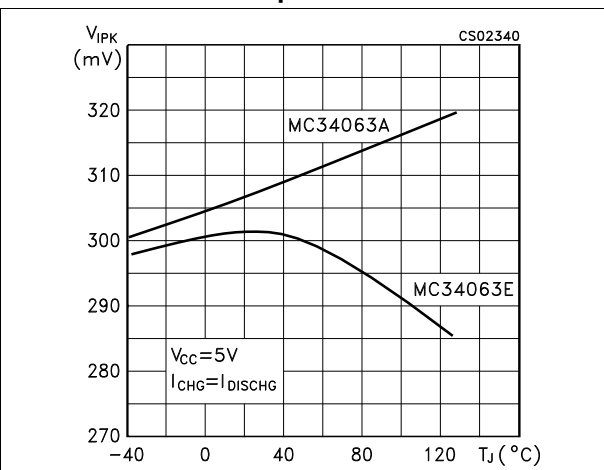
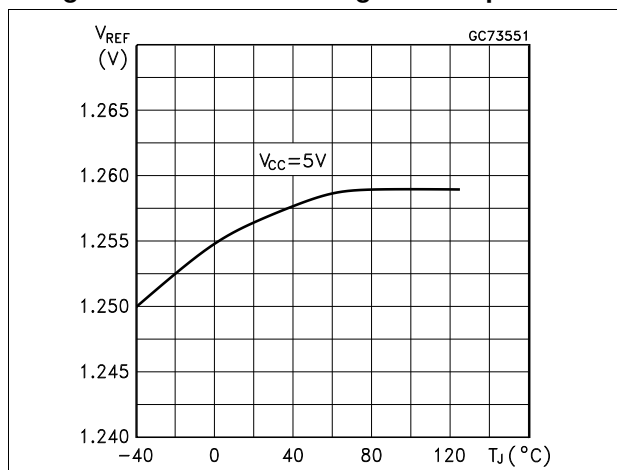
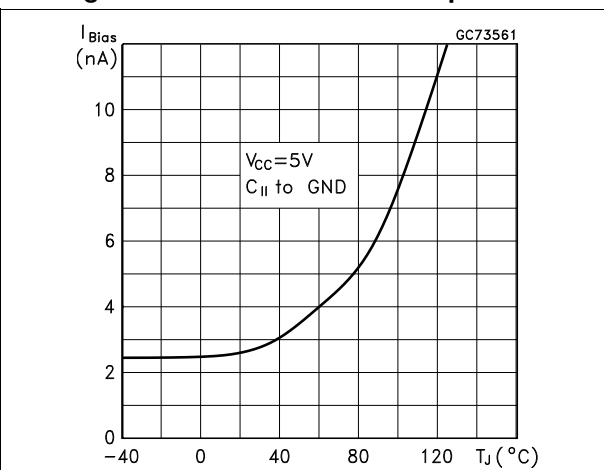
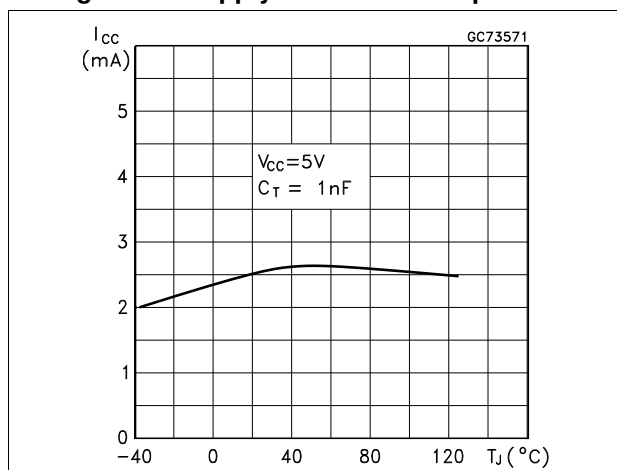
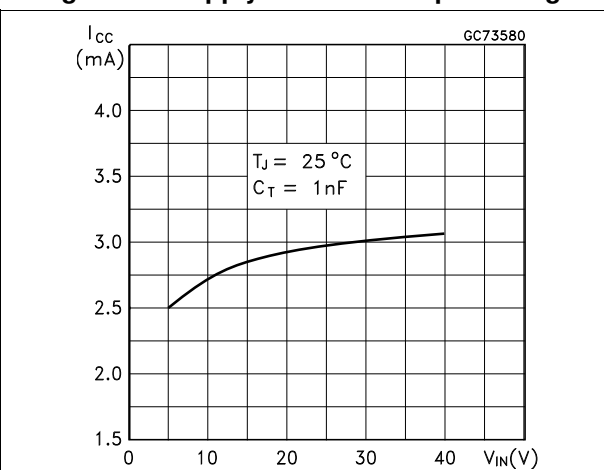


Figure 6. Darlington configuration collector emitter saturation voltage ( $V_{CE(sat)}$ ) vs. temperature



**Figure 7. Power collector emitter saturation voltage ( $V_{CEsat}$ ) vs. temperature****Figure 8. Current limit sense voltage ( $V_{IPK}$ ) vs. temperature****Figure 9. Reference voltage vs. temperature****Figure 10. Bias current vs. temperature****Figure 11. Supply current vs. temperature****Figure 12. Supply current vs. input voltage**

6 Typical application circuit

Figure 13. Step-up converter

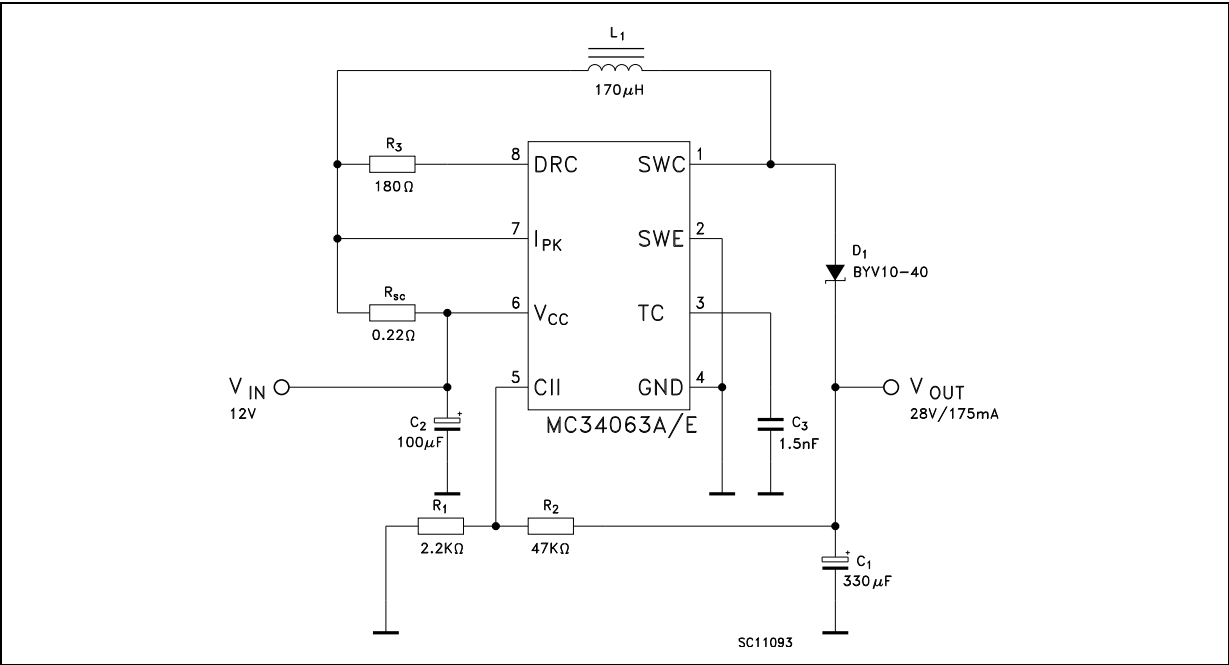


Figure 14. Printed evaluation board

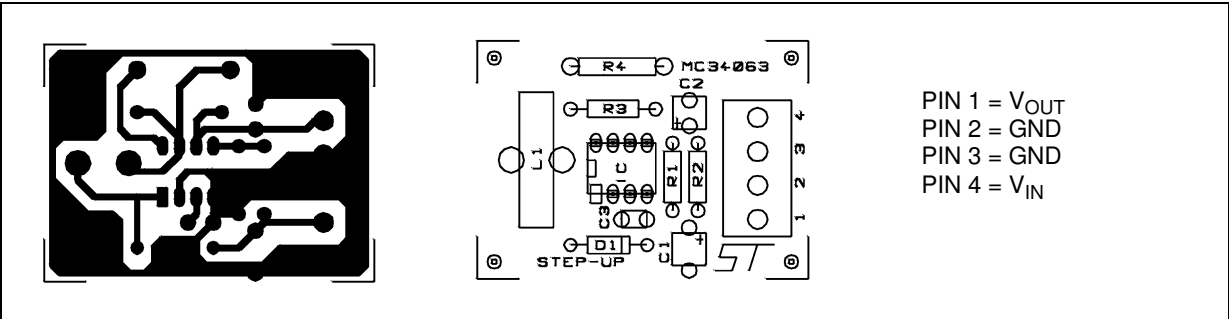
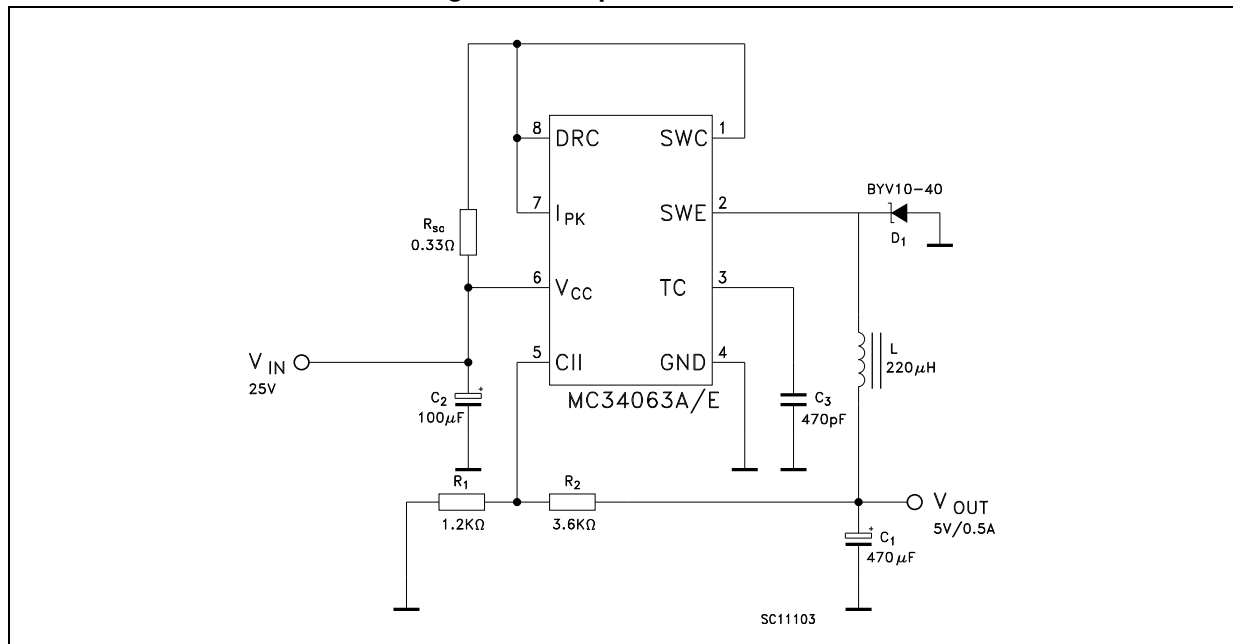



Table 9. Test condition ( $V_{OUT} = 28$  V)

| Test            | Conditions                              | Value (Typ.) | Unit |
|-----------------|-----------------------------------------|--------------|------|
| Line Regulation | $V_{IN} = 8$ to $16$ V, $I_O = 175$ mA  | 30           | mV   |
| Load Regulation | $V_{IN} = 12$ V, $I_O = 75$ to $175$ mA | 10           | mV   |
| Output Ripple   | $V_{IN} = 12$ V, $I_O = 175$ mA         | 300          | mV   |
| Efficiency      | $V_{IN} = 12$ V, $I_O = 175$ mA         | 89           | %    |

### Figure 15. Step-down converter



**Figure 16. Printed evaluation board**

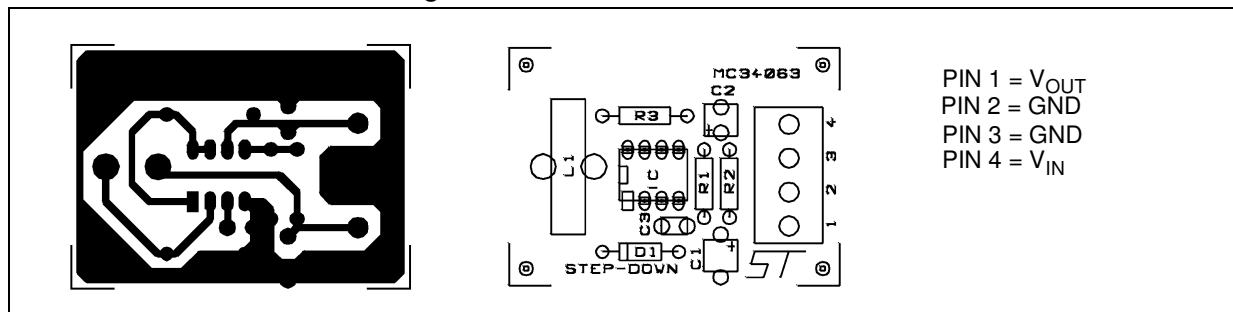**Table 10. Test condition ( $V_{OUT} = 5\text{ V}$ )**

| Test            | Conditions                                                      | Value (typ.) | Unit |
|-----------------|-----------------------------------------------------------------|--------------|------|
| Line regulation | $V_{IN} = 15 \text{ to } 25 \text{ V}$ , $I_O = 500 \text{ mA}$ | 5            | mV   |
| Load regulation | $V_{IN} = 25 \text{ V}$ , $I_O = 50 \text{ to } 500 \text{ mA}$ | 30           | mV   |
| Output ripple   | $V_{IN} = 25 \text{ V}$ , $I_O = 500 \text{ mA}$                | 100          | mV   |
| Efficiency      | $V_{IN} = 25 \text{ V}$ , $I_O = 500 \text{ mA}$                | 80           | %    |
| $I_{SC}$        | $V_{IN} = 25 \text{ V}$ , $R_{LOAD} = 0.1 \Omega$               | 1.2          | A    |

Figure 17. Voltage inverting converter

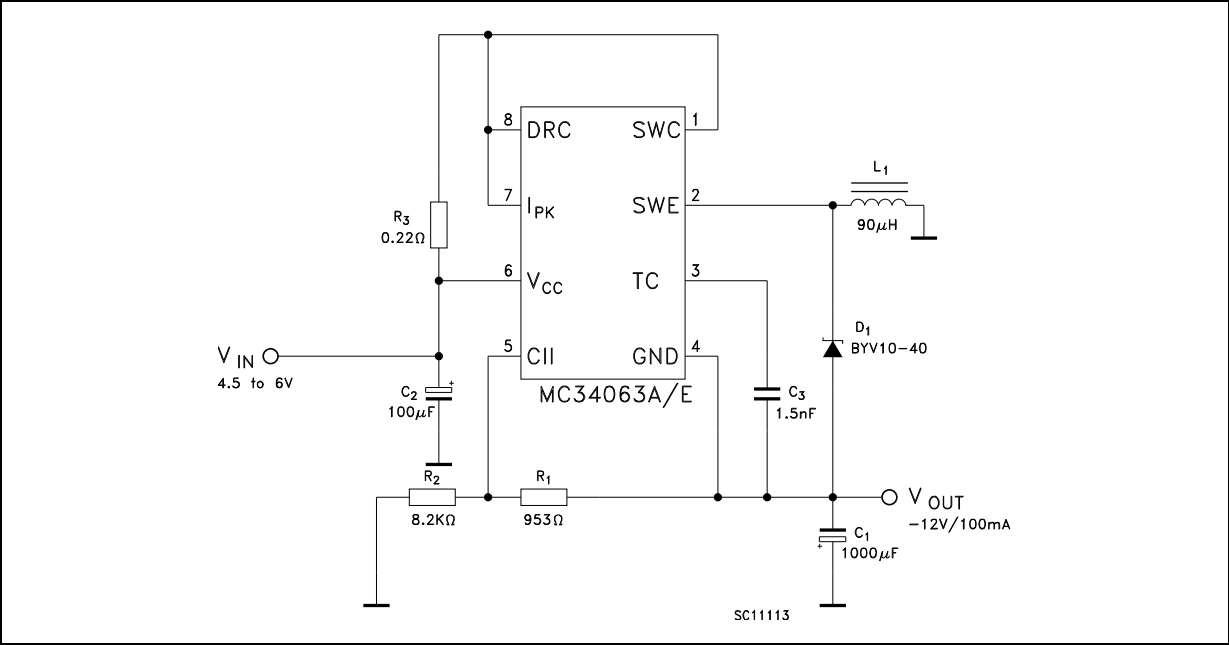


Figure 18. Printed evaluation board

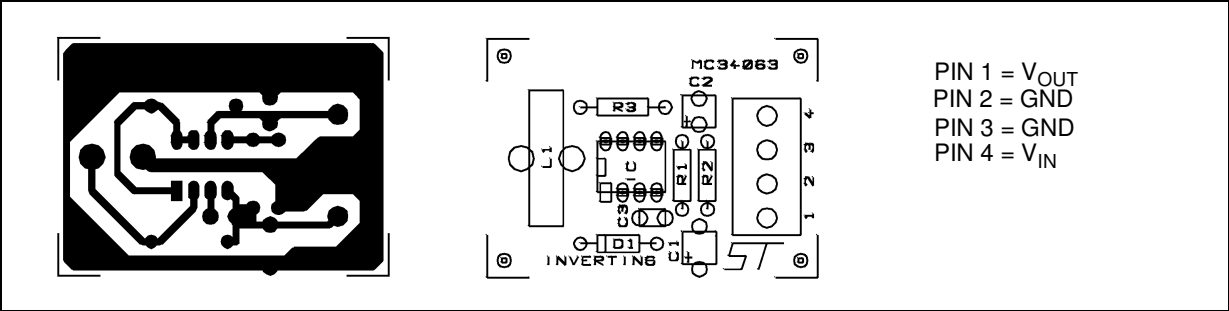


Table 11. Test condition ( $V_{OUT} = 12\text{ V}$ )

| Test            | Conditions                                                  | Value (typ.) | Unit |
|-----------------|-------------------------------------------------------------|--------------|------|
| Line regulation | $V_{IN} = 4.5\text{ to }6\text{ V}$ , $I_O = 100\text{ mA}$ | 15           | mV   |
| Load regulation | $V_{IN} = 5\text{ V}$ , $I_O = 10\text{ to }100\text{ mA}$  | 20           | mV   |
| Output ripple   | $V_{IN} = 5\text{ V}$ , $I_O = 100\text{ mA}$               | 230          | mV   |
| Efficiency      | $V_{IN} = 5\text{ V}$ , $I_O = 100\text{ mA}$               | 58           | %    |
| $I_{SC}$        | $V_{IN} = 5\text{ V}$ , $R_{LOAD} = 0.1\ \Omega$            | 0.9          | A    |

Table 12. Calculation

| Parameter                        | Step-Up<br>(Discontinuous mode)                                   | Step-Down<br>(Continuous mode)                                              | Voltage Inverting<br>(Discontinuous mode)                         |
|----------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------|
| $t_{on}/t_{off}$                 | $\frac{V_{OUT} + V_F - V_{IN(min)}}{V_{IN(min)} - V_{sat}}$       | $\frac{V_{OUT} + V_F}{V_{IN(min)} - V_{sat} - V_{OUT}}$                     | $\frac{ V_{OUT}  + V_F}{V_{IN} - V_{sat}}$                        |
| $(t_{on} + t_{off}) \text{ max}$ | $1/f_{min}$                                                       | $1/f_{min}$                                                                 | $1/f_{min}$                                                       |
| $C_T$                            | $4.5 \times 10^{-5} t_{on}$                                       | $4.5 \times 10^{-5} t_{on}$                                                 | $4.5 \times 10^{-5} t_{on}$                                       |
| $I_{PK(switch)}$                 | $2I_{out(max)}[(t_{on}/t_{off}) + 1]$                             | $2I_{out(max)}$                                                             | $2I_{out(max)}[(t_{on}/t_{off}) + 1]$                             |
| $R_{SC}$                         | $0.3/I_{PK(switch)}$                                              | $0.3/I_{PK(switch)}$                                                        | $0.3/I_{PK(switch)}$                                              |
| $C_O$                            | $\frac{I_{out} t_{on}}{V_{ripple(p-p)}}$                          | $\frac{I_{PK(switch)}(t_{on} + t_{off})}{8V_{ripple(p-p)}}$                 | $\frac{I_{out} t_{on}}{V_{ripple(p-p)}}$                          |
| $L_{(min)}$                      | $\frac{V_{IN(min)} - V_{sat}}{I_{PK(switch)}} \times t_{on(min)}$ | $\frac{V_{IN(min)} - V_{sat} - V_{out}}{I_{PK(switch)}} \times t_{on(min)}$ | $\frac{V_{IN(min)} - V_{sat}}{I_{PK(switch)}} \times t_{on(min)}$ |

Note:  $V_{SAT}$  = Saturation voltage of the output switch

$V_F$  = Forward voltage drop of the output rectifier

The following power supply characteristics must be chosen:

$V_{IN}$  = Nominal input voltage

$V_{OUT}$  = Desired output voltage,  $|V_{OUT}| = 1.25 (1 + R_2/R_1)$

$I_{OUT}$  = Desired output current

$f_{MIN}$  = Minimum desired output switching frequency at the selected values of  $V_{IN}$  and  $I_O$

$V_{RIPPLE}$  = Desired peak to peak output ripple voltage. In practice, the calculated capacitor value will and to be increased due to its equivalent series resistance and board layout. The ripple voltage should be kept to a low value since it will directly affect the line and load regulation.

Figure 19. Step-up with external NPN switch

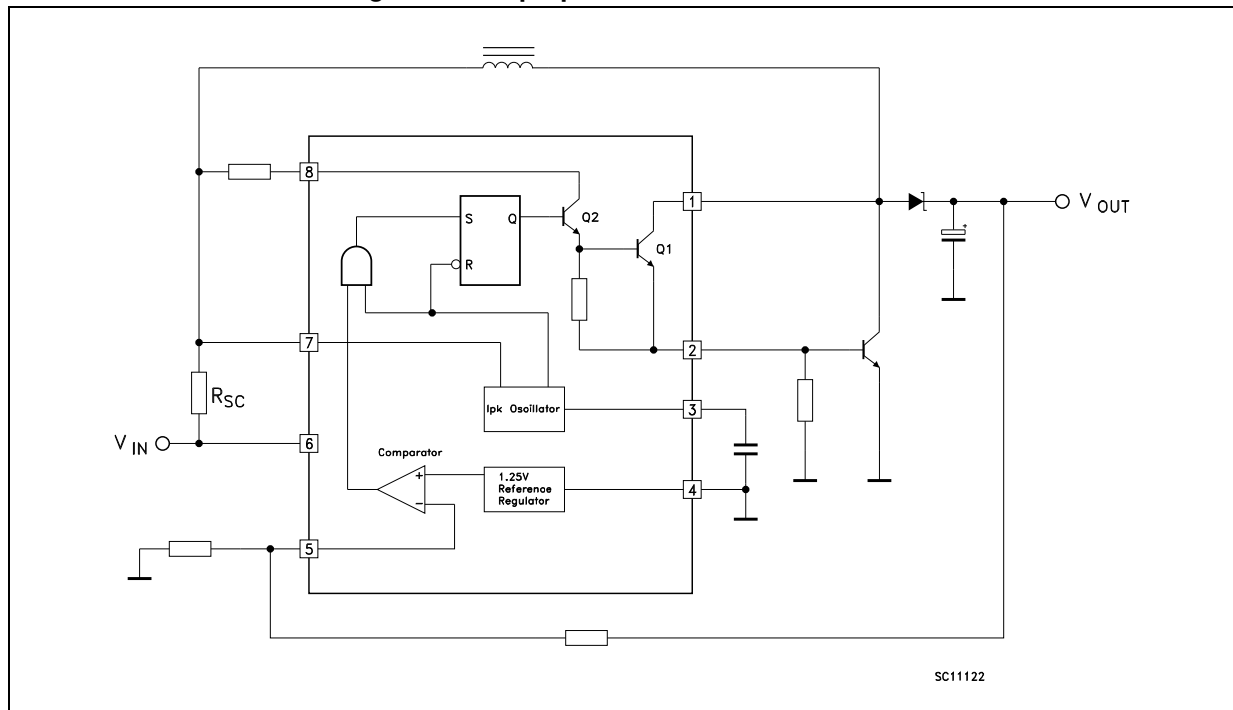


Figure 20. Step-down with external NPN switch

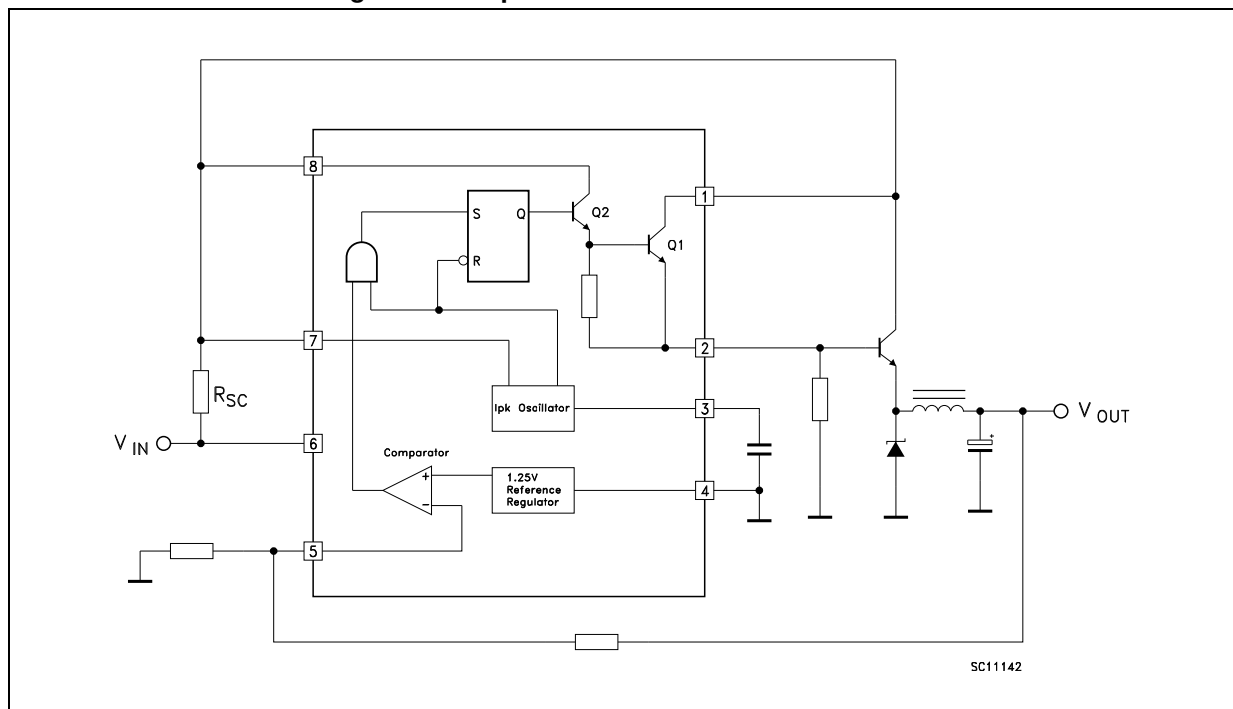


Figure 21. Step-down with external PNP switch

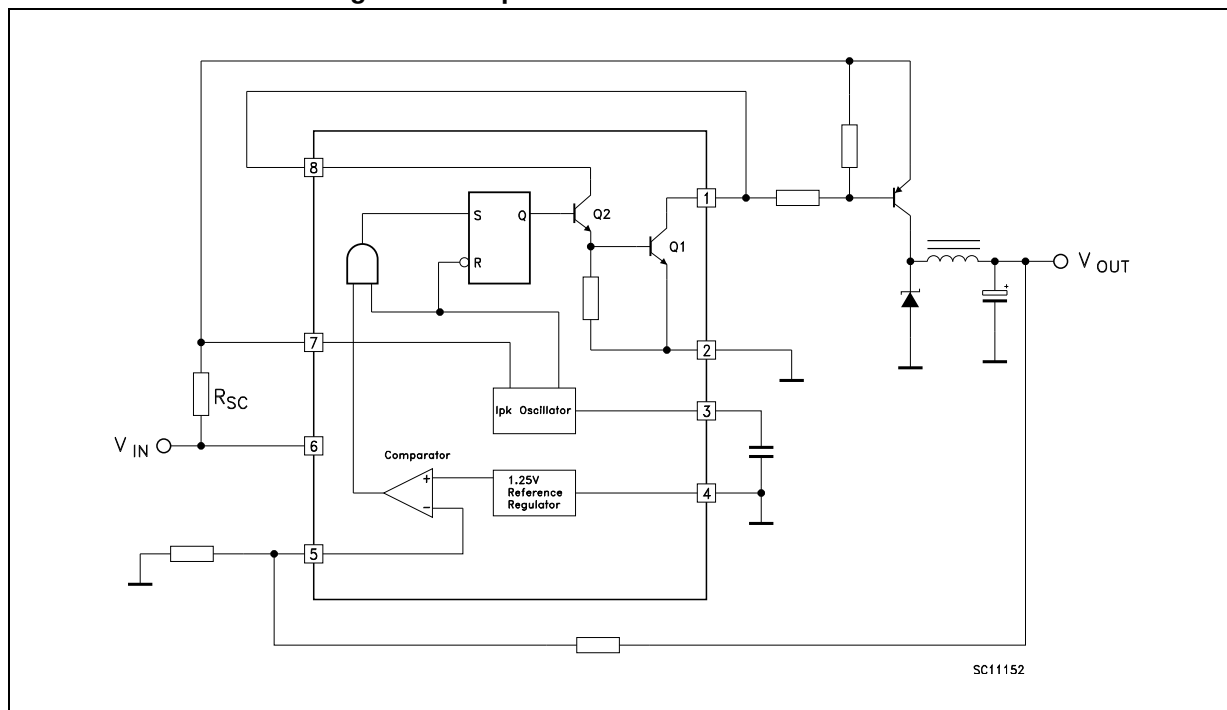


Figure 22. Voltage inverting with external NPN switch

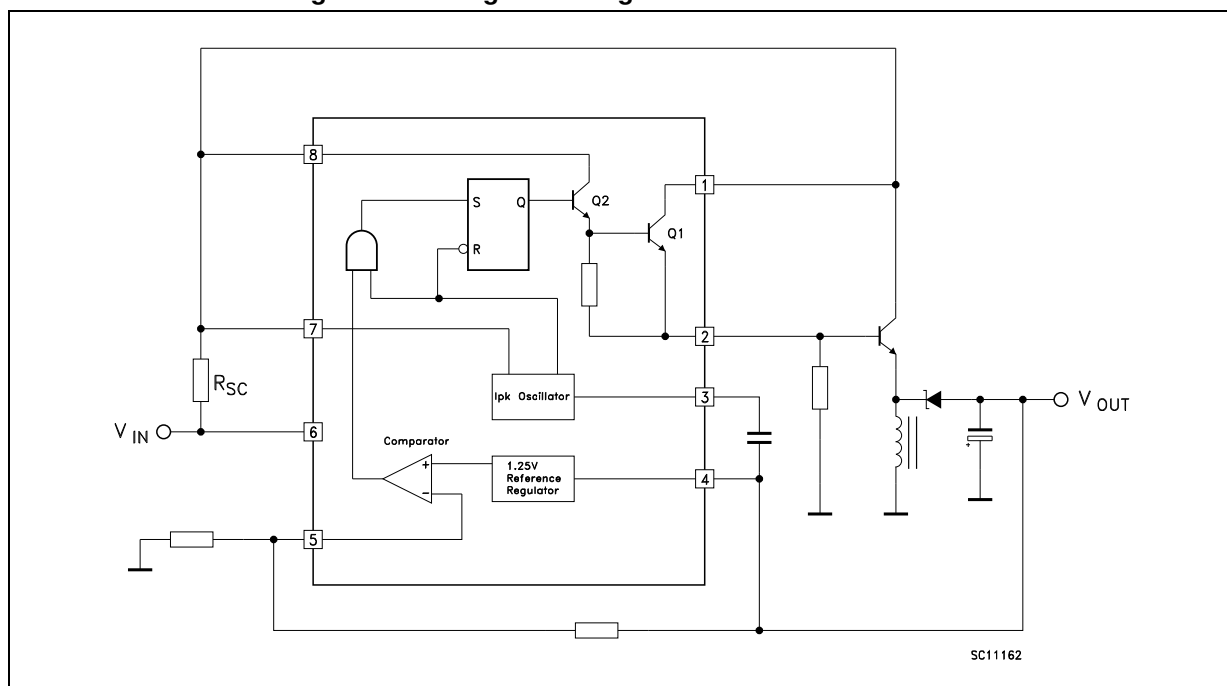


Figure 23. Voltage inverting with external PNP saturated switch

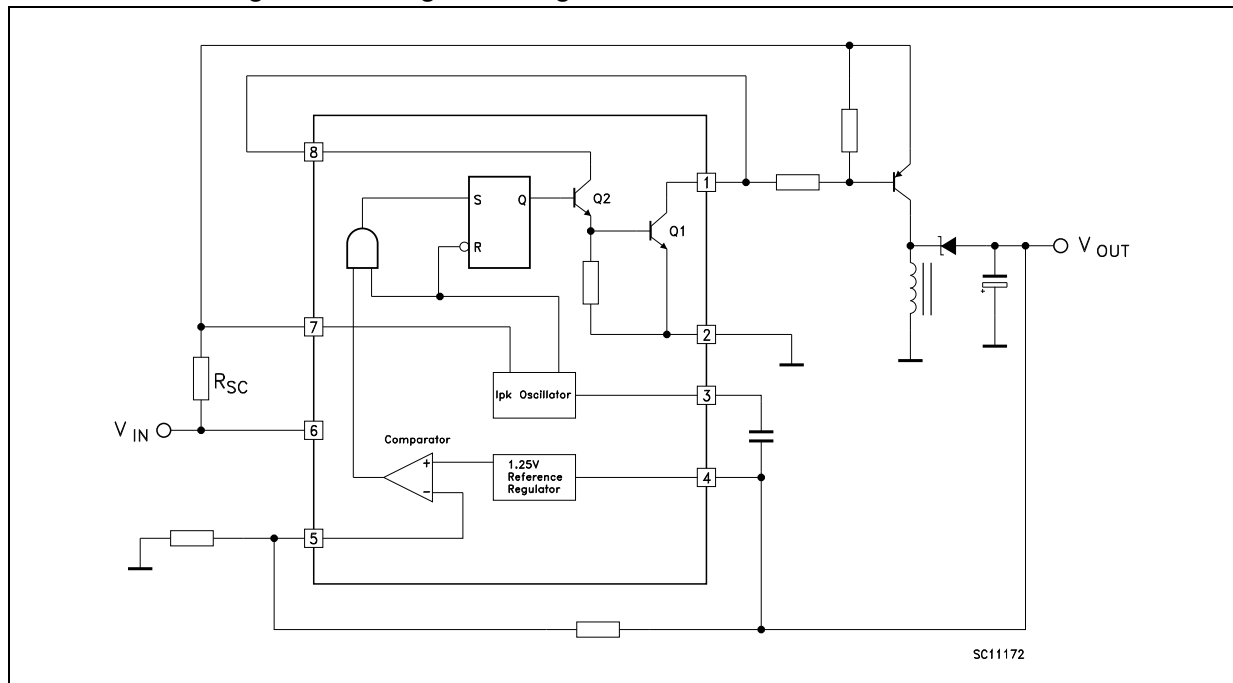


Figure 24. Dual output voltage


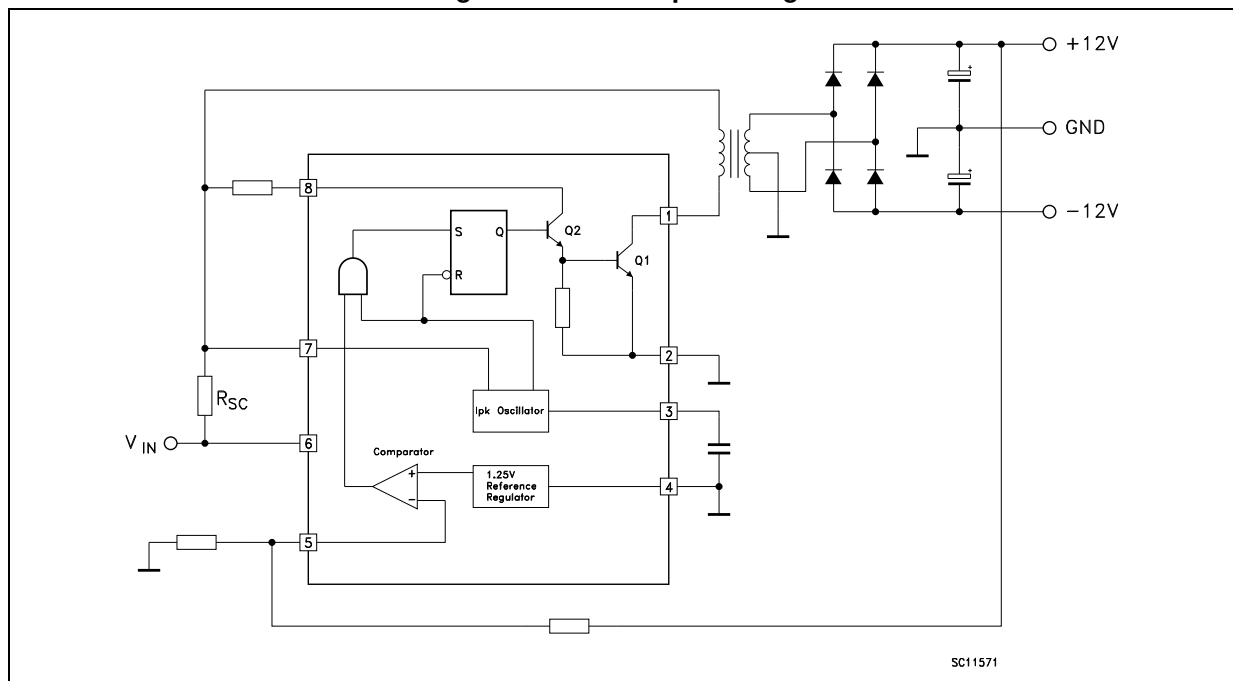


Figure 25. Higher output power, higher input voltage

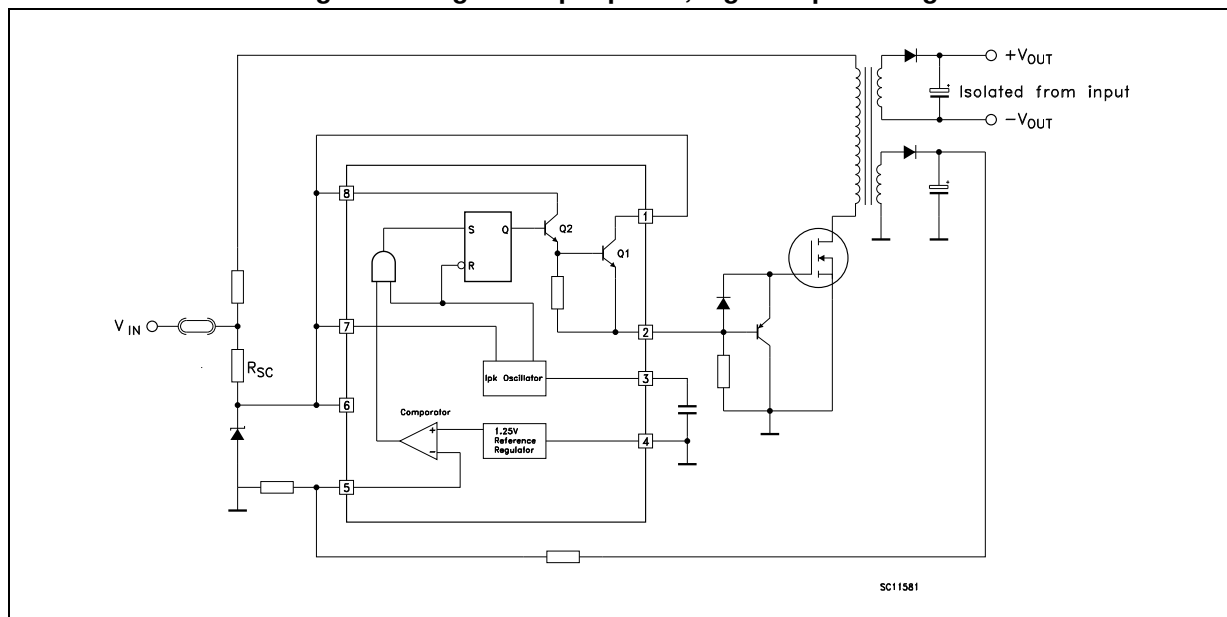


## 7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

Plastic DIP-8 mechanical data


| Dim. | mm.  |      |      | inch. |       |       |
|------|------|------|------|-------|-------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    |      | 3.3  |      |       | 0.130 |       |
| a1   | 0.7  |      |      | 0.028 |       |       |
| B    | 1.39 |      | 1.65 | 0.055 |       | 0.065 |
| B1   | 0.91 |      | 1.04 | 0.036 |       | 0.041 |
| b    |      | 0.5  |      |       | 0.020 |       |
| b1   | 0.38 |      | 0.5  | 0.015 |       | 0.020 |
| D    |      |      | 9.8  |       |       | 0.386 |
| E    |      | 8.8  |      |       | 0.346 |       |
| e    |      | 2.54 |      |       | 0.100 |       |
| e3   |      | 7.62 |      |       | 0.300 |       |
| e4   |      | 7.62 |      |       | 0.300 |       |
| F    |      |      | 7.1  |       |       | 0.280 |
| I    |      |      | 4.8  |       |       | 0.189 |
| L    |      | 3.3  |      |       | 0.130 |       |
| Z    | 0.44 |      | 1.6  | 0.017 |       | 0.063 |

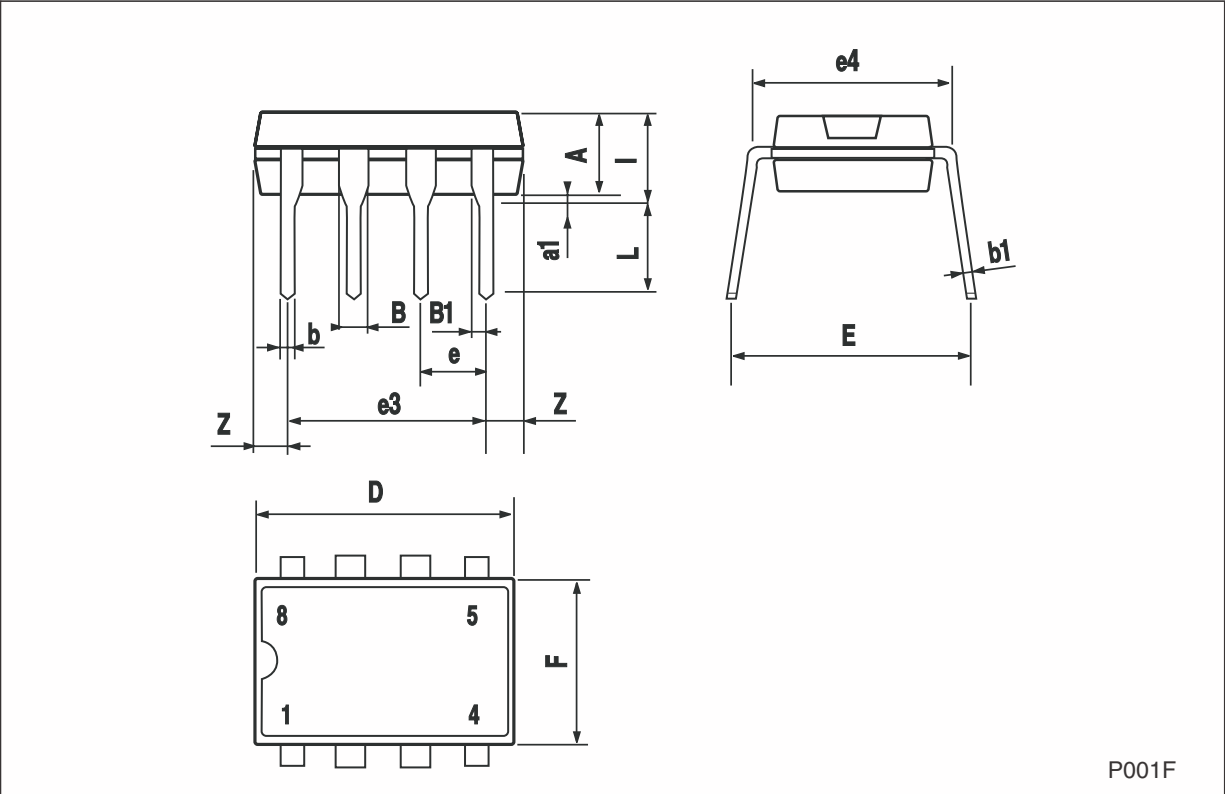

P001F


SO-8 mechanical data

| Dim. | mm.       |      |      | inch. |       |       |
|------|-----------|------|------|-------|-------|-------|
|      | Min.      | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    | 1.35      |      | 1.75 | 0.053 |       | 0.069 |
| A1   | 0.10      |      | 0.25 | 0.04  |       | 0.010 |
| A2   | 1.10      |      | 1.65 | 0.043 |       | 0.065 |
| B    | 0.33      |      | 0.51 | 0.013 |       | 0.020 |
| C    | 0.19      |      | 0.25 | 0.007 |       | 0.010 |
| D    | 4.80      |      | 5.00 | 0.189 |       | 0.197 |
| E    | 3.80      |      | 4.00 | 0.150 |       | 0.157 |
| e    |           | 1.27 |      |       | 0.050 |       |
| H    | 5.80      |      | 6.20 | 0.228 |       | 0.244 |
| h    | 0.25      |      | 0.50 | 0.010 |       | 0.020 |
| L    | 0.40      |      | 1.27 | 0.016 |       | 0.050 |
| k    | 8° (max.) |      |      |       |       |       |
| ddd  |           |      | 0.1  |       |       | 0.04  |

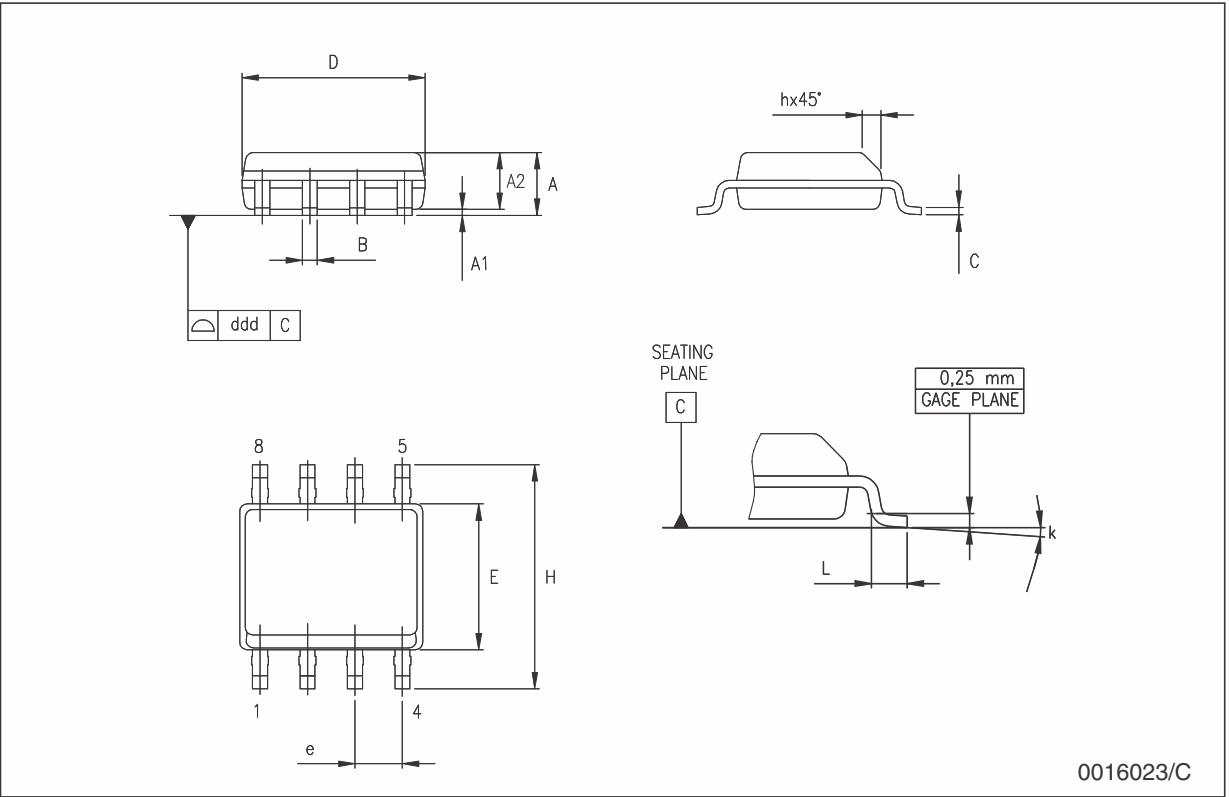

Tape & reel SO-8 mechanical data

| Dim. | mm.  |      |      | inch. |      |        |
|------|------|------|------|-------|------|--------|
|      | Min. | Typ. | Max. | Min.  | Typ. | Max.   |
| A    |      |      | 330  |       |      | 12.992 |
| C    | 12.8 |      | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |      |      | 0.795 |      |        |
| N    | 60   |      |      | 2.362 |      |        |
| T    |      |      | 22.4 |       |      | 0.882  |
| Ao   | 8.1  |      | 8.5  | 0.319 |      | 0.335  |
| Bo   | 5.5  |      | 5.9  | 0.216 |      | 0.232  |
| Ko   | 2.1  |      | 2.3  | 0.082 |      | 0.090  |
| Po   | 3.9  |      | 4.1  | 0.153 |      | 0.161  |
| P    | 7.9  |      | 8.1  | 0.311 |      | 0.319  |

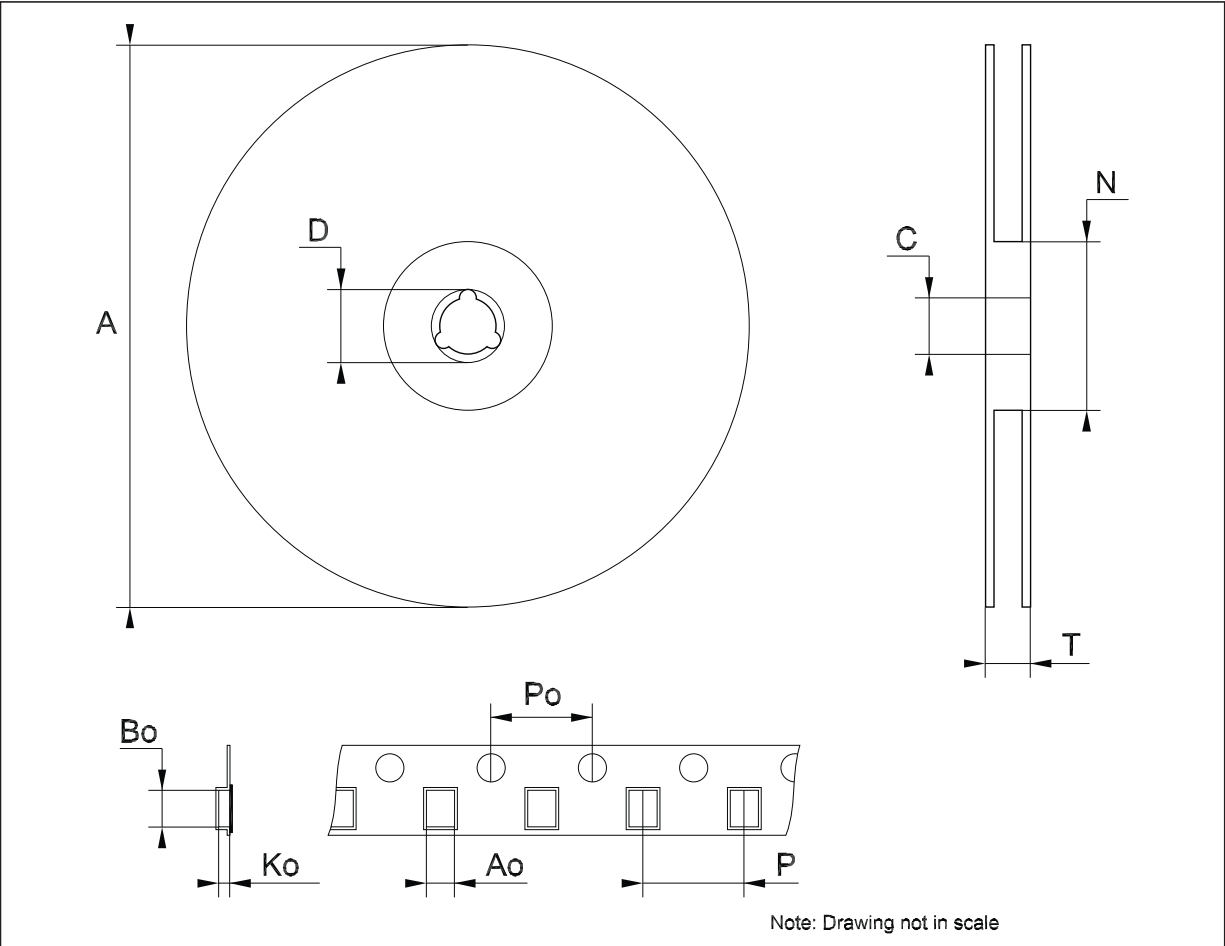

## 8 Revision history

**Table 13. Document revision history**

| Date        | Revision | Changes                                                                                                                   |
|-------------|----------|---------------------------------------------------------------------------------------------------------------------------|
| 20-Nov-2007 | 10       | Added Table 1.                                                                                                            |
| 24-Apr-2013 | 11       | Removed note in Table 1.                                                                                                  |
| 11-Feb-2020 | 12       | Corrected a typo on Reg <sub>line</sub> parameter (from 5 mV Max. to 10 mV Max.) in <a href="#">Table 7: Comparator</a> . |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.