

# 1600 W high efficiency PSU

Optimized form, fit and function  
platform for server application

EVAL\_1K6W\_PSU\_G7\_DD

Meneses Herrera David (IFAT PMM ACDC AE)  
Kutschak Matteo-Alessandro (IFAT PMM ACDC AE)  
Zechner Florian (IFAT PMM ACDC AE)



# Table of content

1

Introduction

2

Measurements and specifications

3

Summary and outlook

# Table of content

1

Introduction

2

Measurements and specifications

3

Summary and outlook

# Introduction

## Introduction

- › This Infineon evaluation board (EVAL\_1K6W\_PSU\_G7\_DD) represents a complete system solution for a 1600 W server power supply (PSU), which achieves the **80Plus® Titanium® standard**. The power supply is composed of a continuous conduction mode (CCM) bridgeless power factor corrector (PFC) using a bi-directional switch and a half-bridge LLC DC-DC resonant converter.
- › To achieve the high efficiency results the evaluation board features several Infineon key components:
  - › 600 V CoolMOS™ G7 superjunction MOSFET
  - › CoolSiC™ Schottky diode 650 V G6
  - › OptiMOS™ 6 40 V MOSFET
  - › 1EDI20N12AF isolated and 2EDN7524F non-isolated gate drivers (EiceDRIVER™)
  - › XMC1402 and XMC4200 microcontrollers
  - › CoolSET™ quasi-resonant flyback controller


## Summary of features:

- › Input voltage: 176-265 V<sub>ac</sub>
- › Output voltage: 12.2 V<sub>dc</sub>
- › Output power: 1600 W
- › Switching frequency: PFC 65 kHz  
LLC 160 kHz (resonant frequency)
- › Peak efficiency: 96%




# Introduction

## Simplified diagram

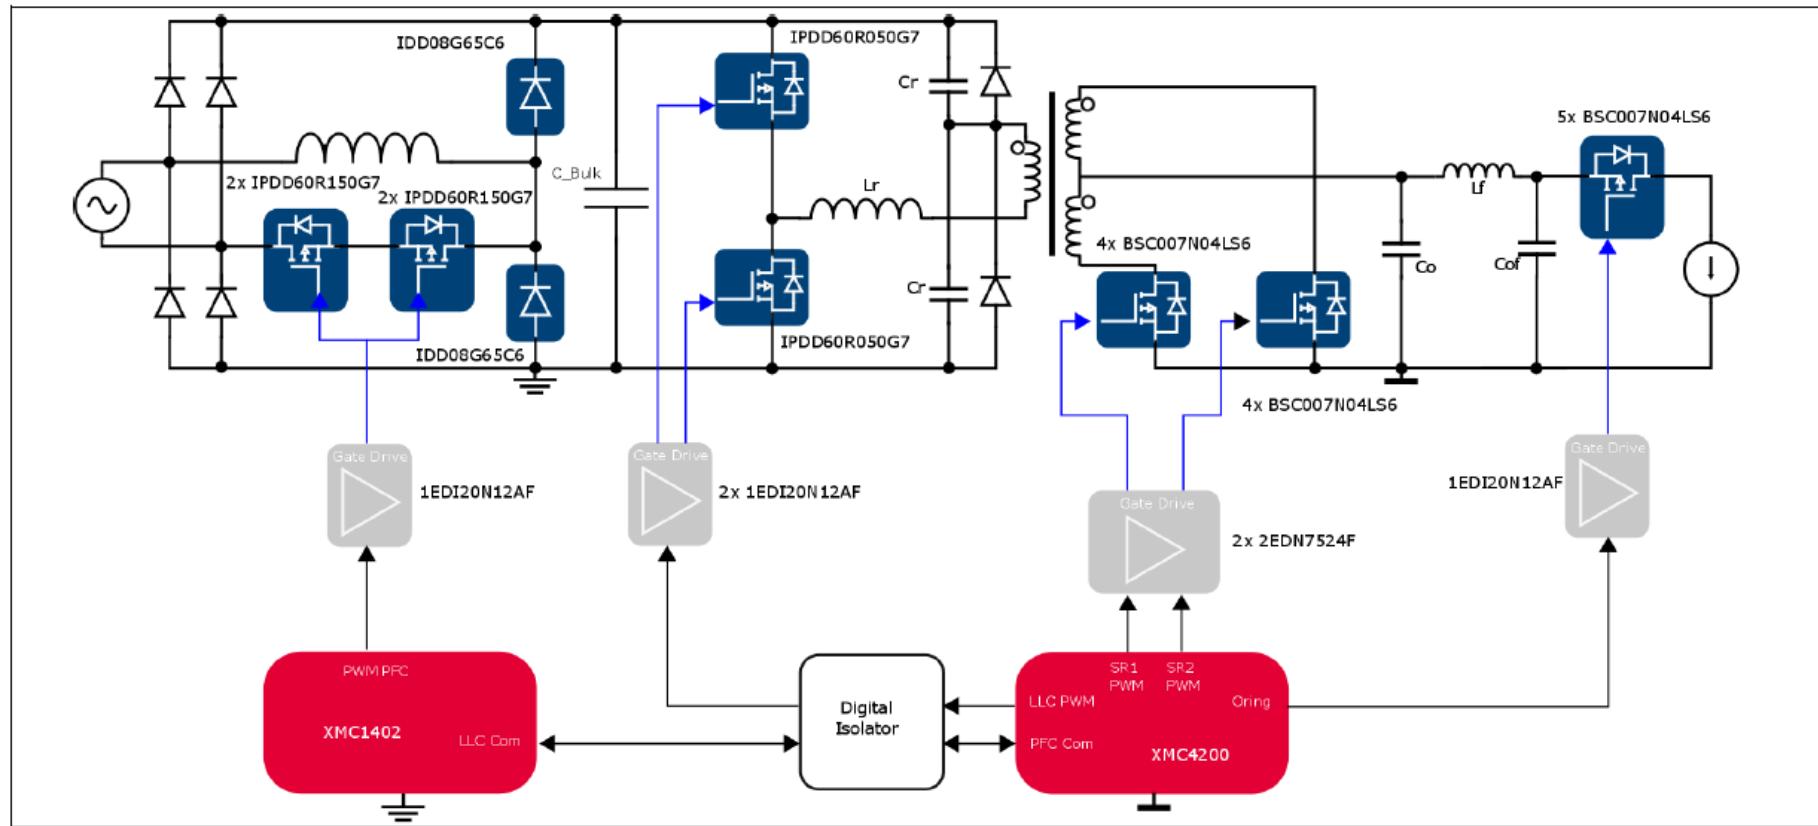

# Introduction


**Placement of the different sections in the 1600 W PSU with Infineon's CoolMOS™ and CoolSiC™ products in Double DPAK (DDPAK) package**

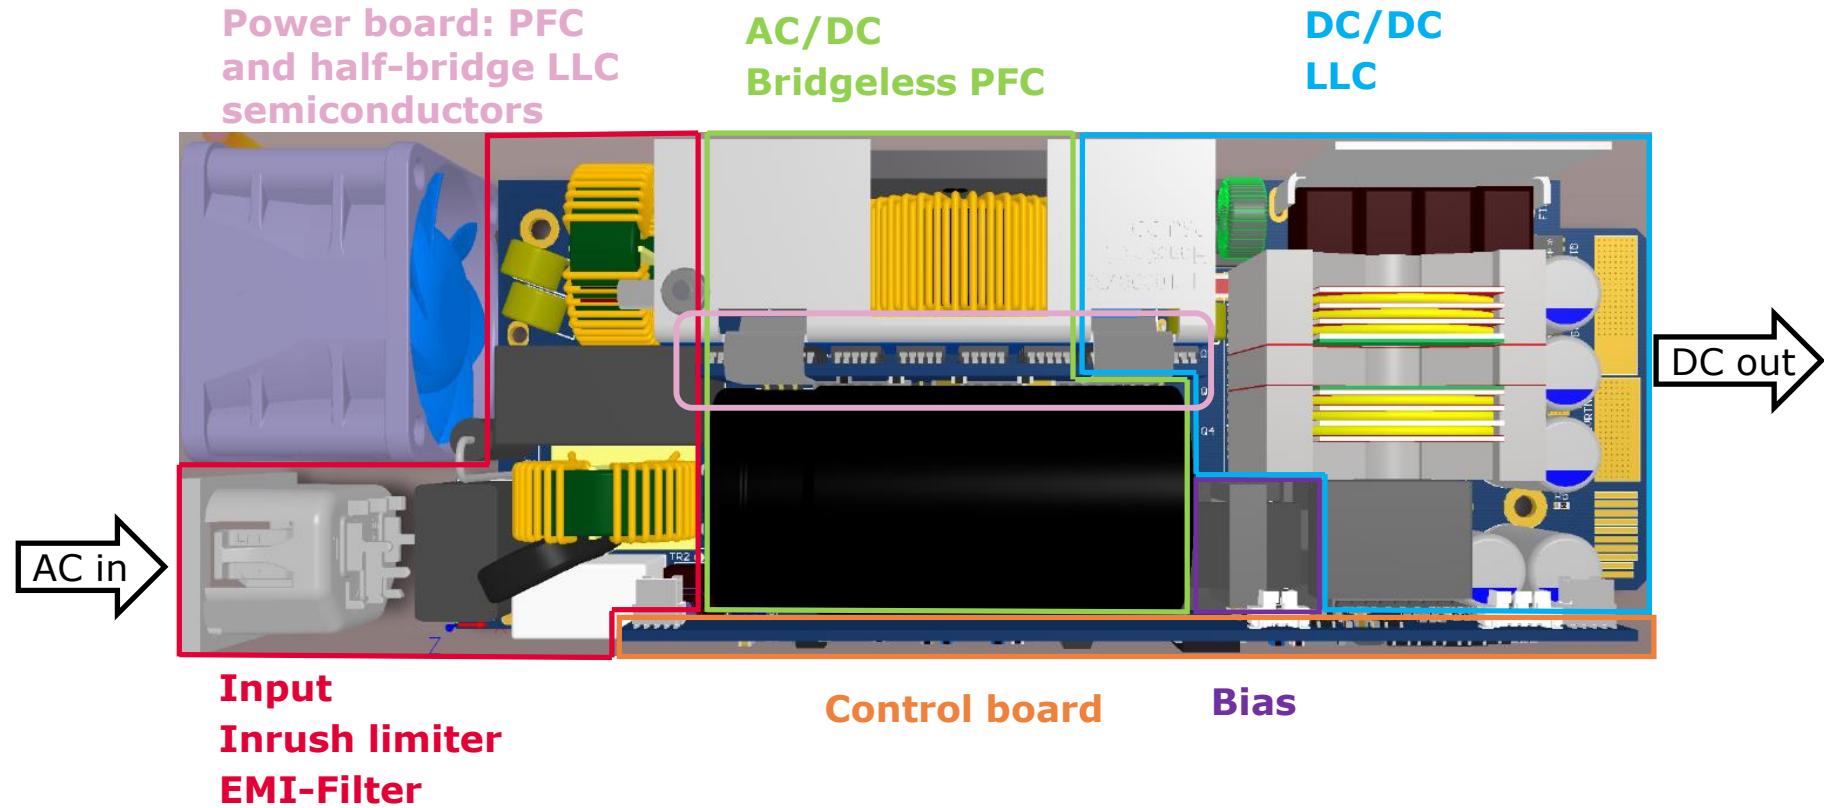

# Introduction

## Power module: PFC and half-bridge LLC semiconductors

Mounting scheme for the DDPAK Infineon semiconductors in the PFC and half-bridge LLC configuration is shown below:

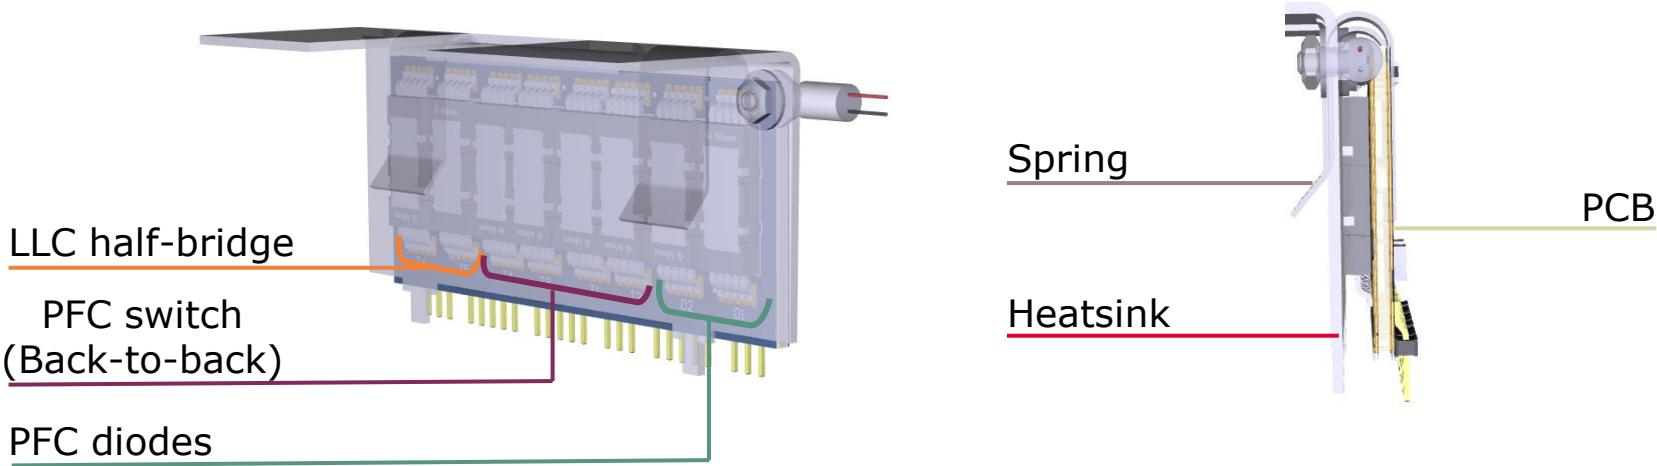

- › The power board integrates eight DDPAK semiconductors - CoolMOS™ G7 switches and CoolSiC™ G6 Schottky diodes used for the PFC, in combination with the CoolMOS™ G7 half-bridge switches for the LLC
- › It is designed for mass production as a single module by using a customized copper heatsink with a tinned surface and isolation foil which provides thermal conductivity and electrical isolation
- › The module is soldered vertically into the main PCB of the PSU and positioned in front of the fan to optimize airflow.

# Table of content

1

Introduction

2

Measurements and specifications

3

Summary and outlook



# Measurements and specifications

## Summary of specifications and test conditions for the 1600 W PSU

| Test                     |                        | Conditions   | Specification   |  |  |
|--------------------------|------------------------|--|---|--|--|
| Efficiency test          |                        | 230Vrms 50Hz/60Hz, 10% to 100% load                    | 80Plus® Titanium® efficiency.<br>$\eta_{pk} = 96\%$ at 800W (50% load)                            |  |  |
| Current THD              |                        | 230Vrms 50Hz/60Hz, 10% to 100% load                    | THDi < 10% from 20% load  |  |  |
| Power factor             |                        | 230Vrms 50Hz/60Hz, 10% to 100% load                    | PF > 0.95 from 20% load   |  |  |
| Output voltage           |                        |  | 12.2V   |  |  |
| Steady state Vout ripple |                        | 230Vrms 50/60Hz, 10% to 100% load                      | $ \Delta V_{out}  < 120 \text{ mVpk-pk}$  |  |  |
| Inrush current           |                        | 230Vrms, 50Hz/60Hz, measured on the first AC cycle     | $I_{in\_peak} < 30A$  |  |  |
| Power line disturbance   | AC lost (Hold-up time) | 230Vrms 50Hz, 10ms at 100% load, 20ms at 50% load      | $ \Delta V_{out}  < 240 \text{ mVpk}$   | No damage:<br>* PSU soft start if bulk voltage under 310V<br>* PSU soft start if Vac out of range for certain time |  |
|                          | Voltage sag            | 200Vrms 50Hz/60Hz, Different sag conditions; 100% load |   |  |  |
| Brown out                |                        |  | 174V ON; 168V OFF   |  |  |
| Load transient           |                        | 1 A $\leftrightarrow$ 66 A, 0.5 A/ $\mu$ s             | $ \Delta V_{out}  < 240 \text{ mVpk}$   |  |  |
|                          |                        | 66 A $\leftrightarrow$ 133 A, 0.5 A/ $\mu$ s           |   |  |  |
| Over current protection  |                        | 30 s at 141 A  | LLC OFF.  |  |  |
|                          |                        | 10 s at 149 A  | Resume of operation requires bulk voltage to drop under 310V                                      |  |  |
|                          |                        | 1ms at 168 A   |   |  |  |
|                          |                        | Output terminals in shortcircuit                       | Detection within switching cycle.<br>Resume of operation requires bulk voltage to drop under 310V |  |  |
| EMI                      |                        | 230Vrms 50Hz, full load, resistive load, lab set-up    | Complies with Class B limits  |  |  |

# Measurements and specifications

## Efficiency results

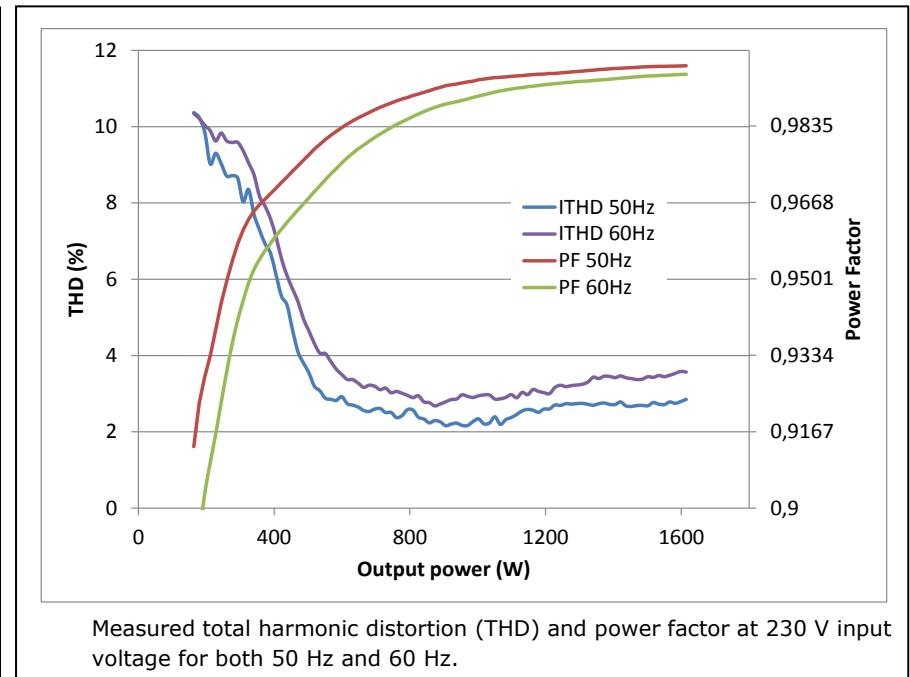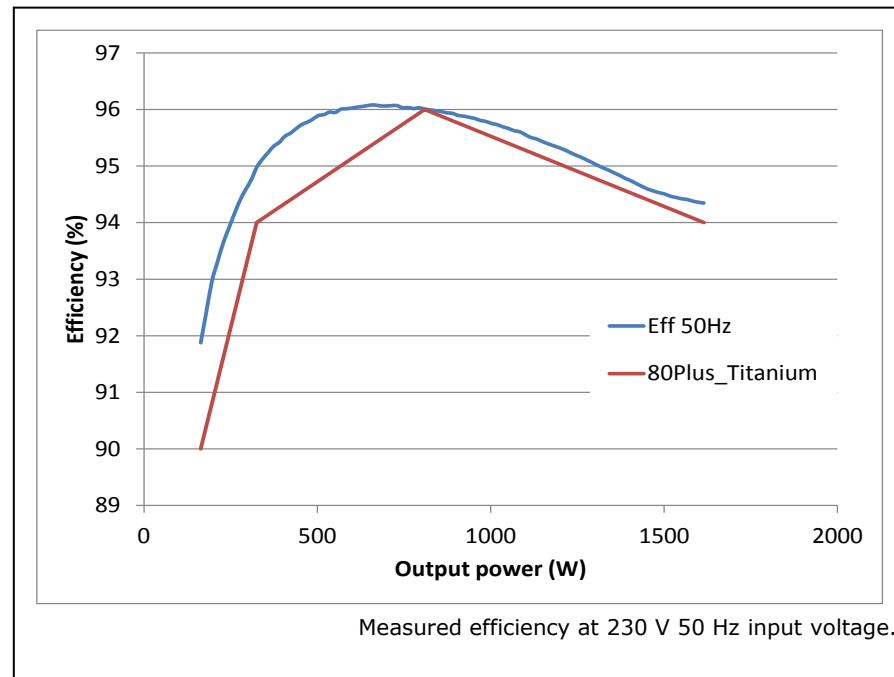

# Table of content

1

Introduction

2

Efficiency results

3


Summary and outlook

# Summary and outlook

- › The trend in the field of switched mode power supplies (SMPS) is a move towards power density and optimized cost. To reach the required higher power density levels, heat dissipation must be minimized, making efficiency key parameter in the process
- › The 800 W server power supply [EVAL\\_800W\\_PSU\\_3P\\_P7](#) and [EVAL\\_800W\\_PSU\\_4P\\_C7](#) evaluation boards developed with Infineon semiconductors, are great examples how to achieve high efficiency, similar to the 80Plus® Platinum® efficiency standards
- › Infineon's new **EVAL\_1K6W\_PSU\_G7\_DD PSU** evaluation board keeps the same form factor as the previously described 800W server PSU, while providing twice the power. Therefore, the power density increased to 44 W/in<sup>3</sup> in the 1600 W design
- › There is always a relationship between form factor and increasing power density. Reducing the heat dissipation is a result of higher efficiency
- › *This server power supply allows the implementation and test of future Infineon devices and technologies. Further modifications of the presented power supply will be possible by updating different Infineon products such as EiceDRIVER™ 2EDF isolated drivers for the LLC stage, 5<sup>th</sup> generation CoolSET™ in the bias supply or CoolMOS™ as a relay replacement. In the case of OptiMOS™ 6, those who would like more information are requested to check the Infineon website*

# Summary and outlook

## Dimension

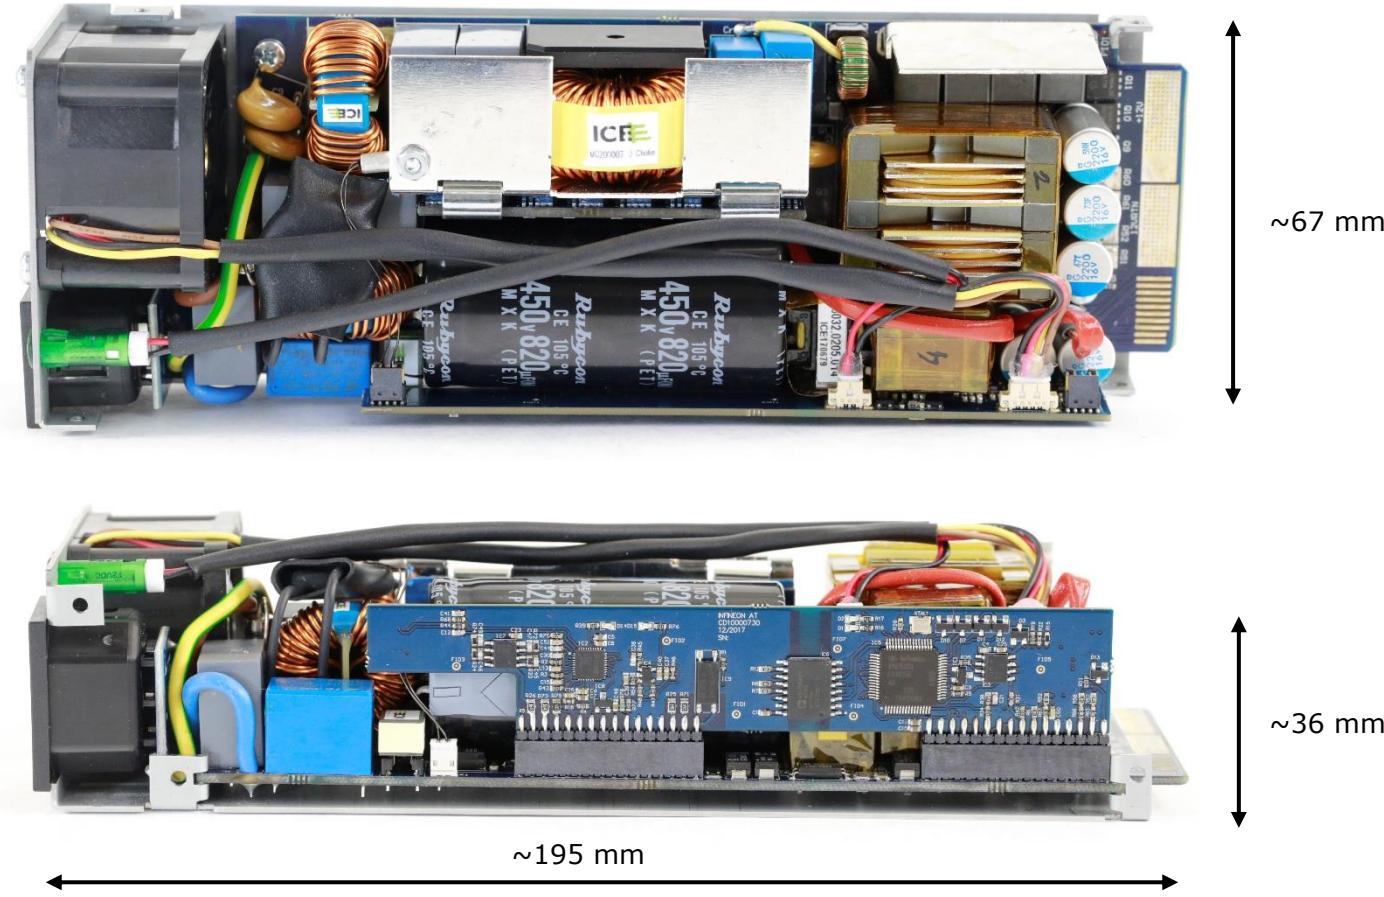



# Support

## Technical Material

- › Application Notes
- › Datasheets

› <https://www.infineon.com/eval-1k6w-psu-g7-dd>

## Evaluation Boards

- › Evaluation Boards
- › Demoboards
- › Reference Designs

› [www.infineon.com/evaluationboards](http://www.infineon.com/evaluationboards)

## Videos

- › Technical Videos
- › Product Information Videos

› [www.infineon.com/mediacenter](http://www.infineon.com/mediacenter)

# Support Online tools and services



1 Newsletter   2 Contact   3 Where to Buy   English ▾   Login ▾   Search  

**Lighting**

New LED controller enables low-wattage luminaire designs  
August 26th 17:00 CEST  
[Register Now! >](#)

2

3

4

**Subscribe to Newsletter**

**Where to Buy**

**Tools, Finders and Selectors**

**Support**

**Products**

**Applications**

**Tools**

**Support** (highlighted)

**Technology**

**Power**

- Automotive System IC
- ESD & EMI
- Microcontroller
- RF & Wireless Control
- Security IC
- Sensor
- Smart Card IC
- Interface
- Transistor & Diode

**Power Overview**

- Power MOSFET
- IGBT
- Smart Low-Side & High-Side Switches
- Linear Voltage Regulator
- DC-DC Converter
- LED Driver | Lighting ICs
- Silicon Carbide (SiC)
- High Power Thyristors & Diodes
- Motor Control & Gate Driver
- AC-DC Supply

News & Tweets



Part of your life. Part of tomorrow.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.