

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 1 of 9 | | Publish Date | Jun. 22, 2018 | |

● FUNCTIONS

1. One way tilt detection
2. Upside down detection
3. Rotation detection in vertical position



● APPLICATIONS

1. Anti-theft for motorbike
2. Automatically shut off for upside down action

● FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, generating highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. RoHS compliance, complete replacement of mercury switch.
6. A more economical tilt and vibration detection option than IC design solution.
7. Made in Taiwan and examined before shipment.

● PATENTS

1. Taiwan Patent NO. I 321332
2. U.S.A. Patent NO. US 7,485,818 B2
3. China Patent NO. ZL 200610078607.7




Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 2 of 9 | | Publish Date | Jun. 22, 2018 | |

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.25mm)

Fig. 1

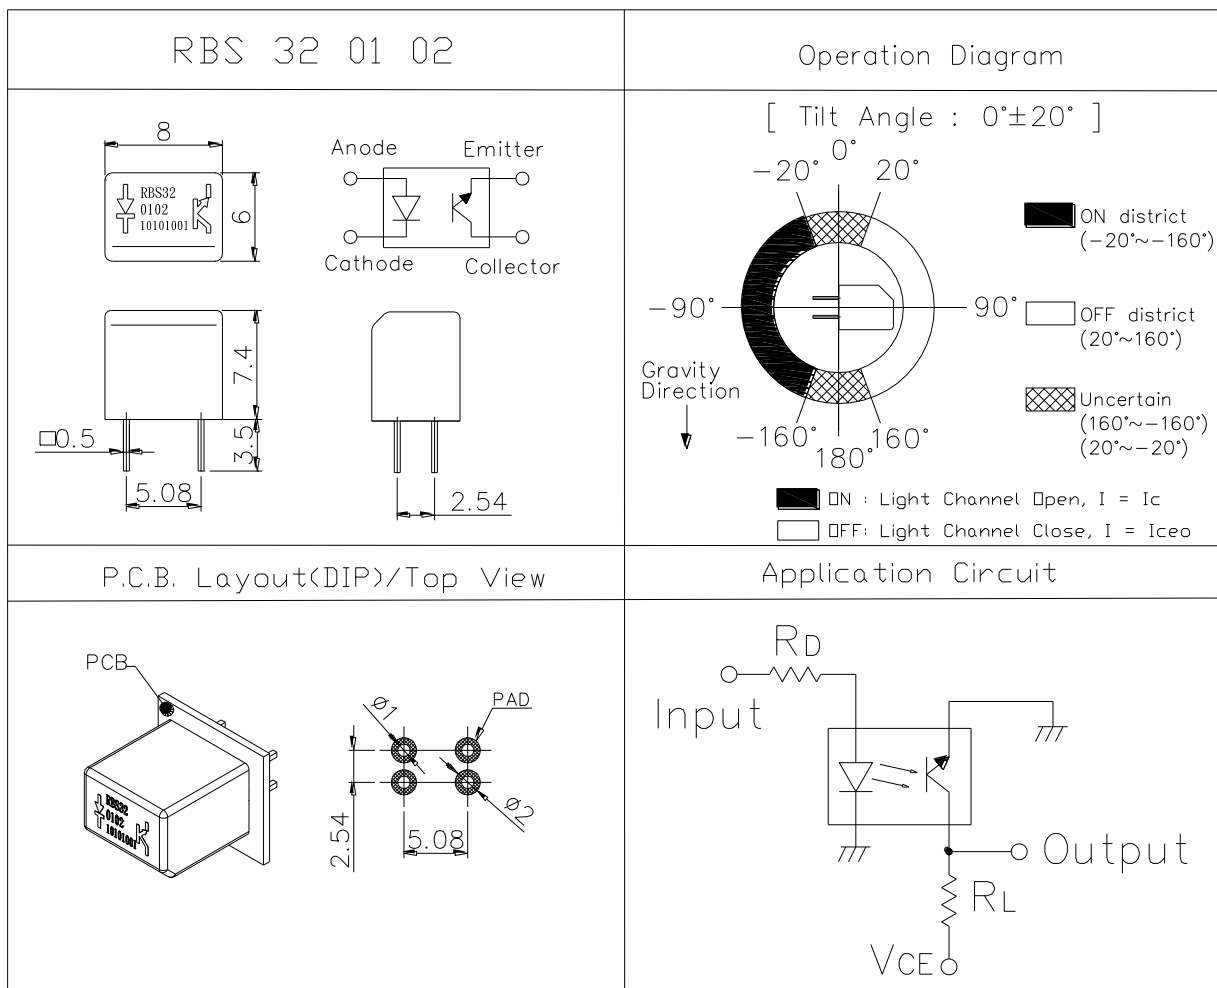

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 3 of 9 | | Publish Date | Jun. 22, 2018 | |

● Current/Voltage Suggested

| Input Current (mA) | Operating Voltage (V) | Condition |
|--------------------|-----------------------|---|
| 10 | 3.3 | V _{CE} =3.3V R _D =200 ohm R _L =15K ohm |
| 10 | 5 | V _{CE} =5V R _D =390 ohm R _L =22K ohm |

* Please refer to above Application Circuit for designing electrical circuit.

● Absolute Maximum Rating (Ta=25°C)

| Item | | Symbol | Rating | Unit |
|----------------------------|-----------------------------|------------------|---------|------|
| Input | Power Dissipation | P _d | 75 | mW |
| | Reverse Voltage | V _R | 5 | V |
| | Forward Current | I _F | 50 | mA |
| | Peak Forward Current (*1) | I _{FP} | 1 | A |
| Output | Collector Power Dissipation | P _C | 100 | mW |
| | Collector Current | I _C | 20 | mA |
| | C-E Voltage | V _{CEO} | 30 | V |
| | E-C Voltage | V _{ECO} | 5 | V |
| Operating Temperature | | T _{opr} | -25~+85 | °C |
| Storage Temperature | | T _{stg} | -40~+85 | °C |
| Soldering Temperature (*2) | | T _{sol} | 260 | °C |

(*1) t_w=100 μSec., T=10 mSec.

(*2) t=5 Sec



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 4 of 9 | | Publish Date | Jun. 22, 2018 | |

● Electrical Optical Characteristics (Ta=25°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|----------------|-----------------------------|------|------|------|-----------|
| Forward Voltage | V_F | $I_F=20mA$ | - | 1.2 | 1.5 | V |
| Reverse Current | I_R | $V_R=5V$ | - | - | 10 | μA |
| Peak Wavelength | λ_p | $I_F=10mA$ | | 940 | | nm |
| Dark Current | I_{ceo} | $V_{CE}=10V$ | - | - | 100 | μA |
| C-E Saturation Voltage | $V_{CE} (sat)$ | $I_C=0.25mA$ $I_F=20mA$ | - | - | 0.4 | V |
| Light Current | I_c | $V_{CE}=5V$ $I_F=20mA$ | 0.5 | 5 | - | mA |
| Rise Time | T_r | $I_C=0.8mA$ $V_{CC}=30V$ | - | 5 | - | μsec |
| Fall Time | T_f | $R_L=1K\Omega$ | - | 5 | - | μsec |
| Operation Diagram | θ | Fig. 1 | -20 | 0 | 20 | $^\circ$ |



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 5 of 9 | | Publish Date | Jun. 22, 2018 | |

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

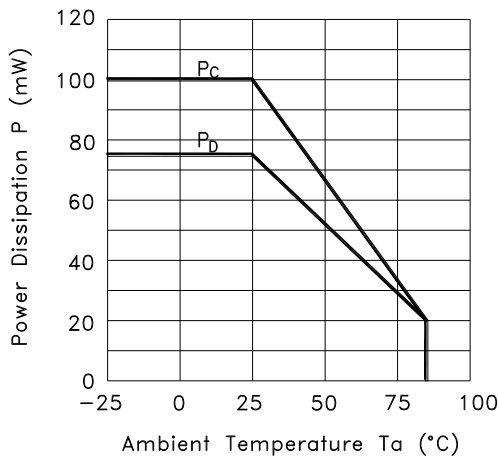


Fig.2 Forward Current vs. Forward Voltage

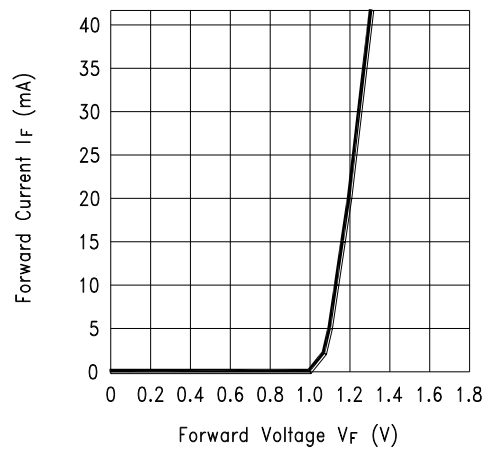


Fig.3 Collector Current vs. Collector-emitter Voltage


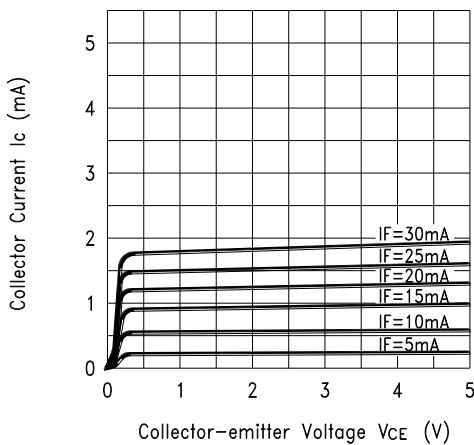


Fig.4 Collector Current vs. Ambient Temperature

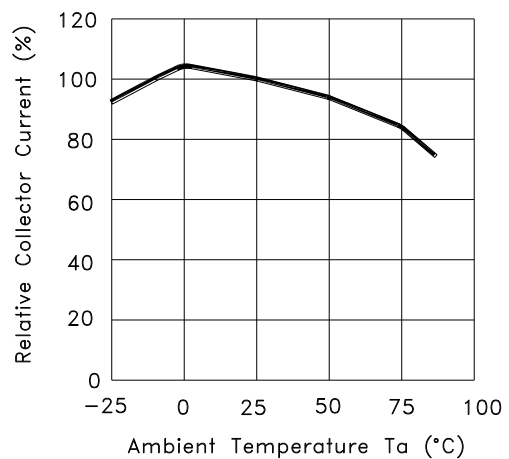

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 6 of 9 | | Publish Date | Jun. 22, 2018 | |

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

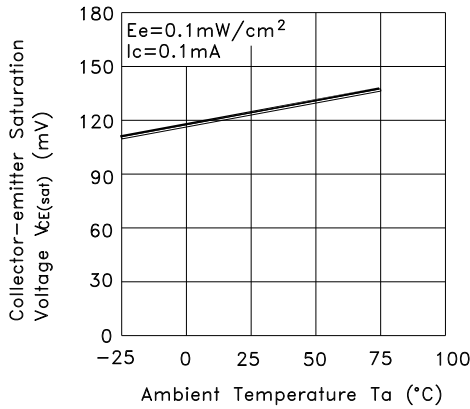


Fig.6 Response Time vs. Load Resistance



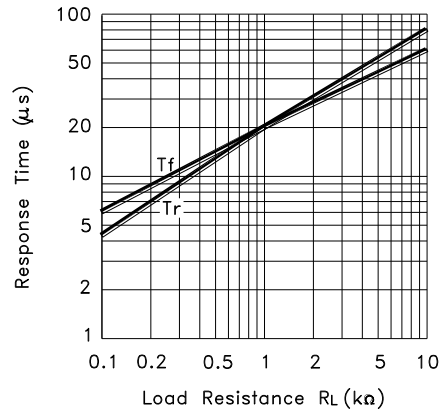



Fig.7 Sensing Position Characteristics (Typical)

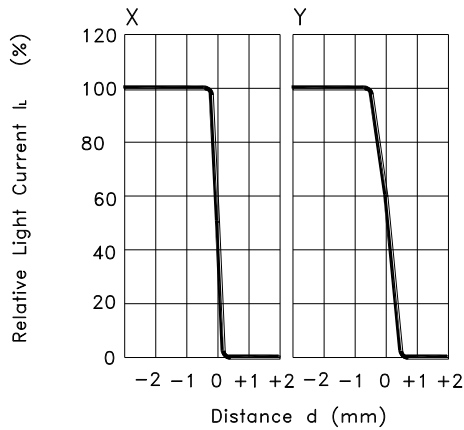

(Center of Optical axis)

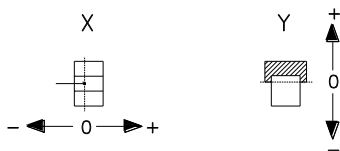

Test Circuit for Response Time

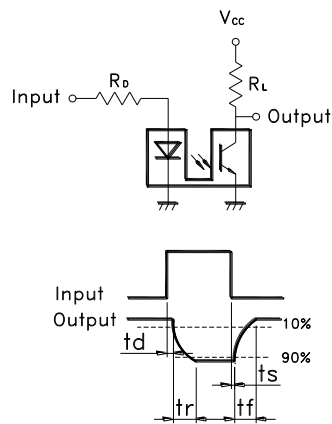

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 7 of 9 | | Publish Date | Jun. 22, 2018 | |

● RELIABLE TEST ITEMS

Reliable Test for RBS320102

| | Test Item | Contents |
|---|-----------------------|---|
| 1 | Operating Temperature | -25°C ~ 85°C |
| 2 | Storage Temperature | -40°C ~ 85°C |
| 3 | Humidity | 40 °C / 95 %RH |
| 4 | Mechanical Life | 2Hz, horizontal 1,000,000 times |
| 5 | Electrical Life | I _F =20 mA, V _{CE} =5 V TIME: 30,000 hrs |

● SOLDERING CONDITION

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

| Condition | Soldering Temperature | Soldering Time | Wattage of Manual Soldering | Type |
|-----------------------------|-----------------------|------------------|--|------|
| Suitable Production Process | | | | |
| Wave Soldering | 260±5°C | < 5 seconds max. | - | DIP |
| Manual Soldering | 300±5°C | < 3 seconds max. | 20W or Temperature-controlled manual soldering | DIP |



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 8 of 9 | | Publish Date | Jun. 22, 2018 | |

● PACKAGE

| | Part Number | Package | Quantity | Total | Dimension (mm) |
|----|-------------|--------------|-----------|------------|----------------|
| 1. | RBS320102 | IC tube | 62 pcs | 62 pcs | 525L*10W*17.5H |
| | | Inner box | 120 tubes | 7,440 pcs | 539L*130W*130H |
| | | Outer carton | 4 boxes | 29,760 pcs | 551L*285W*288H |

※ Package shown as below for reference.



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|---------------|---------------|----|
| Item No. | RBS320102 | Description | Photoelectric | Version | 13 |
| Page | 9 of 9 | | Publish Date | Jun. 22, 2018 | |

● NOTES

1. Suggestion for usage: For vibration usage or application, we suggest to add hysteresis for IC.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.

● PRECAUTIONS FOR USE

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Do not try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. Please follow the soldering instruction accordingly, otherwise might lead to defective.
5. Do not use switch in the environment of high humidity, because such an environment may cause the leakage current between the terminals.
6. Please do not exceed the rated load as there will be a risk of disabling the product function.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).
8. To prevent damaging IR and PT, please make electrostatic protective treatment, for example: wearing a conductive wrist strap or antistatic gloves during production process, grounding machinery etc.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.