

**3 V, SUPER MINIMOLD SILICON MMIC
WIDEBAND AMPLIFIER FOR MOBILE COMMUNICATIONS****DESCRIPTION**

The μ PC2745TB and μ PC2746TB are silicon monolithic integrated circuits designed as buffer amplifier for mobile communications. These low current amplifiers operate on 3.0 V (1.8 V MIN.).

These ICs are manufactured using our 20 GHz f_T NESATIII silicon bipolar process. This process uses silicon nitride passivation film and gold electrodes. These materials can protect chip surface from external pollution and prevent corrosion/migration. Thus, these IC have excellent performance, uniformity and reliability.

FEATURES

- Supply voltage : Recommended $V_{CC} = 2.7$ to 3.3 V
Circuit operation $V_{CC} = 1.8$ to 3.3 V
- Upper limit operating frequency : μ PC2745TB; $f_U = 2.7$ GHz TYP. @ 3 dB bandwidth
 μ PC2746TB; $f_U = 1.5$ GHz TYP. @ 3 dB bandwidth
- High isolation : μ PC2745TB; $ISL = 38$ dB TYP. @ $f = 500$ MHz
 μ PC2746TB; $ISL = 45$ dB TYP. @ $f = 500$ MHz
- Power gain : μ PC2745TB; $G_P = 12$ dB TYP. @ $f = 500$ MHz
 μ PC2746TB; $G_P = 19$ dB TYP. @ $f = 500$ MHz
- Saturated output power : μ PC2745TB; $P_{O(sat)} = -1$ dBm TYP. @ $f = 500$ MHz
 μ PC2746TB; $P_{O(sat)} = 0$ dBm TYP. @ $f = 500$ MHz
- High-density surface mounting : 6-pin super minimold package ($2.0 \times 1.25 \times 0.9$ mm)

APPLICATIONS

- 1.5 GHz to 2.5 GHz communication system : μ PC2745TB
- 800 MHz to 900 MHz communication system : μ PC2746TB

ORDERING INFORMATION

Part Number	Package	Marking	Supplying Form
μ PC2745TB-E3-A	6-pin super minimold	C1Q	<ul style="list-style-type: none">• Embossed tape 8 mm wide• 1, 2, 3 pins face the perforation side of the tape• Qty 3 kpcs/reel
μ PC2746TB-E3-A		C1R	


Remark To order evaluation samples, contact your nearby sales office.

Part number for sample order: μ PC2745TB-A, μ PC2746TB-A

Caution: Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

PIN CONNECTION

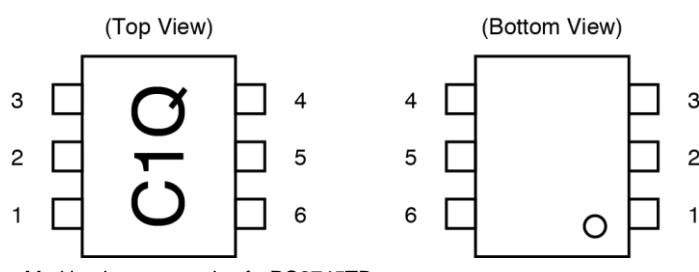

Marking is an example of μ PC2745TB

Pin No.	Pin Name
1	INPUT
2	GND
3	GND
4	OUTPUT
5	GND
6	V _{cc}

PRODUCT LINE-UP ($T_A = +25^\circ\text{C}$, $V_{CC} = 3.0 \text{ V}$, $Z_S = Z_L = 50 \Omega$)


Part No.	f _u (GHz)	P _{O(sat)} (dBm)	G _P (dB)	NF (dB)	I _{cc} (mA)	Package	Making
μPC2745T	2.7	-1.0	12	6.0	7.5	6-pin minimold	C1Q
μPC2745TB						6-pin super minimold	
μPC2746T	1.5	0	19	4.0	7.5	6-pin minimold	C1R
μPC2746TB						6-pin super minimold	
μPC2747T	1.8	-7.0	12	3.3	5.0	6-pin minimold	C1S
μPC2747TB						6-pin super minimold	
μPC2748T	0.2 to 1.5	-3.5	19	2.8	6.0	6-pin minimold	C1T
μPC2748TB						6-pin super minimold	
μPC2749T	2.9	-6.0	16	4.0	6.0	6-pin minimold	C1U
μPC2749TB						6-pin super minimold	

Remark Typical performance. Please refer to **ELECTRICAL CHARACTERISTICS** in detail.


Caution The package size distinguish between minimold and super minimold.

SYSTEM APPLICATION EXAMPLE

DIGITAL CELLULAR SYSTEM BLOCK DIAGRAM

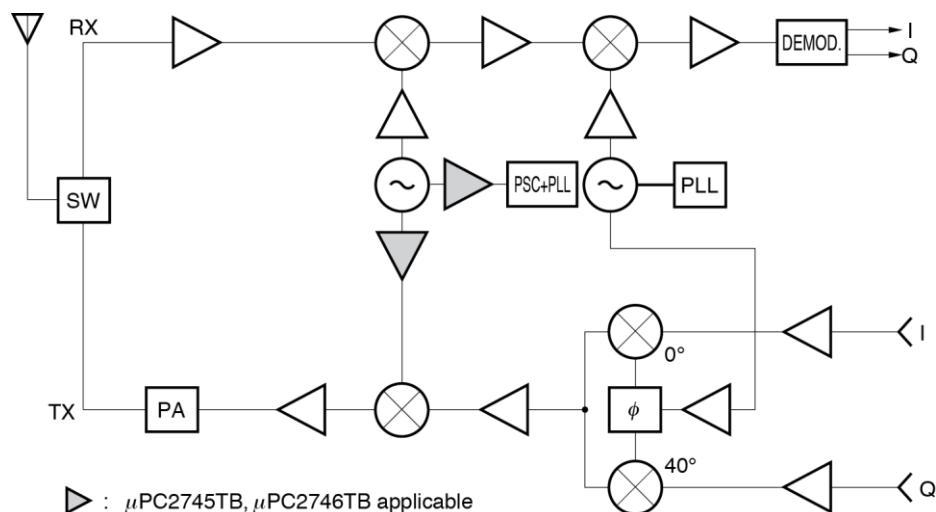

PIN EXPLANATION

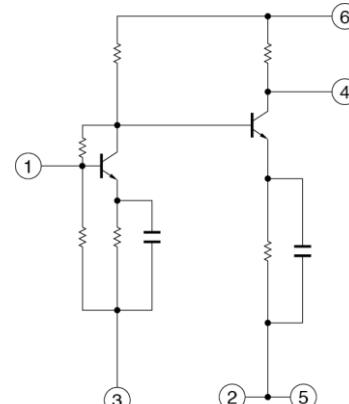Pin No.	Pin Name	Applied Voltage (V)	Pin Voltage Note (V)	Function and Applications	Internal Equivalent Circuit
1	INPUT	—	0.87 0.82	Signal input pin. A internal matching circuit, configured with resistors, enables 50 Ω connection over a wide band. This pin must be coupled to signal source with capacitor for DC cut.	
2 3 5	GND	0	—	Ground pin. This pin should be connected to system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with wide ground pattern to decrease impedance difference.	
4	OUTPUT	—	1.95 2.54	Signal output pin. A internal matching circuit, configured with resistors, enables 50 Ω connection over a wide band. This pin must be coupled to next stage with capacitor for DC cut.	
6	Vcc	2.7 to 3.3	—	Power supply pin. This pin should be externally equipped with bypass capacity to minimize ground impedance.	

Note Pin voltage is measured at $V_{cc} = 3.0$ V. Above: μ PC2745TB, Below: μ PC2746TB

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Conditions	Ratings	Unit
Supply Voltage	V _{cc}	T _A = +25°C	4.0	V
Circuit Current	I _{cc}	T _A = +25°C	16	mA
Power Dissipation	P _D	T _A = +85°C	Note 270	mW
Operating Ambient Temperature	T _A		-40 to +85	°C
Storage Temperature	T _{stg}		-55 to +150	°C
Input Power	P _{in}	T _A = +25°C	0	dBm

Note Mounted on double-sided copper-clad 50 × 50 × 1.6 mm epoxy glass PWB

RECOMMENDED OPERATING RANGE

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{cc}	2.7	3.0	3.3	V

ELECTRICAL CHARACTERISTICS


(T_A = +25°C, V_{cc} = 3.0 V, Z_s = Z_L = 50 Ω, unless otherwise specified)

Parameter	Symbol	Test Conditions	μ PC2745TB			μ PC2746TB			Unit
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Circuit Current	I _{cc}	No signal	5.0	7.5	10.0	5.0	7.5	10.0	mA
Power Gain	G _P	f = 500 MHz	9	12	14	16	19	21	dB
Noise Figure	NF	f = 500 MHz	—	6.0	7.5	—	4.0	5.5	dB
Upper Limit Operating Frequency	f _u	3 dB down below from gain at f = 0.1 GHz	2.3	2.7	—	1.1	1.5	—	GHz
Isolation	ISL	f = 500 MHz	33	38	—	40	45	—	dB
Input Return Loss	RL _{in}	f = 500 MHz	8	11	—	10	13	—	dB
Output Return Loss	RL _{out}	f = 500 MHz	2.5	5.5	—	5.5	8.5	—	dB
Saturated Output Power	P _{o(sat)}	f = 500 MHz, P _{in} = -6 dBm	-4.0	-1.0	—	-3.0	0	—	dBm


STANDARD CHARACTERISTICS FOR REFERENCE ($T_A = +25^\circ\text{C}$, $V_{cc} = 3.0 \text{ V}$, $Z_s = Z_L = 50 \Omega$)

Parameter	Symbol	Test Conditions	Reference Value		Unit
			μ PC2745TB	μ PC2746TB	
Circuit Current	I_{cc}	$V_{cc} = 1.8 \text{ V}$, No signal	4.5	4.5	mA
Power Gain	G_P	$V_{cc} = 3.0 \text{ V}$, $f = 1.0 \text{ GHz}$	12.0	18.5	dB
		$V_{cc} = 3.0 \text{ V}$, $f = 2.0 \text{ GHz}$	11.0	—	
		$V_{cc} = 1.8 \text{ V}$, $f = 0.5 \text{ GHz}$	7.0	14.0	
Noise Figure	NF	$V_{cc} = 3.0 \text{ V}$, $f = 1.0 \text{ GHz}$	5.5	4.2	dB
		$V_{cc} = 3.0 \text{ V}$, $f = 2.0 \text{ GHz}$	5.7	—	
		$V_{cc} = 1.8 \text{ V}$, $f = 0.5 \text{ GHz}$	8.0	5.0	
Upper Limit Operating Frequency	f_u	$V_{cc} = 1.8 \text{ V}$, 3 dB down below from gain at $f = 0.1 \text{ GHz}$	1.8	1.1	GHz
Isolation	ISL	$V_{cc} = 3.0 \text{ V}$, $f = 1.0 \text{ GHz}$	33	38	dB
		$V_{cc} = 3.0 \text{ V}$, $f = 2.0 \text{ GHz}$	30	—	
		$V_{cc} = 1.8 \text{ V}$, $f = 0.5 \text{ GHz}$	35	37	
Input Return Loss	RL_{in}	$V_{cc} = 3.0 \text{ V}$, $f = 1.0 \text{ GHz}$	13.0	10.0	dB
		$V_{cc} = 3.0 \text{ V}$, $f = 2.0 \text{ GHz}$	14.0	—	
		$V_{cc} = 1.8 \text{ V}$, $f = 0.5 \text{ GHz}$	6.5	10.0	
Output Return Loss	RL_{out}	$V_{cc} = 3.0 \text{ V}$, $f = 1.0 \text{ GHz}$	6.5	8.5	dB
		$V_{cc} = 3.0 \text{ V}$, $f = 2.0 \text{ GHz}$	8.5	—	
		$V_{cc} = 1.8 \text{ V}$, $f = 0.5 \text{ GHz}$	6.0	9.5	
Saturated Output Power	$P_{O(sat)}$	$V_{cc} = 3.0 \text{ V}$, $f = 1.0 \text{ GHz}$, $P_{in} = -6 \text{ dBm}$	-2.5	-1.0	dBm
		$V_{cc} = 3.0 \text{ V}$, $f = 2.0 \text{ GHz}$, $P_{in} = -6 \text{ dBm}$	-3.5	—	
		$V_{cc} = 1.8 \text{ V}$, $f = 0.5 \text{ GHz}$, $P_{in} = -10 \text{ dBm}$	-11.0	-8.0	
3rd Order Intermodulation Distortion	IM ₃	$V_{cc} = 3.0 \text{ V}$, $P_{out} = -10 \text{ dBm}$, $f_1 = 500 \text{ MHz}$, $f_2 = 502 \text{ MHz}$	-30.0	-26.0	dBc
		$V_{cc} = 1.8 \text{ V}$, $P_{out} = -20 \text{ dBm}$, $f_1 = 500 \text{ MHz}$, $f_2 = 502 \text{ MHz}$	-31.0	-37.0	
		$V_{cc} = 3.0 \text{ V}$, $P_{out} = -10 \text{ dBm}$, $f_1 = 1000 \text{ MHz}$, $f_2 = 1002 \text{ MHz}$	-26.0	—	

TEST CIRCUIT

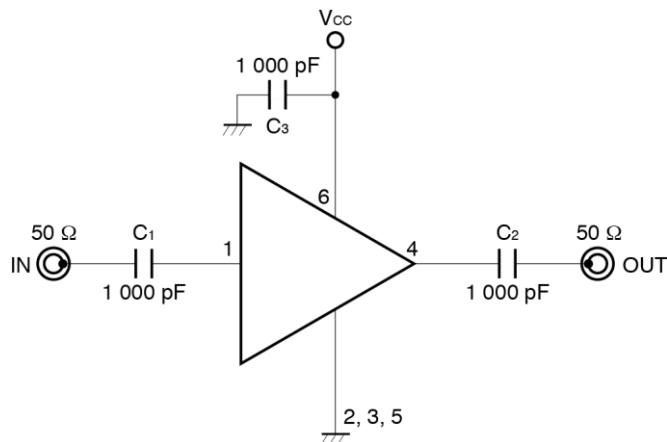

EXAMPLE OF APPLICATION CIRCUIT

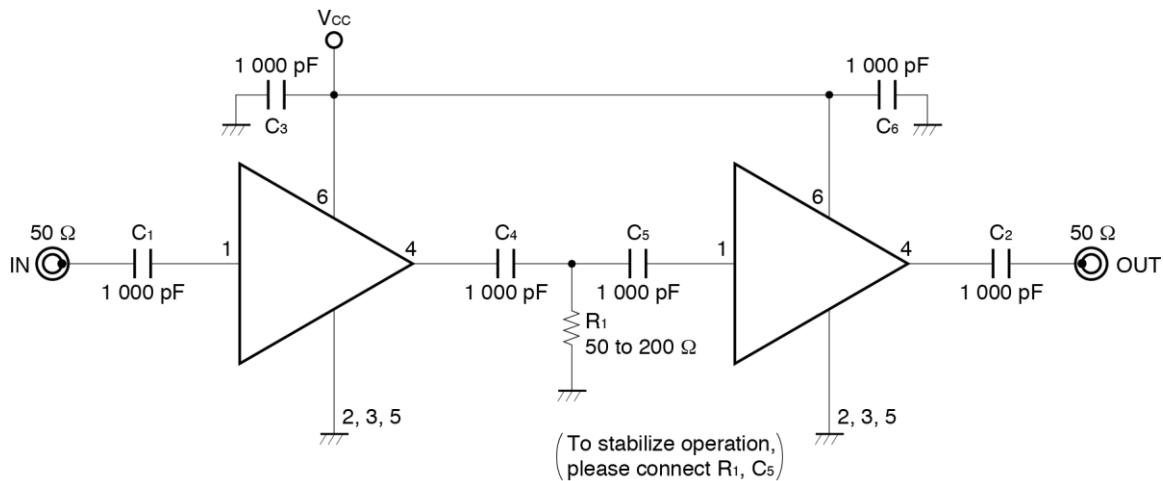

The application circuits and their parameters are for references only and are not intended for use in actual design-ins.

CAPACITORS FOR THE V_{CC}, INPUT, AND OUTPUT PINS


Capacitors of 1 000 pF are recommendable as the bypass capacitor for the V_{CC} pin and the coupling capacitors for the input and output pins.

The bypass capacitor connected to the V_{CC} pin is used to minimize ground impedance of V_{CC} pin. So, stable bias can be supplied against V_{CC} fluctuation.

The coupling capacitors, connected to the input and output pins, are used to cut the DC and minimize RF serial impedance. Their capacitance are therefore selected as lower impedance against a 50 Ω load. The capacitors thus perform as high pass filters, suppressing low frequencies to DC.

To obtain a flat gain from 100 MHz upwards, 1 000 pF capacitors are used in the test circuit. In the case of under 10 MHz operation, increase the value of coupling capacitor such as 10 000 pF. Because the coupling capacitors are determined by equation, $f_c = 1/(2\pi RC)$.

ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD






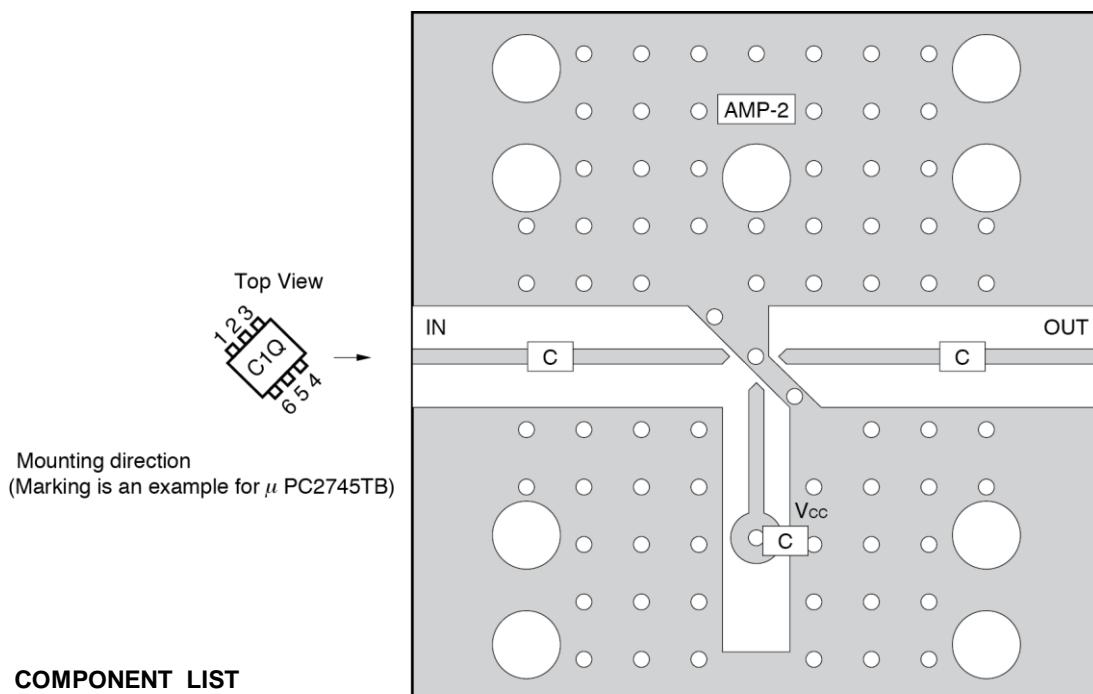


	Value
C	1 000 pF

Notes






1. 30 x 30 x 0.4 mm double sided copper clad polyimide board.
2. Back side: GND pattern
3. Solder plated on pattern
4. \oplus \ominus \ominus : Through holes

For more information on the use of this IC, refer to the following application note: **USAGE AND APPLICATIONS OF 6-PIN MINI-MOLD, 6-PIN SUPER MINI-MOLD SILICON HIGH-FREQUENCY WIDEBAND AMPLIFIER MMIC (P11976E).**

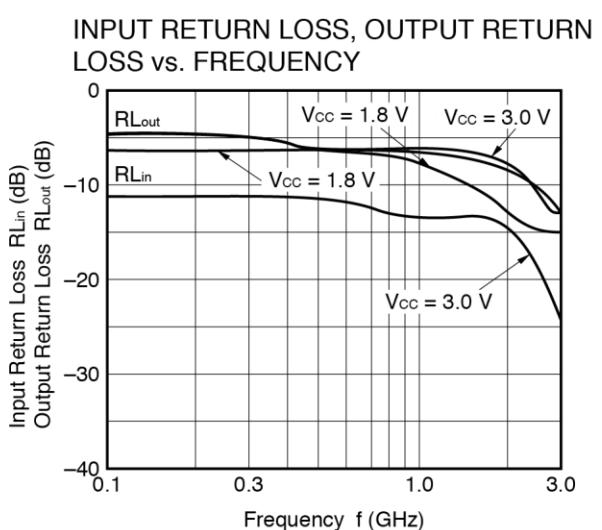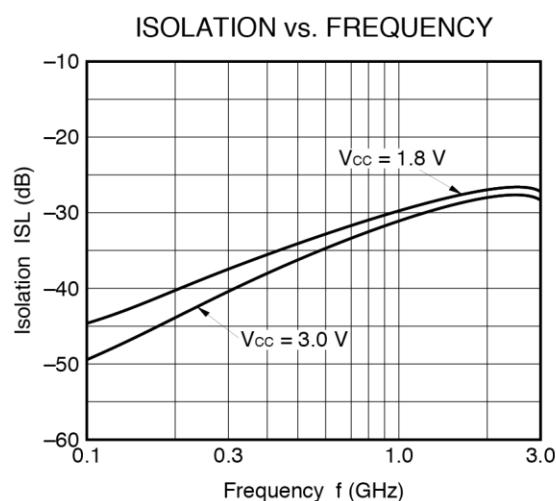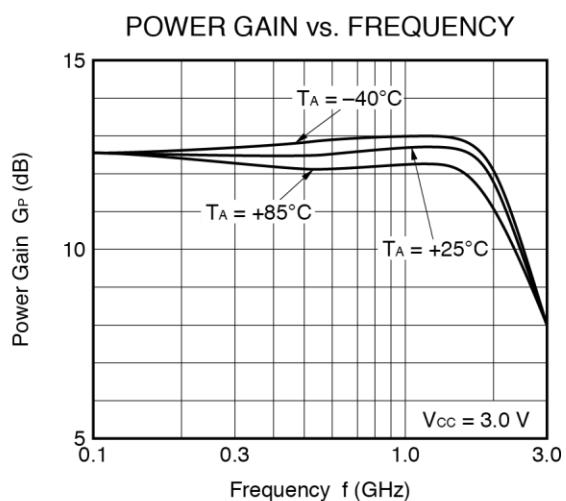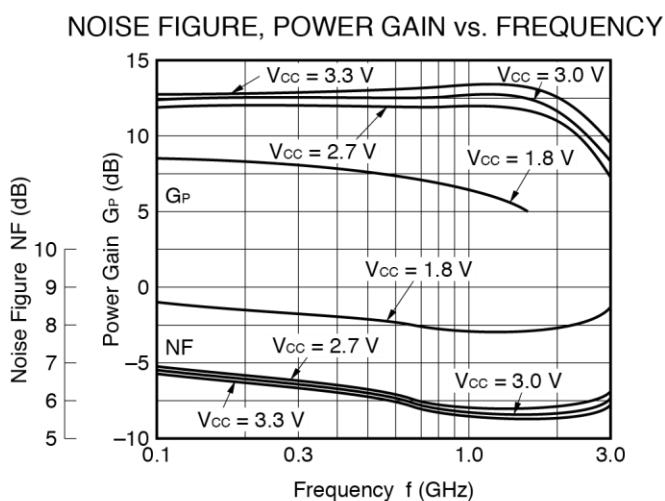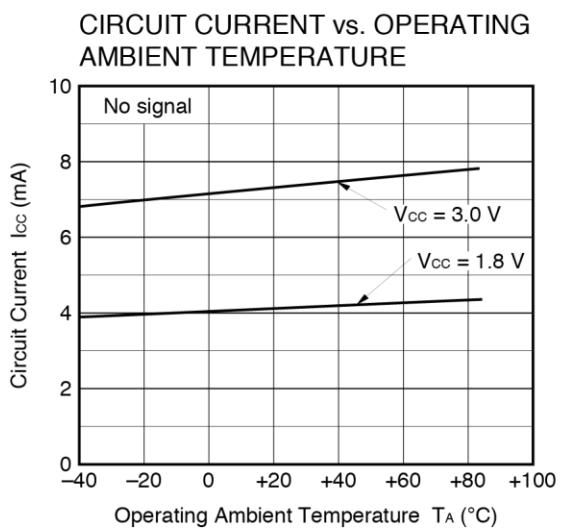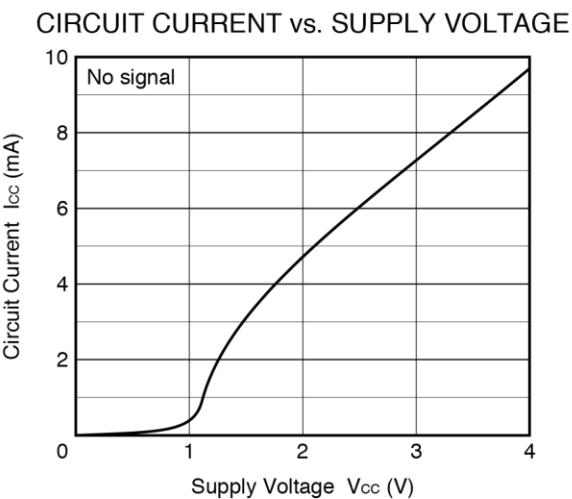
TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise specified)— μ PC2745TB —

Remark The graphs indicate nominal characteristics.



— μ PC2745TB —

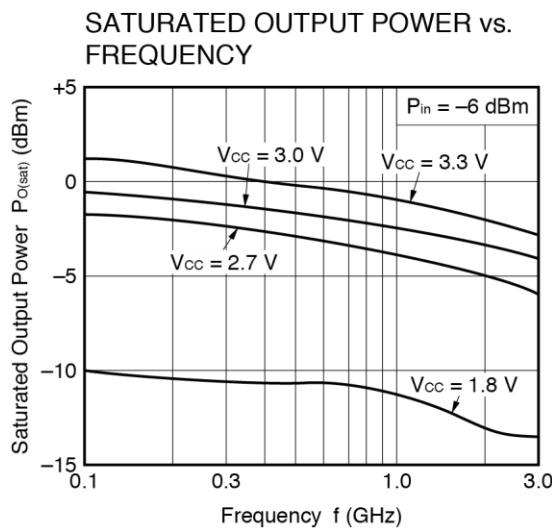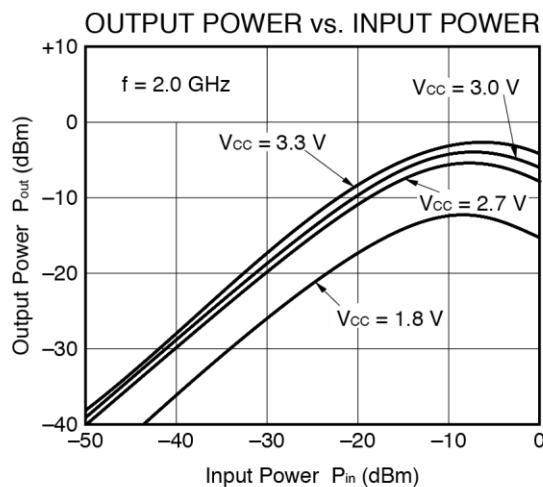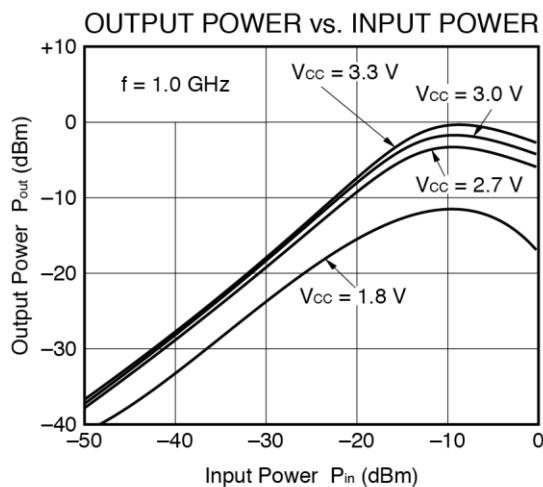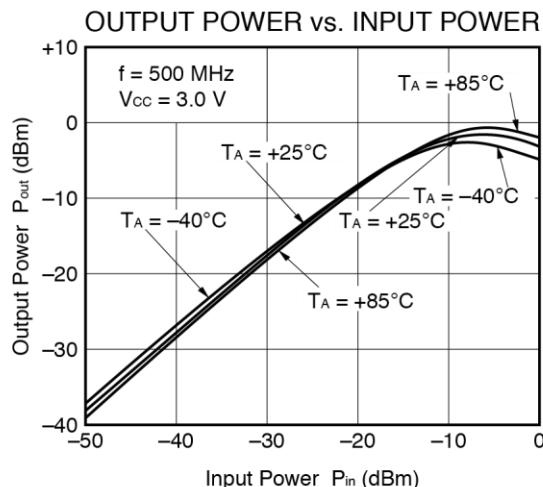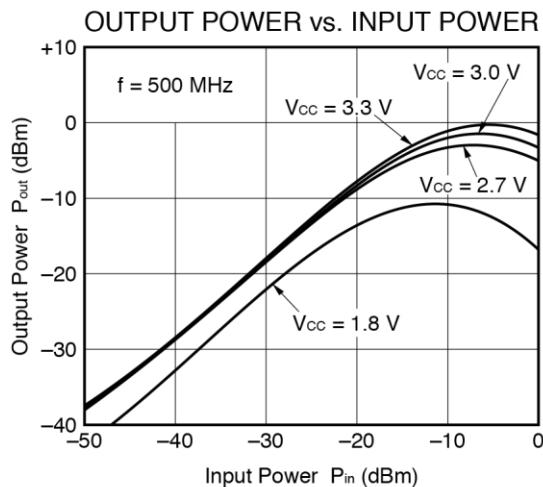

3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE

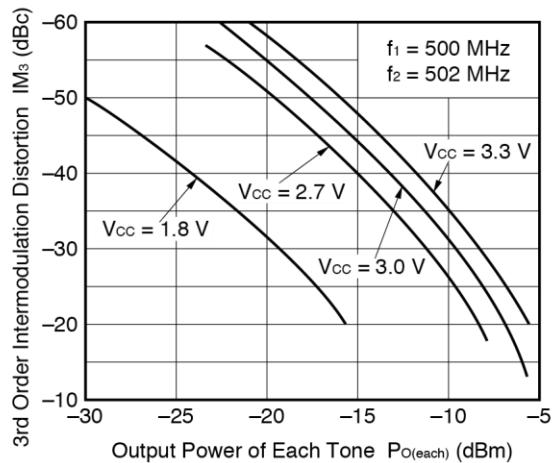

Remark The graphs indicate nominal characteristics.

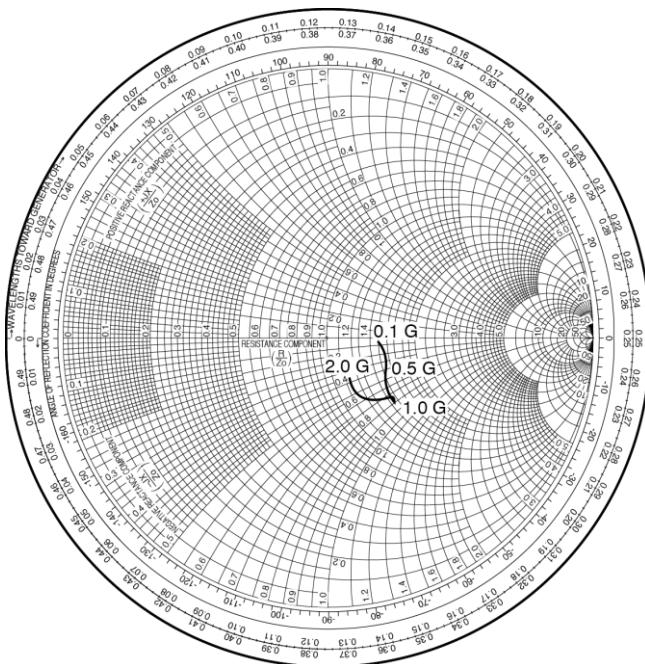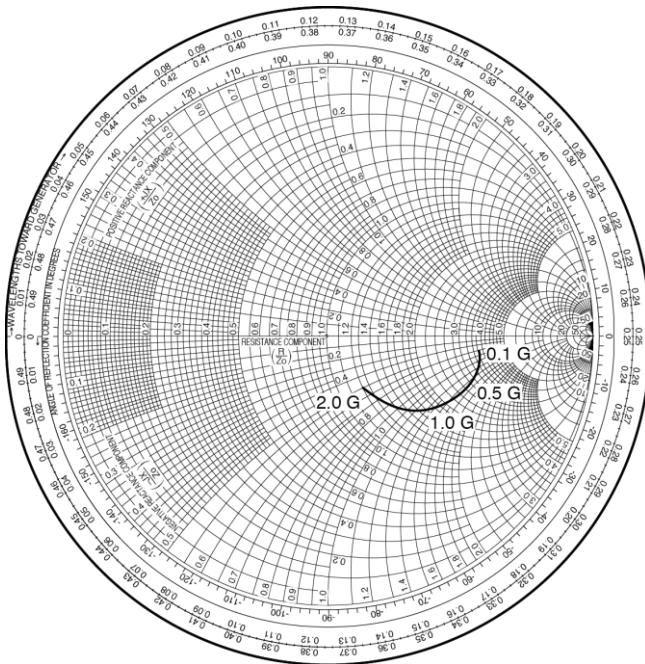
SMITH CHART ($T_A = +25^\circ\text{C}$, $V_{cc} = 3.0 \text{ V}$)— μ PC2745TB —S₁₁-FREQUENCYS₂₂-FREQUENCY

S-PARAMETERS


- S-parameters and noise parameters are provided on our Web site in a format (S2P) that enables the direct import of the parameters to microwave circuit simulators without the need for keyboard inputs.
- Click here to download S-parameters.
- [RF and Microwave] ® [Device Parameters]
- URL <http://www.necel.com/microwave/en/>

TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise specified)— μ PC2746TB —


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

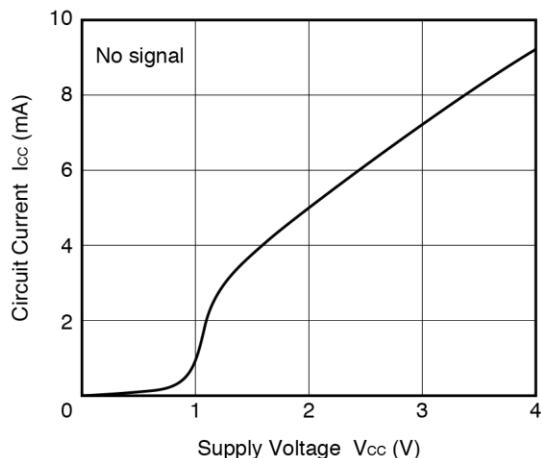


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

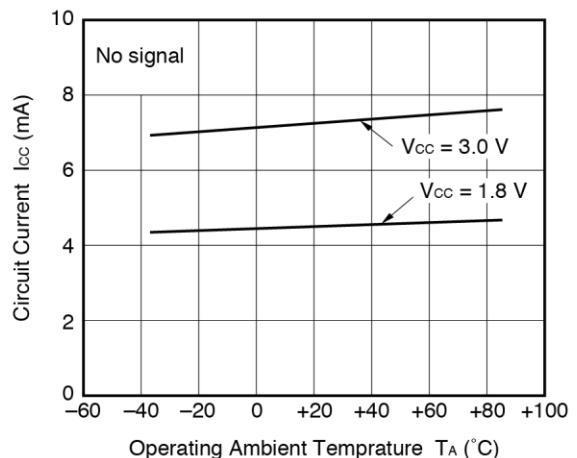


NOISE FIGURE, POWER GAIN vs. FREQUENCY

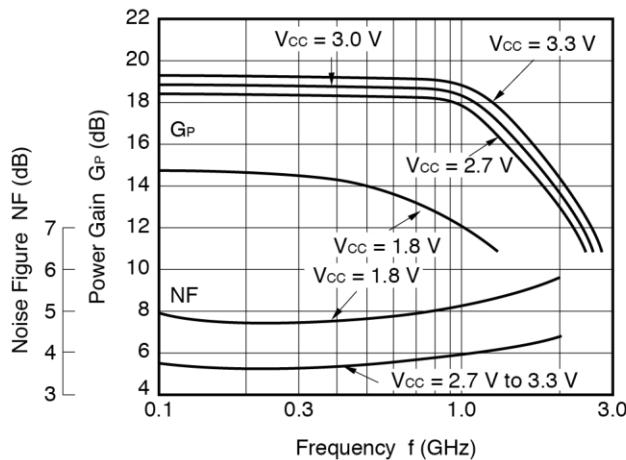


POWER GAIN vs. FREQUENCY

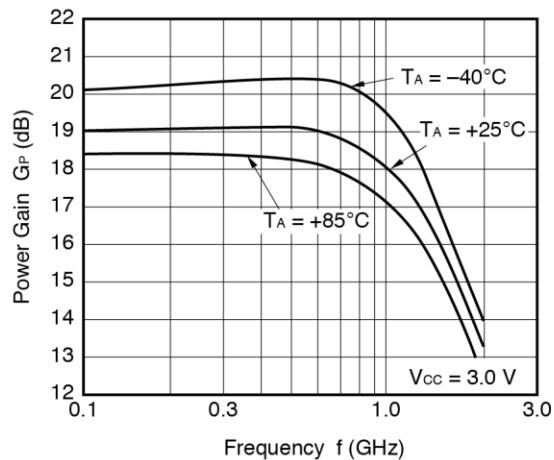







ISOLATION vs. FREQUENCY

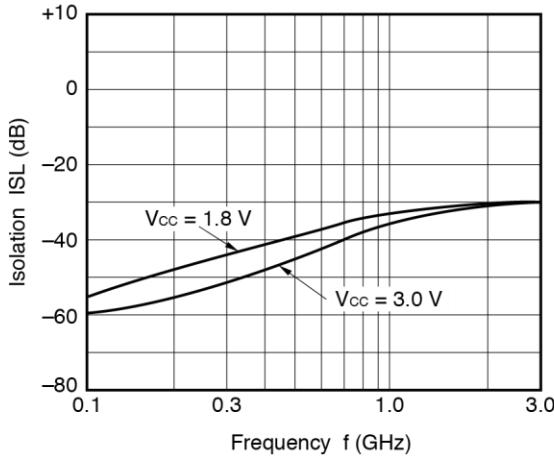



INPUT RETURN LOSS, OUTPUT RETURN LOSS vs. FREQUENCY

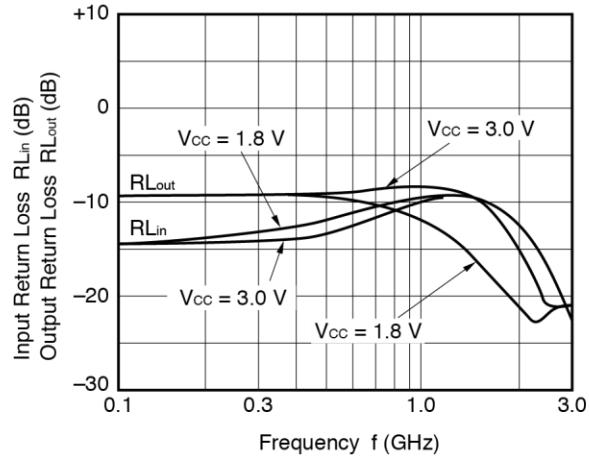

Remark The graphs indicate nominal characteristics.

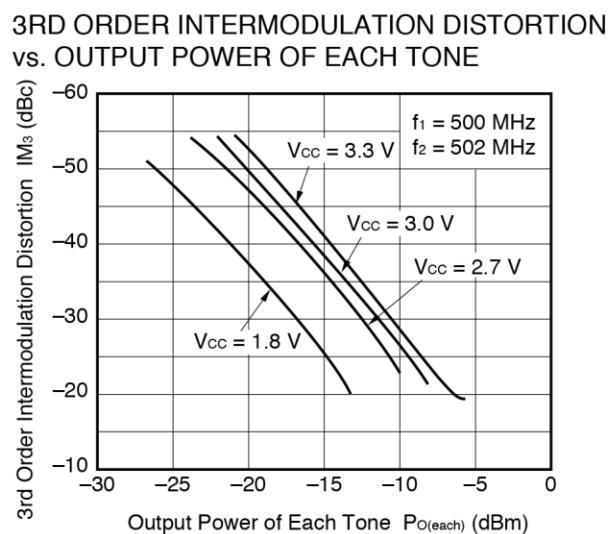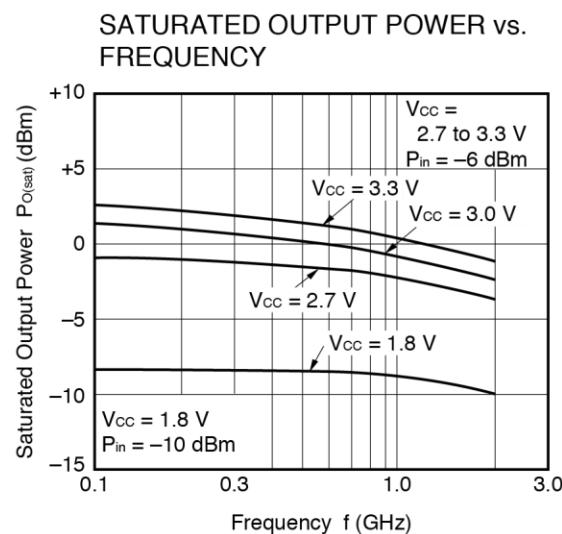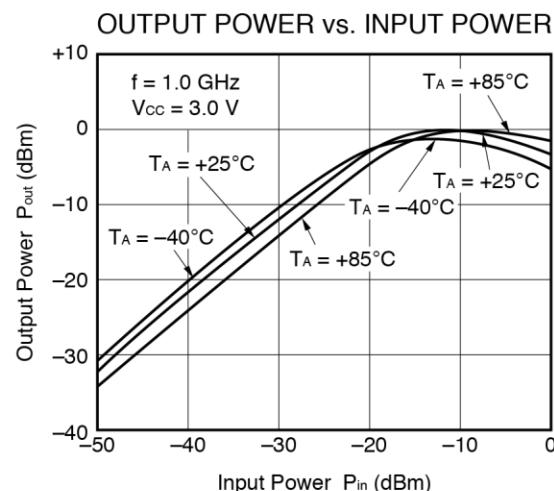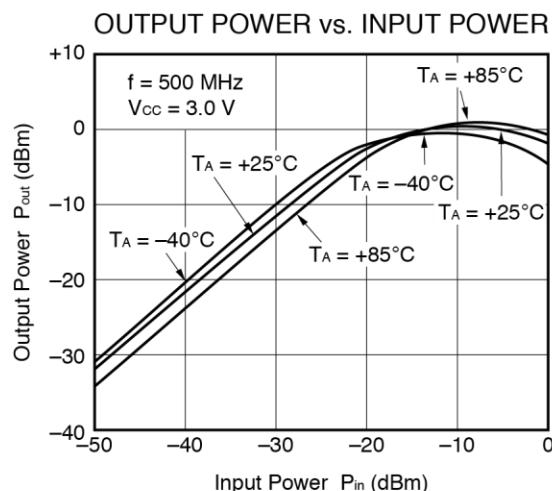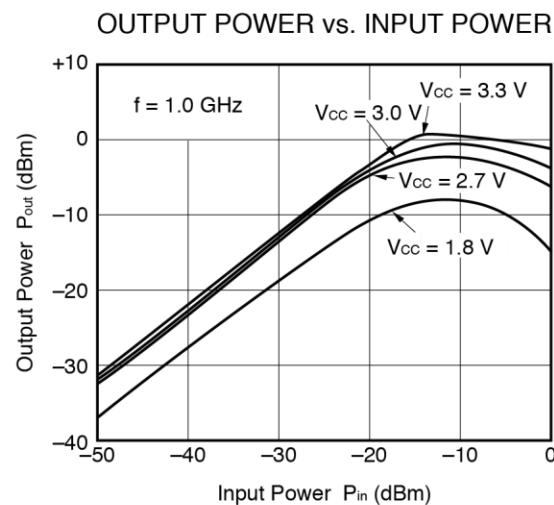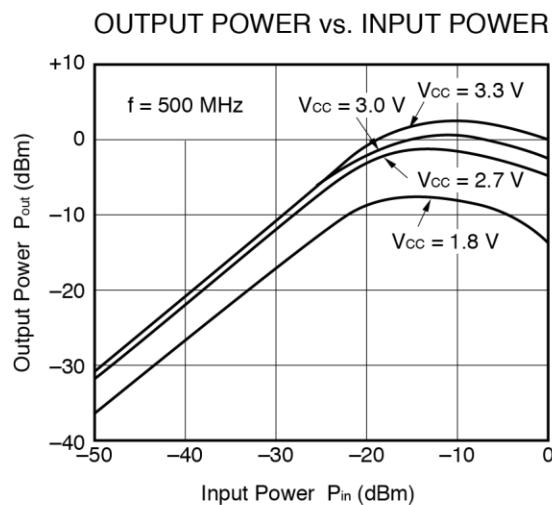— μ PC2746TB —

Remark The graphs indicate nominal characteristics.

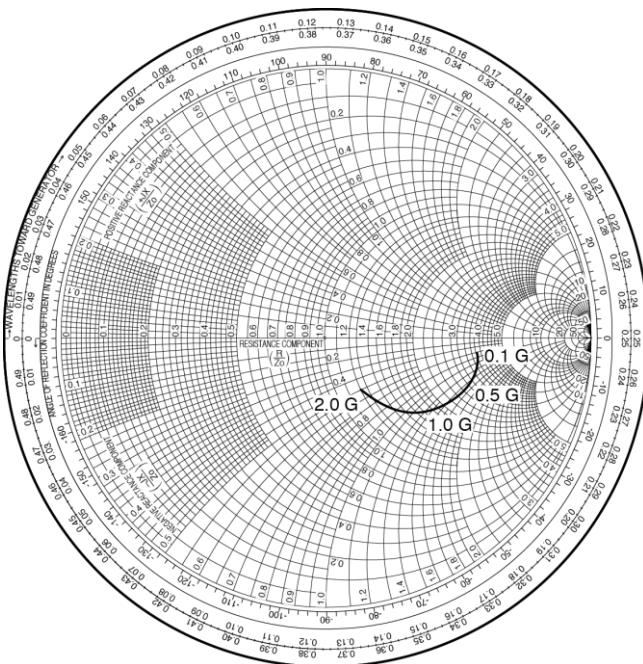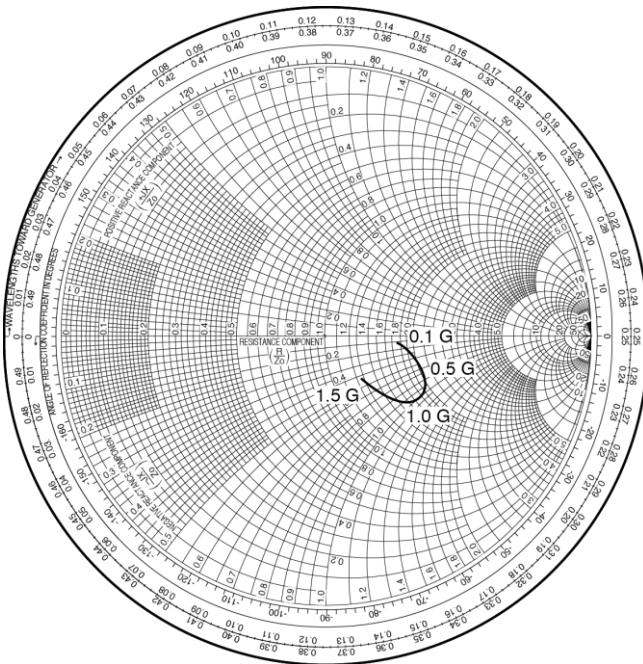
SMITH CHART ($T_A = +25^\circ\text{C}$, $V_{cc} = 3.0 \text{ V}$)— μ PC2746TB —S₁₁-FREQUENCYS₂₂-FREQUENCY

S-PARAMETERS

- S-parameters and noise parameters are provided on our Web site in a format (S2P) that enables the direct import of the parameters to microwave circuit simulators without the need for keyboard inputs.
- Click here to download S-parameters.
- [RF and Microwave] ® [Device Parameters]
- URL <http://www.necel.com/microwave/en/>

PACKAGE DIMENSIONS

6-PIN SUPER MINIMOLD (UNIT: mm)

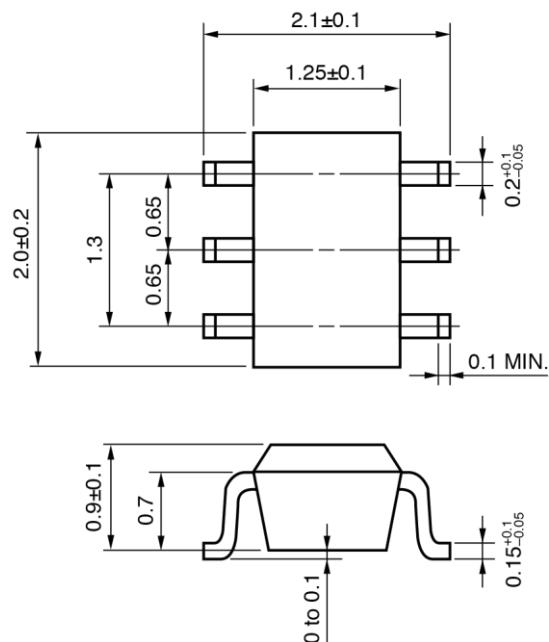

NOTES ON CORRECT USE

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as widely as possible to minimize ground impedance (to prevent undesired oscillation).
All the ground pins must be connected together with wide ground pattern to decrease impedance difference.
- (3) The bypass capacitor should be attached to the Vcc pin.
- (4) The DC cut capacitor must be attached to input pin and output pin.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions		Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature)	: 260°C or below	IR260
	Time at peak temperature	: 10 seconds or less	
	Time at temperature of 220°C or higher	: 60 seconds or less	
	Preheating time at 120 to 180°C	: 120±30 seconds	
	Maximum number of reflow processes	: 3 times	
	Maximum chlorine content of rosin flux (% mass)	: 0.2%(Wt.) or below	
VPS	Peak temperature (package surface temperature)	: 215°C or below	VP215
	Time at temperature of 200°C or higher	: 25 to 40 seconds	
	Preheating time at 120 to 150°C	: 30 to 60 seconds	
	Maximum number of reflow processes	: 3 times	
	Maximum chlorine content of rosin flux (% mass)	: 0.2%(Wt.) or below	
Wave Soldering	Peak temperature (molten solder temperature)	: 260°C or below	WS260
	Time at peak temperature	: 10 seconds or less	
	Preheating temperature (package surface temperature)	: 120°C or below	
	Maximum number of flow processes	: 1 time	
	Maximum chlorine content of rosin flux (% mass)	: 0.2%(Wt.) or below	
Partial Heating	Peak temperature (pin temperature)	: 350°C or below	HS350
	Soldering time (per side of device)	: 3 seconds or less	
	Maximum chlorine content of rosin flux (% mass)	: 0.2%(Wt.) or below	

Caution Do not use different soldering methods together (except for partial heating).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.