

# SILENT RELAY FOR AUTOMOTIVE APPLICATIONS 1 POLE—25 A

## FTR-P5 SERIES

RoHS compliant

### ■ FEATURES

- Low operating sound  
An original silent mechanism decreases the propagation of operating sound when mounted on a PCB. (Average sound pressure: 50dB at 5 cm).
- Compact, high density package  
198 mm<sup>2</sup> mounting area. (46% less than the FTR-P1 series quiet relay).
- High sensitivity, low power consumption  
(nominal power consumption: 450 mW).
- High capacity  
Heat dissipation is high due to a single cover structure.
- Ease of PCB layout  
All terminals are on the perimeter.
- High breaking capability.  
In addition to the standard gap product (0.3 mm), a higher gap product (0.6 mm), suitable for over voltage breaking can be supplied.
- Typical applications:  
Wiper / IWW, Power window, Doorlock, Power seat  
Sunroof, Interior lighting, Fan
- RoHS compliant since date code: 0623  
Please see page 8 for more information



### ■ ORDERING INFORMATION

[Example]      FTR-P5   C   N   012   W1   \*\*  
                  (a)    (b)   (c)   (d)   (e)   (f)

|     |                               |   |             |             |
|-----|-------------------------------|---|-------------|-------------|
| (a) | Series Name                   | FTR-P2 : FTR-P2 Series                          |             |             |
| (b) | Contact Arrangement           | C : 1 Form C                                    |             |             |
| (c) | Contact Gap                   | N : 0.3 mm gap                                  |             |             |
| (d) | Nominal Voltage               | 009: 9 VDC                                      | 010: 10 VDC | 012: 12 VDC |
| (e) | Contact Material              | W1 : Silver-Tin-Oxide Indium Oxide              |             |             |
| (f) | Special product specification | Symbol to specify special specification product |             |             |

Note: The part number on the relay cover does not include 'FTR'

Example:      Ordering part number: FTR-P5CN012W1  
                  Stamped part number: P5CN012W1

# FTR-P5 SERIES

## ■ SPECIFICATIONS

| Item                   |                                    | Specifications                                       |                                     |
|------------------------|------------------------------------|--|-------------------------------------|
| Contact                | Arrangement                        | 1 Form C   |                                     |
|                        | Material                           | Silver-tin oxide-indium                              |                                     |
|                        | Voltage drop                       | 100mV (1A, 12VDC)                                    |                                     |
|                        | Contact rating                     | 14VDC, 25A (motor locked)                            |                                     |
|                        | Maximum carrying current           | 25A / 1 hour (25°C, nominal voltage applied to coil) |                                     |
|                        | Maximum switching current          | 35A, 16 VDC (reference)                              |                                     |
|                        | Minimum load*                      | 6V, 1A (reference)                                   |                                     |
| Coil                   | Operating temperature range        | -40°C to +85°C (no frost)                            |                                     |
|                        | Storage temperature range          | -40°C to +100°C (no frost)                           |                                     |
| Time                   | Operate (at nominal voltage)       | 10 ms maximum  |                                     |
|                        | Release (at nominal voltage)       | 5 ms maximum (without diode)                         |                                     |
| Life                   | Mechanical                         | 10 million operations minimum                        |                                     |
|                        | Electrical                         | 100k operations minimum (at contact rating)          |                                     |
| Other                  | Vibration resistance (operational) |  | 10-55HZ, 1.5mm double amplitude     |
|                        | Shock resistance                   | operational  | 100 m/s <sup>2</sup> minimum (10G)  |
|                        |                                    | no damage  | 100 m/s <sup>2</sup> minimum (100G) |
|                        | Weight                             |  | Approximately 13 grams              |
| Average sound pressure |                                    | Approximately 50dB at 5cm                            |                                     |

\*This is the standard value of the minimum load level. This value may differ depending on the switching frequency, environmental conditions and target reliability standard. We recommend to check this value by an actual load prior to use.



## ■ COIL DATA

| Product Name  | Nominal Coil Voltage | Coil Resistance* (±10%) | Power Consumption at nominal coil voltage* | Must Operate Voltage*      | Must Release Voltage |
|---------------|----------------------|-------------------------|--|----------------------------|----------------------|
| FTR-P5CN009W1 | DC 9V                | 180Ω                    | 450mW                                      | 5.5V (20° )<br>6.9V (85° ) | 0.72                 |
| FTR-P5CN010W1 | DC 10V               | 220Ω                    | 455mW                                      | 6.3V (20° )<br>7.9V(85° )  | 0.8                  |
| FTR-P5CN012W1 | DC 12V               | 320Ω                    | 450mW                                      | 7.3V (20° )<br>9.2V (85° ) | 0.96                 |


# FTR-P5 SERIES

## CHARACTERISTIC DATA

### 1. MAXIMUM BREAK CAPACITY

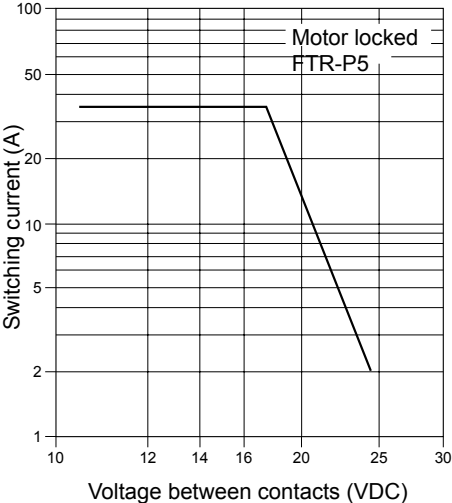

### 2. LIFE

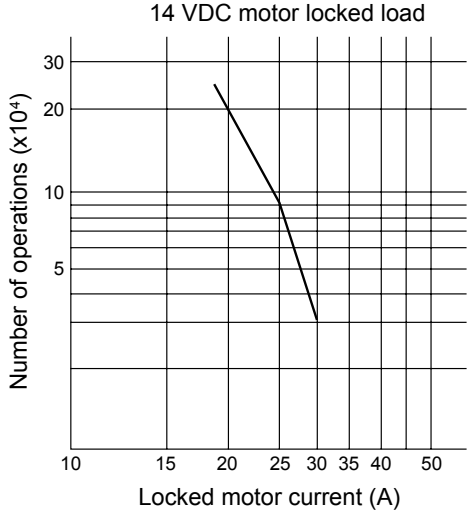


# FTR-P5 SERIES

## 3. LIFE TEST (EXAMPLES)


- Test item  
14 V DC,  
inrush current: 30 A  
motor free  
300K operations minimum  
0.25 seconds ON,  
9.75 seconds OFF

- Test circuit




Note: NC contacts provide dynamic brake circuit


- Current wave form



- Change in pick-up drop-out voltage

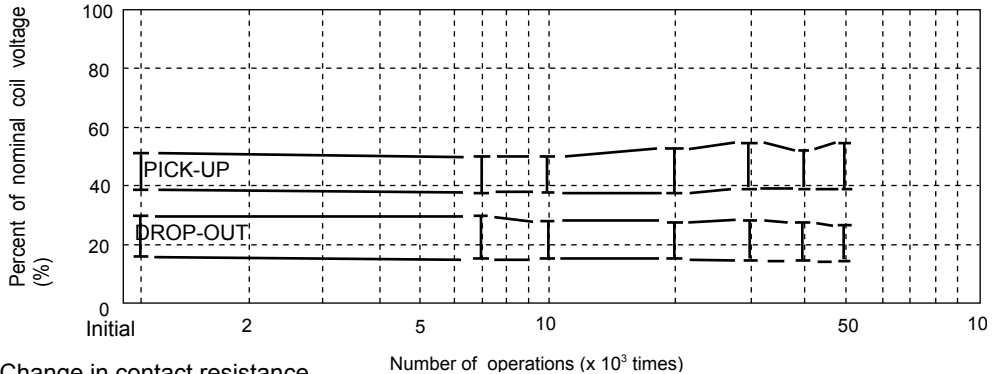


- Change in contact resistance

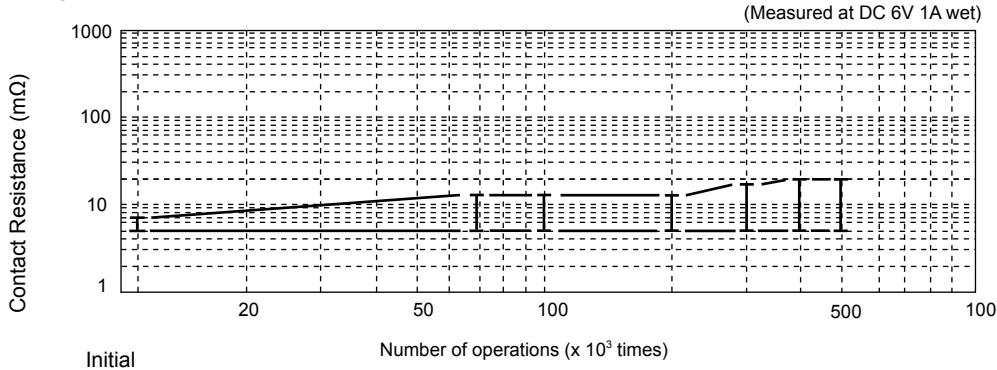


- Test item  
14 V DC-25 A  
Motor Lock  
100K operations  
minimum\*

- Test circuit




- Current wave form




\* 1 operation = 1 forward and 1 reverse

- Shift of pick-up drop-out voltage

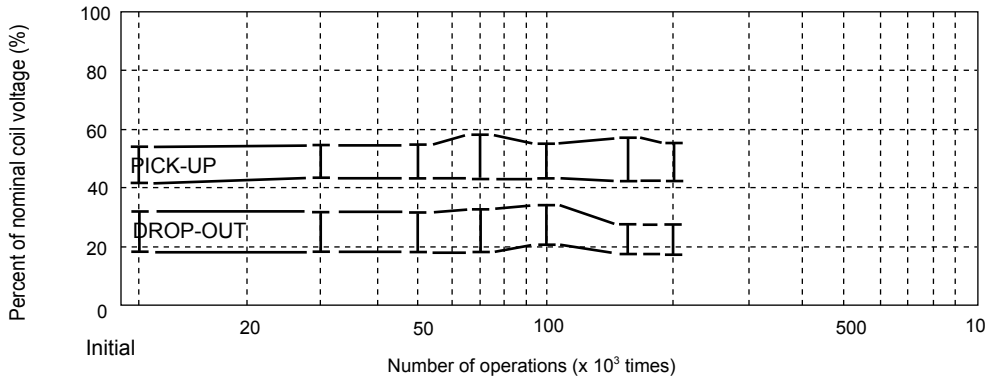


- Change in contact resistance

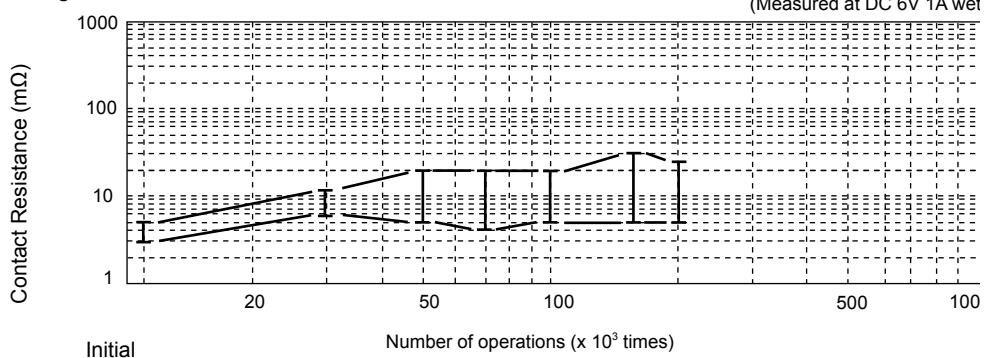


# FTR-P5 SERIES


## 4. COIL TEMPERATURE RISE

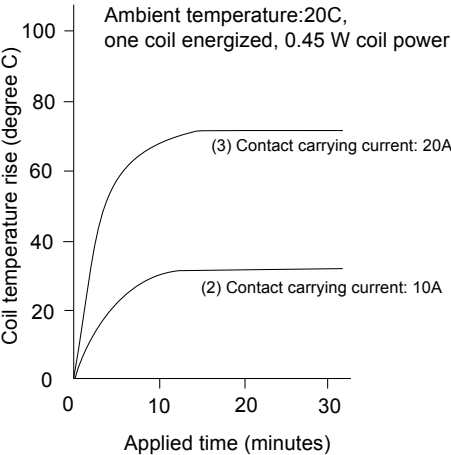


## 5. MAXIMUM BREAK CAPACITY

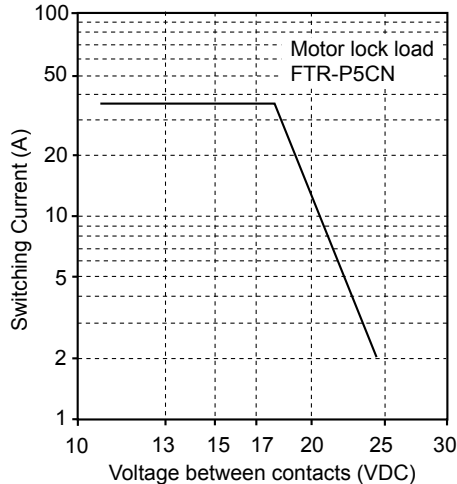


## 6. OPERATING COIL VOLTAGE RANGE

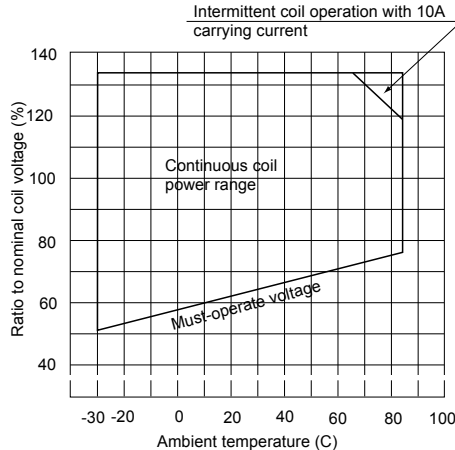


## 7. VIBRATION RESISTANCE CHARACTERISTICS

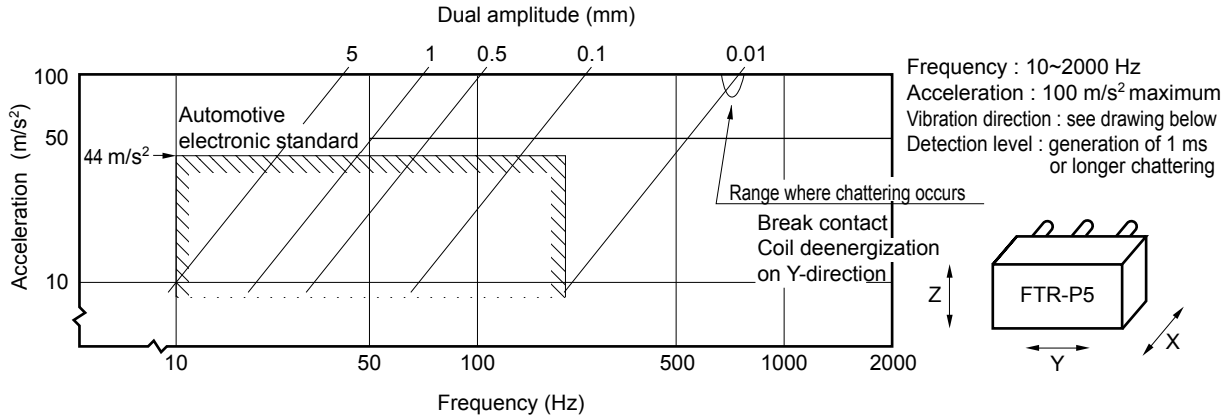

## 8. SHOCK RESISTANCE CHARACTERISTIC





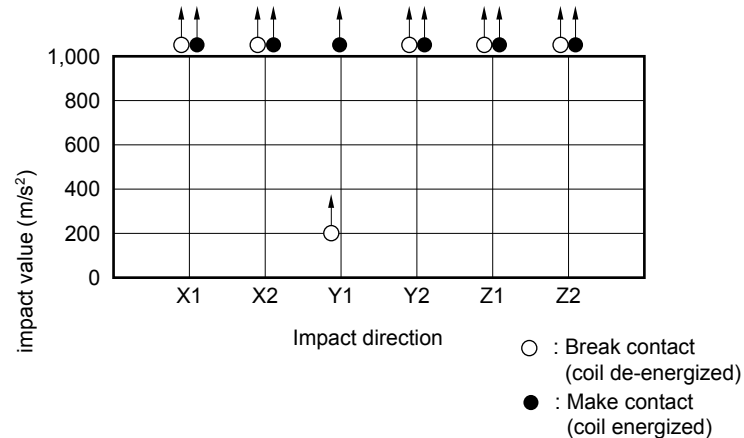


Impact apply time : 111 ms, half-sine wave  
Test condition: coil, energized and de-energized  
Impact direction : see drawing below  
Detection level : generation of 1 ms or longer contact chattering




# FTR-P5 SERIES


## REFERENCE DATA

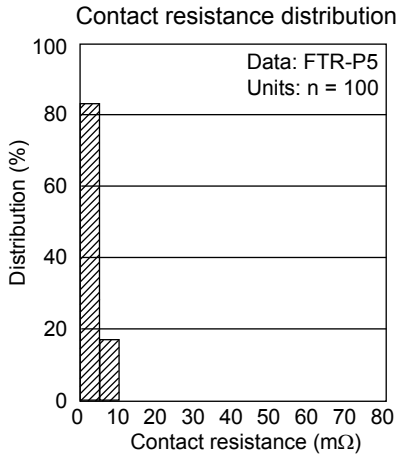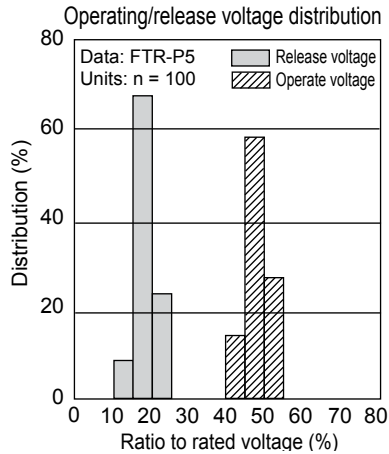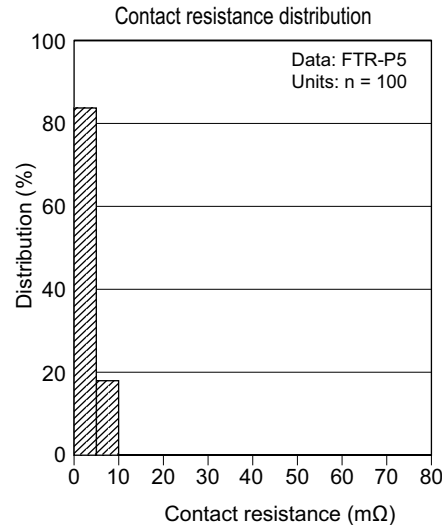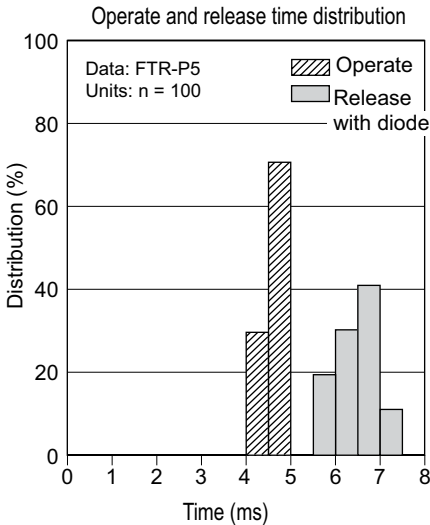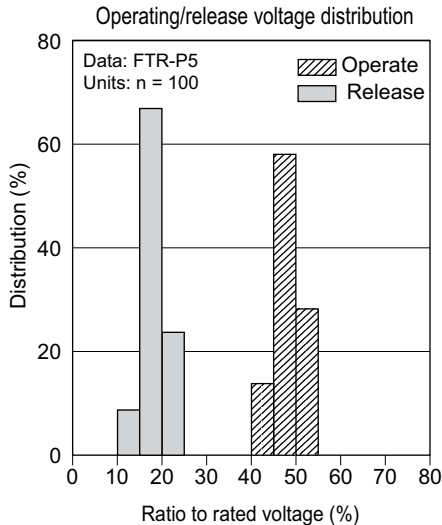


Distribution of sound pressure (with diode)

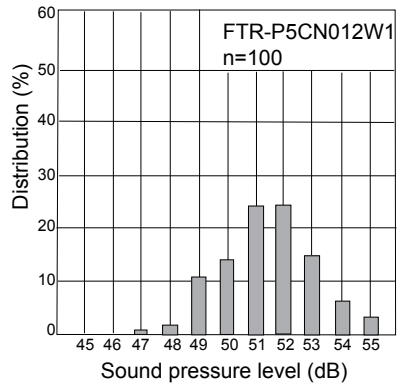

Method of acoustic noise measure  
Measuring condition: Distance from 5 cm,  
relay operation at 10Hz  
Tester: Noise tester Ryon NA-61, A range

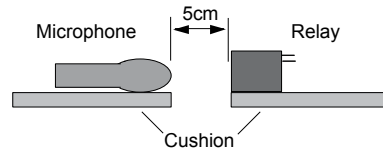

## DIMENSIONS

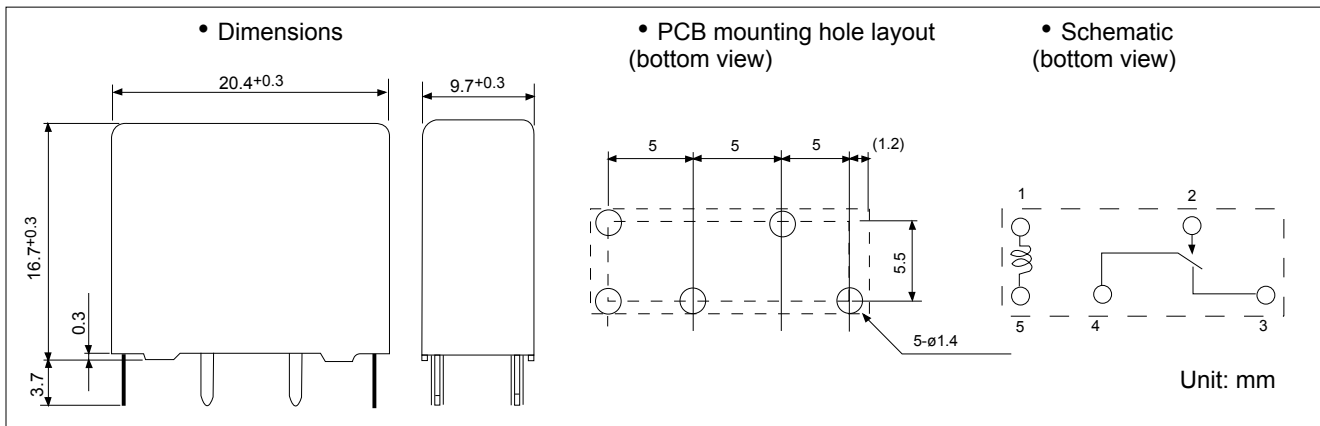

## RoHS Compliance and Lead Free Relay Information

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

#### Reflow Solder condition

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

# FTR-P5 SERIES

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141 8630, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@fcl.fujitsu.com](mailto:promothq@fcl.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://www.fujitsu.com/us/services/edevices/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. January 3, 2008.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.