

LVSP SURGE SUPPRESSION FUSE

600 Vac • 5-100 kA



Description

The Littelfuse® Varistor Protection (LVSP) Fuses are intended for the protection of TVSS products. The LVSP series has been designed to survive the 8 x 20 μ s lightning surges described in various standards (UL 1449, IEC 61000-4-5 and IEEE C62.41) without opening. This allows the TVSS to perform the necessary suppression. The LVSP is not rated for continuous current and the ratings are specific 8 x 20 μ s surge capability. The LVSP series can be used to facilitate TVSS module compliance to UL 1449 in permanently connected applications (abnormal overvoltage, unlimited current conditions).

Features/Benefits

- Very current limiting under AC short-circuit conditions
- Available in multiple mounting configurations (cartridge, bolt-in, PC board mount)
- Provides short circuit protection in TVSS systems and complements the Littelfuse line of overvoltage products (HA, HB34, TMOV® and iTMOV® varistors as well as the AK-10 series TVS diodes)

Applications

- TVSS products
- Surge arrestors


Electrical Specifications

SURGE RATING	RATING CODE	VOLTAGE RATING (A)	INTERRUPT RATING (kA)	CARTRIDGE		LEADED		BOLT-IN		8 X 20 μ S SURGE RATING	NOMINAL MELTING I ² T (A ² S)	NOMINAL CLEARING I ² T (A ² S)	I _{peak} @100 kHz (A)
				CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER				
5	0005	600	200	LVSP5-2	LVSP0005TX2	LVSP5-R	LVSP0005TXR	—	—	5,000	359	981	3,700
10	0010	600	200	LVSP10-2	LVSP0010TX2	LVSP10-R	LVSP0010TXR	—	—	10,000	1,300	3,210	5,823
15	0015	600	200	LVSP15-2	LVSP0015TX2	LVSP15-R	LVSP0015TXR	—	—	15,000	3,267	6,235	7,765
20	0020	600	200	LVSP20-2	LVSP0020TX2	LVSP20-R	LVSP0020TXR	—	—	20,000	4,940	11,710	8,135
30	0030	600	200	LVSP30-2	LVSP0030TX2	—	—	LVSP30	LVSP0030T	30,000	11,950	35,325	12,478
40	0040	600	200	LVSP40-2	LVSP0040TX2	—	—	LVSP40	LVSP0040T	40,000	20,550	61,700	15,250
60	0060	600	200	LVSP60-2	LVSP0060TX2	—	—	LVSP60	LVSP0060T	60,000	39,240	145,555	19,604
80	0080	600	200	LVSP80-2	LVSP0080TX2	—	—	LVSP80	LVSP0080T	80,000	75,000	254,000	24,600
100	0100	600	200	—	—	—	—	LVSP100-L	LVSP0100VXL	100,000	Contact Factory		

Specifications

Voltage Rating	600 Vac
Interrupting Rating	200 kA
Ratings	5 – 100 kA 8 x 20 μ s surge withstand
Approvals	UL Recognized (File: E71611)
Environmental	RoHS Compliant

Part Numbering System

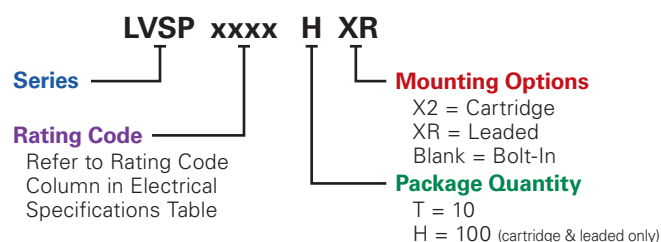

SERIES	SURGE RATING	RATING CODE	PACKAGE QUANTITY	MOUNTING METHOD	CATALOG NUMBER	ORDERING NUMBER
LVSP	5	0005	10	CARTRIDGE	LVSP05-2	LVSP0005TX2
LVSP	15	0015	10	CARTRIDGE	LVSP15-2	LVSP0015TX2
LVSP	20	0020	100	LEADED	LVSP20-R	LVSP0020HXR
LVSP	80	0080	10	BOLT-IN	LVSP80	LVSP0080T

Recommended Fuse Blocks

LVSP (5-20)-2

L60030M (open block) • LPSM (dead front)

LVSP (30-80)-2

LFJ60030 (open block) • LFPSJ30 (dead front)

LVSP (100)

LFJ60100 (open block)

Web Resources


Download other technical information:

littelfuse.com/lvsp


LVSP SURGE SUPPRESSION FUSE

Dimensions Inches (mm)


Cartridge 5-20 A




Leaded 5-20 A

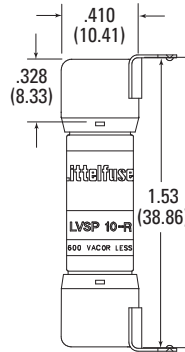


Cartridge 30-80 A

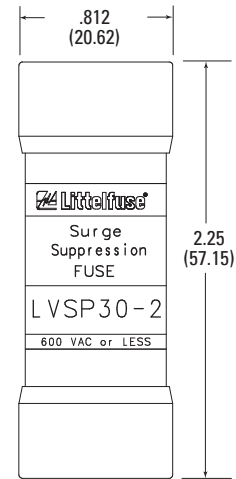

Bolt-In 30-80 A

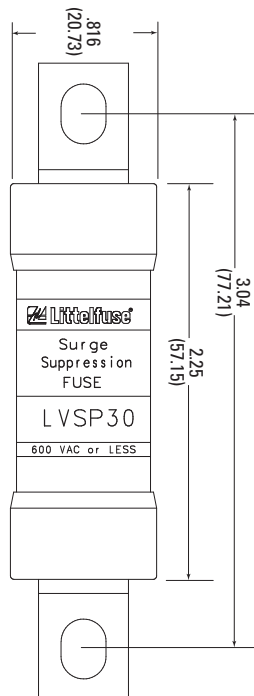

Bolt-In 100 A

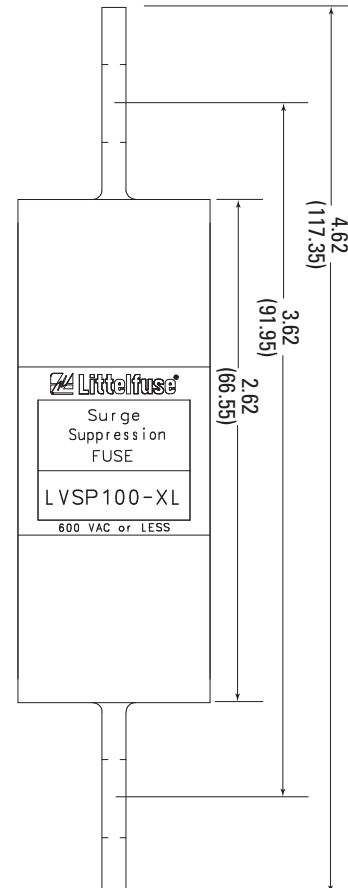

Disclaimer Notice – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.