


# SRPE-03E1A0

## Non-Isolated DC-DC Converter

The Bel SRPE-03E1A0 is part of the non-isolated DC-DC converter power module series. The modules use a SMD package. These converters are available in a range of output voltages from 0.6 VDC to 5.5 VDC over a wide range of input voltage ( $V_{IN} = 5.5 \text{ VDC} - 13.2 \text{ VDC}$ ). The efficiency is typically 92% at 3.3 Vout ( $V_{in} = 12 \text{ VDC}$ ) at full load.

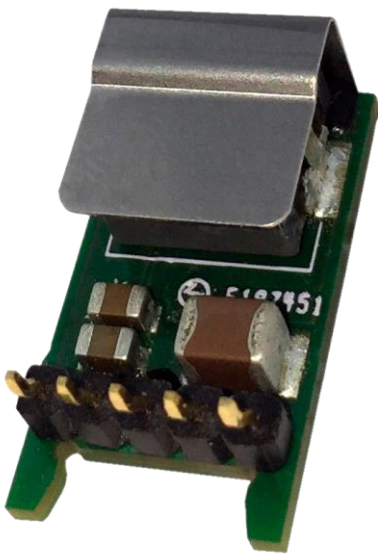

### Key Features & Benefits

- 5.5 VDC - 13.2 VDC Input
- 0.6 VDC - 5.5 VDC @ 3 A Output
- Non-Isolated
- High Efficiency
- Fixed Frequency
- Low Cost
- Wide Input
- Under-Voltage Lockout
- Wide Trim
- OCP/SCP
- Remote On/Off
- Class 2, Category 2 (refer to IPC-9592B)

### Applications

- Networking
- Computers and peripherals
- Telecommunications

## 1. MODEL SELECTION

| MODEL NUMBER | OUTPUT VOLTAGE | INPUT VOLTAGE  | MAX. OUTPUT CURRENT | MAX. OUTPUT POWER | TYPICAL EFFICIENCY |
|--------------|----------------|----------------|---------------------|-------------------|--------------------|
| SRPE-03E1A0  | 0.6 V - 5.5 V  | 5.5 V - 13.2 V | 3 A                 | 16.5 W            | 92%                |

**NOTE:** Add "G" suffix at the end of the model numbers listed above to indicate "Tray Packaging".

### 1.1 PART NUMBER EXPLANATION

| S             | R      | PE               | - 03        | E                               | 1A                              | 0      | X       |
|---------------|--------|------------------|-------------|---------------------------------|---------------------------------|--------|---------|
| Surface mount | RoHS 6 | Series name, SMD | Series code | Wide input range (5.5 - 13.2 V) | Wide output range (0.6 - 5.5 V) | Suffix | Package |

## 2. ABSOLUTE MAXIMUM RATINGS

All specifications are typical at 25°C unless otherwise stated.

| PARAMETER                              | DESCRIPTION | MIN  | TYP | MAX  | UNITS |
|--|-------------|------|-----|------|-------|
| Continuous non-operating Input Voltage |             | -0.3 | -   | 15   | V     |
| Remote On/Off                          |             | -0.3 | -   | 15   | V     |
| Ambient Temperature                    |             | 0    | -   | 50   | °C    |
| Storage Temperature                    |             | -55  | -   | 125  | °C    |
| Altitude                               |             | -    | -   | 2000 | m     |

**NOTE:** Use beyond the maximum ratings may cause a reliability degradation of the converter or may permanently damage the device.

## 3. INPUT SPECIFICATIONS

All specifications are typical at 25°C unless otherwise stated.

| PARAMETER                                 | DESCRIPTION  | MIN  | TYP | MAX  | UNIT             |
|---|--|------|-----|------|------------------|
| Input Voltage                             |  | 5.5  | -   | 13.2 | V                |
| Input Current (full load)                 | This power module is not internally fused. An input line fuse must always be used  | -    | -   | 2.6  | A                |
| Input Current (no load)                   |  | -    | 10  | 150  | mA               |
| Remote Off Input Current                  |  | -    | 1   | 5    | mA               |
| Input Reflected Ripple Current (rms)      | With simulated source impedance of 1000 nH, 5 Hz to 20 MHz. Use a 1000 uF/25V AL-Cap with ESR = 0.03 ohm max and 2*100 uF/25 V | -    | 5   | 15   | mA               |
| Input Reflected Ripple Current (pk-pk)    | Tan cap with ESR = 0.013 ohm max, at 100 KHz @ 25°C.   | -    | 15  | 30   | mA               |
| I <sup>2</sup> t Inrush Current Transient |  | -    | -   | 1    | A <sup>2</sup> s |
| Turn-on Voltage Threshold                 |  | 4.15 | 4.2 | 4.45 | V                |
| Turn-off Voltage Threshold                |  | 3.7  | 4   | 4.2  | V                |

## 4. OUTPUT SPECIFICATIONS

All specifications are typical at 25°C unless otherwise stated.

| PARAMETER   | DESCRIPTION  | MIN  | TYP | MAX  | UNIT                 |
|---|--|------|-----|------|----------------------|
| Output Voltage Set Point  | $V_o, \text{ set} \geq 0.9 \text{ VDC}$                          | -2   | -   | 2    | % $V_{o,\text{set}}$ |
|   | $V_o, \text{ set} < 0.9 \text{ VDC}$                             | -3   | -   | 3    | % $V_{o,\text{set}}$ |
| Load Regulation   | $V_o \geq 3.3 \text{ VDC}$                                       | -1.5 | -   | 1.5  | % $V_{o,\text{set}}$ |
|   | $V_o < 3.3 \text{ VDC}$  | -20  | -   | 20   | mV                   |
| Line Regulation   | $V_o \geq 3.3 \text{ VDC}$                                       | -1.5 | -   | 1.5  | % $V_{o,\text{set}}$ |
|   | $V_o < 3.3 \text{ VDC}$  | -15  | -   | 15   | mV                   |
| Regulation Over Temperature   |  | -    | 0.8 | -    | % $V_{o,\text{set}}$ |
| Output Ripple and Noise (pk-pk)   | 0-20 MHz BW, with 360 $\mu\text{F}$ ceramic capacitor at output. | -    | 20  | 50   | mV                   |
| Output Ripple and Noise (rms)   |  | -    | 5   | 20   | mV                   |
| Output Current Range  |  | 0    | -   | 3    | A                    |
| Output DC Current Limit   |  | 3.5  | 4   | 6    | A                    |
| Output Short-Circuit Current ( $V_o \leq 20 \text{ mV}$ ) (Hiccup Mode) |  | -    | -   | 2    | ADC                  |
| Rise time   |  | -    | 2   | 2.5  | ms                   |
| Turn On Time  |  | -    | 3   | 5    | ms                   |
| Overshoot at Turn on  |  | -    | 0   | 3.5  | %                    |
| Output Capacitance  |  | 200  | -   | 1000 | $\mu\text{F}$        |
| <b>Transient Response</b>   |  |      |     |      |                      |
| $\Delta V_{50\% \sim 100\%}$ of Max Load                                | Overshoot  | -    | 30  | 60   | mV                   |
|   | Settling Time  | -    | 20  | 50   | us                   |
| $\Delta V_{100\% \sim 50\%}$ of Max Load                                | Overshoot  | -    | 30  | 60   | mV                   |
|   | Settling Time  | -    | 20  | 50   | us                   |

## 5. GENERAL SPECIFICATIONS

All specifications are typical at 25°C unless otherwise stated.

| PARAMETER                             | DESCRIPTION  | MIN                  | TYP  | MAX | UNIT |
|---------------------------------------|--|----------------------|------|-----|------|
| Efficiency                            | 5.5 V  | 92                   | 94   |     | %    |
|                                       | 3.3 V  | 90                   | 92   |     |      |
|                                       | 0.6 V  | 72                   | 74   |     |      |
| Switching Frequency                   |  | -                    | 650  | -   | kHz  |
| Output Voltage Trim Range (Wide Trim) | This voltage is achieved by trimming up output slowly.   | 0.6                  | -    | 5.5 | V    |
| Weight                                |  | -                    | 2.5  | -   | g    |
| FIT                                   | Calculated Telcordia SR-332, Issue 2 ( $V_{in} = 12 \text{ V}$ , $V_o = 5.5 \text{ V}$ , $I_o = 12 \text{ A}$ , $T_a = 40^\circ\text{C}$ , no forced air, 90% confidence Level, FIT = $10^9/\text{MTBF}$ ) |                      | 16.8 |     | -    |
| Dimensions                            | Inches (L x W x H)   | 0.41 x 0.65 x 0.339  |      |     | -    |
|                                       | Millimeters (L x W x H)  | 10.41 x 16.51 x 8.60 |      |     |      |



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

6. EFFICIENCY DATA

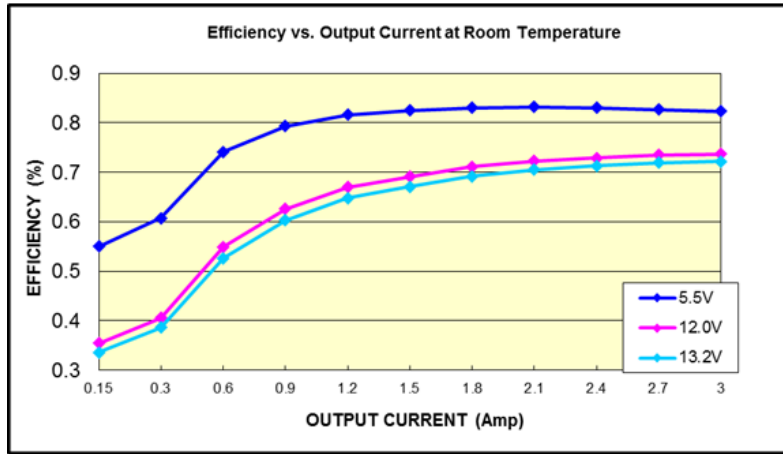


Figure 1. Vout: 0.6 V

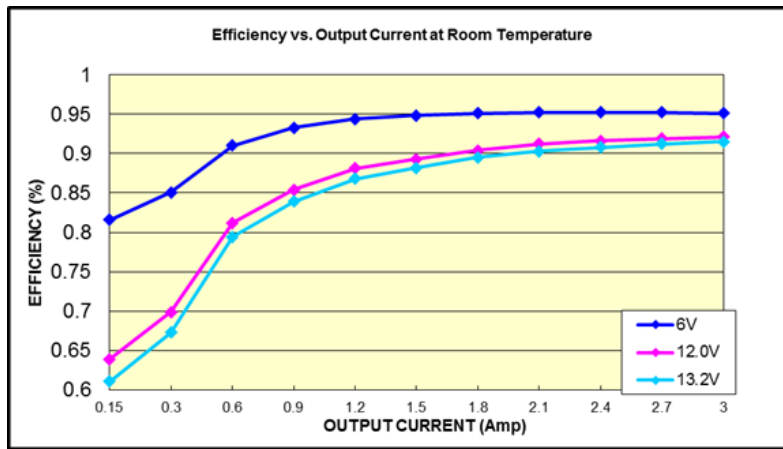


Figure 2. Vout: 3.3 V

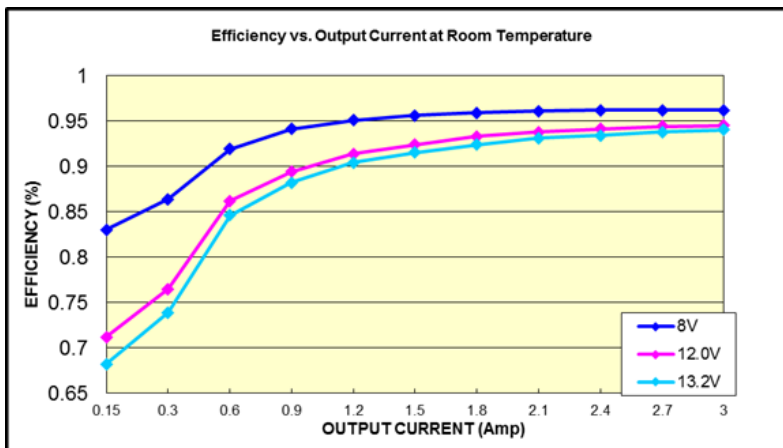


Figure 3. Vout: 5.5 V

7. INPUT UNDER-VOLTAGE LOCKOUT

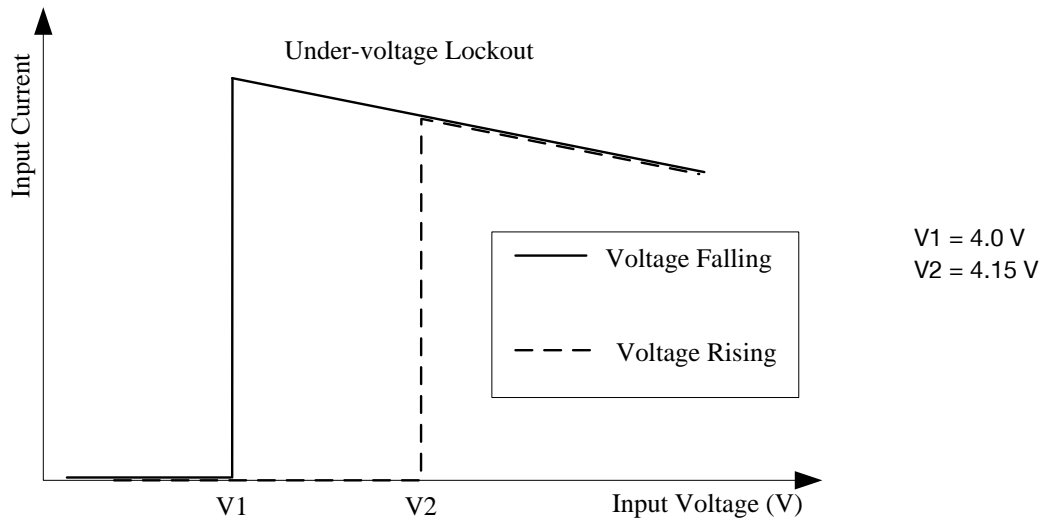


Figure 4. Input Under-Voltage Lockout

8. THERMAL DERATING CURVES


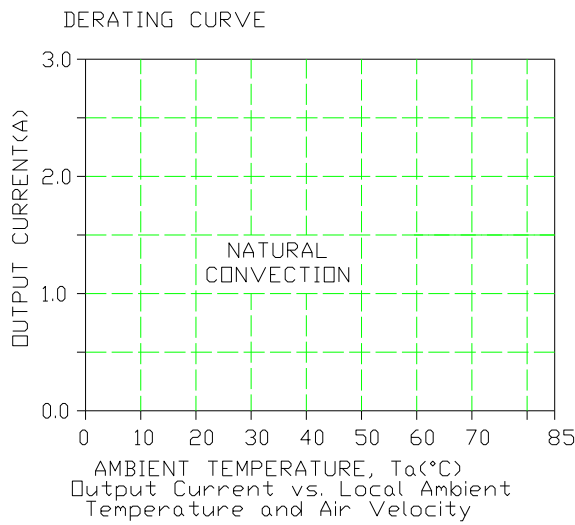


Figure 5.  $V_{out} = 0.6 - 5.5\text{ V}$

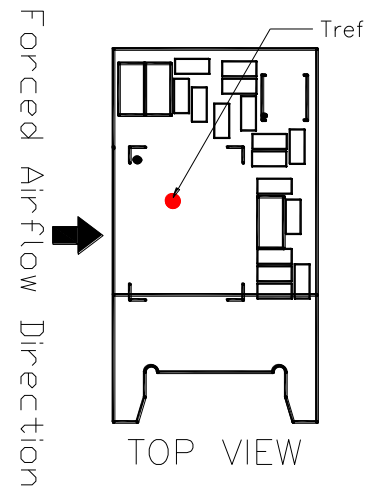

### 9. RIPPLE AND NOISE WAVEFORM

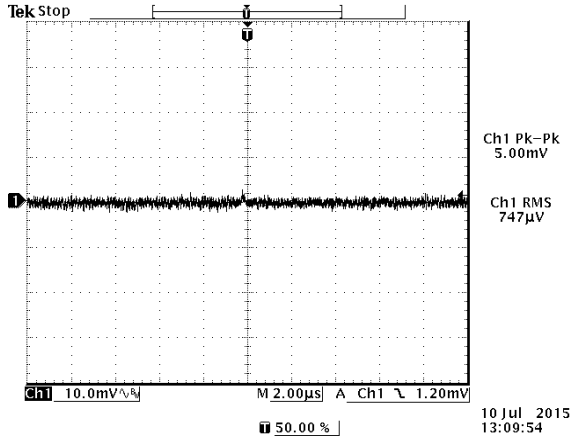


Figure 6. Ripple and noise at full load, 12 V input, 0.6 V output and  $T_a = 25^\circ\text{C}$

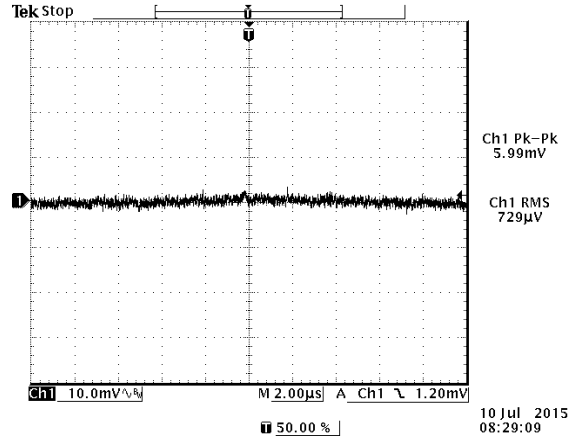


Figure 7. Ripple and noise at full load, 12 V input, 3.3 V output and  $T_a = 25^\circ\text{C}$

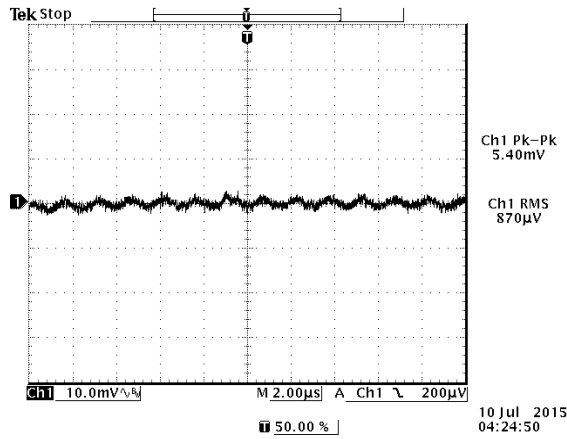


Figure 8. Ripple and noise at full load, 12 V input, 5.5 V output and  $T_a = 25^\circ\text{C}$

**NOTE:** Test condition of the output ripple and noise: 0-20 MHz BW with a 360 uF ceramic cap at output.

10. TRANSIENT RESPONSE WAVEFORMS

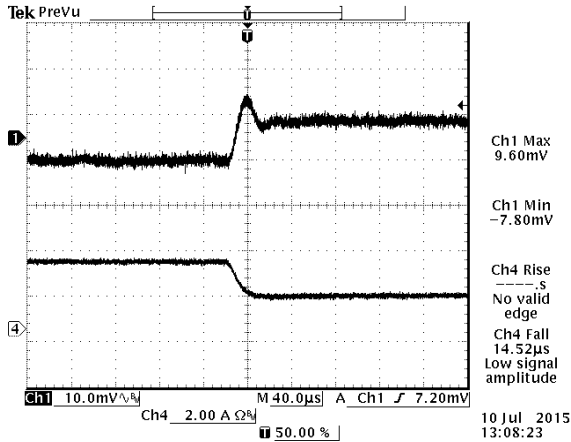


Figure 9. 100%-50% Load Transients at  $V_{in} = 12 V$ ,  $V_{out} = 0.6 V @ Ta = 25^{\circ}C$

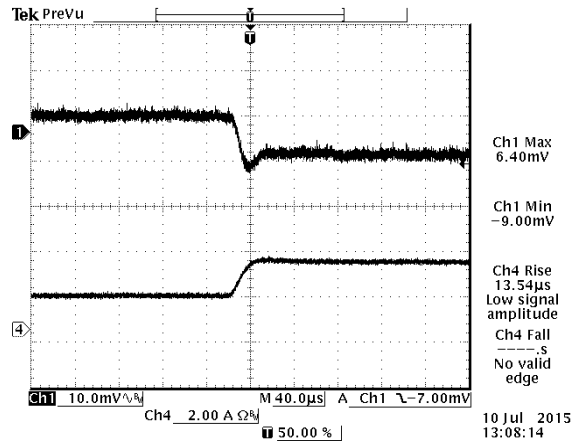


Figure 10. 50%-100% Load Transients at  $V_{in} = 12 V$ ,  $V_{out} = 0.6 V @ Ta = 25^{\circ}C$

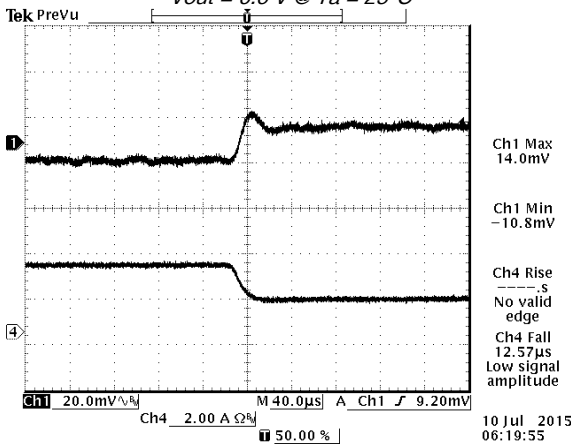


Figure 11. 100%-50% Load Transients at  $V_{in} = 12 V$ ,  $V_{out} = 3.3 V @ Ta = 25^{\circ}C$

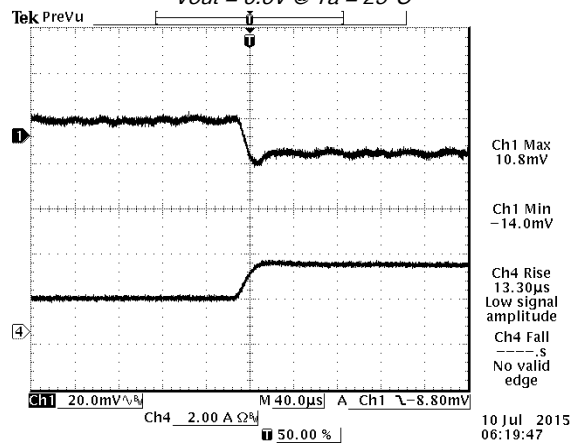


Figure 12. 50%-100% Load Transients at  $V_{in} = 12 V$ ,  $V_{out} = 3.3 V @ Ta = 25^{\circ}C$

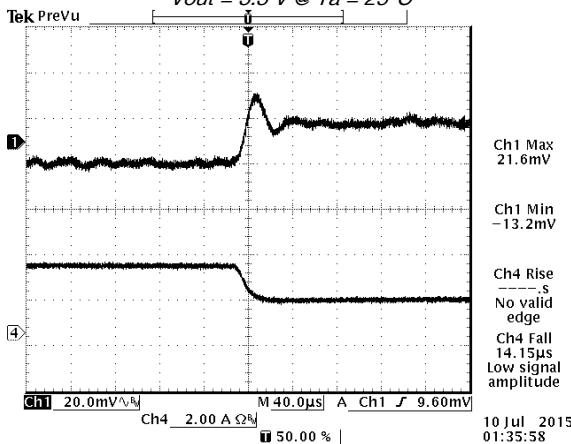


Figure 13. 100%-50% Load Transients at  $V_{in} = 12 V$ ,  $V_{out} = 5.5 V @ Ta = 25^{\circ}C$

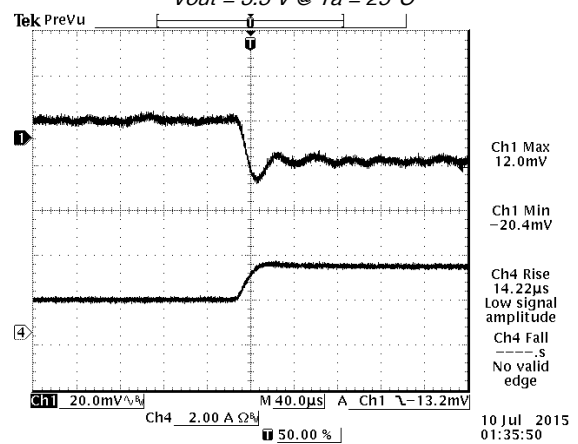


Figure 14. 50%-100% Load Transients at  $V_{in} = 12 V$ ,  $V_{out} = 5.5 V @ Ta = 25^{\circ}C$

NOTE: Test condition of the transient response:  $di/dt = 0.25 A/\mu s$ , with a 360  $\mu F$  ceramic cap at output



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

### 11. REMOTE ON/OFF

| PARAMETER             | DESCRIPTION   | MIN  | TYP | MAX | UNIT |
|-----------------------|---|------|-----|-----|------|
| Signal Low (Unit Off) | Active High Remote On/Off pin is open, the module is off. | -0.3 | -   | 0.8 | V    |
| Signal High (Unit On) |   | 2.4  | -   | 18  | V    |

Recommended remote on/off circuit for active high

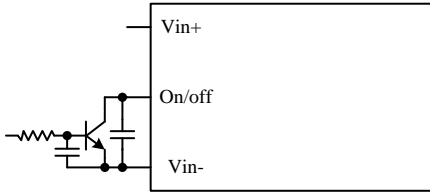


Figure 15. Control with open collector/drain circuit

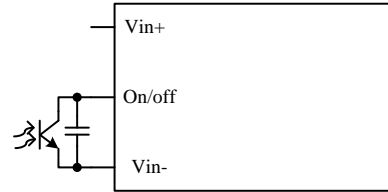


Figure 16. Control with photocoupler circuit

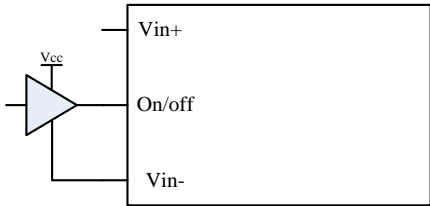


Figure 17. Control with logic circuit


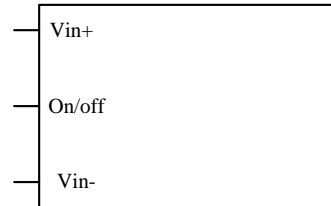


Figure 18. Permanently off

### 12. TRIM

Trim up circuit (using an external resistor)

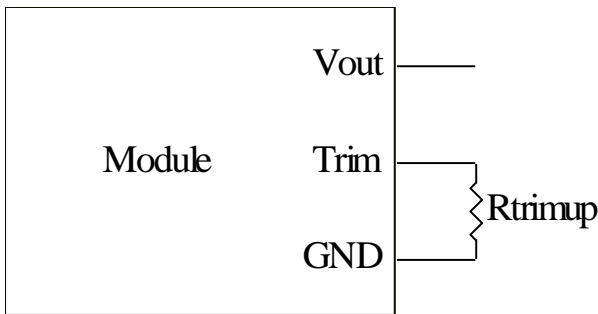


$$R_{trim} = \frac{1.2}{V_o - 0.6} k\Omega$$

Vo is the desired output voltage  
Rtrim is the required resistance between TRIM and GND


Figure 19. SRPE-03E1A0 Trim up Resistor Calculate



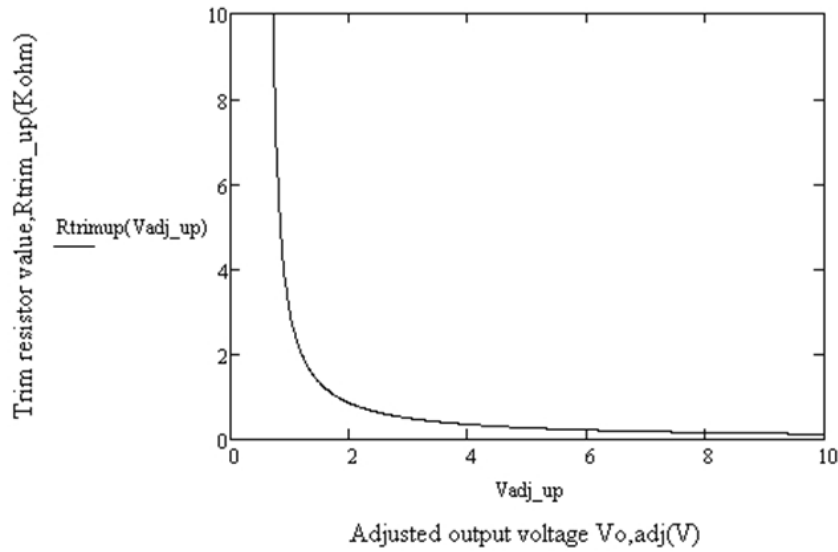

**13. SOLDERING INFORMATION**

The SRPE-03E1A0G modules are designed to be compatible with a Paste-In-Hole assembly process. The suggested Pb-free solder paste is Sn/Ag/Cu (SAC). The recommended reflow profile using Sn/Ag/Cu solder is shown in the following. Recommended reflow peak temperature is 245°C while the part can withstand peak temperature of 260°C maximum for 10 seconds. This profile should be used only as a guideline. Many other factors influence the success of SMT reflow soldering. Since your production environment may differ, please thoroughly review these guidelines with your process engineers.

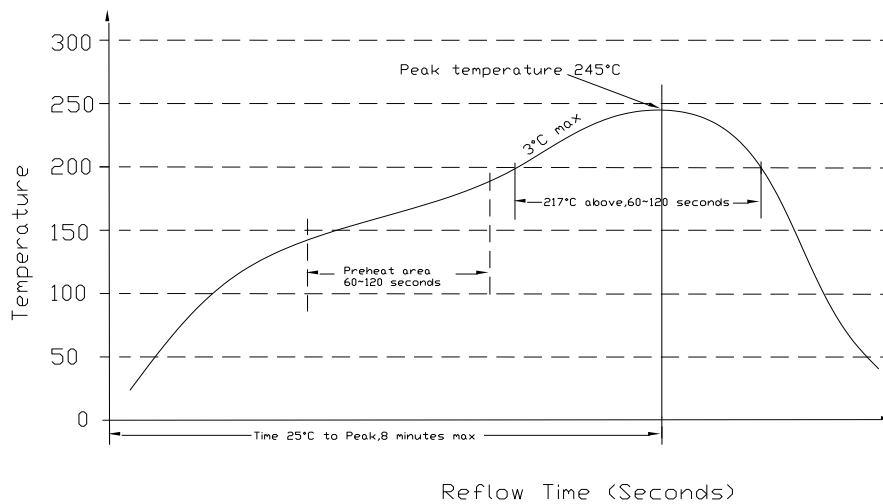

**14. MSL RATING**

The SRPE-03E1A0G modules have a MSL rating of 3.



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200


### 15. STORAGE AND HANDLING



The SRPE-03E1A0G modules are designed to be compatible with J-STD-033 Rev: A (Handling, Packing, Shipping and Use of Moisture /Reflow Sensitive surface Mount devices). Moisture barrier bags (MBB) with desiccant are applied. The recommended storage environment and handling procedure is detailed in J-STD-033.

### 16. PRE-BAKING

This component has been designed, handled, and packaged ready for pb-free reflow soldering. If the assembly shop follows J-STD-033 guidelines, no pre-bake of this component is required before being reflowed to a PCB. However, if the J-STD-033 guidelines are not followed by the assembler, Bel recommends that the modules should be pre-baked @ 120~125°C for a minimum of 4 hours (preferably 24 hours) before reflow soldering.



### 17. MECHANICAL DIMENSIONS

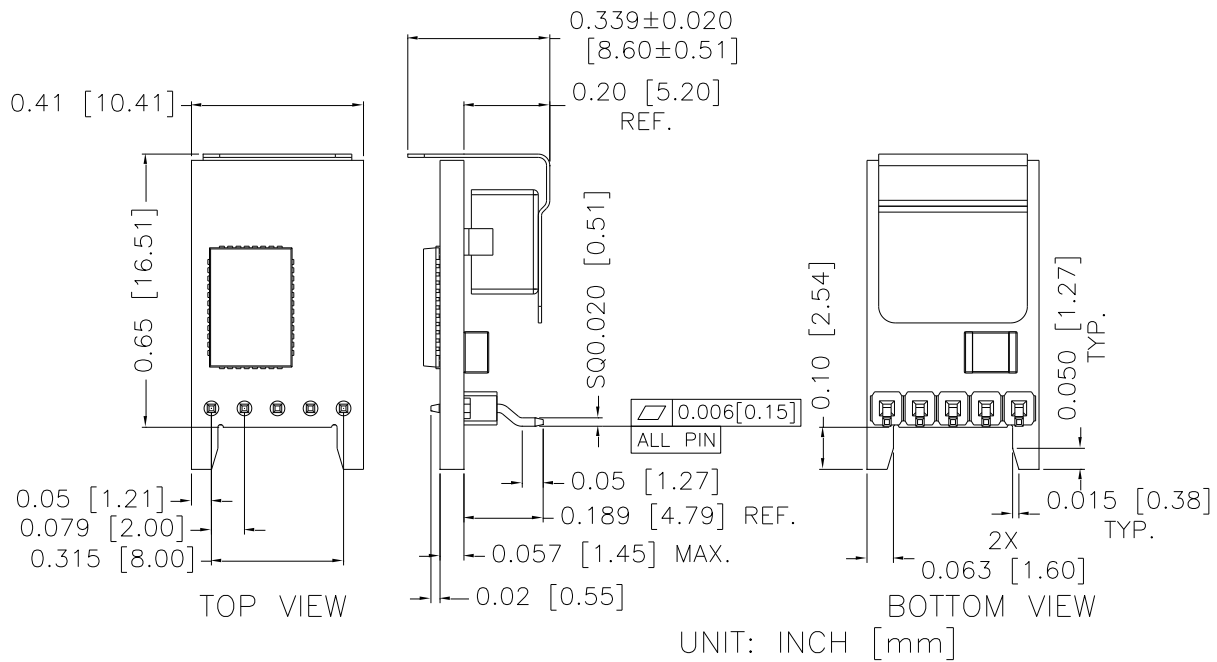

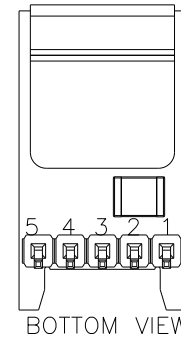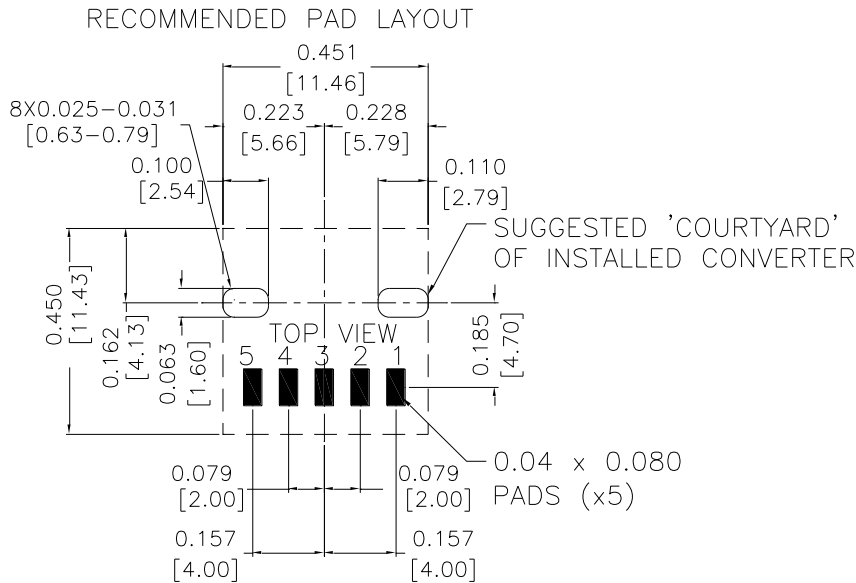

### PIN CONNECTIONS

| PIN | FUNCTION |
|-----|----------|
| 1   | Enable   |
| 2   | Vin      |
| 3   | GND      |
| 4   | Vout     |
| 5   | Trim     |

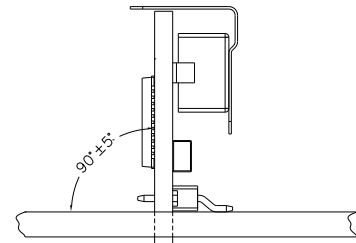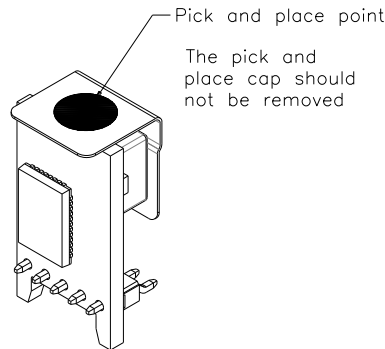

### NOTES:

- 1) All Pins: Material - Copper Alloy; Finish - 3 micro inches minimum Gold over 50 micro inches minimum Nickel plate.
- 2) Undimensioned components are shown for visual reference only.
- 3) All dimensions in inches (mm); Tolerances: x.xx +/-0.02 in [0.5 mm] x.xxx +/-0.010 in [0.25 mm].

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific  
 +86 755 298 85888

Europe, Middle East  
 +353 61 225 977

North America  
 +1 408 785 5200



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.