

## 500mA LDO REGULATOR (Operating Voltage up to 24V)

NO.EA-151-160425

### OUTLINE

The R1500x series are CMOS-based positive voltage regulator (VR) ICs. The R1500xxxxB has features of high input voltage operating, 500mA output current drive, and low supply current.

A DMOS transistor is used for the driver, high voltage operating and low on resistance (0.6Ω at  $V_{OUT}=10V$ ) device is realized. A standard regulator circuit with a current limit circuit and a thermal shutdown circuit are built in the R1500x series.

As the operating temperature range is from  $-40^{\circ}C$  to  $105^{\circ}C$  and maximum input voltage is up to 24V, the R1500x series are suitable for the constant voltage source for car accessories.

The regulator output voltage is fixed in the R1500x. Output voltage accuracy is  $\pm 2.0\%$  and output voltage range is from 3.0V to 12.0V with a step of 0.1V. The chip enable pin realizes ultra low supply current standby mode.

Since the packages for these ICs are the SOT-89-5 for high density mounting of the ICs on boards, and the TO-252-5-P2.

\*) The DMOS (Double Diffused MOS) transistor adopted by R1500x is characterized by a double diffusion structure which comprises a low density n-type (channel) diffused layer and a high density p-type (sources) diffused layer from the edge of the gate electrode. The R1500x series possess outstanding properties of high operating voltage and low on-resistance, which have been achieved by the channel length scaled down to submicron dimensions and decreased thickness of the gate oxide film.

### FEATURES

- Input Voltage Range .....4.0V to 24.0V
- Supply Current .....Typ. 70μA
- Standby Current .....Typ. 0.1μA
- Ripple Rejection .....Typ. 60dB ( $V_{OUT}=5.0V$ )
- Temperature-Drift Coefficient of Output Voltage .....Typ.  $\pm 100ppm/^{\circ}C$
- Output Current.....Min. 500mA ( $V_{IN}=V_{OUT}+1V$ )
- Line Regulation .....Typ. 0.05%/V
- Output Voltage Accuracy..... $\pm 2\%$
- Output Voltage.....3.0V to 12.0V (0.1V steps)  
(For other voltages, please refer to MARK INFORMATION.)
- Packages.....SOT-89-5, TO-252-5-P2
- Built-in Current Limit Circuit
- Built-in Fold-Back Circuit
- Built-in Thermal Shutdown Circuit
- Operating Temperature range ..... $-40^{\circ}C$  to  $105^{\circ}C$

### APPLICATIONS


- Power source for home appliances such as refrigerators, rice cookers, electric water warmers, etc.
- Power source for car audio equipment, car navigation system, ETC system, etc.
- Power source for notebook PCs, digital TVs, cordless phones, and private LAN system, etc.
- Power source for office equipment machines such as copiers, printers, facsimiles, scanners, projectors, etc.

---

**R1500x**

---

NO.EA-151-160425

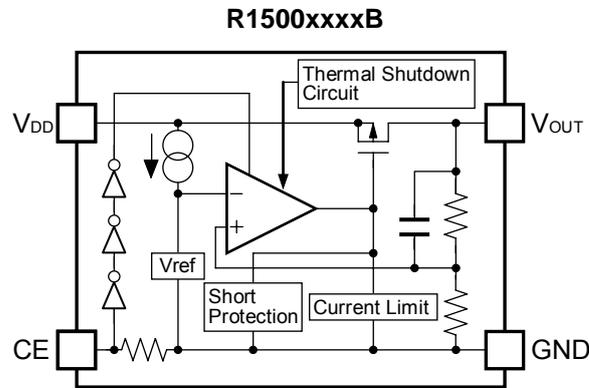**BLOCK DIAGRAMS****SELECTION GUIDE**


The output voltage, package for the ICs can be selected at the user's request.

| Product Name     | Package     | Quantity per Reel | Pb Free | Halogen Free |
|------------------|-------------|-------------------|---------|--------------|
| R1500HxxxB-T1-FE | SOT-89-5    | 1,000 pcs         | Yes     | Yes          |
| R1500JxxxB-T1-FE | TO-252-5-P2 | 3,000 pcs         | Yes     | Yes          |


xxx : The output voltage can be designated in the range from 3.0V(030) to 12.0V(120) in 0.1V steps.  
(For other voltages, please refer to MARK INFORMATIONS.)

## PIN CONFIGURATIONS

### • SOT-89-5

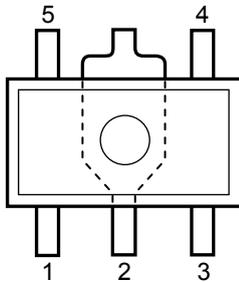

### • TO-252-5-P2

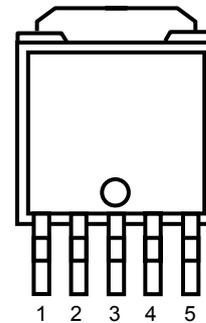

## PIN DESCRIPTIONS

### • SOT-89-5

| Pin No. | Symbol    | Description                  |
|---------|-----------|------------------------------|
| 1       | $V_{DD}$  | Input Pin                    |
| 2       | GND*      | Ground Pin                   |
| 3       | GND*      | Ground Pin                   |
| 4       | CE        | Chip Enable Pin ("H" Active) |
| 5       | $V_{OUT}$ | Output Pin                   |

\*) The GND pin must be wired together when it is mounted on board.

### • TO-252-5-P2

| Pin No. | Symbol    | Description                  |
|---------|-----------|------------------------------|
| 1       | $V_{DD}$  | Input Pin                    |
| 2       | GND*      | Ground Pin                   |
| 3       | GND*      | Ground Pin                   |
| 4       | CE        | Chip Enable Pin ("H" Active) |
| 5       | $V_{OUT}$ | Output Pin                   |

\*) The GND pin must be wired together when it is mounted on board.

---

**R1500x**

---

NO.EA-151-160425

**ABSOLUTE MAXIMUM RATINGS**

| Symbol    | Item                             | Rating                     | Unit        |
|-----------|----------------------------------|----------------------------|-------------|
| $V_{IN}$  | Input Voltage                    | 36                         | V           |
| $V_{CE}$  | Input Voltage (CE Pin)           | $-0.3$ to $V_{IN} \leq 36$ | V           |
| $V_{OUT}$ | Output Voltage                   | $-0.3$ to $V_{IN} \leq 36$ | V           |
| $P_D$     | Power Dissipation (SOT-89-5)*    | 900                        | mW          |
|           | Power Dissipation (TO-252-5-P2)* | 1900                       |             |
| $T_{opt}$ | Operating Temperature Range      | $-40$ to $105$             | $^{\circ}C$ |
| $T_{stg}$ | Storage Temperature Range        | $-55$ to $125$             | $^{\circ}C$ |

\*) For Power Dissipation, please refer to PACKAGE INFORMATION.

**ABSOLUTE MAXIMUM RATINGS**

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

## ELECTRICAL CHARACTERISTICS

### • R1500xxxxB


T<sub>opt</sub>=25°C

| Symbol                               | Item                                   | Conditions                                                                                           | Min.                            | Typ.  | Max.            | Unit   |
|--------------------------------------|----------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------|-------|-----------------|--------|
| V <sub>IN</sub>                      | Input Voltage                          |                                                                                                      | 4                               |       | 24              | V      |
| I <sub>SS</sub>                      | Supply Current                         | V <sub>IN</sub> =V <sub>OUT</sub> +1.0V, V <sub>IN</sub> =V <sub>CE</sub>                            |                                 | 70    | 130             | μA     |
| I <sub>standby</sub>                 | Standby Current                        | V <sub>IN</sub> =24V                                                                                 |                                 | 0.1   | 1.0             | μA     |
| V <sub>OUT</sub>                     | Output Voltage                         | V <sub>IN</sub> =V <sub>OUT</sub> +1.0V, I <sub>OUT</sub> =100mA                                     | ×0.98                           |       | ×1.02           | V      |
| ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Load Regulation                        | V <sub>IN</sub> =V <sub>OUT</sub> +2.0V,<br>0.1mA ≤ I <sub>OUT</sub> ≤ 200mA                         |                                 | 25    | 60              | mV     |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation                        | V <sub>OUT</sub> +1V ≤ V <sub>IN</sub> ≤ 24V, I <sub>OUT</sub> =10mA                                 |                                 | 0.05  | 0.1             | %/V    |
| V <sub>DIF</sub>                     | Dropout Voltage                        | I <sub>OUT</sub> =200mA                                                                              | 3.0V ≤ V <sub>OUT</sub> < 5.0V  | 0.135 | 0.225           | V      |
|                                      |                                        |                                                                                                      | 5.0V ≤ V <sub>OUT</sub> < 9.0V  | 0.115 | 0.180           |        |
|                                      |                                        |                                                                                                      | 9.0V ≤ V <sub>OUT</sub> ≤ 12.0V | 0.095 | 0.155           |        |
| ΔV <sub>OUT</sub> /ΔT <sub>opt</sub> | Output Voltage Temperature Coefficient | V <sub>IN</sub> =V <sub>OUT</sub> +2.0V, I <sub>OUT</sub> =100μA<br>-40°C ≤ T <sub>opt</sub> ≤ 105°C |                                 | ±100  |                 | ppm/°C |
| I <sub>LIM</sub>                     | Output Current                         | V <sub>IN</sub> =V <sub>OUT</sub> +1.0V                                                              | 500                             |       |                 | mA     |
| I <sub>SC</sub>                      | Short Current Limit                    | V <sub>OUT</sub> =0V                                                                                 |                                 | 65    |                 | mA     |
| RR                                   | Ripple Rejection                       | f=1kHz,<br>Ripple 0.5Vp-p,<br>I <sub>OUT</sub> =100mA,<br>V <sub>IN</sub> =V <sub>OUT</sub> +2V      | V <sub>OUT</sub> ≤ 6.0V         | 60    |                 | dB     |
|                                      |                                        |                                                                                                      | V <sub>OUT</sub> > 6.0V         | 50    |                 |        |
| V <sub>CEH</sub>                     | CE Input Voltage "H"                   |                                                                                                      | 2.0                             |       | V <sub>IN</sub> | V      |
| V <sub>CEL</sub>                     | CE Input Voltage "L"                   |                                                                                                      | 0                               |       | 0.4             | V      |
| T <sub>TSD</sub>                     | Thermal Shutdown Temperature           | Junction Temperature                                                                                 | 150                             | 170   |                 | °C     |
| T <sub>TSR</sub>                     | Thermal Shutdown Released Temperature  | Junction Temperature                                                                                 |                                 | 145   |                 | °C     |

### RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## TYPICAL APPLICATION

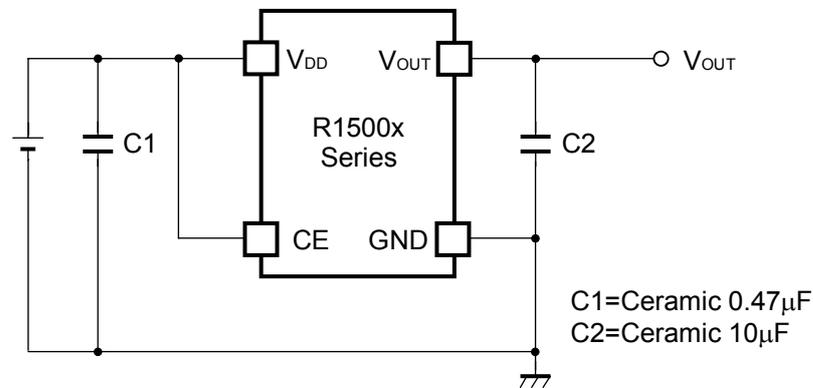

(External Components)

C2: Ceramic 10 $\mu$ F MURATA: GRM32DB31E106K (size: 3225)

## TECHNICAL NOTES

When using these ICs, consider the following points:

### Phase Compensation

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, use a capacitor C2 with good frequency characteristics and ESR (Equivalent Series Resistance).

If you use a tantalum type capacitor and ESR value of the capacitor is large, output might be unstable. Evaluate your circuit with considering frequency characteristics.

Depending on the capacitor size, manufacturer, and part number, the bias characteristics and temperature characteristics are different. Evaluate the circuit with actual using capacitors.

### PCB Layout

Make V<sub>DD</sub> and GND lines sufficient. If their impedance is high, noise pickup or unstable operation may result. Connect a capacitor C1 with a capacitance value as much as 0.47 $\mu$ F or more between V<sub>DD</sub> and GND pin, and as close as possible to the pins.


Set external components, especially the output capacitor C2, as close as possible to the ICs, and make wiring as short as possible.

No.2 pin and No.3 pin of SOT-89-5 and TO-252-5-P2 package must be wired to the GND plane when it is mounted on board.

### Thermal Shutdown

There is the built-in thermal-shutdown function in R1500x series. It discontinues operation of the IC when the junction temperature becomes over 170°C (Typ.) and IC re-operates when the junction temperature under 145°C. If the temperature increasing keeps the IC repeats ON and OFF operating. The output becomes the pulse condition.

## TYPICAL APPLICATION FOR PREVENTING IC DESTRUCTION

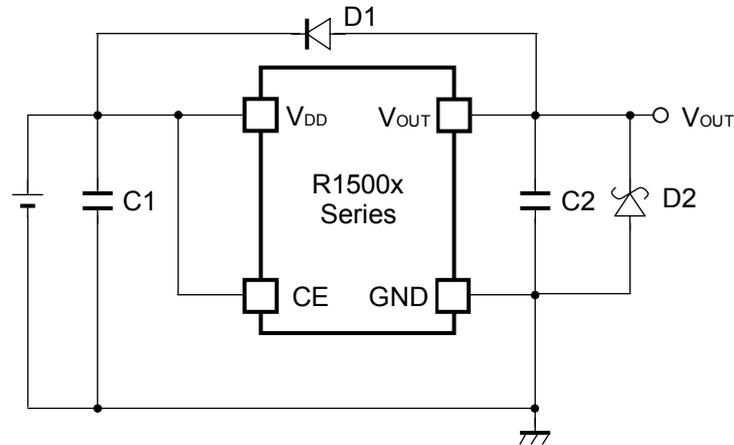

C1: 0.47 $\mu$ F or more (preventing for unstable operation)


C2: 10 $\mu$ F or more (preventing for unstable operation)

D1: If V<sub>OUT</sub> pin could be higher than V<sub>IN</sub> pin, D1 is necessary.


D2: If V<sub>OUT</sub> pin could be lower than GND pin, SBD is necessary.

Note: Do not force the voltage to V<sub>OUT</sub> pin.


## TEST CIRCUITS

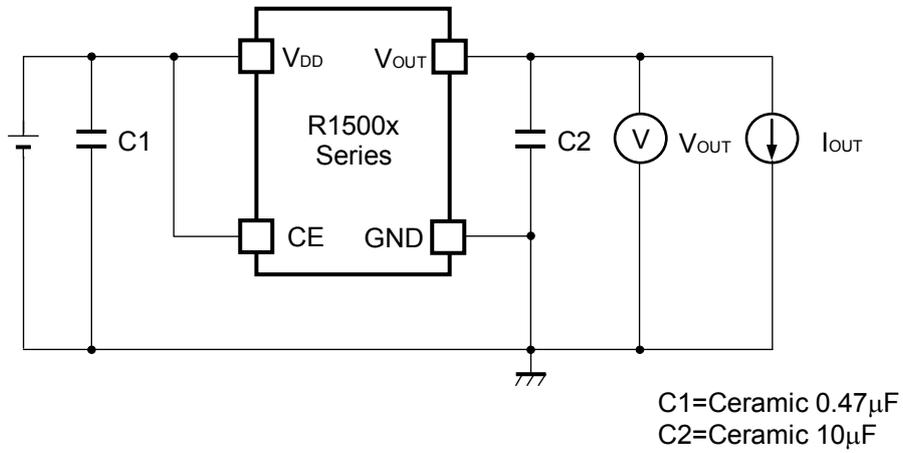


Basic Test Circuit

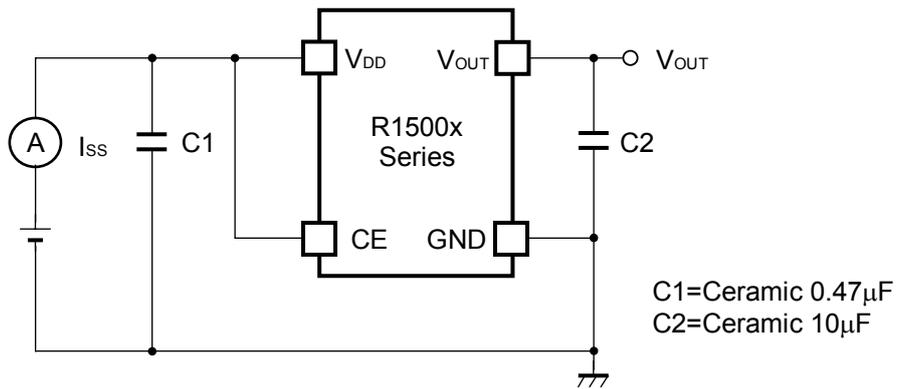


Test Circuit for Supply Current

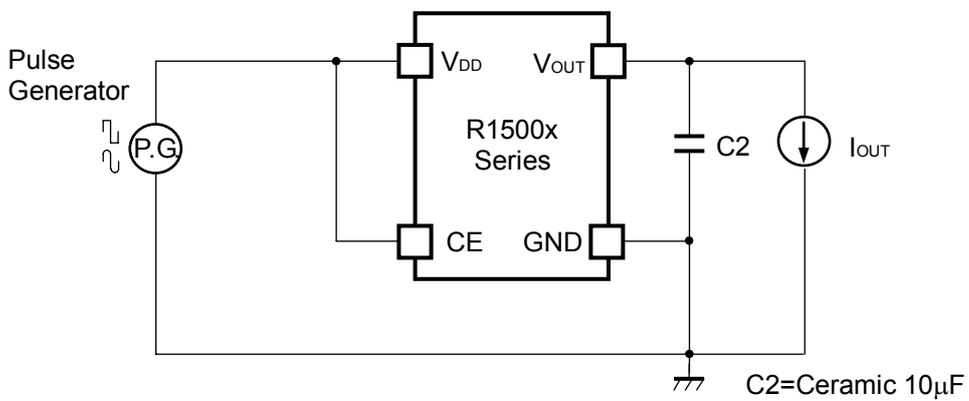

Test Circuit for Ripple Rejection, Input Transient Response

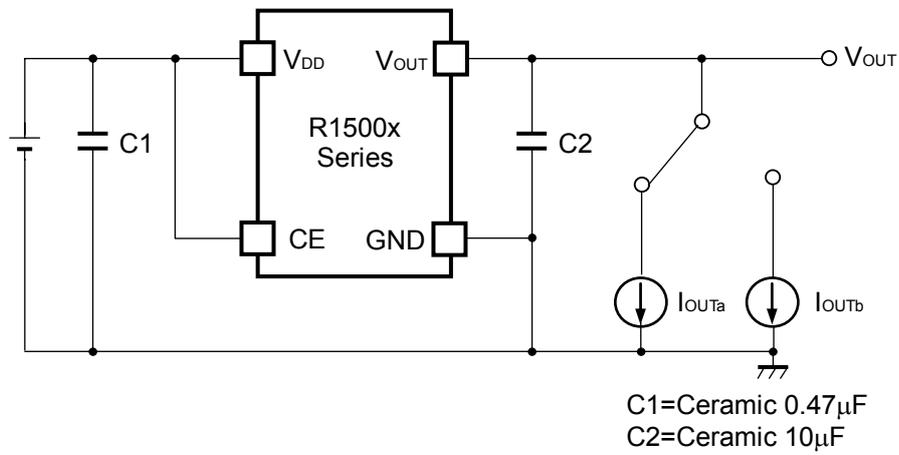





Test Circuit for Load Transient Response

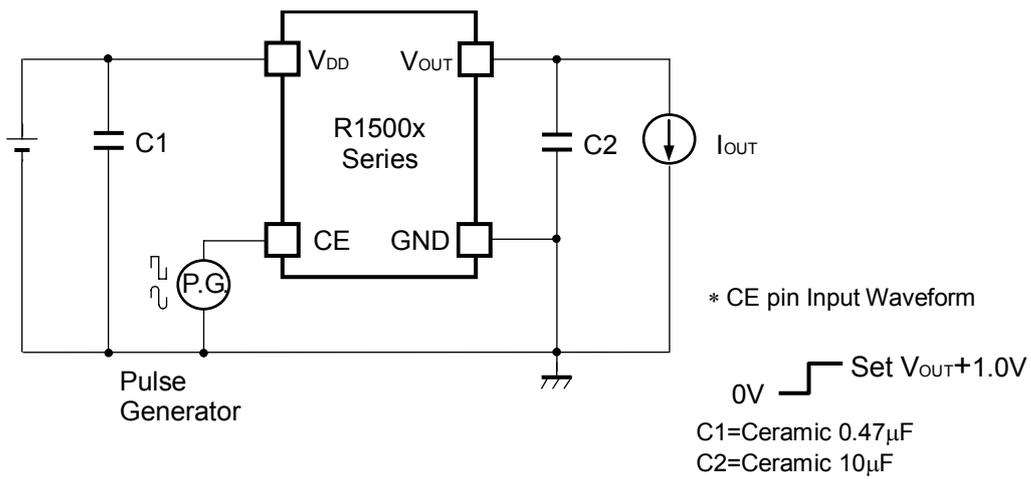



Test Circuit for Turn On Speed with CE pin



## TYPICAL CHARACTERISTICS

### 1) Output Voltage vs. Output Current (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, T<sub>opt</sub>=25°C)

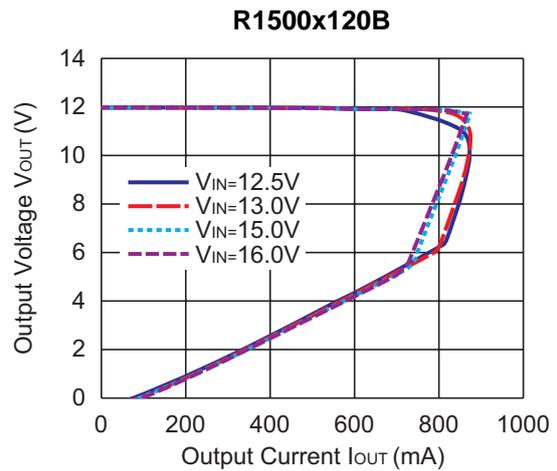
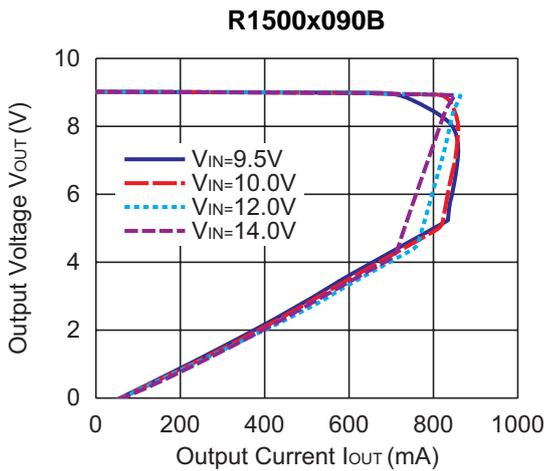
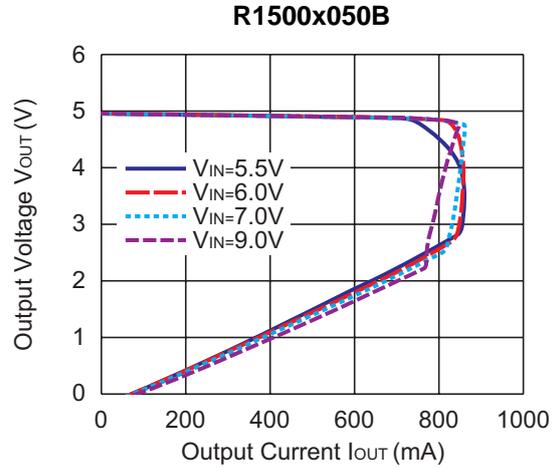
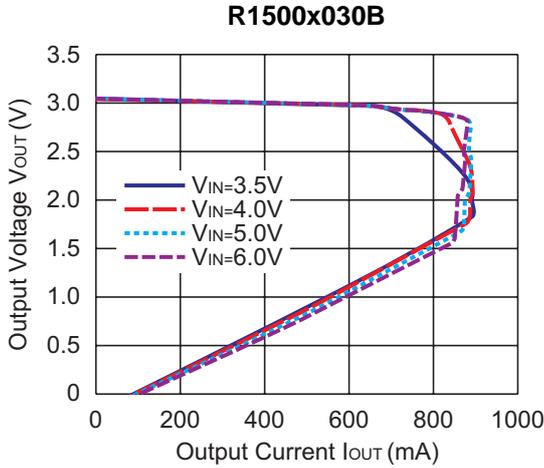


### 2) Output Voltage vs. Input Voltage (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, T<sub>opt</sub>=25°C)

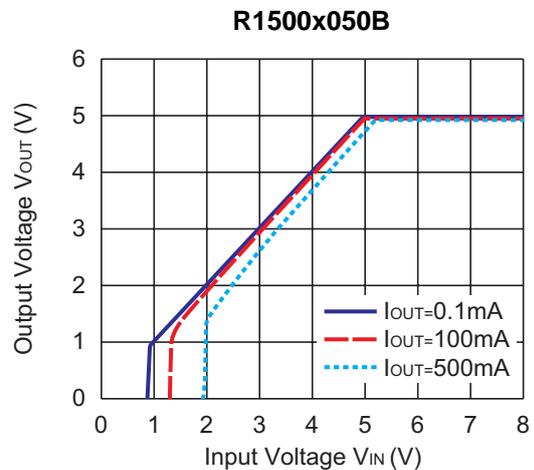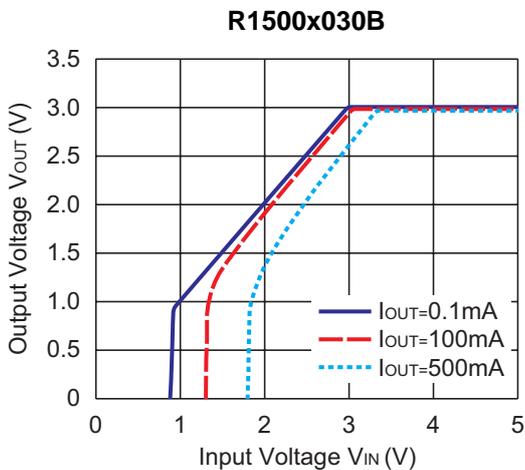

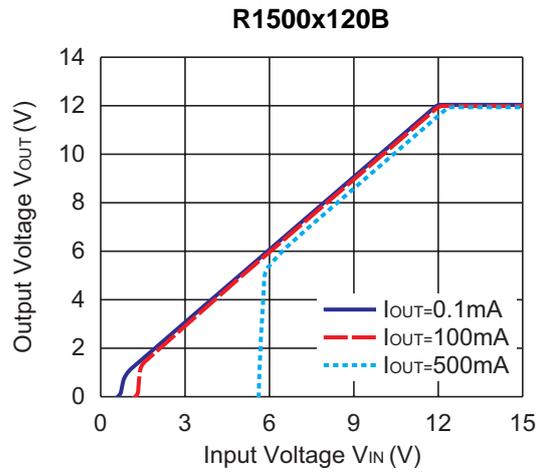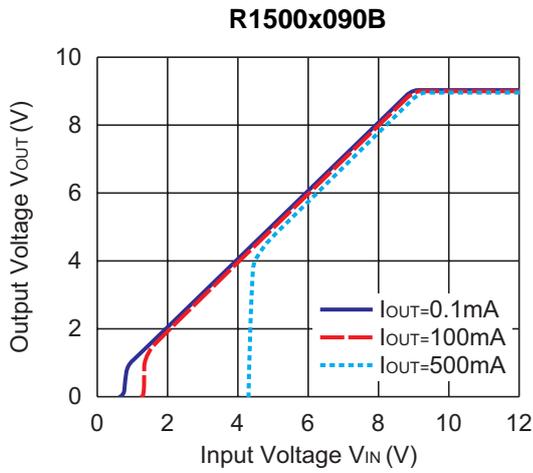

**3) Supply Current vs. Input Voltage (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, Topt=25 $^{\circ}$ C)**

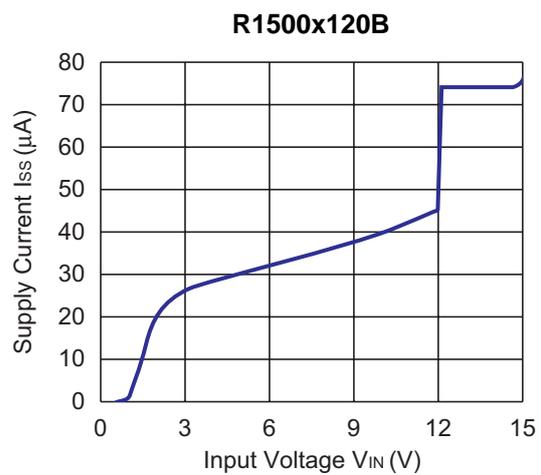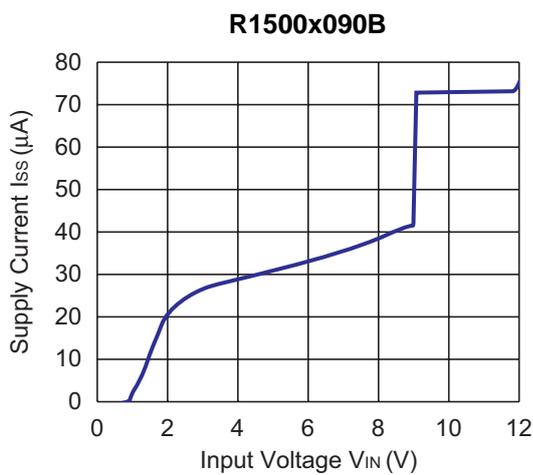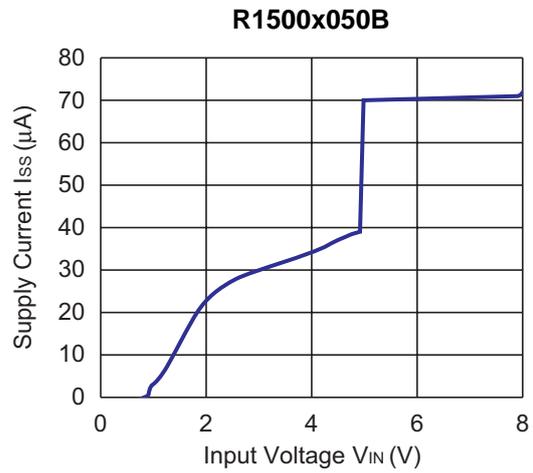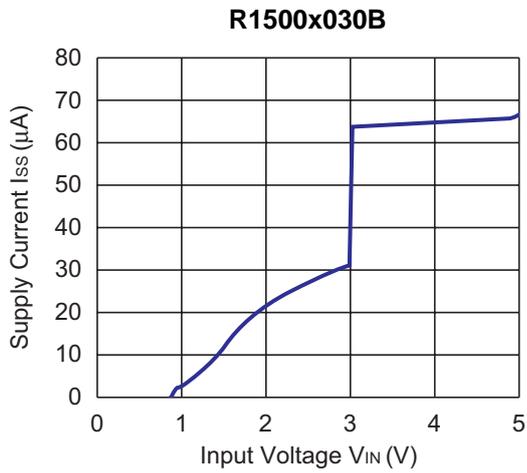





---

## R1500x



---

NO.EA-151-160425


### 4) Output Voltage vs. Temperature (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, I<sub>OUT</sub>=100mA)

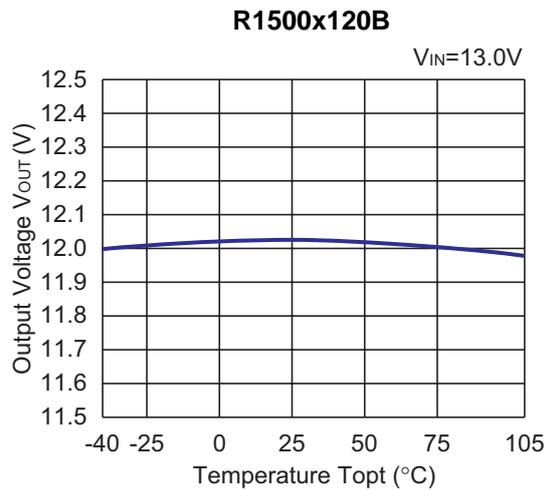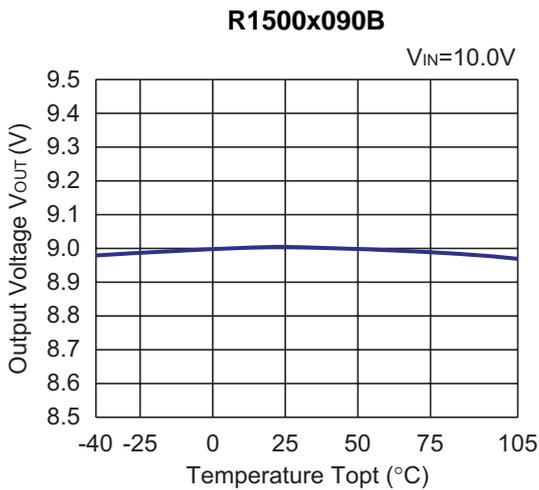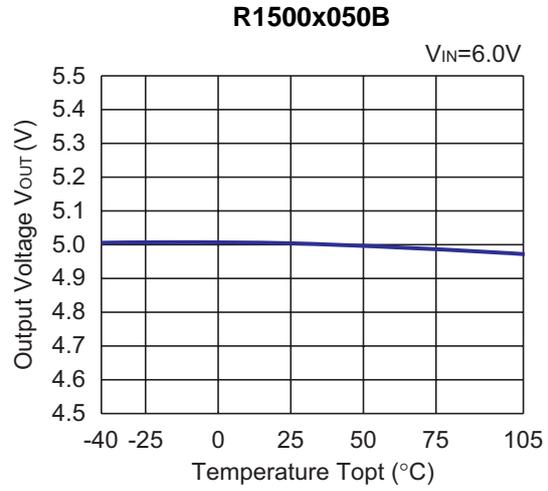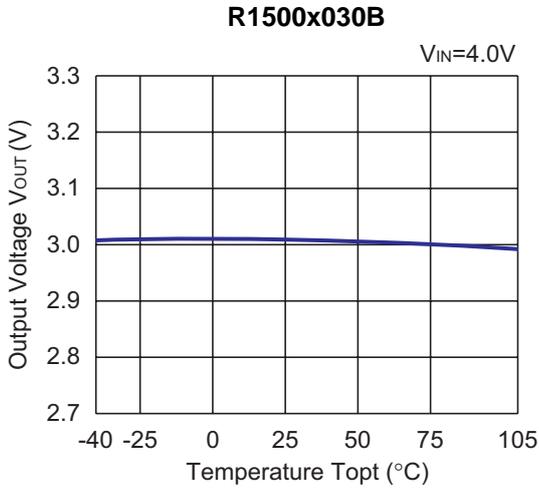


### 5) Supply Current vs. Temperature (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, I<sub>OUT</sub>=0mA)

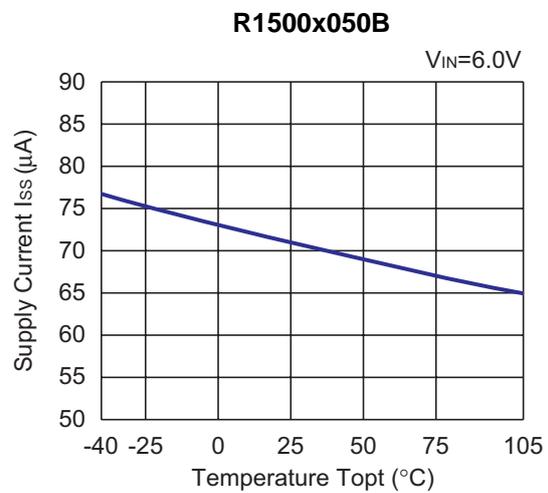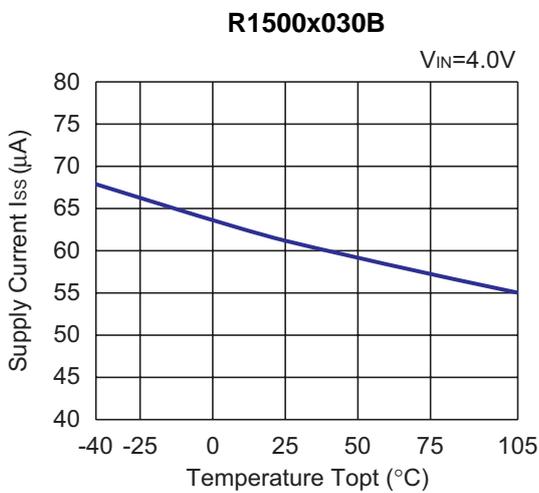

R1500x090B

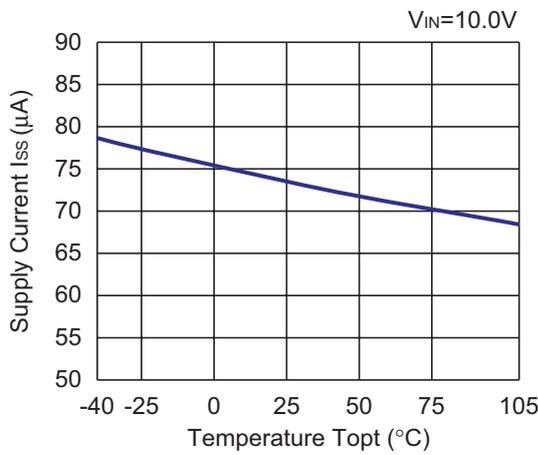


R1500x120B

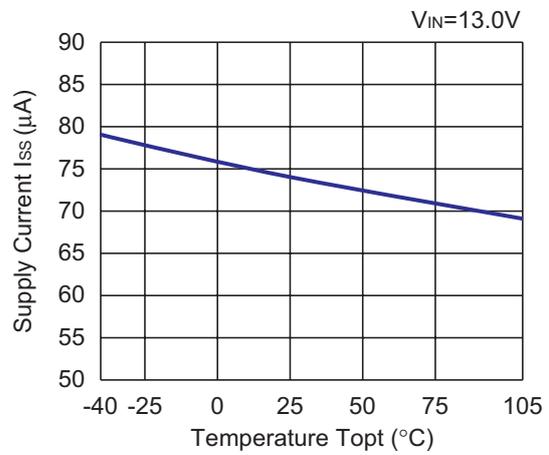


6) Dropout Voltage vs. Output Current (C1=Ceramic 0.47µF, C2=Ceramic 10µF)


R1500x030B

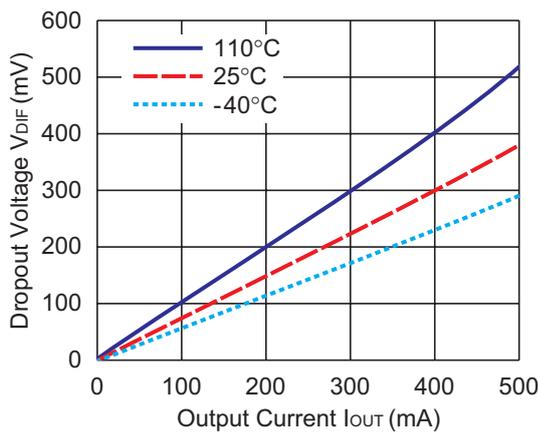


R1500x050B

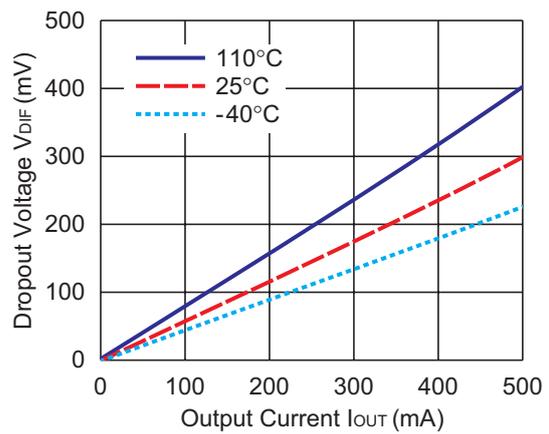

R1500x090B

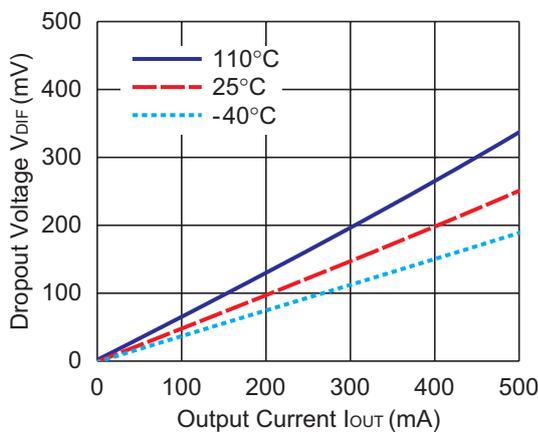


R1500x120B

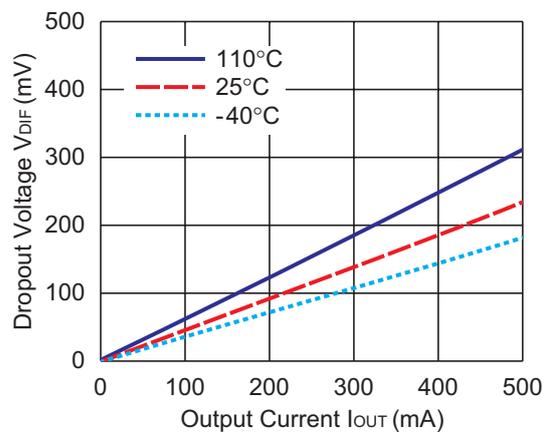



# R1500x

NO.EA-151-160425



## 7) Dropout Voltage vs. Set Output Voltage (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, T<sub>opt</sub>=25°C)


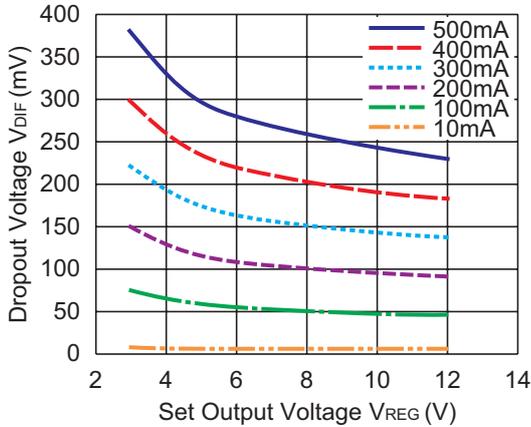


## 8) Ripple Rejection vs. Input Bias Voltage (C1=none, C2=Ceramic 10 $\mu$ F, I<sub>OUT</sub>=100mA, T<sub>opt</sub>=25°C)



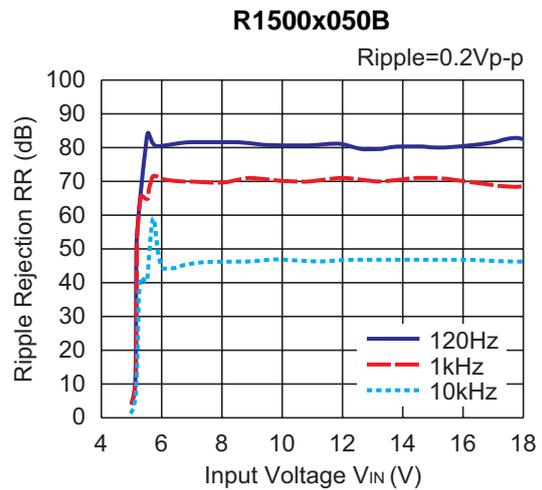
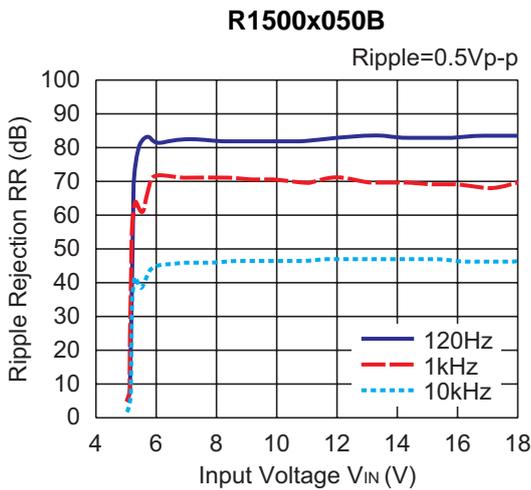


## 9) Ripple Rejection vs. Frequency (C1=none, C2=Ceramic 10 $\mu$ F, Ripple=0.5V<sub>p-p</sub>)

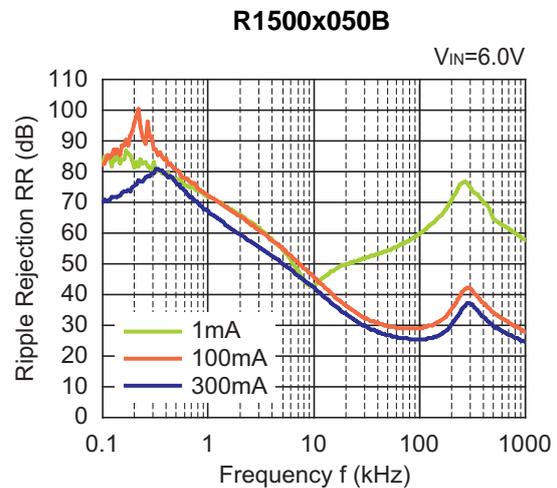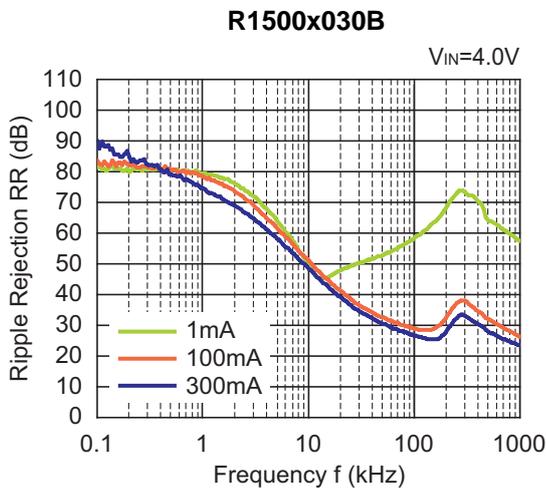

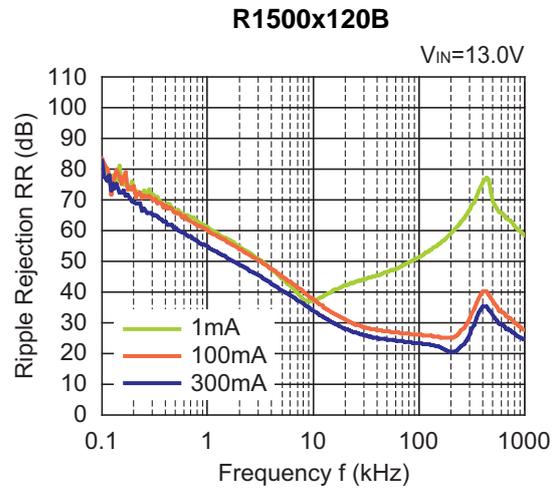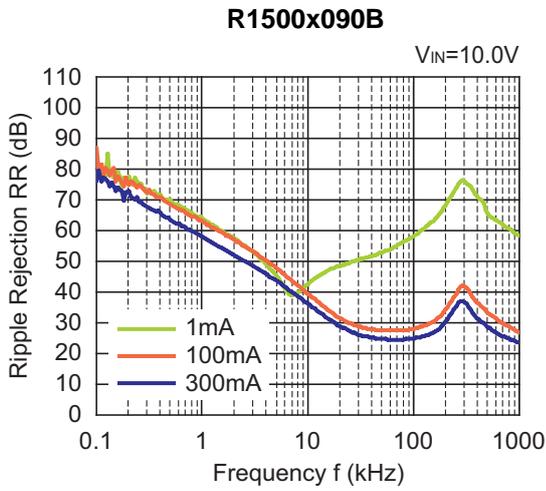





**10) Input Transient Response ( $C1$ =none,  $C2$ =Ceramic  $10\mu F$ ,  $I_{OUT}=100mA$ ,  $t_r=t_f=10\mu s$ ,  $T_{opt}=25^\circ C$ )**

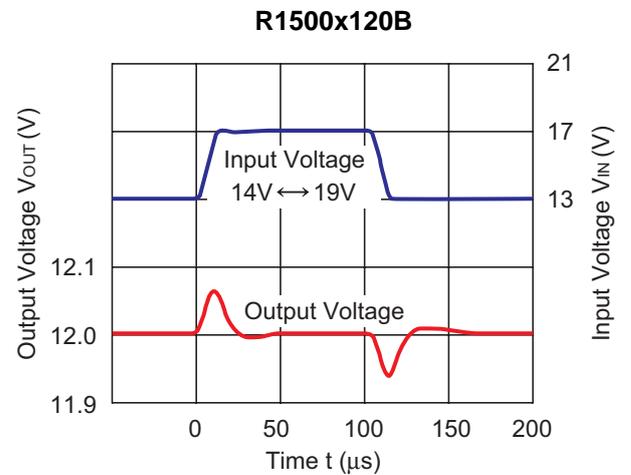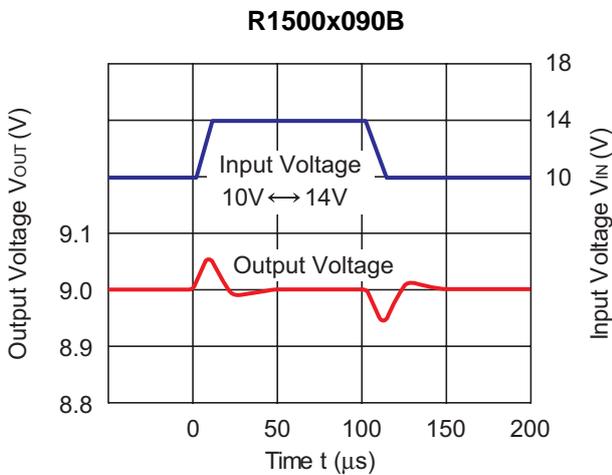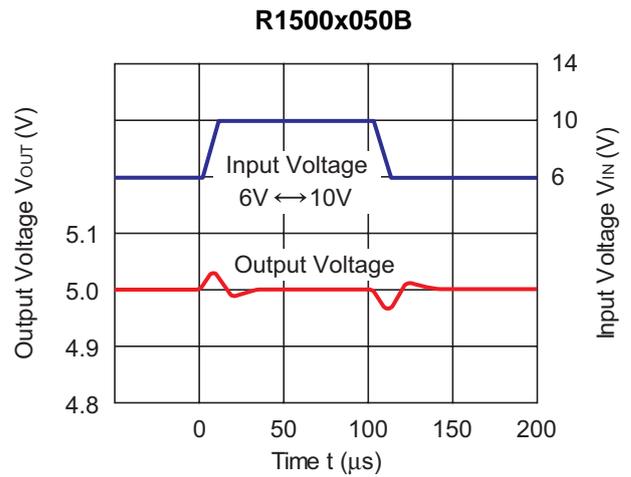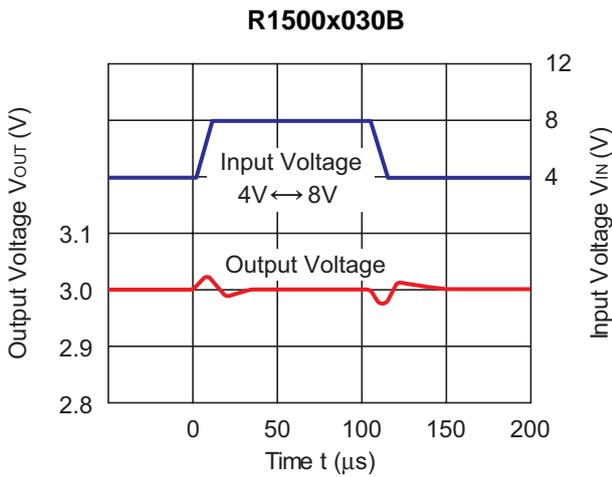



# R1500x

NO.EA-151-160425


## 11) Load Transient Response (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, tr=tf=0.5 $\mu$ s, Topt=25°C)

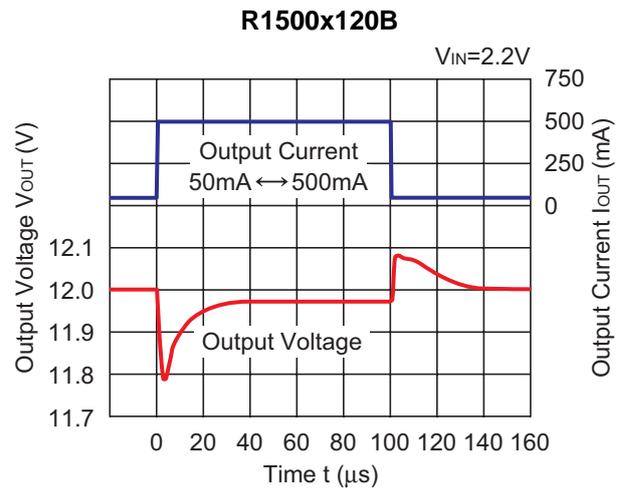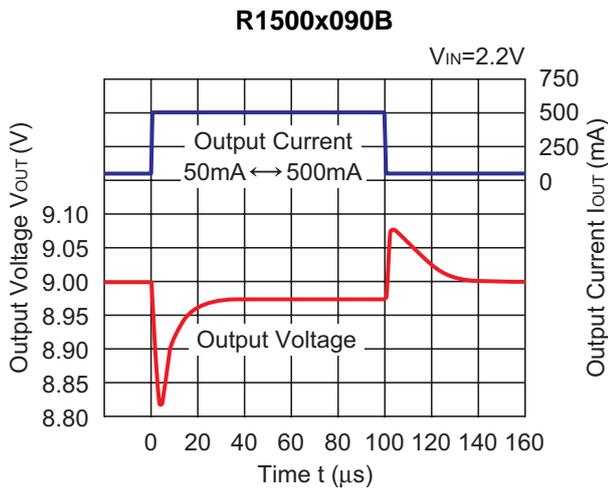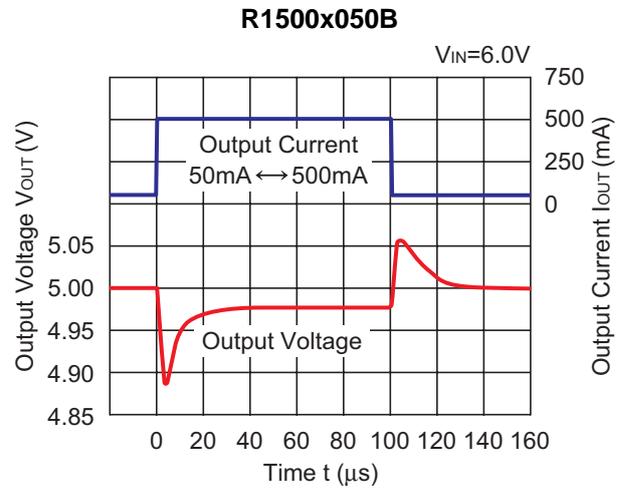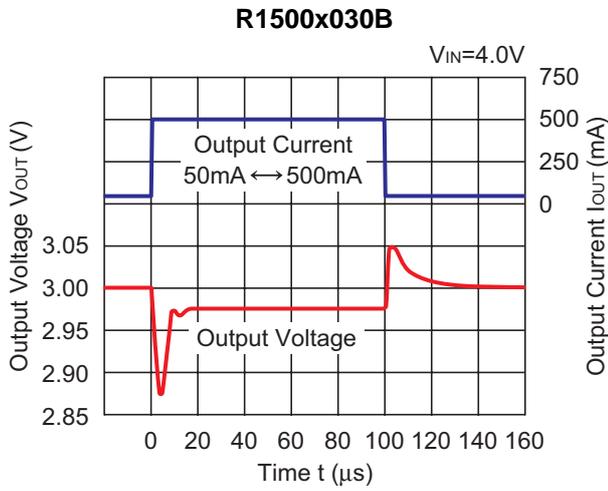


## 12) Turn On Speed with CE pin (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, Topt=25°C)

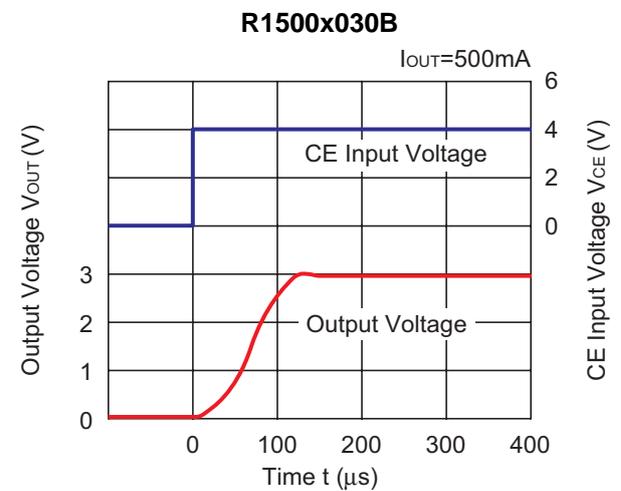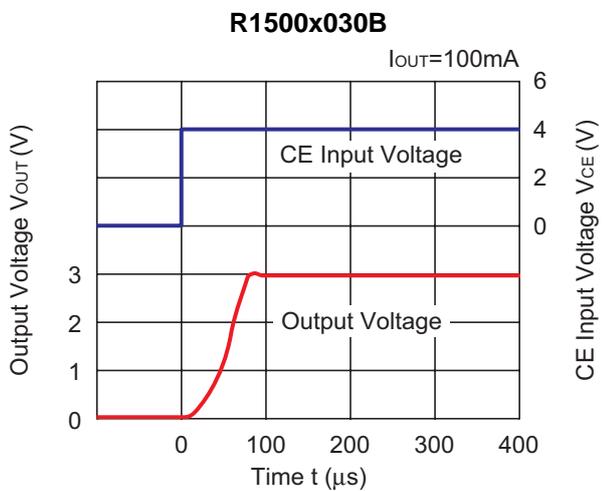


**R1500x050B**

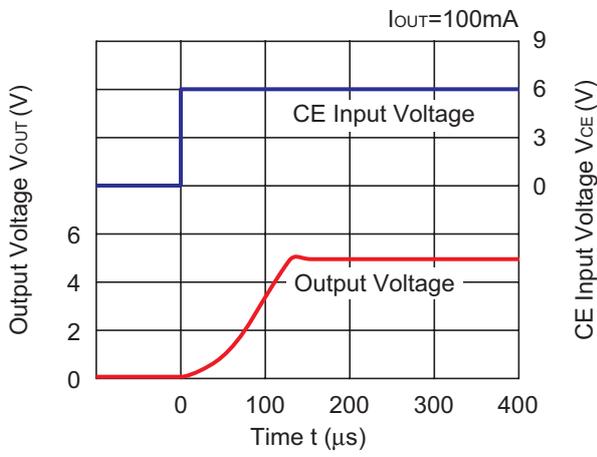


**R1500x050B**

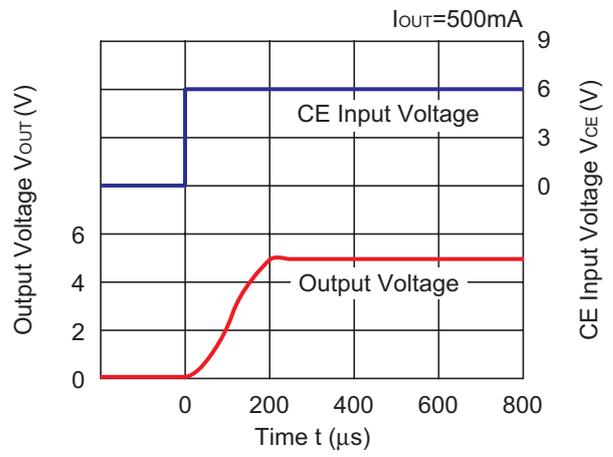


**R1500x090B**

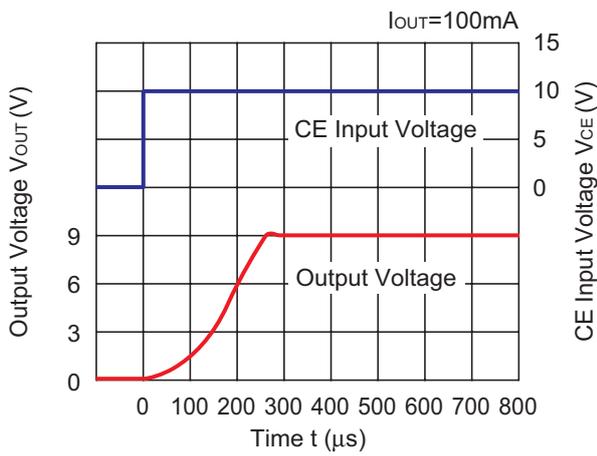


**R1500x090B**

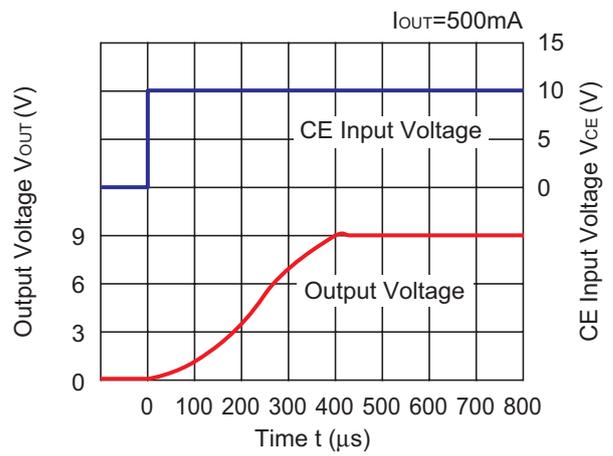

**R1500x120B**

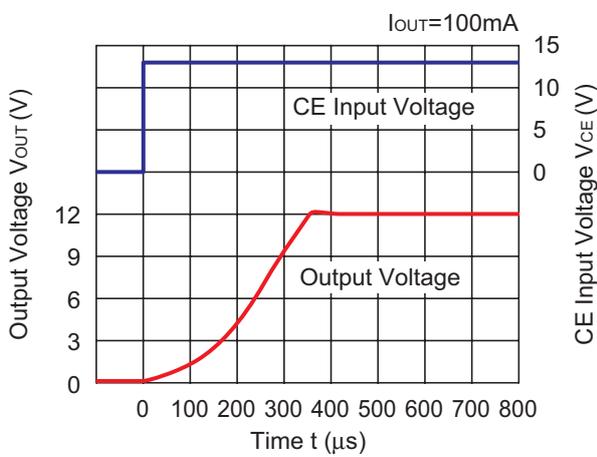

**R1500x120B**

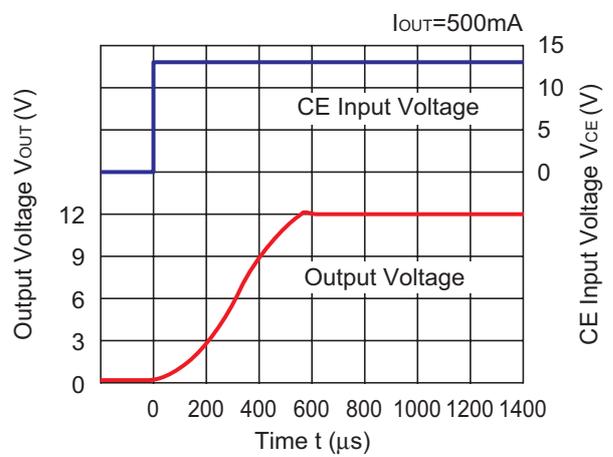


# R1500x


NO.EA-151-160425

## 13) Turn Off Speed with CE (C1=Ceramic 0.47 $\mu$ F, C2=Ceramic 10 $\mu$ F, I<sub>OUT</sub>=500mA, T<sub>opt</sub>=25°C)


**R1500x030B**

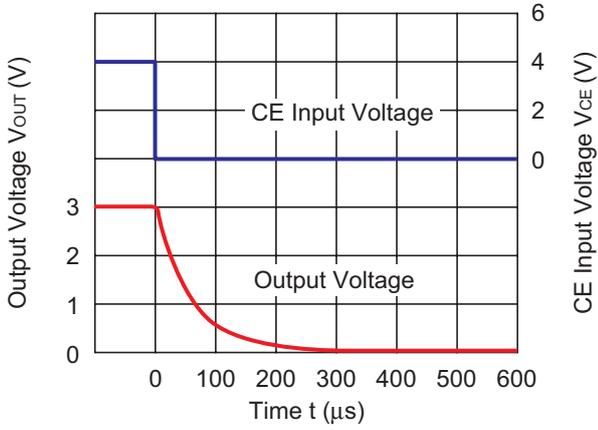


**R1500x050B**

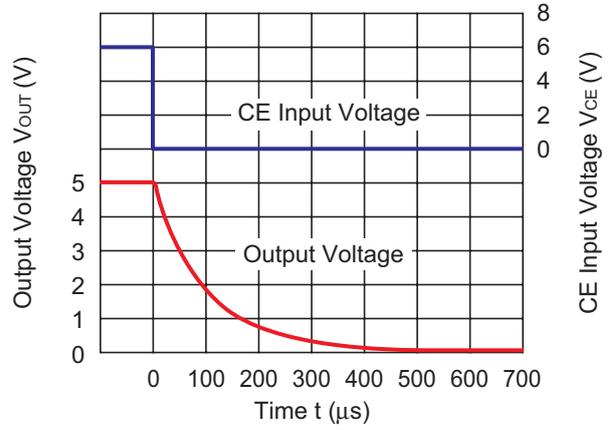

**R1500x090B**

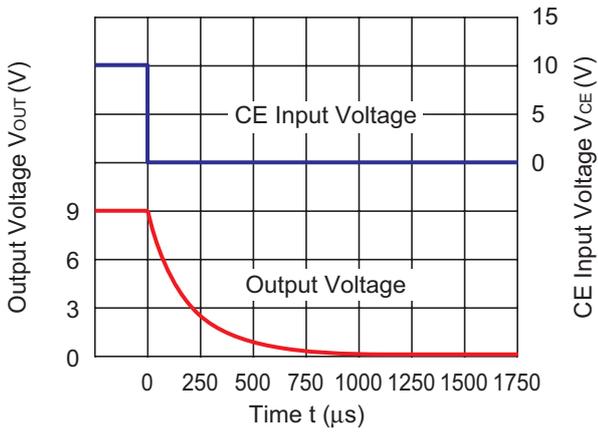

**R1500x120B**

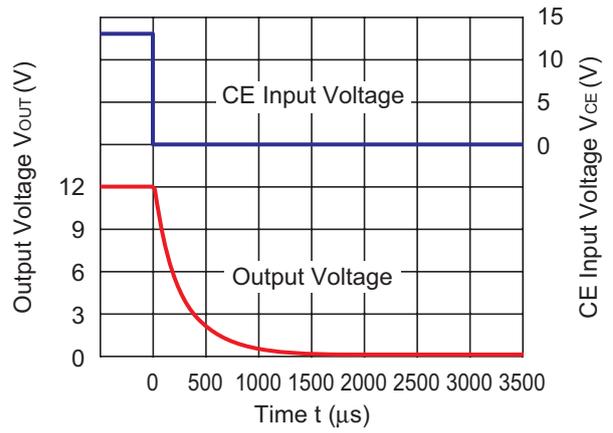

## ESR vs. Output Current

The relations between  $I_{OUT}$  (Output Current) and ESR of an output capacitor are shown below.





The conditions when the white noise level is under the specified certain level are marked as the hatched area in the graph.

### Measurement conditions

Input Voltage :  $V_{OUT} + 1V$

Frequency Band : 10Hz to 1MHz

Temperature :  $-40^{\circ}C$  to  $105^{\circ}C$

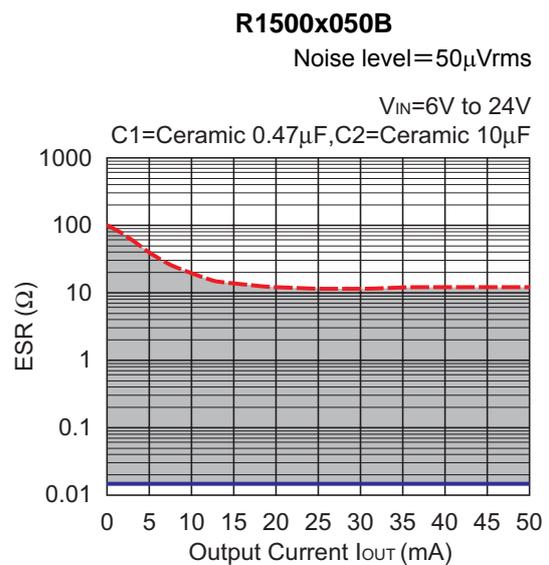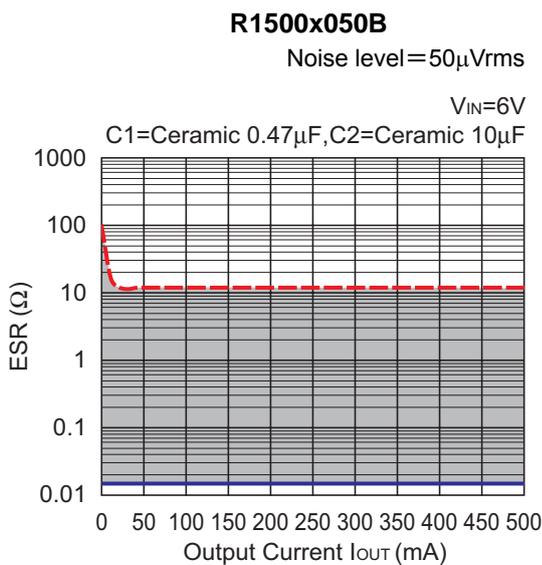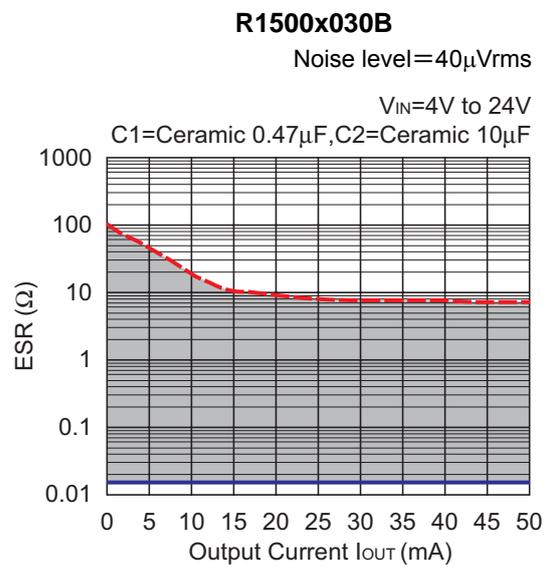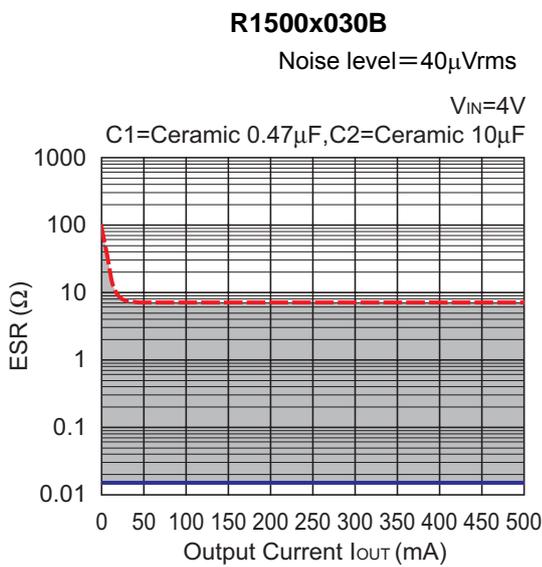

# R1500x


NO.EA-151-160425

## R1500x090B

Noise level=120 $\mu$ Vrms

$V_{IN}$ =10V

C1=Ceramic 0.47 $\mu$ F,C2=Ceramic 10 $\mu$ F

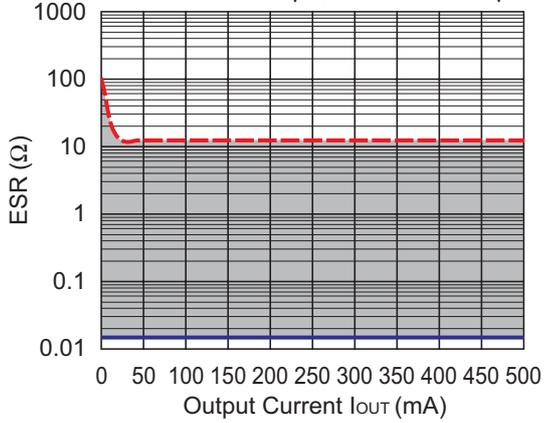


## R1500x090B

Noise level=120 $\mu$ Vrms

$V_{IN}$ =10V to 24V

C1=Ceramic 0.47 $\mu$ F,C2=Ceramic 10 $\mu$ F

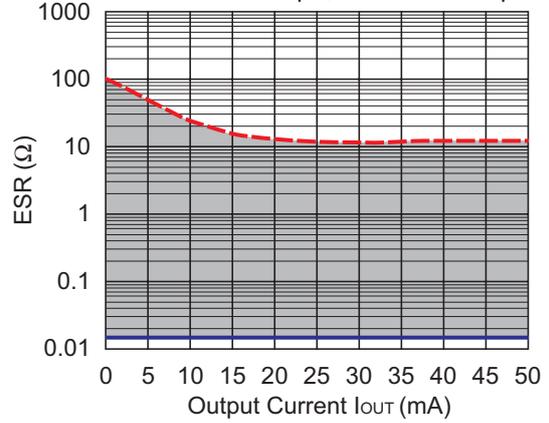


## R1500x120B

Noise level=140 $\mu$ Vrms

$V_{IN}$ =13V

C1=Ceramic 0.47 $\mu$ F,C2=Ceramic 10 $\mu$ F

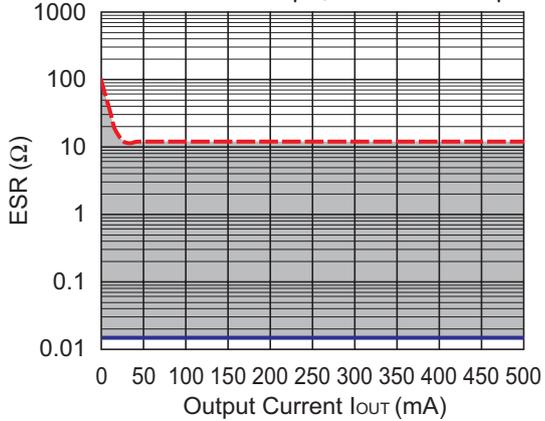


## R1500x120B

Noise level=140 $\mu$ Vrms

$V_{IN}$ =13V to 24V

C1=Ceramic 0.47 $\mu$ F,C2=Ceramic 10 $\mu$ F

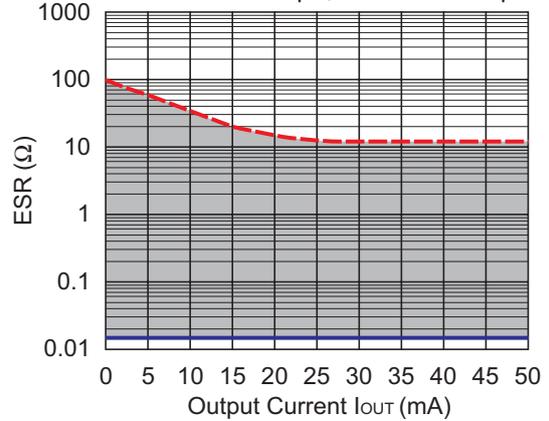

## PACKAGE INFORMATION

### Power Dissipation (SOT-89-5)

Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:



#### Measurement Conditions

|                  | High Wattage Land Pattern                            | Standard Land Pattern                                |
|------------------|------------------------------------------------------|------------------------------------------------------|
| Environment      | Mounting on Board (Wind velocity=0m/s)               | Mounting on Board (Wind velocity=0m/s)               |
| Board Material   | Glass cloth epoxy plastic (Double sided)             | Glass cloth epoxy plastic (Double sided)             |
| Board Dimensions | 30mm × 30mm × 1.6mm                                  | 50mm × 50mm × 1.6mm                                  |
| Copper Ratio     | Top side : Approx. 20% ,<br>Back side : Approx. 100% | Top side : Approx. 10% ,<br>Back side : Approx. 100% |
| Through-hole     | φ0.85mm × 10pcs                                      | -                                                    |

#### Measurement Result

( $T_a=25^\circ\text{C}$ ,  $T_{j\text{max}}=125^\circ\text{C}$ )

|                    | High Wattage Land Pattern | Standard Land Pattern | Free Air |
|--------------------|---------------------------|-----------------------|----------|
| Power Dissipation  | 1300mW                    | 900mW                 | 500mW    |
| Thermal Resistance | 77°C/W                    | 111°C/W               | 200°C/W  |

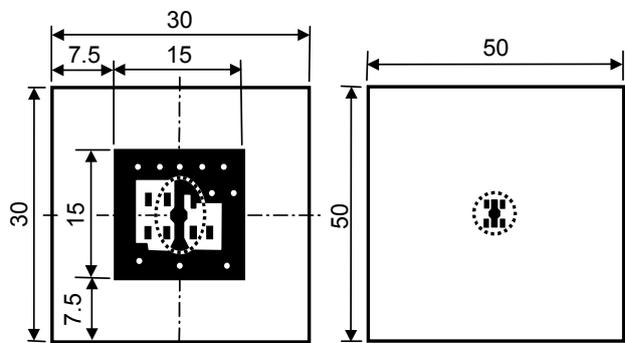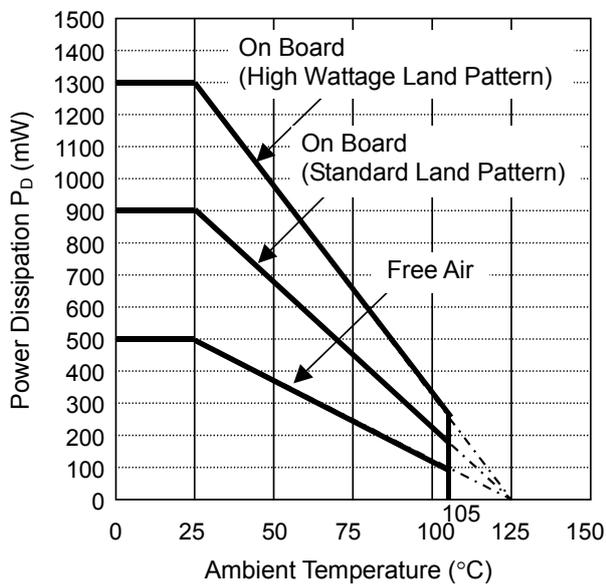

High Wattage

Standard

Measurement Board Pattern

○ IC Mount Area (Unit : mm)

Power Dissipation



R1500H Series marking list table

PKG : SOT-89-5

| Product Name | ①②③④           | Vset |
|--------------|----------------|------|
| R1500H030B   | <b>R 0 3 0</b> | 3.0V |
| R1500H031B   | <b>R 0 3 1</b> | 3.1V |
| R1500H032B   | <b>R 0 3 2</b> | 3.2V |
| R1500H033B   | <b>R 0 3 3</b> | 3.3V |
| R1500H034B   | <b>R 0 3 4</b> | 3.4V |
| R1500H035B   | <b>R 0 3 5</b> | 3.5V |
| R1500H036B   | <b>R 0 3 6</b> | 3.6V |
| R1500H037B   | <b>R 0 3 7</b> | 3.7V |
| R1500H038B   | <b>R 0 3 8</b> | 3.8V |
| R1500H039B   | <b>R 0 3 9</b> | 3.9V |
|              |                |      |
| R1500H040B   | <b>R 0 4 0</b> | 4.0V |
| R1500H041B   | <b>R 0 4 1</b> | 4.1V |
| R1500H042B   | <b>R 0 4 2</b> | 4.2V |
| R1500H043B   | <b>R 0 4 3</b> | 4.3V |
| R1500H044B   | <b>R 0 4 4</b> | 4.4V |
| R1500H045B   | <b>R 0 4 5</b> | 4.5V |
| R1500H046B   | <b>R 0 4 6</b> | 4.6V |
| R1500H047B   | <b>R 0 4 7</b> | 4.7V |
| R1500H048B   | <b>R 0 4 8</b> | 4.8V |
| R1500H049B   | <b>R 0 4 9</b> | 4.9V |
|              |                |      |
| R1500H050B   | <b>R 0 5 0</b> | 5.0V |
| R1500H051B   | <b>R 0 5 1</b> | 5.1V |
| R1500H052B   | <b>R 0 5 2</b> | 5.2V |
| R1500H053B   | <b>R 0 5 3</b> | 5.3V |
| R1500H054B   | <b>R 0 5 4</b> | 5.4V |
| R1500H055B   | <b>R 0 5 5</b> | 5.5V |
| R1500H056B   | <b>R 0 5 6</b> | 5.6V |
| R1500H057B   | <b>R 0 5 7</b> | 5.7V |
| R1500H058B   | <b>R 0 5 8</b> | 5.8V |
| R1500H059B   | <b>R 0 5 9</b> | 5.9V |
|              |                |      |
|              |                |      |

| Product Name | ①②③④           | Vset |
|--------------|----------------|------|
| R1500H060B   | <b>R 0 6 0</b> | 6.0V |
| R1500H061B   | <b>R 0 6 1</b> | 6.1V |
| R1500H062B   | <b>R 0 6 2</b> | 6.2V |
| R1500H063B   | <b>R 0 6 3</b> | 6.3V |
| R1500H064B   | <b>R 0 6 4</b> | 6.4V |
| R1500H065B   | <b>R 0 3 5</b> | 6.5V |
| R1500H066B   | <b>R 0 6 6</b> | 6.6V |
| R1500H067B   | <b>R 0 6 7</b> | 6.7V |
| R1500H068B   | <b>R 0 6 8</b> | 6.8V |
| R1500H069B   | <b>R 0 6 9</b> | 6.9V |
|              |                |      |
| R1500H070B   | <b>R 0 7 0</b> | 7.0V |
| R1500H071B   | <b>R 0 7 1</b> | 7.1V |
| R1500H072B   | <b>R 0 7 2</b> | 7.2V |
| R1500H073B   | <b>R 0 7 3</b> | 7.3V |
| R1500H074B   | <b>R 0 7 4</b> | 7.4V |
| R1500H075B   | <b>R 0 7 5</b> | 7.5V |
| R1500H076B   | <b>R 0 7 6</b> | 7.6V |
| R1500H077B   | <b>R 0 7 7</b> | 7.7V |
| R1500H078B   | <b>R 0 7 8</b> | 7.8V |
| R1500H079B   | <b>R 0 7 9</b> | 7.9V |
|              |                |      |
| R1500H080B   | <b>R 0 8 0</b> | 8.0V |
| R1500H081B   | <b>R 0 8 1</b> | 8.1V |
| R1500H082B   | <b>R 0 8 2</b> | 8.2V |
| R1500H083B   | <b>R 0 8 3</b> | 8.3V |
| R1500H084B   | <b>R 0 8 4</b> | 8.4V |
| R1500H085B   | <b>R 0 8 5</b> | 8.5V |
| R1500H086B   | <b>R 0 8 6</b> | 8.6V |
| R1500H087B   | <b>R 0 8 7</b> | 8.7V |
| R1500H088B   | <b>R 0 8 8</b> | 8.8V |
| R1500H089B   | <b>R 0 8 9</b> | 8.9V |
|              |                |      |
|              |                |      |

| Product Name | ①②③④           | Vset  |
|--------------|----------------|-------|
| R1500H090B   | <b>R 0 9 0</b> | 9.0V  |
| R1500H091B   | <b>R 0 9 1</b> | 9.1V  |
| R1500H092B   | <b>R 0 9 2</b> | 9.2V  |
| R1500H093B   | <b>R 0 9 3</b> | 9.3V  |
| R1500H094B   | <b>R 0 9 4</b> | 9.4V  |
| R1500H095B   | <b>R 0 9 5</b> | 9.5V  |
| R1500H096B   | <b>R 0 9 6</b> | 9.6V  |
| R1500H097B   | <b>R 0 9 7</b> | 9.7V  |
| R1500H098B   | <b>R 0 9 8</b> | 9.8V  |
| R1500H099B   | <b>R 0 9 9</b> | 9.9V  |
|              |                |       |
| R1500H100B   | <b>R 1 0 0</b> | 10.0V |
| R1500H101B   | <b>R 1 0 1</b> | 10.1V |
| R1500H102B   | <b>R 1 0 2</b> | 10.2V |
| R1500H103B   | <b>R 1 0 3</b> | 10.3V |
| R1500H104B   | <b>R 1 0 4</b> | 10.4V |
| R1500H105B   | <b>R 1 0 5</b> | 10.5V |
| R1500H106B   | <b>R 1 0 6</b> | 10.6V |
| R1500H107B   | <b>R 1 0 7</b> | 10.7V |
| R1500H108B   | <b>R 1 0 8</b> | 10.8V |
| R1500H109B   | <b>R 1 0 9</b> | 10.9V |
|              |                |       |
| R1500H110B   | <b>R 1 1 0</b> | 11.0V |
| R1500H111B   | <b>R 1 1 1</b> | 11.1V |
| R1500H112B   | <b>R 1 1 2</b> | 11.2V |
| R1500H113B   | <b>R 1 1 3</b> | 11.3V |
| R1500H114B   | <b>R 1 1 4</b> | 11.4V |
| R1500H115B   | <b>R 1 1 5</b> | 11.5V |
| R1500H116B   | <b>R 1 1 6</b> | 11.6V |
| R1500H117B   | <b>R 1 1 7</b> | 11.7V |
| R1500H118B   | <b>R 1 1 8</b> | 11.8V |
| R1500H119B   | <b>R 1 1 9</b> | 11.9V |
|              |                |       |
| R1500H120B   | <b>R 1 2 0</b> | 12.0V |

# R1500x

NO.EA-151-160425

## Power Dissipation (TO-252-5-P2)

Power Dissipation ( $P_D$ ) depends on conditions of mounting on board.  
This specification is based on the measurement at the condition below.


\* Measurement conditions

|                  | Standard Land Pattern                            | Ultra High Wattage Land Pattern                                              |
|------------------|--------------------------------------------------|------------------------------------------------------------------------------|
| Environment      | Mounting on board (Wind velocity 0m/s)           |                                                                              |
| Board Material   | Glass cloth epoxy plastic (Double layers)        | Glass cloth epoxy plastic (Four-layers)                                      |
| Board Dimensions | 50mm x 50mm x 1.6mm                              | 76.2mm x 114.3mm x 0.8mm                                                     |
| Copper Ratio     | Top side: Approx. 50%,<br>Back side: Approx. 50% | Top, Back side: 50mmSquare Approx. 96%,<br>2nd, 3rd: 50mmSquare Approx. 100% |
| Through - hole   | $\phi$ 0.5mm x 24pcs                             | $\phi$ 0.4mm x 30pcs                                                         |


\* Measurement Results

( $T_a=25^\circ\text{C}$ ,  $T_{j\text{max}}=125^\circ\text{C}$ )


|                    | Standard Land Pattern                                                | Ultra High Wattage Land Pattern                                       |
|--------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------|
| Power Dissipation  | 1900mW                                                               | 3800mW                                                                |
| Thermal Resistance | $\theta_{ja}=(125-25^\circ\text{C})/1.9\text{W}= 53^\circ\text{C/W}$ | $\theta_{ja}=(125-25^\circ\text{C})/3.8\text{W} = 26^\circ\text{C/W}$ |
|                    | $\theta_{jc}= 17^\circ\text{C/W}$                                    | $\theta_{jc}= 7^\circ\text{C/W}$                                      |

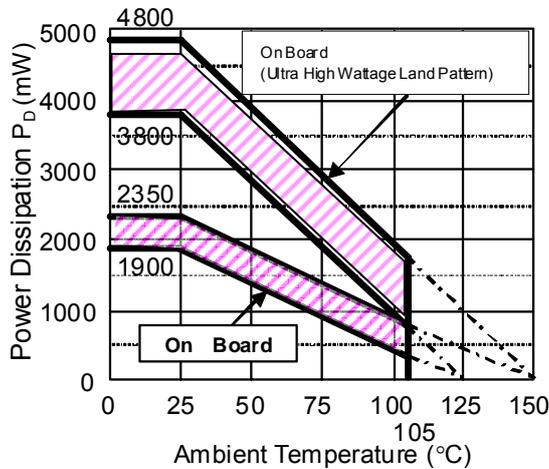

Power Dissipation

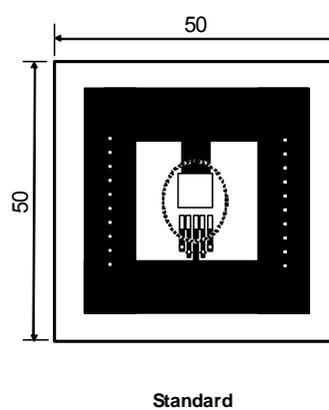

Standard

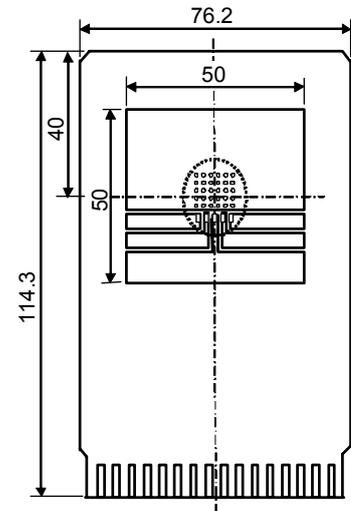

Ultra High Wattage

### Measurement Board Pattern


○ IC Mount Area (Unit: mm)

The above graph shows the Power Dissipation of the package based on  $T_{j\text{max}}=125^\circ\text{C}$  and  $T_{j\text{max}}=150^\circ\text{C}$ .

Operating the IC in the shaded area in the graph might have an influence its lifetime. Operating time must be within the time limit described in the table below, in case of operating in the shaded area.

| Operating Time | Estimated years<br>(Operating four hours/day) |
|----------------|-----------------------------------------------|
| 13,000 hours   | 9 years                                       |


Package Dimensions (TO-252-5-P2)

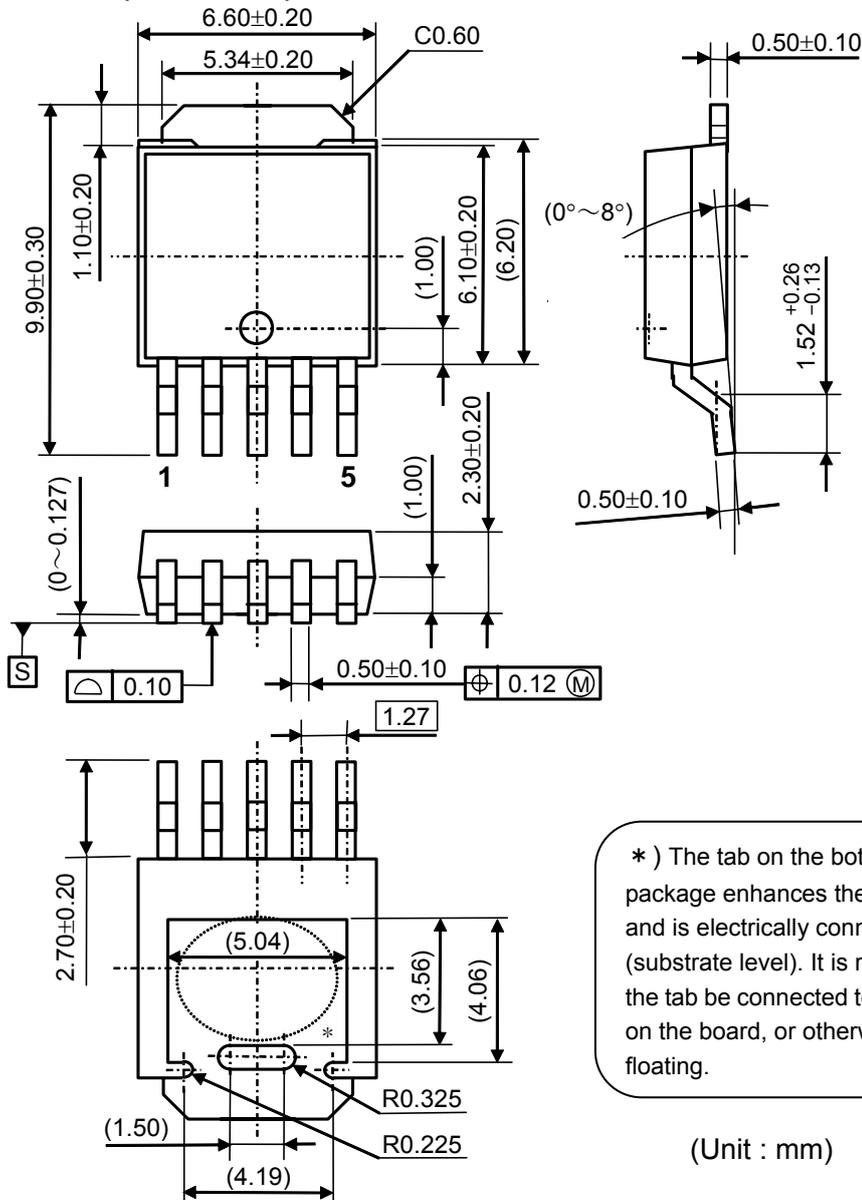

\* ) The tab on the bottom of the package enhances thermal performance and is electrically connected to GND (substrate level). It is recommended that the tab be connected to the ground plane on the board, or otherwise be left floating.

(Unit : mm)

Mark Specification (TO-252-5-P2)

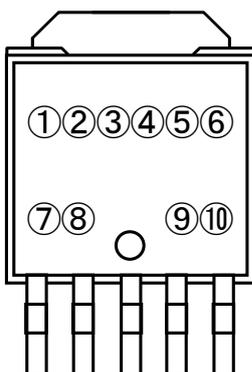

- ① ② ③ ④ ⑤ ⑥ ⑦ : Product Code ... Refer to the mark list table.
- ⑧ : Blank
- ⑨ ⑩ : Lot Number ... Alphanumeric Serial Number

**R1500x**

NO.EA-151-160425

**R1500J Series marking list table**

PKG : TO-252-5-P2

| Product Name | ①②③④⑤⑥⑦              | Vset |
|--------------|----------------------|------|
| R1500J030B   | <b>C 1 J 0 3 0 B</b> | 3.0V |
| R1500J031B   | <b>C 1 J 0 3 1 B</b> | 3.1V |
| R1500J032B   | <b>C 1 J 0 3 2 B</b> | 3.2V |
| R1500J033B   | <b>C 1 J 0 3 3 B</b> | 3.3V |
| R1500J034B   | <b>C 1 J 0 3 4 B</b> | 3.4V |
| R1500J035B   | <b>C 1 J 0 3 5 B</b> | 3.5V |
| R1500J036B   | <b>C 1 J 0 3 6 B</b> | 3.6V |
| R1500J037B   | <b>C 1 J 0 3 7 B</b> | 3.7V |
| R1500J038B   | <b>C 1 J 0 3 8 B</b> | 3.8V |
| R1500J039B   | <b>C 1 J 0 3 9 B</b> | 3.9V |
|              |                      |      |
| R1500J040B   | <b>C 1 J 0 4 0 B</b> | 4.0V |
| R1500J041B   | <b>C 1 J 0 4 1 B</b> | 4.1V |
| R1500J042B   | <b>C 1 J 0 4 2 B</b> | 4.2V |
| R1500J043B   | <b>C 1 J 0 4 3 B</b> | 4.3V |
| R1500J044B   | <b>C 1 J 0 4 4 B</b> | 4.4V |
| R1500J045B   | <b>C 1 J 0 4 5 B</b> | 4.5V |
| R1500J046B   | <b>C 1 J 0 4 6 B</b> | 4.6V |
| R1500J047B   | <b>C 1 J 0 4 7 B</b> | 4.7V |
| R1500J048B   | <b>C 1 J 0 4 8 B</b> | 4.8V |
| R1500J049B   | <b>C 1 J 0 4 9 B</b> | 4.9V |
|              |                      |      |
| R1500J050B   | <b>C 1 J 0 5 0 B</b> | 5.0V |
| R1500J051B   | <b>C 1 J 0 5 1 B</b> | 5.1V |
| R1500J052B   | <b>C 1 J 0 5 2 B</b> | 5.2V |
| R1500J053B   | <b>C 1 J 0 5 3 B</b> | 5.3V |
| R1500J054B   | <b>C 1 J 0 5 4 B</b> | 5.4V |
| R1500J055B   | <b>C 1 J 0 5 5 B</b> | 5.5V |
| R1500J056B   | <b>C 1 J 0 5 6 B</b> | 5.6V |
| R1500J057B   | <b>C 1 J 0 5 7 B</b> | 5.7V |
| R1500J058B   | <b>C 1 J 0 5 8 B</b> | 5.8V |
| R1500J059B   | <b>C 1 J 0 5 9 B</b> | 5.9V |
|              |                      |      |
|              |                      |      |

| Product Name | ①②③④⑤⑥⑦              | Vset |
|--------------|----------------------|------|
| R1500J060B   | <b>C 1 J 0 6 0 B</b> | 6.0V |
| R1500J061B   | <b>C 1 J 0 6 1 B</b> | 6.1V |
| R1500J062B   | <b>C 1 J 0 6 2 B</b> | 6.2V |
| R1500J063B   | <b>C 1 J 0 6 3 B</b> | 6.3V |
| R1500J064B   | <b>C 1 J 0 6 4 B</b> | 6.4V |
| R1500J065B   | <b>C 1 J 0 6 5 B</b> | 6.5V |
| R1500J066B   | <b>C 1 J 0 6 6 B</b> | 6.6V |
| R1500J067B   | <b>C 1 J 0 6 7 B</b> | 6.7V |
| R1500J068B   | <b>C 1 J 0 6 8 B</b> | 6.8V |
| R1500J069B   | <b>C 1 J 0 6 9 B</b> | 6.9V |
|              |                      |      |
| R1500J070B   | <b>C 1 J 0 7 0 B</b> | 7.0V |
| R1500J071B   | <b>C 1 J 0 7 1 B</b> | 7.1V |
| R1500J072B   | <b>C 1 J 0 7 2 B</b> | 7.2V |
| R1500J073B   | <b>C 1 J 0 7 3 B</b> | 7.3V |
| R1500J074B   | <b>C 1 J 0 7 4 B</b> | 7.4V |
| R1500J075B   | <b>C 1 J 0 7 5 B</b> | 7.5V |
| R1500J076B   | <b>C 1 J 0 7 6 B</b> | 7.6V |
| R1500J077B   | <b>C 1 J 0 7 7 B</b> | 7.7V |
| R1500J078B   | <b>C 1 J 0 7 8 B</b> | 7.8V |
| R1500J079B   | <b>C 1 J 0 7 9 B</b> | 7.9V |
|              |                      |      |
| R1500J080B   | <b>C 1 J 0 8 0 B</b> | 8.0V |
| R1500J081B   | <b>C 1 J 0 8 1 B</b> | 8.1V |
| R1500J082B   | <b>C 1 J 0 8 2 B</b> | 8.2V |
| R1500J083B   | <b>C 1 J 0 8 3 B</b> | 8.3V |
| R1500J084B   | <b>C 1 J 0 8 4 B</b> | 8.4V |
| R1500J085B   | <b>C 1 J 0 8 5 B</b> | 8.5V |
| R1500J086B   | <b>C 1 J 0 8 6 B</b> | 8.6V |
| R1500J087B   | <b>C 1 J 0 8 7 B</b> | 8.7V |
| R1500J088B   | <b>C 1 J 0 8 8 B</b> | 8.8V |
| R1500J089B   | <b>C 1 J 0 8 9 B</b> | 8.9V |
|              |                      |      |
|              |                      |      |

| Product Name | ①②③④⑤⑥⑦              | Vset  |
|--------------|----------------------|-------|
| R1500J090B   | <b>C 1 J 0 9 0 B</b> | 9.0V  |
| R1500J091B   | <b>C 1 J 0 9 1 B</b> | 9.1V  |
| R1500J092B   | <b>C 1 J 0 9 2 B</b> | 9.2V  |
| R1500J093B   | <b>C 1 J 0 9 3 B</b> | 9.3V  |
| R1500J094B   | <b>C 1 J 0 9 4 B</b> | 9.4V  |
| R1500J095B   | <b>C 1 J 0 9 5 B</b> | 9.5V  |
| R1500J096B   | <b>C 1 J 0 9 6 B</b> | 9.6V  |
| R1500J097B   | <b>C 1 J 0 9 7 B</b> | 9.7V  |
| R1500J098B   | <b>C 1 J 0 9 8 B</b> | 9.8V  |
| R1500J099B   | <b>C 1 J 0 9 9 B</b> | 9.9V  |
|              |                      |       |
| R1500J100B   | <b>C 1 J 1 0 0 B</b> | 10.0V |
| R1500J101B   | <b>C 1 J 1 0 1 B</b> | 10.1V |
| R1500J102B   | <b>C 1 J 1 0 2 B</b> | 10.2V |
| R1500J103B   | <b>C 1 J 1 0 3 B</b> | 10.3V |
| R1500J104B   | <b>C 1 J 1 0 4 B</b> | 10.4V |
| R1500J105B   | <b>C 1 J 1 0 5 B</b> | 10.5V |
| R1500J106B   | <b>C 1 J 1 0 6 B</b> | 10.6V |
| R1500J107B   | <b>C 1 J 1 0 7 B</b> | 10.7V |
| R1500J108B   | <b>C 1 J 1 0 8 B</b> | 10.8V |
| R1500J109B   | <b>C 1 J 1 0 9 B</b> | 10.9V |
|              |                      |       |
| R1500J110B   | <b>C 1 J 1 1 0 B</b> | 11.0V |
| R1500J111B   | <b>C 1 J 1 1 1 B</b> | 11.1V |
| R1500J112B   | <b>C 1 J 1 1 2 B</b> | 11.2V |
| R1500J113B   | <b>C 1 J 1 1 3 B</b> | 11.3V |
| R1500J114B   | <b>C 1 J 1 1 4 B</b> | 11.4V |
| R1500J115B   | <b>C 1 J 1 1 5 B</b> | 11.5V |
| R1500J116B   | <b>C 1 J 1 1 6 B</b> | 11.6V |
| R1500J117B   | <b>C 1 J 1 1 7 B</b> | 11.7V |
| R1500J118B   | <b>C 1 J 1 1 8 B</b> | 11.8V |
| R1500J119B   | <b>C 1 J 1 1 9 B</b> | 11.9V |
|              |                      |       |
| R1500J120B   | <b>C 1 J 1 2 0 B</b> | 12.0V |



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



**Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.**

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

**RICOH** RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

#### Sales & Support Offices

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

**Higashi-Shinagawa Office (International Sales)**  
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan  
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

##### **RICOH EUROPE (NETHERLANDS) B.V.**

**Semiconductor Support Centre**  
Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands  
Phone: +31-20-5474-309

##### **RICOH INTERNATIONAL B.V. - German Branch**

**Semiconductor Sales and Support Centre**  
Oberrather Strasse 6, 40472 Düsseldorf, Germany  
Phone: +49-211-6546-0

##### **RICOH ELECTRONIC DEVICES KOREA CO., LTD.**

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

##### **RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.**

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203, People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

**Taipei office**  
Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ricoh Electronics:](#)

[R1500H036B-T1-FE](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.