

400mA LOAD SWITCH FEATURING PRE-BIASED PNP TRANSISTOR AND ESD PROTECTED N-MOSFET
Features

- Voltage Controlled Small Signal Switch
- N-MOSFET with ESD Gate Protection
- Ideally Suited for Automated Assembly Processes
- **Lead Free By Design/ROHS Compliant (Note 1)**
- **"Green" Device (Note 2)**


Description

LMN400E01 is best suited for applications where the load needs to be turned on and off using control circuits like micro-controllers, comparators etc. particularly at a point of load. It features a discrete pass transistor with stable $V_{CE(SAT)}$ which does not depend on input voltage and can support continuous maximum current of 400 mA. It also contains an ESD protected discrete N-MOSFET that can be used as control. The component can be used as a part of a circuit or as a stand alone discrete device.

Mechanical Data


- Case: SOT363
- Case Material: Molded Plastic. "Green Molding" Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Marking Information: See Page 8
- Ordering Information: See Page 8
- Weight: 0.006 grams (approximate)

| Reference | Device Type | R1(NOM) | R2(NOM) | Figure |
|-----------|----------------|---------|---------|--------|
| Q1 | PNP Transistor | 10K | 220 | 2 |
| Q2 | N-MOSFET | — | — | 2 |

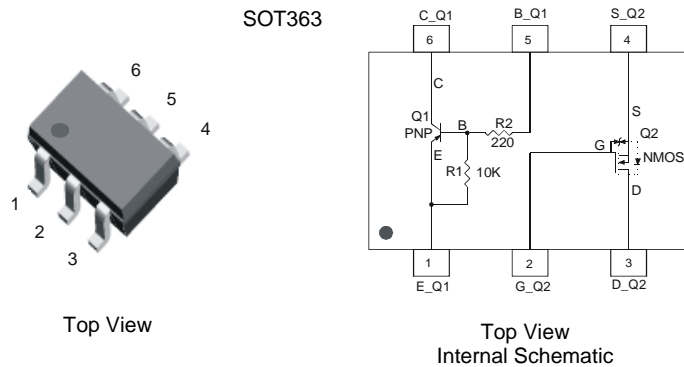
Ordering Information (Note 3)

| Device | Packaging | Shipping |
|-------------|-----------|------------------|
| LMN400E01-7 | SOT363 | 3000/Tape & Reel |

- Notes:
1. No purposefully added lead.
 2. Diodes Inc.'s "Green" policy can be found on our website at <http://www.diodes.com>.
 3. For packaging details, go to our website at <http://www.diodes.com>.

Marking Information


PM5 = Product Type Marking Code,
 YM = Date Code Marking
 Y = Year, e.g., Y = 2011
 M = Month, e.g., 9 = September

Date Code Key

| Year | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 |
|------|------|------|------|------|------|------|------|------|
| Code | T | U | V | W | X | Y | Z | A |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

Maximum Ratings, Total Device @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|------------------|-------|----------------------|
| Power Dissipation (Note 4) | P_D | 200 | mW |
| Power Derating Factor above 37.5°C | P_{der} | 1.6 | mW/ $^\circ\text{C}$ |
| Output Current | I_{out} | 400 | mA |

Thermal Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------|-------------|---------------------------|
| Operating and Storage Temperature Range | T_j, T_{STG} | -55 to +150 | $^\circ\text{C}$ |
| Thermal Resistance, Junction to Ambient Air (Note 4) | $R_{\theta\text{JA}}$ | 625 | $^\circ\text{C}/\text{W}$ |

**Maximum Ratings:
Pre-Biased PNP Transistor (Q1)** @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|---------------------------|------------------|----------|------|
| Collector-Base Voltage | V_{CBO} | -50 | V |
| Collector-Emitter Voltage | V_{CEO} | -50 | V |
| Supply Voltage | V_{CC} | -50 | V |
| Input Voltage | V_{in} | -6 to +5 | V |
| Output Current | I_{C} | -400 | mA |

**Maximum Ratings:
ESD Protected N-Channel MOSFET (Q2)** @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|---|------------------|---|-------|
| Drain-Source Voltage | V_{DSS} | 60 | V |
| Drain Gate Voltage ($R_{\text{GS}} \leq 1\text{M Ohm}$) | V_{DGR} | 60 | V |
| Gate-Source Voltage | V_{GSS} | Continuous | +/-20 |
| | | Pulsed ($t_p < 50 \mu\text{s}$) | +/-40 |
| Drain Current (Note 4) | I_{D} | Continuous ($V_{\text{GS}} = 10\text{V}$) | 300 |
| | | Pulsed ($t_p < 10 \mu\text{s}$, Duty Cycle <1%) | 800 |
| Continuous Source Current | I_{S} | 300 | mA |

Notes: 4. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics: Pre-Biased PNP Transistor (Q1) @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|--|----------------------|-------|-------|-------|------|---|
| OFF CHARACTERISTICS (Note 5) | | | | | | |
| Collector-Base Cut Off Current | I _{CBO} | — | — | -500 | nA | V _{CB} = -50V, I _E = 0 |
| Collector-Emitter Cut Off Current | I _{CEO} | — | — | -1 | uA | V _{CE} = -50V, I _B = 0 |
| Collector-Base Breakdown Voltage | V _{(BR)CBO} | -50 | — | — | V | I _C = -10uA, I _E = 0 |
| Collector-Emitter Breakdown Voltage | V _{(BR)CEO} | -50 | — | — | V | I _C = -2mA, I _B = 0 |
| Input Off Voltage | V _{I(OFF)} | -0.3 | -0.55 | — | V | V _{CE} = -5V, I _C = -100uA |
| Output Current | I _{O(OFF)} | — | — | -1 | uA | V _{CC} = -50V, V _I = 0V |
| ON CHARACTERISTICS (Note 5) | | | | | | |
| Collector-Emitter Saturation Voltage | V _{CE(SAT)} | — | — | -0.15 | V | I _C = -10mA, I _B = -0.3mA |
| | | — | — | -0.3 | V | I _C = -200mA, I _B = -20mA |
| | | — | — | -0.5 | V | I _C = -400mA, I _B = -40mA |
| | | — | — | -0.6 | V | I _C = -500mA, I _B = -50mA |
| DC Current Gain | h _{FE} | 55 | 220 | — | — | V _{CE} = -5V, I _C = -50mA |
| | | 55 | 225 | — | — | V _{CE} = -5V, I _C = -400mA |
| Input On Voltage | V _{I(ON)} | -3 | -1.5 | — | V | V _O = -0.3V, I _C = -20mA |
| Output Voltage (Equivalent to V _{CE(SAT)}) | V _{O(ON)} | — | -0.1 | -0.3 | V | I _O /I _I = -50mA / -2.5mA |
| Input Current | I _I | — | -18 | -45 | mA | V _I = -5V |
| Base-Emitter Turn-on Voltage | V _{BE(ON)} | — | -1.2 | -1.6 | V | V _{CE} = -5V, I _C = -400mA |
| Base-Emitter Saturation Voltage | V _{BE(SAT)} | — | -1.9 | -2.5 | V | I _C = -50mA, I _B = -5mA |
| Input Resistor (Base), +/- 30% | R2 | 0.154 | 0.22 | 0.286 | KΩ | — |
| Pull-up Resistor (Base to V _{CC} supply), +/- 30% | R1 | 7 | 10 | 13 | KΩ | — |
| Resistor Ratio (Input Resistor/Pullup resistor) | R1/R2 | 36 | 45 | 55 | — | — |
| SMALL SIGNAL CHARACTERISTICS | | | | | | |
| Gain Bandwidth Product | f _T | — | 200 | — | MHz | V _{CE} = -10V, I _E = -5mA, f = 100MHz |

Notes: 5. Short duration pulse test used to minimize self-heating effect.

Electrical Characteristics:
ESD Protected N-Channel MOSFET (Q2) @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|---|---------------|-----|------|------|----------|--|
| OFF CHARACTERISTICS (Note 5) | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | 60 | — | — | V | $V_{GS} = 0V, I_D = 10\mu A$ |
| Zero Gate Voltage Drain Current | I_{DSS} | — | — | 1 | μA | $V_{GS} = 0V, V_{DS} = 60V$ |
| Gate-Body Leakage Current, Forward | I_{GSSF} | — | — | 10 | μA | $V_{GS} = 20V, V_{DS} = 0V$ |
| Gate-Body Leakage Current, Reverse | I_{GSSR} | — | — | -10 | μA | $V_{GS} = -20V, V_{DS} = 0V$ |
| ON CHARACTERISTICS (Note 5) | | | | | | |
| Gate Source Threshold Voltage | $V_{GS(th)}$ | 1 | 1.6 | 2.5 | V | $V_{DS} = V_{GS}, I_D = 0.25mA$ |
| Static Drain-Source On-State Voltage | $V_{DS(on)}$ | — | 0.09 | 1.9 | V | $V_{GS} = 5V, I_D = 50mA$ |
| | | — | 0.6 | 3.75 | | $V_{GS} = 10V, I_D = 500mA$ |
| On-State Drain Current | $I_{D(on)}$ | 500 | — | — | mA | $V_{GS} = 10V,$ $V_{DS} \geq 2 * V_{DS(ON)}$ |
| Static Drain-Source On Resistance | $R_{DS(on)}$ | — | 1.6 | 3 | Ω | $V_{GS} = 5V, I_D = 50mA$ |
| | | — | 1.2 | 2 | | $V_{GS} = 10V, I_D = 500mA$ |
| Forward Transconductance | g_{FS} | 80 | 260 | — | mS | $V_{DS} \geq 2 * V_{DS(ON)}, I_D = 200 mA$ |
| DYNAMIC CHARACTERISTICS | | | | | | |
| Input Capacitance | C_{iss} | — | — | 50 | pF | $V_{DS} = -25V, V_{GS} = 0V, f = 1MHz$ |
| Output Capacitance | C_{oss} | — | — | 25 | pF | |
| Reverse Transfer Capacitance | C_{rss} | — | — | 5 | pF | |
| SWITCHING CHARACTERISTICS (Note 5) | | | | | | |
| Turn-On Delay Time | $t_{d(on)}$ | — | — | 20 | ns | $V_{DD} = 30V, V_{GS} = 10V,$ $I_D = 200mA,$ $R_G = 25 \text{ Ohm}, R_L = 150 \text{ Ohm}$ |
| Turn-Off Delay Time | $t_{d(off)}$ | — | — | 40 | ns | |
| SOURCE-DRAIN (BODY) DIODE CHARACTERISTICS AND MAXIMUM RATINGS | | | | | | |
| Drain-Source Diode Forward On-Voltage | V_{SD} | — | 0.88 | 1.5 | V | $V_{GS} = 0V, I_S = 300 mA^*$ |
| Maximum Continuous Drain-Source Diode Forward Current (Reverse Drain Current) | I_S | — | — | 300 | mA | |
| Maximum Pulsed Drain-Source Diode Forward Current | I_{SM} | — | — | 800 | mA | |

Notes: 5. Short duration pulse test used to minimize self-heating effect.

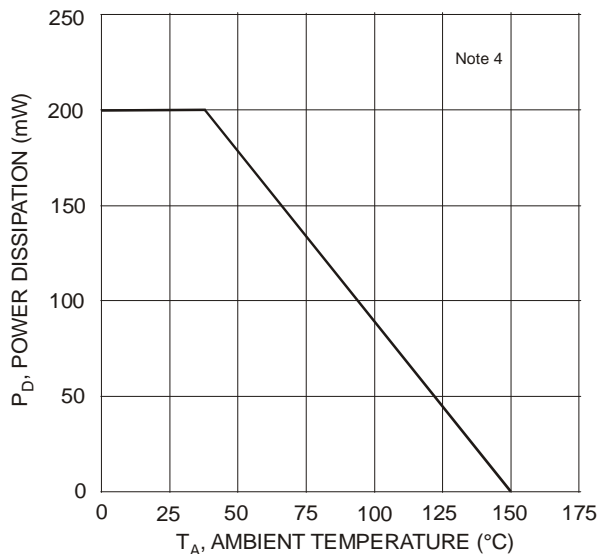


Fig. 3 Max Power Dissipation vs. Ambient Temperature

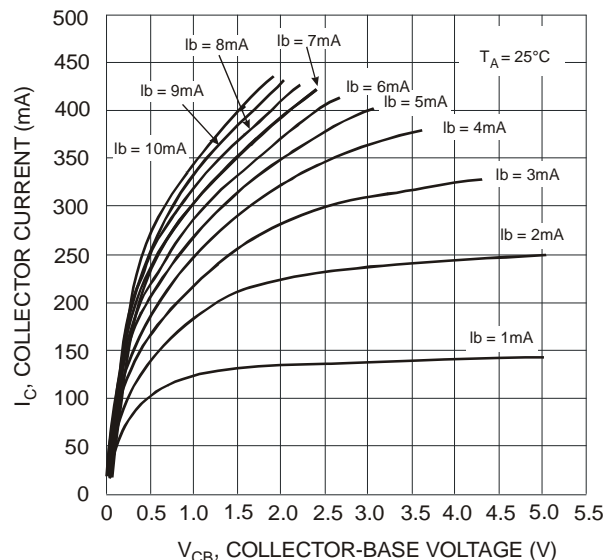


Fig. 4 Output Current vs. Voltage Drop (Pass Element PNP)

Pre-Biased PNP Transistor Characteristics

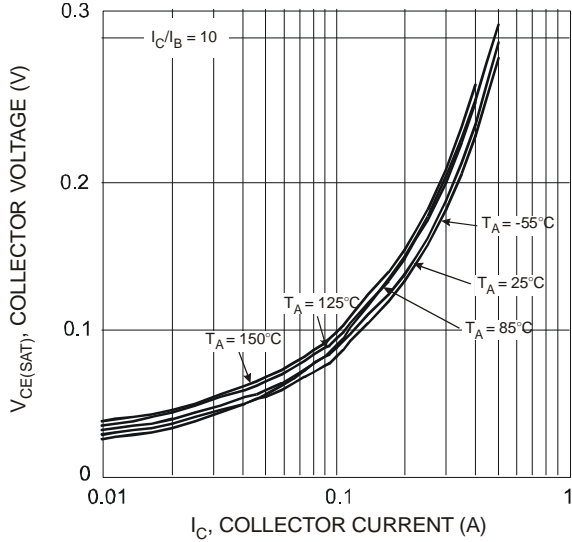


Fig. 5 $V_{CE(SAT)}$ vs. I_C @ $I_C/I_B = 10$

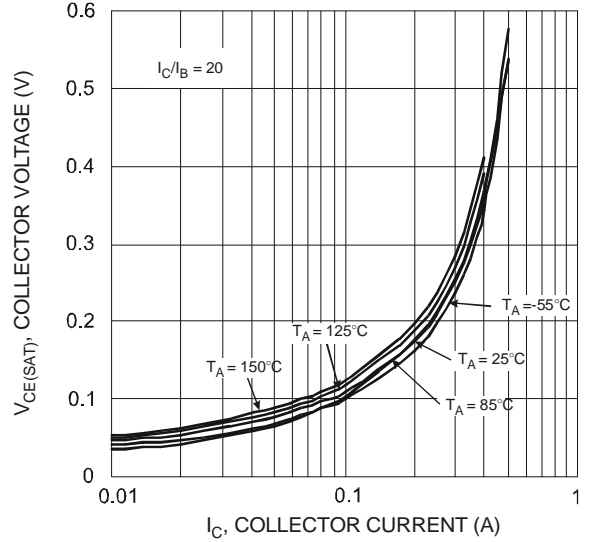


Fig. 6 $V_{CE(SAT)}$ vs. I_C @ $I_C/I_B = 20$

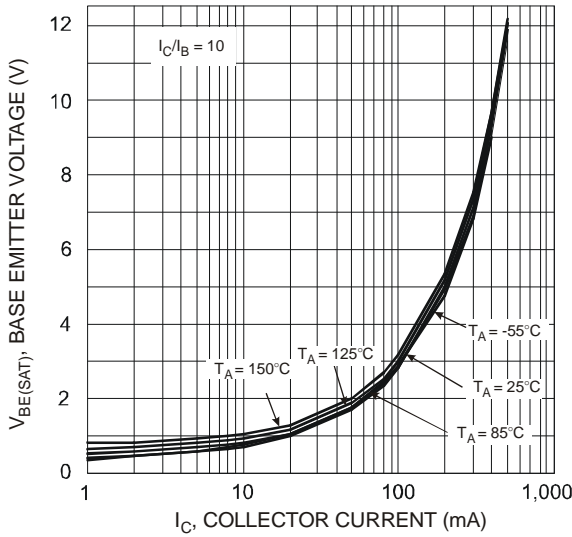


Fig. 7 $V_{BE(SAT)}$ vs. I_C @ $I_C/I_B = 10$

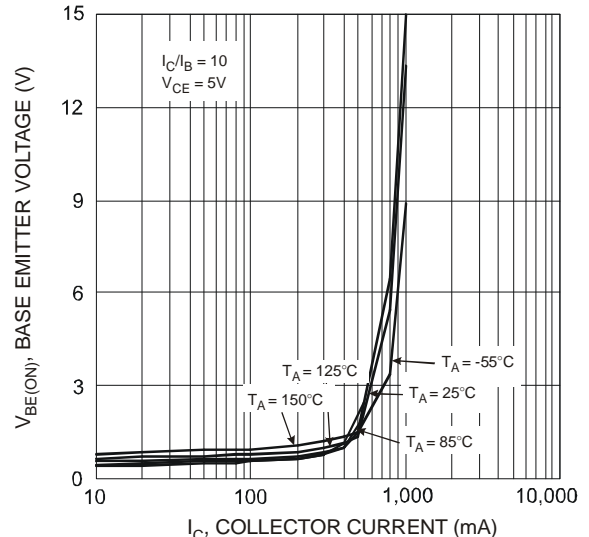


Fig. 8 $V_{BE(ON)}$ vs. I_C @ $V_{CE} = 5\text{V}$

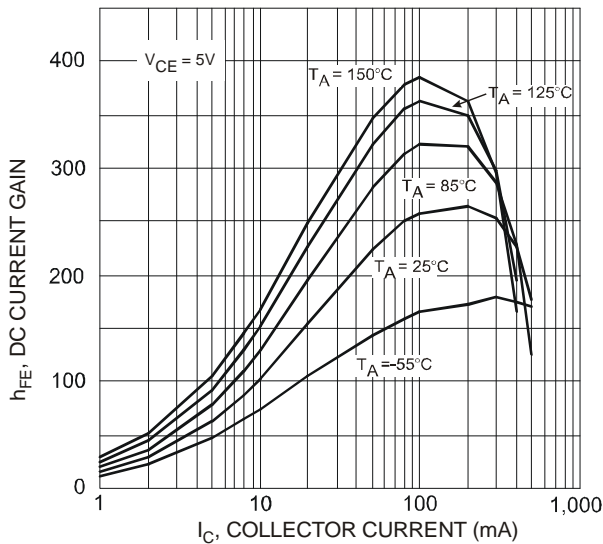


Fig. 9 h_{FE} vs. I_C @ $V_{CE} = 5\text{V}$

Typical N-Channel MOSFET (ESD Protected) Characteristics

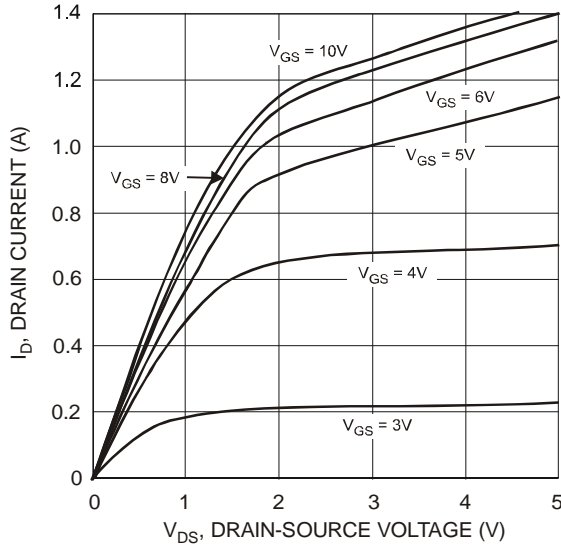


Fig. 10 Output Characteristics

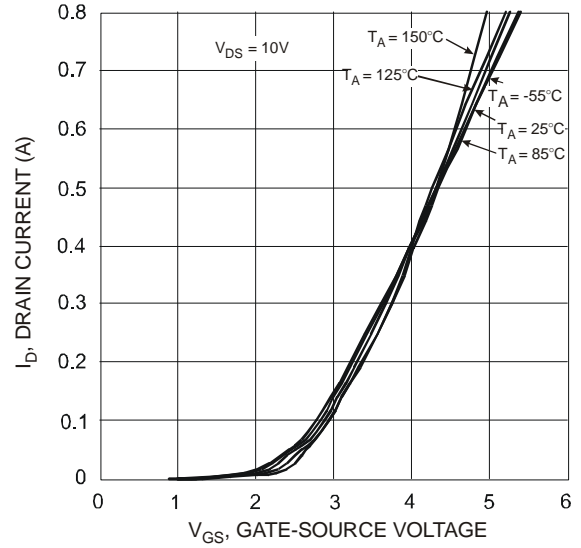


Fig. 11 Transfer Characteristics

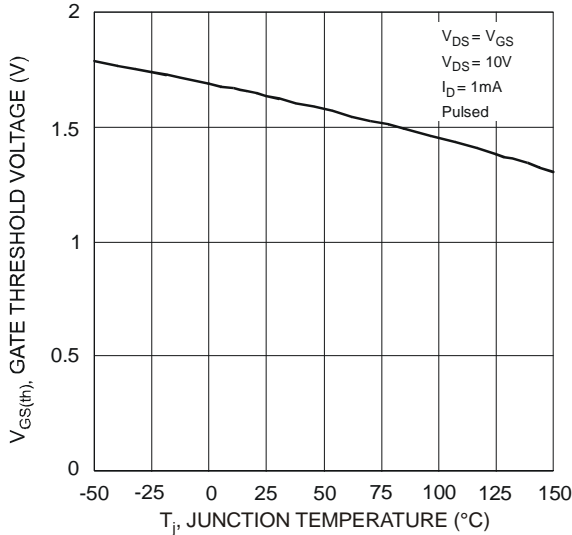


Fig. 12 Gate Threshold Voltage vs. Junction Temperature

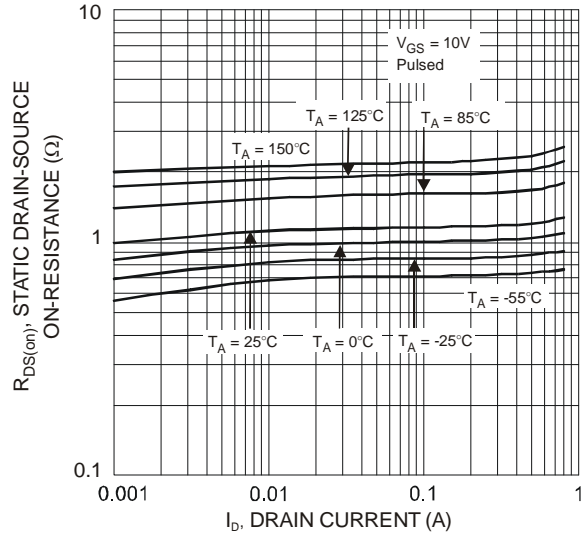


Fig. 13 Static Drain-Source On-Resistance vs. Drain Current

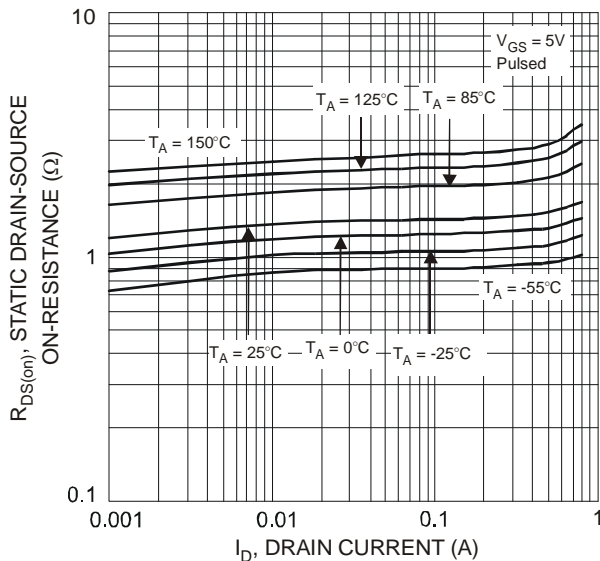


Fig. 14 Static Drain-Source On-Resistance vs. Drain Current

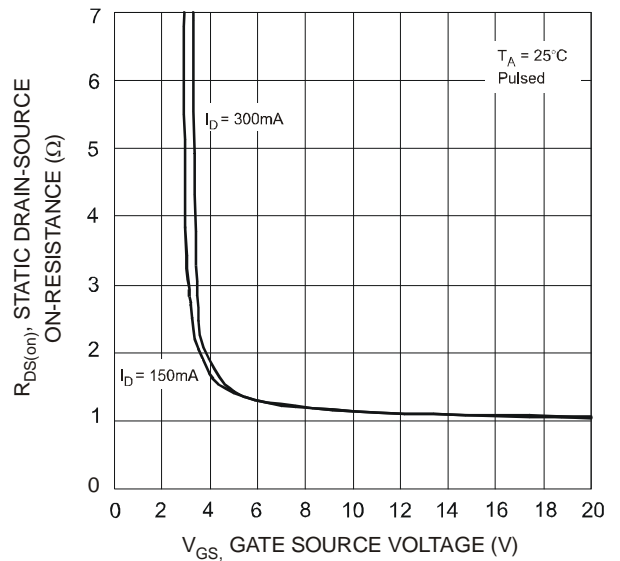


Fig. 15 Static Drain-Source On-Resistance vs. Gate-Source Voltage

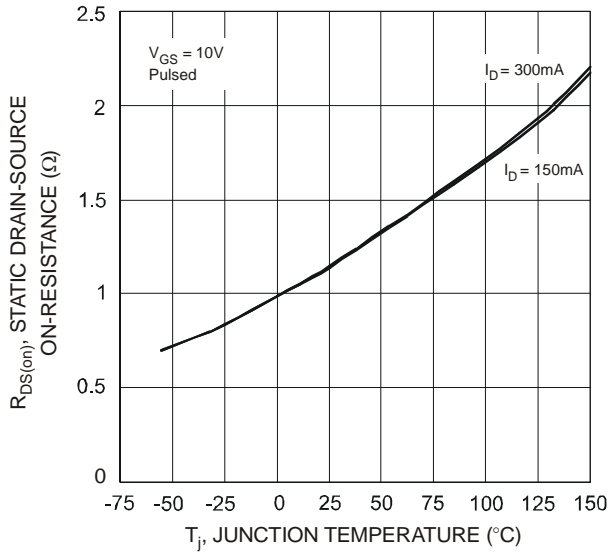


Fig. 16 Static Drain-Source On-State Resistance vs. Junction Temperature

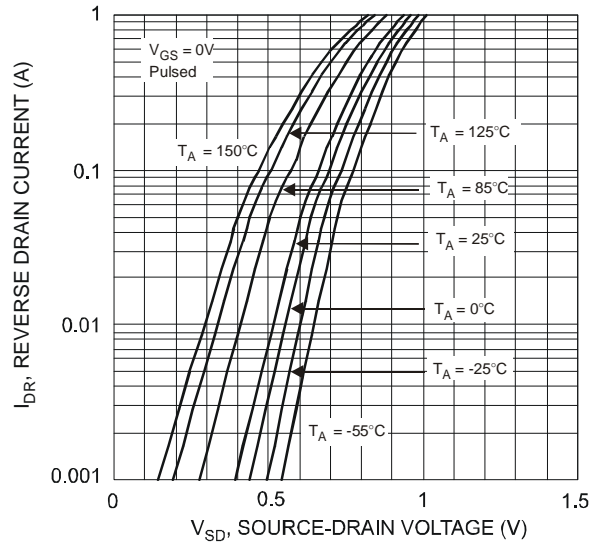


Fig. 17 Reverse Drain Current vs. Source-Drain Voltage

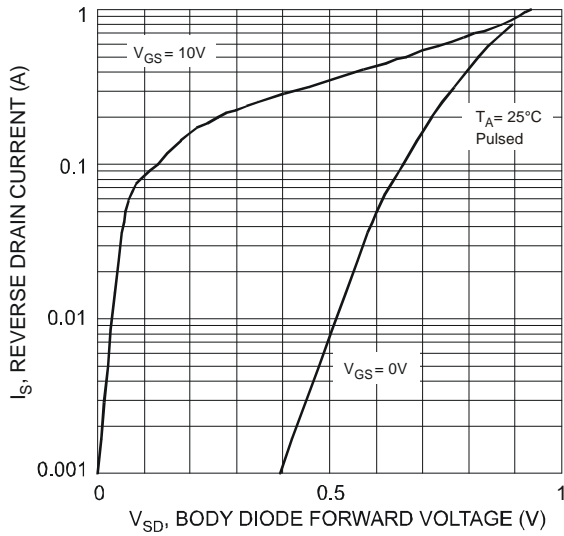


Fig. 18 Reverse Drain Current vs. Source-Drain Voltage

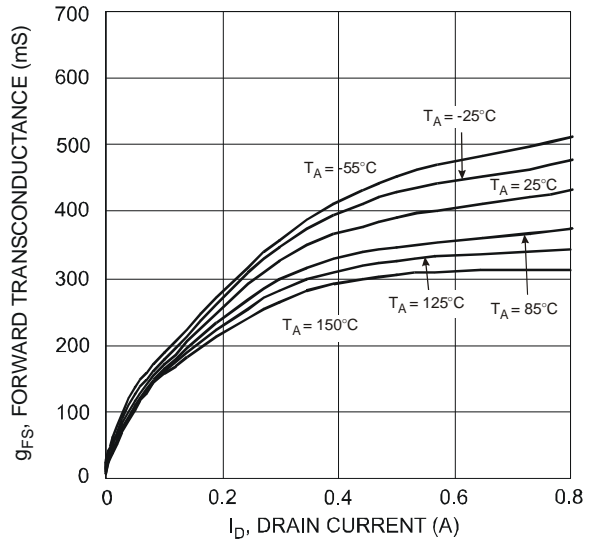


Fig. 19 Forward Transconductance vs. Drain Current ($V_{DS} > I_D * R_{DS(ON)}$)

Application Details

PNP Transistor and ESD Protected N-MOSFET integrated as one in LMN400E01 can be used as a discrete entity for general application or as an integrated circuit to function as a Load Switch. When it is used as the latter as shown in Fig. 20, various input voltage sources can be used as long as it does not exceed the maximum ratings of the device. These devices are designed to deliver continuous output load current up to a maximum of 400 mA. The MOSFET Switch draws no current, hence loading of control circuitry is prevented. Care must be taken for higher levels of dissipation while designing for higher load conditions. These devices provide high power and also consume less space. The product mainly helps in optimizing power usage, thereby conserving battery life in a controlled load system like portable battery powered applications. (Please see Fig. 21 for one example of a typical application circuit used in conjunction with a voltage regulator as a part of power management system).

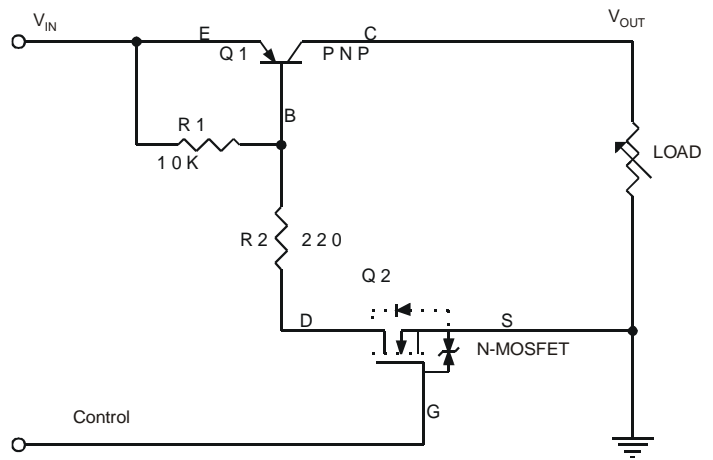


Fig. 20 Circuit Diagram


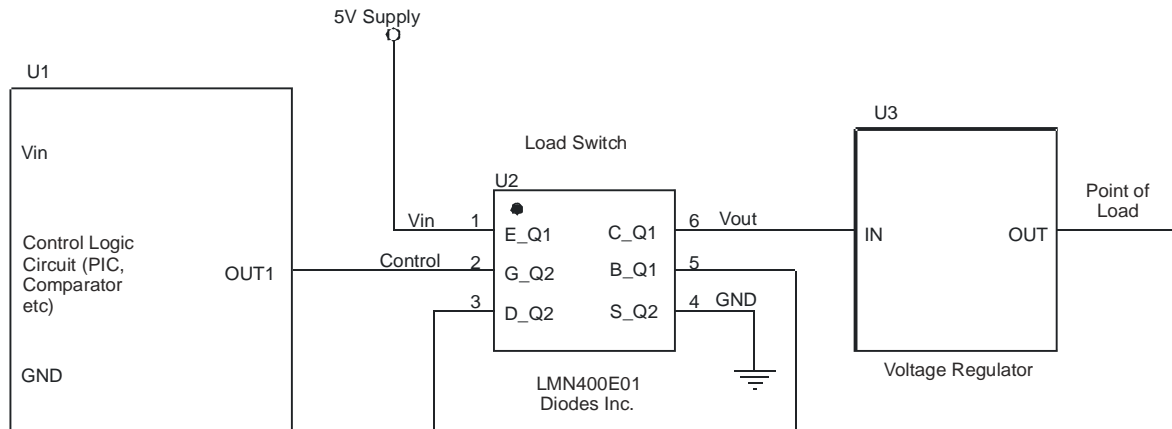



Fig. 21 Typical Application Circuit

Package Outline Dimensions

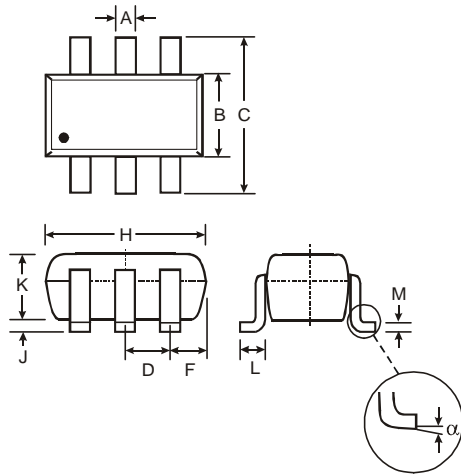

| SOT-363 | | |
|----------------------|--------------|------|
| Dim | Min | Max |
| A | 0.10 | 0.30 |
| B | 1.15 | 1.35 |
| C | 2.00 | 2.20 |
| D | 0.65 Nominal | |
| F | 0.30 | 0.40 |
| H | 1.80 | 2.20 |
| J | - | 0.10 |
| K | 0.90 | 1.00 |
| L | 0.25 | 0.40 |
| M | 0.10 | 0.25 |
| α | 0° | 8° |
| All Dimensions in mm | | |

Suggested Pad Layout

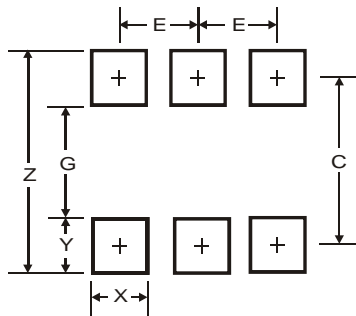

| Dimensions | Value (mm) |
|------------|------------|
| Z | 2.5 |
| G | 1.3 |
| X | 0.42 |
| Y | 0.6 |
| C | 1.9 |
| E | 0.65 |

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2011, Diodes Incorporated

www.diodes.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.