

WT

Chip Type, Wide Temperature Range

series




For SMD



Smaller

Anti-Solvent  
Feature



- Chip type operating over wide temperature range of to  $-55$  to  $+105^{\circ}\text{C}$ .
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2002/95/EC).




## Specifications

| Item                          | Performance Characteristics                                                                                                                                                                                                             |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|------|--------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----|
| Category Temperature Range    | -55 to +105°C                                                                                                                                                                                                                           |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
| Rated Voltage Range           | 4 to 50V                                                                                                                                                                                                                                |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
| Rated Capacitance Range       | 0.1 to 1500μF                                                                                                                                                                                                                           |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                     |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
| Leakage Current               | After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA) , whichever is greater.                                                                                                                |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C                                                                                                                                                                                                   |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
|                               | Rated voltage (V)                                                                                                                                                                                                                       | 4               | 6.3  | 10   | 16                 | 25   | 35                                                                                                                                                                     | 50   |    |
|                               | tan δ (MAX.)                                                                                                                                                                                                                            | 0.40            | 0.30 | 0.24 | 0.20               | 0.16 | 0.14                                                                                                                                                                   | 0.14 |    |
| Stability at Low Temperature  | Measurement frequency : 120Hz                                                                                                                                                                                                           |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
|                               | Rated voltage (V)                                                                                                                                                                                                                       |                 | 4    | 6.3  | 10                 | 16   | 25                                                                                                                                                                     | 35   | 50 |
|                               | Impedance ratio                                                                                                                                                                                                                         | Z-25°C / Z+20°C | 7    | 4    | 3                  | 2    | 2                                                                                                                                                                      | 2    | 2  |
|                               | ZT / Z20 (MAX.)                                                                                                                                                                                                                         | Z-40°C / Z+20°C | 15   | 8    | 8                  | 4    | 4                                                                                                                                                                      | 3    | 3  |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.                                                                                    |                 |      |      | Capacitance change |      | Within ±25% of the initial capacitance value for capacitors of ø3mm unit, and 16V or less. Within ±20% of the initial capacitance value for capacitors of 25V or more. |      |    |
|                               |                                                                                                                                                                                                                                         |                 |      |      | tan δ              |      | 200% or less than the initial specified value                                                                                                                          |      |    |
|                               |                                                                                                                                                                                                                                         |                 |      |      | Leakage current    |      | Less than or equal to the initial specified value                                                                                                                      |      |    |
| Shelf Life                    | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                 |      |      |                    |      |                                                                                                                                                                        |      |    |
| Resistance to soldering heat  | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.               |                 |      |      | Capacitance change |      | Within ±10% of the initial capacitance value                                                                                                                           |      |    |
|                               |                                                                                                                                                                                                                                         |                 |      |      | tan δ              |      | Less than or equal to the initial specified value                                                                                                                      |      |    |
|                               |                                                                                                                                                                                                                                         |                 |      |      | Leakage current    |      | Less than or equal to the initial specified value                                                                                                                      |      |    |
| Marking                       | Black print on the case top.                                                                                                                                                                                                            |                 |      |      |                    |      |                                                                                                                                                                        |      |    |

## Chip Type

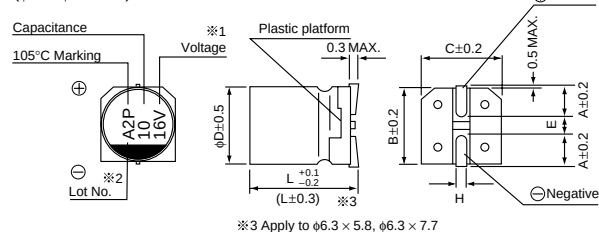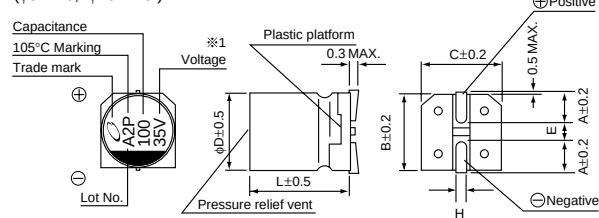( $\phi 3$  to  $\phi 8 \times 5.4$ )( $\phi 8 \times 10$ ,  $\phi 10 \times 10$ )

## Type numbering system (Example : 16V 10 $\mu\text{F}$ )

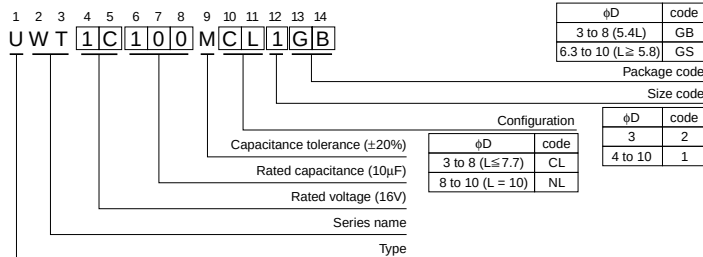

| $\phi D \times L$ | 3 $\times$ 5.4 | 4 $\times$ 5.4 | 5 $\times$ 5.4 | 6.3 $\times$ 5.4 | 6.3 $\times$ 5.8 | 6.3 $\times$ 7.7 | 8 $\times$ 5.4 | 8 $\times$ 10 | 10 $\times$ 10 |
|-------------------|----------------|----------------|----------------|------------------|------------------|------------------|----------------|---------------|----------------|
| A                 | 1.5            | 1.8            | 2.1            | 2.4              | 2.4              | 2.4              | 3.3            | 2.9           | 3.2            |
| B                 | 3.3            | 4.3            | 5.3            | 6.6              | 6.6              | 6.6              | 8.3            | 8.3           | 10.3           |
| C                 | 3.3            | 4.3            | 5.3            | 6.6              | 6.6              | 6.6              | 8.3            | 8.3           | 10.3           |
| E                 | 0.8            | 1.0            | 1.3            | 2.2              | 2.2              | 2.2              | 2.3            | 3.1           | 4.5            |
| L                 | 5.4            | 5.4            | 5.4            | 5.4              | 5.8              | 7.7              | 5.4            | 10            | 10             |
| H                 | 0.5 to 0.8     | 0.5 to 0.8     | 0.5 to 0.8     | 0.5 to 0.8       | 0.5 to 0.8       | 0.5 to 0.8       | 0.5 to 0.8     | 0.8 to 1.1    | 0.8 to 1.1     |

● Dimension table in next page.

## ■Dimensions

| Cap. (μF) | V   | 4       |          | 6.3     |          | 10      |     | 16        |         | 25        |         | 35      |         | 50         |           |
|-----------|-----|---------|----------|---------|----------|---------|-----|-----------|---------|-----------|---------|---------|---------|------------|-----------|
|           |     | 0G      |          | 0J      |          | 1A      |     | 1C        |         | 1E        |         | 1V      |         | 1H         |           |
| 0.1       | 0R1 |         |          |         |          |         |     |           |         |           |         |         |         | 4×5.4 (3)  | 1.0       |
| 0.22      | R22 |         |          |         |          |         |     |           |         |           |         |         |         | 4×5.4 (3)  | 2.6       |
| 0.33      | R33 |         |          |         |          |         |     |           |         |           |         |         |         | 4×5.4 (3)  | 3.2       |
| 0.47      | R47 |         |          |         |          |         |     |           |         |           |         |         |         | 4×5.4 (3)  | 3.8       |
| 1         | 010 |         |          |         |          |         |     |           |         |           |         |         |         | 4×5.4 (3)  | 6.3 (5.9) |
| 2.2       | 2R2 |         |          |         |          |         |     |           |         |           |         | 3×5.4   | 7.5     | 4×5.4 (3)  | 11 (9)    |
| 3.3       | 3R3 |         |          |         |          |         |     |           |         |           |         | 3×5.4   | 9       | 4×5.4      | 14        |
| 4.7       | 4R7 |         |          |         |          |         |     |           |         | 4×5.4 (3) | 13 (10) | 4×5.4   | 15      | 5×5.4      | 19        |
| 10        | 100 |         |          |         |          |         |     | 4×5.4 (3) | 18 (14) | 5×5.4     | 23      | 5×5.4   | 25      | 6.3×5.4    | 30        |
| 22        | 220 | 4×5.4   | 22       | 4×5.4   | 22       | 5×5.4   | 27  | 5×5.4     | 30      | 6.3×5.4   | 38      | 6.3×5.4 | 42      | ● 8×5.4    | 51 (45)   |
| 33        | 330 | 5×5.4   | 30       | 5×5.4   | 30       | 5×5.4   | 35  | 6.3×5.4   | 40      | 6.3×5.4   | 48      | ● 8×5.4 | 59 (52) | 6.3×7.7    | 60        |
| 47        | 470 | 5×5.4   | 36       | 5×5.4   | 36       | 6.3×5.4 | 46  | 6.3×5.4   | 50      | ● 8×5.4   | 66 (59) | 6.3×5.8 | 63      | 6.3×7.7    | 63        |
| 100       | 101 | 6.3×5.4 | 60       | 6.3×5.4 | 60       | 6.3×5.4 | 60  | 6.3×5.4   | 60      | 6.3×7.7   | 91      | 6.3×7.7 | 84      | 8×10       | 140       |
| 150       | 151 | 6.3×5.8 | 86       | 6.3×5.8 | 86       | 6.3×5.8 | 86  | 6.3×7.7   | 95      | 8×10      | 140     | 8×10    | 155     | 10×10      | 180       |
| 220       | 221 | ● 8×5.4 | 102 (91) | ● 8×5.4 | 102 (91) | 6.3×7.7 | 105 | 6.3×7.7   | 105     | 8×10      | 155     | 8×10    | 190     | 10×10      | 220       |
| 330       | 331 | 6.3×7.7 | 105      | 6.3×7.7 | 105      | 8×10    | 195 | 8×10      | 195     | 8×10      | 190     | 10×10   | 300     |            |           |
| 470       | 471 | 8×10    | 210      | 8×10    | 210      | 8×10    | 210 | 8×10      | 230     | 10×10     | 300     |         |         |            |           |
| 680       | 681 | 8×10    | 210      | 8×10    | 210      | 10×10   | 310 | 10×10     | 310     |           |         |         |         |            |           |
| 1000      | 102 | 8×10    | 230      | 8×10    | 230      | 10×10   | 310 |           |         |           |         |         |         | Case size  | Rated     |
| 1500      | 152 | 10×10   | 310      | 10×10   | 310      |         |     |           |         |           |         |         |         | φ D×L (mm) | ripple    |

Rated ripple current (mArms) at 105°C 120Hz

( ) is also available with φ3mm upon request. In such a case, [2] will be put at 12th digit of type numbering system.

Size φ6.3×5.8 is available for capacitors marked. "●". In such a case, [6] will be put at 12th digit of type numbering system.

## ●Frequency coefficient of rated ripple current

| Frequency   | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|-------------|-------|--------|--------|-------|----------------|
| Coefficient | 0.70  | 1.00   | 1.17   | 1.36  | 1.50           |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UX(p.110), UJ(p.116) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.