

**Microsemi**  
POWER PRODUCTS GROUP

APT2x61DQ100J 1000V 60A  
APT2x60DQ100J 1000V 60A

## DUAL DIE ISOTOP® PACKAGE

## ULTRAFAST SOFT RECOVERY RECTIFIER DIODE

| PRODUCT APPLICATIONS   | PRODUCT FEATURES  | PRODUCT BENEFITS  |
|--|---|---|
| <ul style="list-style-type: none"> <li>• Anti-Parallel Diode               <ul style="list-style-type: none"> <li>-Switchmode Power Supply</li> <li>-Inverters</li> </ul> </li> <li>• Free Wheeling Diode               <ul style="list-style-type: none"> <li>-Motor Controllers</li> <li>-Converters</li> </ul> </li> <li>• Snubber Diode</li> <li>• Uninterruptible Power Supply (UPS)</li> <li>• Induction Heating</li> <li>• High Speed Rectifiers</li> </ul> | <ul style="list-style-type: none"> <li>• Ultrafast Recovery Times</li> <li>• Soft Recovery Characteristics</li> <li>• Popular SOT-227 Package</li> <li>• Low Forward Voltage</li> <li>• High Blocking Voltage</li> <li>• Low Leakage Current</li> <li>• Avalanche Energy Rated</li> </ul> | <ul style="list-style-type: none"> <li>• Low Losses</li> <li>• Low Noise Switching</li> <li>• Cooler Operation</li> <li>• Higher Reliability Systems</li> <li>• Increased System Power Density</li> </ul> |

### MAXIMUM RATINGS

All Ratings:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

| Symbol         | Characteristic / Test Conditions   | APT2x61_60DQ100J | UNIT             |
|----------------|--|------------------|------------------|
| $V_R$          | Maximum D.C. Reverse Voltage   | 1000             | Volts            |
| $V_{RRM}$      | Maximum Peak Repetitive Reverse Voltage  |                  |                  |
| $V_{RWM}$      | Maximum Working Peak Reverse Voltage   |                  |                  |
| $I_{F(AV)}$    | Maximum Average Forward Current ( $T_C = 90^\circ\text{C}$ , Duty Cycle = 0.5) | 60               | Amps             |
| $I_{F(RMS)}$   | RMS Forward Current (Square wave, 50% duty)                                    | 77               |                  |
| $I_{FSM}$      | Non-Repetitive Forward Surge Current ( $T_J = 45^\circ\text{C}$ , 8.3ms)       | 540              |                  |
| $E_{AVL}$      | Avalanche Energy (1A, 40mH)  | 20               | mJ               |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range  | -55 to 175       | $^\circ\text{C}$ |

### STATIC ELECTRICAL CHARACTERISTICS

| Symbol   | Characteristic / Test Conditions          | MIN | TYP   | MAX  | UNIT |               |
|----------|---|-----|---|------|------|---------------|
| $V_F$    | Forward Voltage                           |     | $I_F = 60\text{A}$                            | 2.2  | 2.8  | Volts         |
|          |   |     | $I_F = 120\text{A}$                           | 2.67 |      |               |
|          |   |     | $I_F = 60\text{A}, T_J = 125^\circ\text{C}$   | 1.68 |      |               |
| $I_{RM}$ | Maximum Reverse Leakage Current           |     | $V_R = 1000\text{V}$                          |      | 100  | $\mu\text{A}$ |
|          |   |     | $V_R = 1000\text{V}, T_J = 125^\circ\text{C}$ |      | 500  |               |
| $C_T$    | Junction Capacitance, $V_R = 200\text{V}$ |     | 80  |      | pF   |               |

# DYNAMIC CHARACTERISTICS

APT2x61\_60DQ100J

| Symbol    | Characteristic                   | Test Conditions  | MIN | TYP  | MAX | UNIT |
|-----------|----------------------------------|--|-----|------|-----|------|
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 1A, di_F/dt = -100A/\mu s, V_R = 30V, T_J = 25^\circ C$     | -   | 36   |     | ns   |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 60A, di_F/dt = -200A/\mu s, V_R = 667V, T_C = 25^\circ C$   | -   | 235  |     |      |
| $Q_{rr}$  | Reverse Recovery Charge          |  | -   | 445  |     | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |  | -   | 5    | -   | Amps |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 60A, di_F/dt = -200A/\mu s, V_R = 667V, T_C = 125^\circ C$  | -   | 285  |     | ns   |
| $Q_{rr}$  | Reverse Recovery Charge          |  | -   | 2290 |     | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |  | -   | 13   | -   | Amps |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 60A, di_F/dt = -1000A/\mu s, V_R = 667V, T_C = 125^\circ C$ | -   | 125  |     | ns   |
| $Q_{rr}$  | Reverse Recovery Charge          |  | -   | 4170 |     | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |  | -   | 50   |     | Amps |

# THERMAL AND MECHANICAL CHARACTERISTICS

| Symbol          | Characteristic / Test Conditions   | MIN  | TYP  | MAX | UNIT         |
|-----------------|--|------|------|-----|--------------|
| $R_{\theta JC}$ | Junction-to-Case Thermal Resistance  |      |      | .56 | $^\circ C/W$ |
| $V_{Isolation}$ | RMS Voltage (50-60Hz Sinusoidal Waveform From Terminals to Mounting Base for 1 Min.) | 2500 |      |     | Volts        |
| $W_T$           | Package Weight   |      | 1.03 |     | oz           |
|                 |  |      | 29.2 |     | g            |
| Torque          | Maximum Mounting Torque  |      |      | 10  | lb•in        |
|                 |  |      |      | 1.1 | N•m          |

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

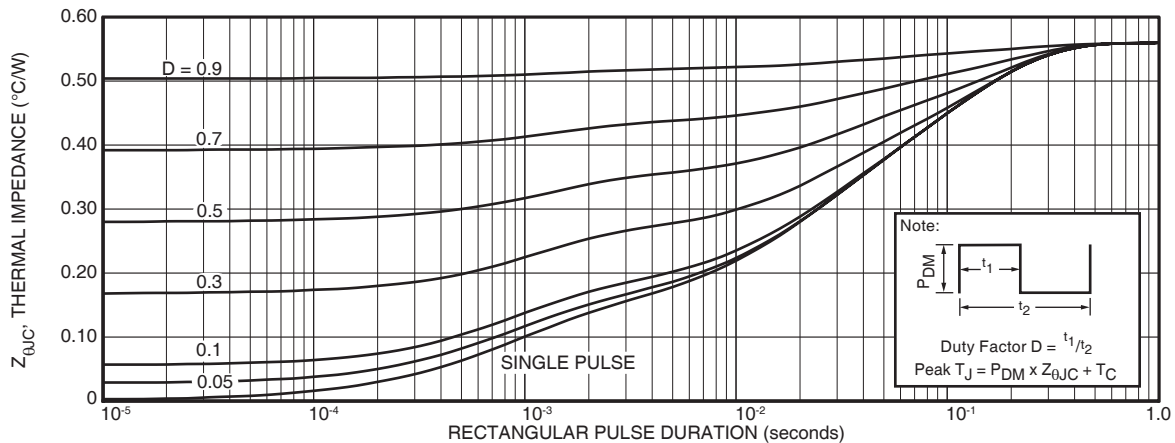


FIGURE 1a. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

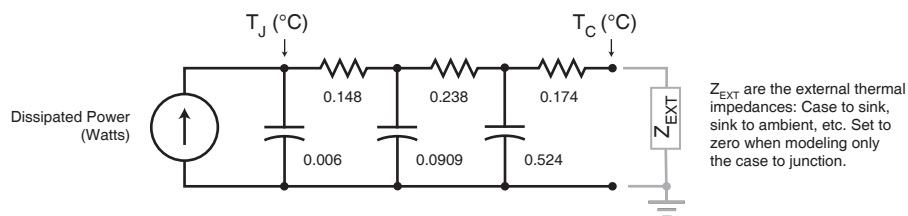


FIGURE 1b. TRANSIENT THERMAL IMPEDANCE MODEL

# TYPICAL PERFORMANCE CURVES

APT2x61\_60DQ100J

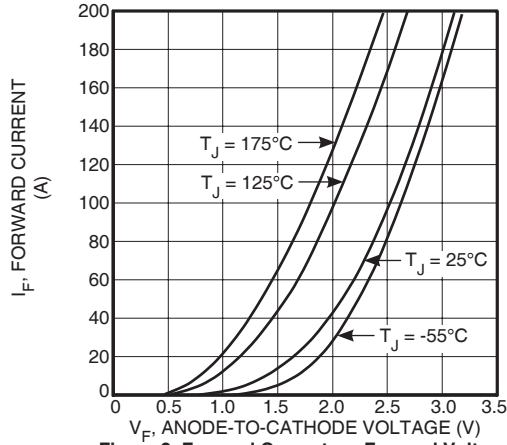


Figure 2. Forward Current vs. Forward Voltage

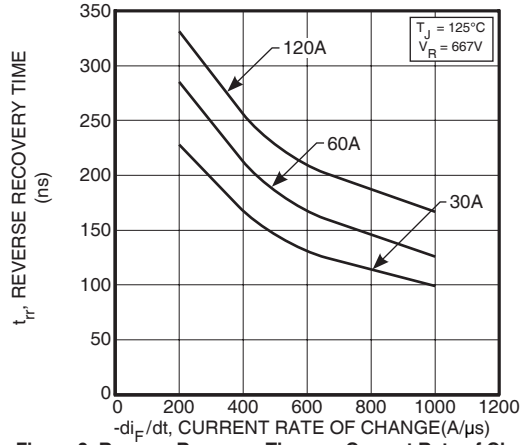


Figure 3. Reverse Recovery Time vs. Current Rate of Change

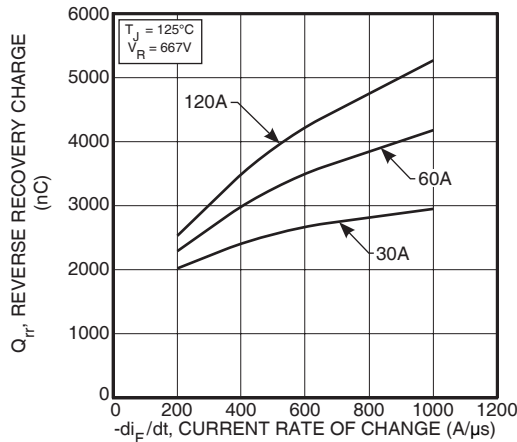


Figure 4. Reverse Recovery Charge vs. Current Rate of Change

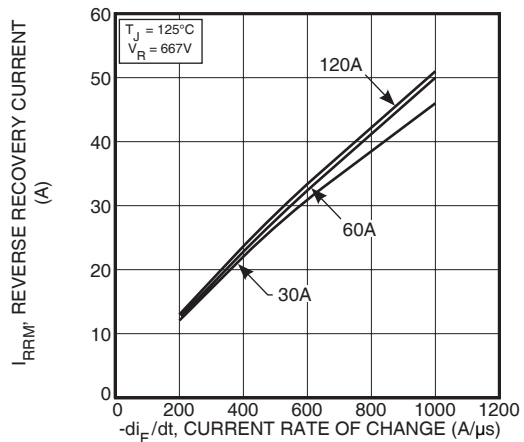


Figure 5. Reverse Recovery Current vs. Current Rate of Change

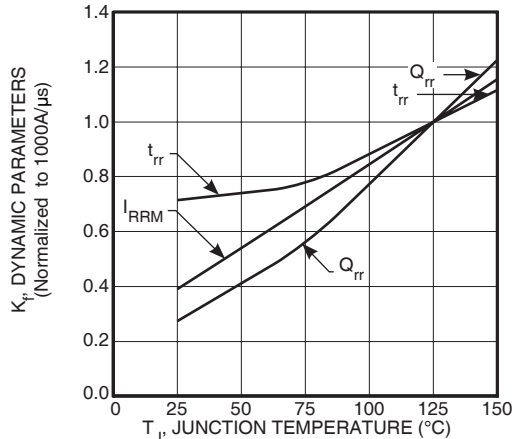


Figure 6. Dynamic Parameters vs. Junction Temperature

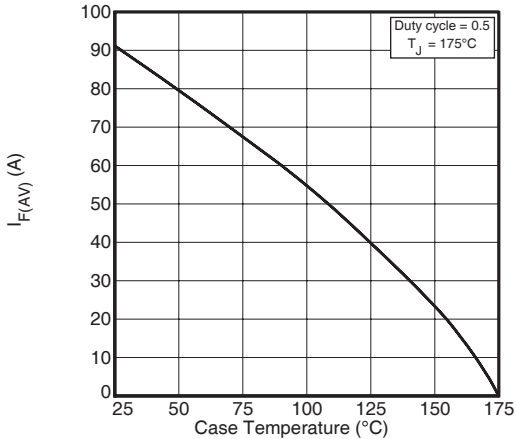


Figure 7. Maximum Average Forward Current vs. Case Temperature

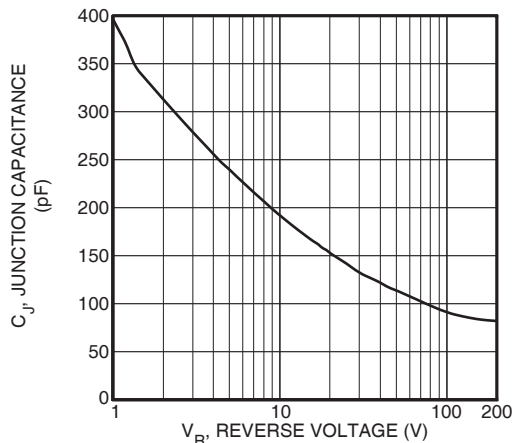


Figure 8. Junction Capacitance vs. Reverse Voltage

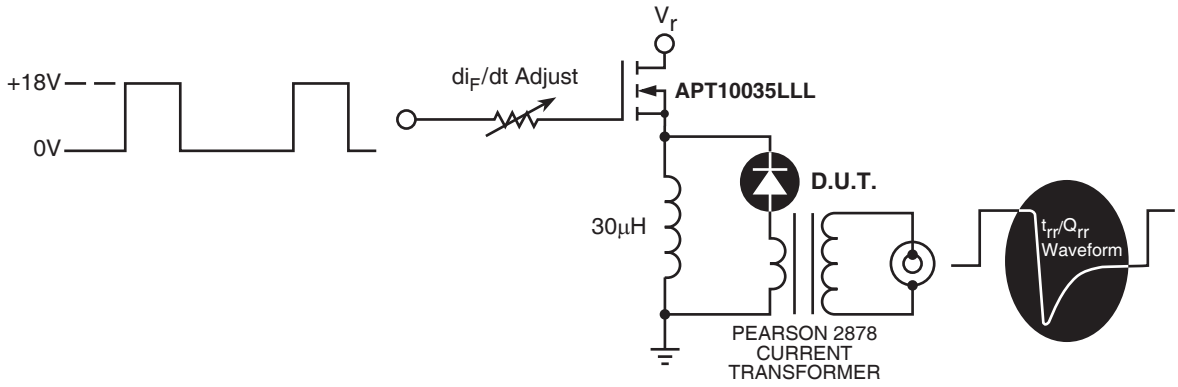


Figure 9. Diode Test Circuit

- 1  $I_F$  - Forward Conduction Current
- 2  $di_F/dt$  - Rate of Diode Current Change Through Zero Crossing.
- 3  $I_{RRM}$  - Maximum Reverse Recovery Current.
- 4  $t_{rr}$  - Reverse Recovery Time, measured from zero crossing where diode current goes from positive to negative, to the point at which the straight line through  $I_{RRM}$  and  $0.25 \cdot I_{RRM}$  passes through zero.
- 5  $Q_{rr}$  - Area Under the Curve Defined by  $I_{RRM}$  and  $t_{rr}$ .



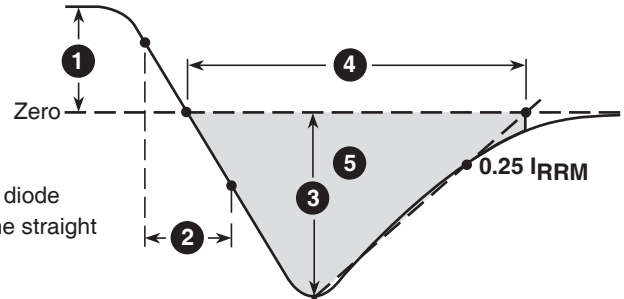


Figure 10, Diode Reverse Recovery Waveform and Definitions

SOT-227 (ISOTOP®) Package Outline

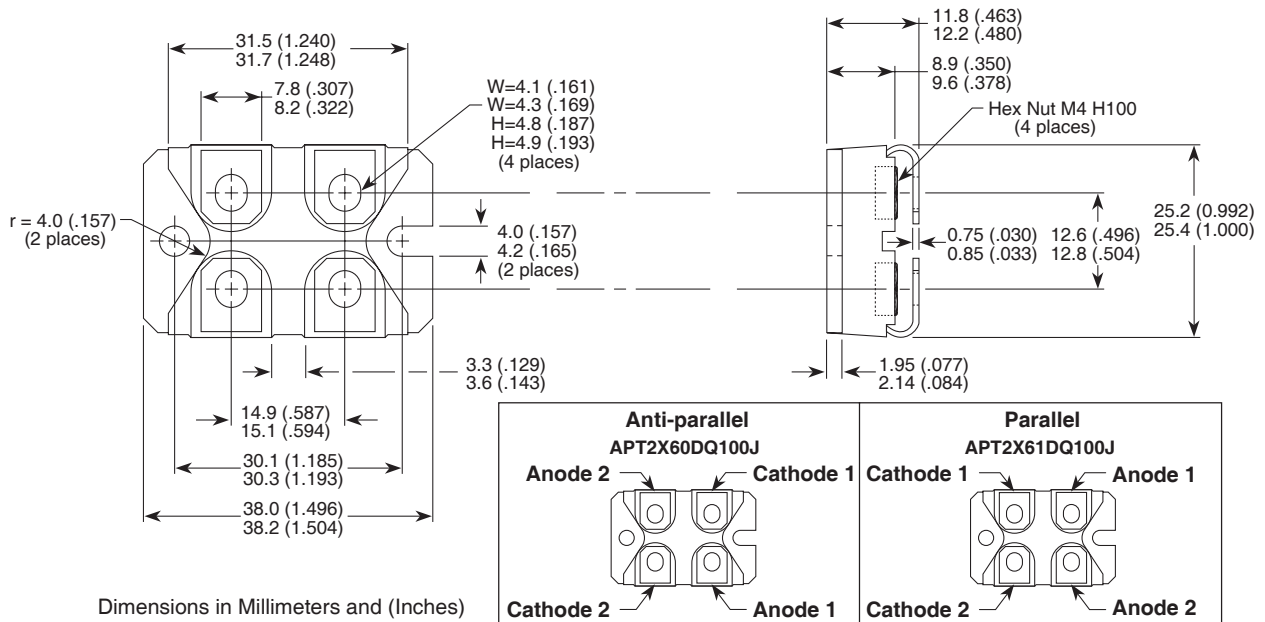

Dimensions in Millimeters and (Inches)

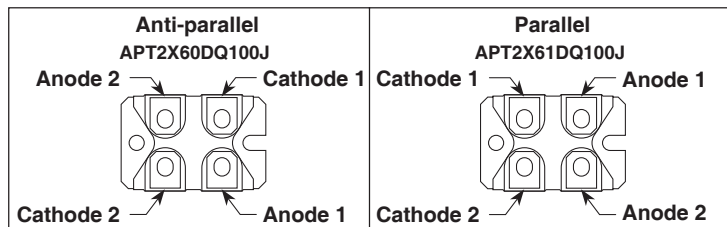



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.