

# TS series

Proportional miniature thumb controls •  
non-contacting Hall effect technology



## DISTINCTIVE FEATURES

- One or two axis
- Analog, PWM or USB outputs
- IP67 Above panel sealing mounting
- Rear or drop-in mounting
- Pushbutton option



## ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Storage Temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Above Panel Sealing: IP67, IP69K<sup>1</sup> (subject to mounting style & final specifications)
- EMC Immunity Level: EN61000-4-3
- EMC Emissions Level: EN61000-6-3:2001
- ESD: EN61000-4-2



## SENSOR SPECIFICATIONS

- Technology: Hall effect sensors, single or dual
- Supply Voltage Range: 5.00 V ± 0.01 VDC
- Supply Current: 11 mA max
- Ratiometric Output Options: See options
- Reverse Polarity max: -10 V
- Transient overvoltage max: 16 V
- Start-up time: 15 ms max
- Output Impedance: 2Ω
- Return to Center Voltage Tolerance: ± 200 mV initial



U.S. Patent #D816,169 S  
U.S. Patent #D732,047 S  
U.S. Patent #D816,169 S  
U.S. Patent #D734,138 S

The company reserves the right to change specifications without notice.

# TS series

Proportional miniature thumb controls • non-contacting Hall effect technology



## MECHANICAL SPECIFICATIONS

- Operating Force: 3.1 N ± 0.5 N (0.70 lbf ± 0.11 lbf)<sup>2</sup>
- Maximum Vertical Load: 200 N (45 lbf)<sup>2</sup>
- Maximum Horizontal Load: 150 N (33.7 lbf)<sup>2</sup>
- Mechanical Angle of Movement: 50° X & Y axis (subject to limiter plate)
- Expected Life: 1 million cycles
- Mass/Weight: 18.25 g ± 5.0 g (0.64 oz ± 0.18 oz)
- Lever Action (centering): Spring

<sup>1</sup> All options are IP68 and IP69K rated, however drop-in mounting does not prevent panel ingress.

<sup>2</sup> Force applied to the top of the castle cap.



## MATERIALS

- Body: Glass filled nylon
- Threaded Housing: Black oxide plated brass
- Boot: Silicone
- Handles:
  - 1, 2, 3, E, F, G - Glass filled nylon
  - 4, 5, 6, 7, 8 - Silicone
  - B, C, D - Thermoplastic elastomer
  - H - Polycarbonate

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.



## CONNECTIONS

WIRING SPECIFICATION  
(Termination options 1 & 2)

Black	Ground & button common, or LED common
Red	Power (5 V) <sup>1</sup>
Blue	X axis output (alpha)
Yellow	Y axis output (alpha)
Orange	Pushbutton switch (option 6 handle) or LED supply (option H handle) <sup>2 2</sup>
Blue/White Stripe	X axis output (beta)
Yellow/Black Stripe	Y axis output (beta)
Red/White Stripe	Power (5 V) (beta)
Black/White Stripe	Ground (beta)

<sup>1</sup> Hall sensor and LED supply (LED control option 1)

<sup>2</sup> User controllable (LED control option 2)



## PUSHBUTTON SWITCH SPECIFICATIONS (OPTION 6 HANDLE)

- Electrical Life: 100,000 cycles
- Rating: 50 mA, 12 VDC.
- Terminal: Brass with silver plating
- Contact Resistance: 100 mΩ max
- Insulation Resistance: 100 MΩ min. 500 VDC
- Dielectric Strength: 250 VAC /1 minute
- Contact Arrangement: 1 pole 1 throw
- Stop Strength: Max 3 kgf vertical static load for 15 seconds
- Operating Temperature: -25 °C to +70 °C (-4 °F to +158 °F)
- Storage Temperature: -30 °C to +85 °C (-22 °F to +158 °F)
- Vibration Resistance: MIL-STD-202F METHOD 201A
- Shock Resistance: MIL-STD-202F METHOD 213B



## LED SPECIFICATIONS (OPTION H HANDLE)

LED CONTROL	OPERATING VOLTAGE	OPERATING CURRENT
1 – ON, driven by joystick supply voltage	-	6 mA
2 – User controlled	5 V	6 mA

Proportional miniature thumb controls • non-contacting Hall effect technology



## NEW OPTIONS AVAILABLE

PLASTIC THREADED HOUSING




LED ILLUMINATION OPTION H HANDLE




## MOUNTING

PLASTIC HOUSING - DROP-IN CUTOUT

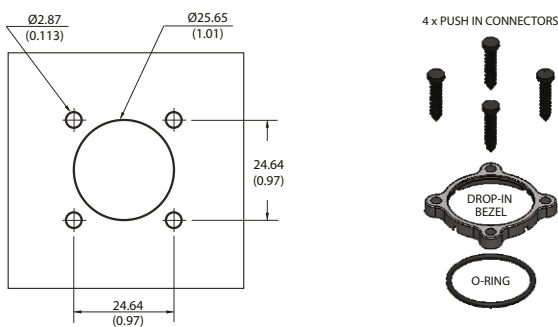

- The under panel depth for the Drop-in configuration is 16.02 mm (0.631 in).


PLASTIC HOUSING - REAR MOUNT OPTION CUTOUT

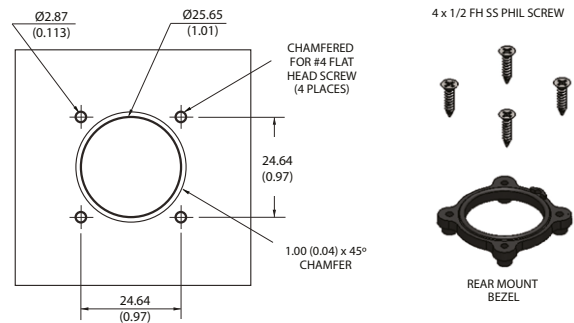

- The maximum panel thickness for the Rear Mount configuration is 2.032 mm (0.08 in).


- Mounting screws can be driven to a recommended torque of 4 lbf.

METAL THREADED HOUSING - DROP-IN CUTOUT

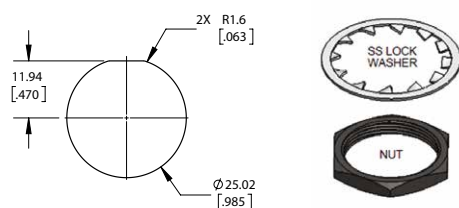

- The under panel depth for the Metal Threaded Housing configuration is 14.55 mm (0.573 in).
- Mounting nut can be tightened to a recommended torque of 10 lbf.

PLASTIC THREADED HOUSING - DROP-IN CUTOUT

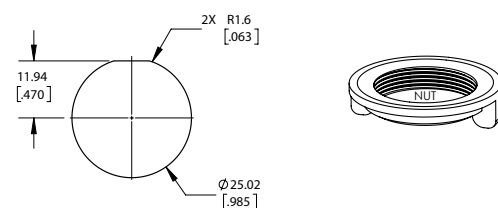

- The under panel depth for the Plastic Threaded Housing configuration is 14.55 mm (0.573 in).
- Mounting nut can be tightened to a recommended torque of 10 lbf.

# TS series

Proportional miniature thumb controls • non-contacting Hall effect technology



## BUILD YOUR PART NUMBER

<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;">TS</div> <p>.....</p> <p><b>SERIES</b></p>	<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>HANDLE<sup>1</sup></b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">0</td> <td style="padding: 2px;">None</td> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">6</td> <td style="padding: 2px;">Pushbutton<sup>1</sup></td> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">D</td> <td style="padding: 2px;">Conical, elastomer</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">1</td> <td style="padding: 2px;">Castle</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">7</td> <td style="padding: 2px;">Mushroom<sup>1</sup></td> <td style="border: 1px solid black; padding: 2px; text-align: center;">E</td> <td style="padding: 2px;">Quadcave</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">2</td> <td style="padding: 2px;">Winged Hat</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">8</td> <td style="padding: 2px;">Low Profile<sup>1</sup></td> <td style="border: 1px solid black; padding: 2px; text-align: center;">F</td> <td style="padding: 2px;">Puck</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">3</td> <td style="padding: 2px;">Conical</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">A</td> <td style="padding: 2px;">Handles 1, 2, 3</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">G</td> <td style="padding: 2px;">Roller</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">4</td> <td style="padding: 2px;">Finger Tip</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">B</td> <td style="padding: 2px;">Castle, elastomer</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">H</td> <td style="padding: 2px;">Castle, LED illumination</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">5</td> <td style="padding: 2px;">Round Jog</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">C</td> <td style="padding: 2px;">Winged Hat, elastomer</td> <td></td> <td></td> </tr> </table>	0	None	6	Pushbutton <sup>1</sup>	D	Conical, elastomer	1	Castle	7	Mushroom <sup>1</sup>	E	Quadcave	2	Winged Hat	8	Low Profile <sup>1</sup>	F	Puck	3	Conical	A	Handles 1, 2, 3	G	Roller	4	Finger Tip	B	Castle, elastomer	H	Castle, LED illumination	5	Round Jog	C	Winged Hat, elastomer			<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>MOUNTING OPTIONS</b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">N</td> <td style="padding: 2px;">None</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">D</td> <td style="padding: 2px;">Drop-in</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">R</td> <td style="padding: 2px;">Rear mount</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">A</td> <td style="padding: 2px;">Drop-in and Rear Mount</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">T</td> <td style="padding: 2px;">Threaded housing, Metal</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">P</td> <td style="padding: 2px;">Threaded housing, Plastic</td> </tr> </table>	N	None	D	Drop-in	R	Rear mount	A	Drop-in and Rear Mount	T	Threaded housing, Metal	P	Threaded housing, Plastic	<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>TERMINATION<sup>2</sup></b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">1</td> <td style="padding: 2px;">22 AWG 25 cm PTFE<sup>2,1</sup></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">2</td> <td style="padding: 2px;">28 AWG 25 cm PTFE<sup>2,2</sup></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">3</td> <td style="padding: 2px;">72" Overmold Cable with USB Male Type Connector</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">4</td> <td style="padding: 2px;">2.54 mm (0.100") Pitch TE Connector</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">5</td> <td style="padding: 2px;">2.54 mm (0.100") Pitch TE Connector with 10" Mating Harness</td> </tr> </table>	1	22 AWG 25 cm PTFE <sup>2,1</sup>	2	28 AWG 25 cm PTFE <sup>2,2</sup>	3	72" Overmold Cable with USB Male Type Connector	4	2.54 mm (0.100") Pitch TE Connector	5	2.54 mm (0.100") Pitch TE Connector with 10" Mating Harness	<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>LIMITER</b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">U</td> <td style="padding: 2px;">Single axis</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">S</td> <td style="padding: 2px;">Square</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">G</td> <td style="padding: 2px;">Guided feel</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">P</td> <td style="padding: 2px;">Plus</td> <td style="padding: 2px;"></td> </tr> </table>	U	Single axis		S	Square		G	Guided feel		P	Plus	
0	None	6	Pushbutton <sup>1</sup>	D	Conical, elastomer																																																																					
1	Castle	7	Mushroom <sup>1</sup>	E	Quadcave																																																																					
2	Winged Hat	8	Low Profile <sup>1</sup>	F	Puck																																																																					
3	Conical	A	Handles 1, 2, 3	G	Roller																																																																					
4	Finger Tip	B	Castle, elastomer	H	Castle, LED illumination																																																																					
5	Round Jog	C	Winged Hat, elastomer																																																																							
N	None																																																																									
D	Drop-in																																																																									
R	Rear mount																																																																									
A	Drop-in and Rear Mount																																																																									
T	Threaded housing, Metal																																																																									
P	Threaded housing, Plastic																																																																									
1	22 AWG 25 cm PTFE <sup>2,1</sup>																																																																									
2	28 AWG 25 cm PTFE <sup>2,2</sup>																																																																									
3	72" Overmold Cable with USB Male Type Connector																																																																									
4	2.54 mm (0.100") Pitch TE Connector																																																																									
5	2.54 mm (0.100") Pitch TE Connector with 10" Mating Harness																																																																									
U	Single axis																																																																									
S	Square																																																																									
G	Guided feel																																																																									
P	Plus																																																																									
	<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>OUTPUT OPTIONS<sup>4</sup></b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">00</td> <td style="padding: 2px;">0 V to 5 V</td> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">06</td> <td style="padding: 2px;">0.5 V to 4.5 V - Sensor 1 0.5 V to 4.5 V - Sensor 2</td> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">11</td> <td style="padding: 2px;">1 V to 4 V - Sensor 1 4 V to 1 V - Sensor 2</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">01</td> <td style="padding: 2px;">0.25 V to 4.75 V</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">07</td> <td style="padding: 2px;">1 V to 4 V - Sensor 1 1 V to 4 V - Sensor 2</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">12</td> <td style="padding: 2px;">Customer specified</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">02</td> <td style="padding: 2px;">0.5 V to 4.5 V</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">08</td> <td style="padding: 2px;">0 V to 5 V - Sensor 1 5 V to 0 V - Sensor 2</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">13</td> <td style="padding: 2px;">PWM<sup>3</sup></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">03</td> <td style="padding: 2px;">1 V to 4 V</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">09</td> <td style="padding: 2px;">0.5 V to 4.5 V - Sensor 1 4.5 V to 0.5 V - Sensor 2</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">14</td> <td style="padding: 2px;">USB (Game Controller)</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">04</td> <td style="padding: 2px;">0 V to 5 V - Sensor 1 0 V to 5 V - Sensor 2</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">10</td> <td style="padding: 2px;">0.25 V to 4.75 V - Sensor 1 4.75 V to 0.25 V - Sensor 2</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">15</td> <td style="padding: 2px;">Joyball (Cursor emulation)</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">05</td> <td style="padding: 2px;">0.25 V to 4.75 V - Sensor 1 0.25 V to 4.75 V - Sensor 2</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	00	0 V to 5 V	06	0.5 V to 4.5 V - Sensor 1 0.5 V to 4.5 V - Sensor 2	11	1 V to 4 V - Sensor 1 4 V to 1 V - Sensor 2	01	0.25 V to 4.75 V	07	1 V to 4 V - Sensor 1 1 V to 4 V - Sensor 2	12	Customer specified	02	0.5 V to 4.5 V	08	0 V to 5 V - Sensor 1 5 V to 0 V - Sensor 2	13	PWM <sup>3</sup>	03	1 V to 4 V	09	0.5 V to 4.5 V - Sensor 1 4.5 V to 0.5 V - Sensor 2	14	USB (Game Controller)	04	0 V to 5 V - Sensor 1 0 V to 5 V - Sensor 2	10	0.25 V to 4.75 V - Sensor 1 4.75 V to 0.25 V - Sensor 2	15	Joyball (Cursor emulation)	05	0.25 V to 4.75 V - Sensor 1 0.25 V to 4.75 V - Sensor 2					<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>LED CONTROL</b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">BLANK</td> <td style="padding: 2px;">No illumination</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">1</td> <td style="padding: 2px;">ON, driven by joystick supply voltage<sup>6</sup></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">2</td> <td style="padding: 2px;">User controlled<sup>7</sup></td> </tr> </table>	BLANK	No illumination	1	ON, driven by joystick supply voltage <sup>6</sup>	2	User controlled <sup>7</sup>	<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>POWER SUPPLY OPTIONS</b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">A</td> <td style="padding: 2px;">Single</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">B</td> <td style="padding: 2px;">Independent<sup>5</sup></td> </tr> </table>	A	Single	B	Independent <sup>5</sup>	<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;"> </div> <p>.....</p> <p><b>LED COLOR</b></p> <table border="0"> <tr> <td style="border: 1px solid black; padding: 2px; width: 40px; text-align: center;">BLANK</td> <td style="padding: 2px;">No illumination</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">BB</td> <td style="padding: 2px;">Blue</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">RR</td> <td style="padding: 2px;">Red</td> </tr> </table>	BLANK	No illumination	BB	Blue	RR	Red																		
00	0 V to 5 V	06	0.5 V to 4.5 V - Sensor 1 0.5 V to 4.5 V - Sensor 2	11	1 V to 4 V - Sensor 1 4 V to 1 V - Sensor 2																																																																					
01	0.25 V to 4.75 V	07	1 V to 4 V - Sensor 1 1 V to 4 V - Sensor 2	12	Customer specified																																																																					
02	0.5 V to 4.5 V	08	0 V to 5 V - Sensor 1 5 V to 0 V - Sensor 2	13	PWM <sup>3</sup>																																																																					
03	1 V to 4 V	09	0.5 V to 4.5 V - Sensor 1 4.5 V to 0.5 V - Sensor 2	14	USB (Game Controller)																																																																					
04	0 V to 5 V - Sensor 1 0 V to 5 V - Sensor 2	10	0.25 V to 4.75 V - Sensor 1 4.75 V to 0.25 V - Sensor 2	15	Joyball (Cursor emulation)																																																																					
05	0.25 V to 4.75 V - Sensor 1 0.25 V to 4.75 V - Sensor 2																																																																									
BLANK	No illumination																																																																									
1	ON, driven by joystick supply voltage <sup>6</sup>																																																																									
2	User controlled <sup>7</sup>																																																																									
A	Single																																																																									
B	Independent <sup>5</sup>																																																																									
BLANK	No illumination																																																																									
BB	Blue																																																																									
RR	Red																																																																									

<sup>1</sup> Pushbutton, Mushroom and Low profile handle not available with P (threaded housing, plastic),

<sup>2,1</sup> Wires are thick, robust, and best suited for stand alone applications.

<sup>2,2</sup> Wires are thin and best suited for tightly constrained wire routing.

<sup>3</sup> Contact factory for PWM configuration.

<sup>4</sup> Output voltage is ratiometric to supply voltage.

<sup>5</sup> Only available on dual output. Not available with Handle 6 (Pushbutton). Not available with termination options 4 or 5.

<sup>6</sup> LED control is driven by joystick supply voltage. Illumination is constantly on

<sup>7</sup> LED requires independent 5V supply. Illumination is user controlled.

# TS series

Proportional miniature thumb controls • non-contacting Hall effect technology


## PLASTIC HOUSING




## METAL THREADED HOUSING



## PLASTIC THREADED HOUSING

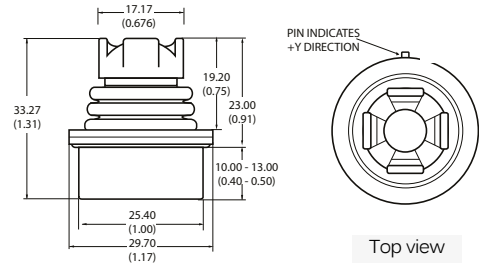


Top view

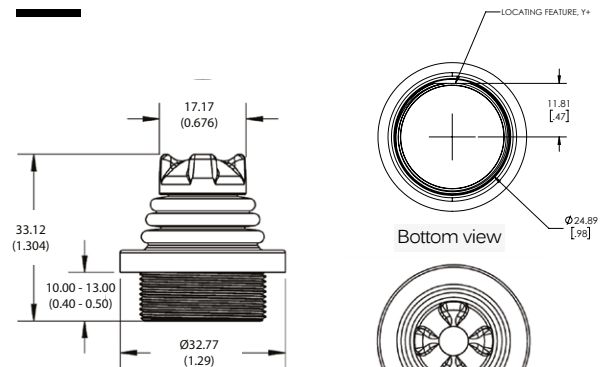

Bottom view

Top view

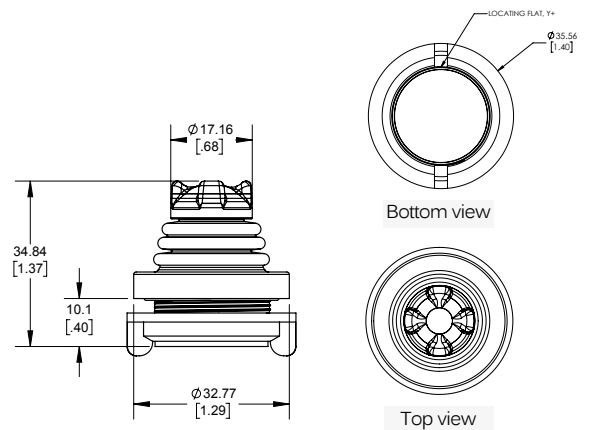

Bottom view


Top view

# TS series


Proportional miniature thumb controls •  
non-contacting Hall effect technology




## HANDLE OPTIONS




1 Castle  
B Castle (elastomer)




2 Winged hat  
C Winged hat (elastomer)




3 Conical  
D Conical (elastomer)

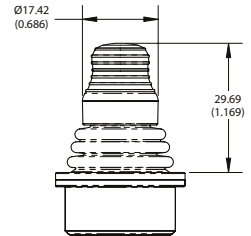


4 Fingertip




5 Round jog




6 Pushbutton




7 Mushroom




8 Low profile




E Quadcave



F Puck



G Roller



H Castle, LED illumination



## USB OPTIONS

### USB : GAME CONTROLLER

Featuring USB 2.0 HID compliant interface. APEM's USB joysticks are recognized as standard HID "game controller" devices. Adhering to the HID specification, APEM's USB joysticks are plug-and-play with most versions of Windows. Joystick button and axis assignments are dependent upon the controlled application.

- Features:
  - USB 2.0 HID compliant "game controller" device
  - Easy to install and operate
  - Functions determined by controlled application
- Supplied wiring: USB Male Type A Connector with 72" overmolded cable


### USB: JOYBALL (CURSOR EMULATION)

The cursor emulation option converts a multi-axis joystick into a mouse or cursor control device

- Applications: The cursor emulation option is ideal for vehicle applications subjected to dirt and high vibration which makes operating a traditional cursor control device difficult. The Cursor Emulation option is widely used in shipboard and military applications.
- Features:
  - HID compliant "pointing device"
  - Plug-and-play with USB option
- Supplied wiring: USB Male Type A Connector with overmolded cable

Proportional miniature thumb controls • non-contacting Hall effect technology

## VOLTAGE OUTPUT OPTIONS <sup>1</sup>

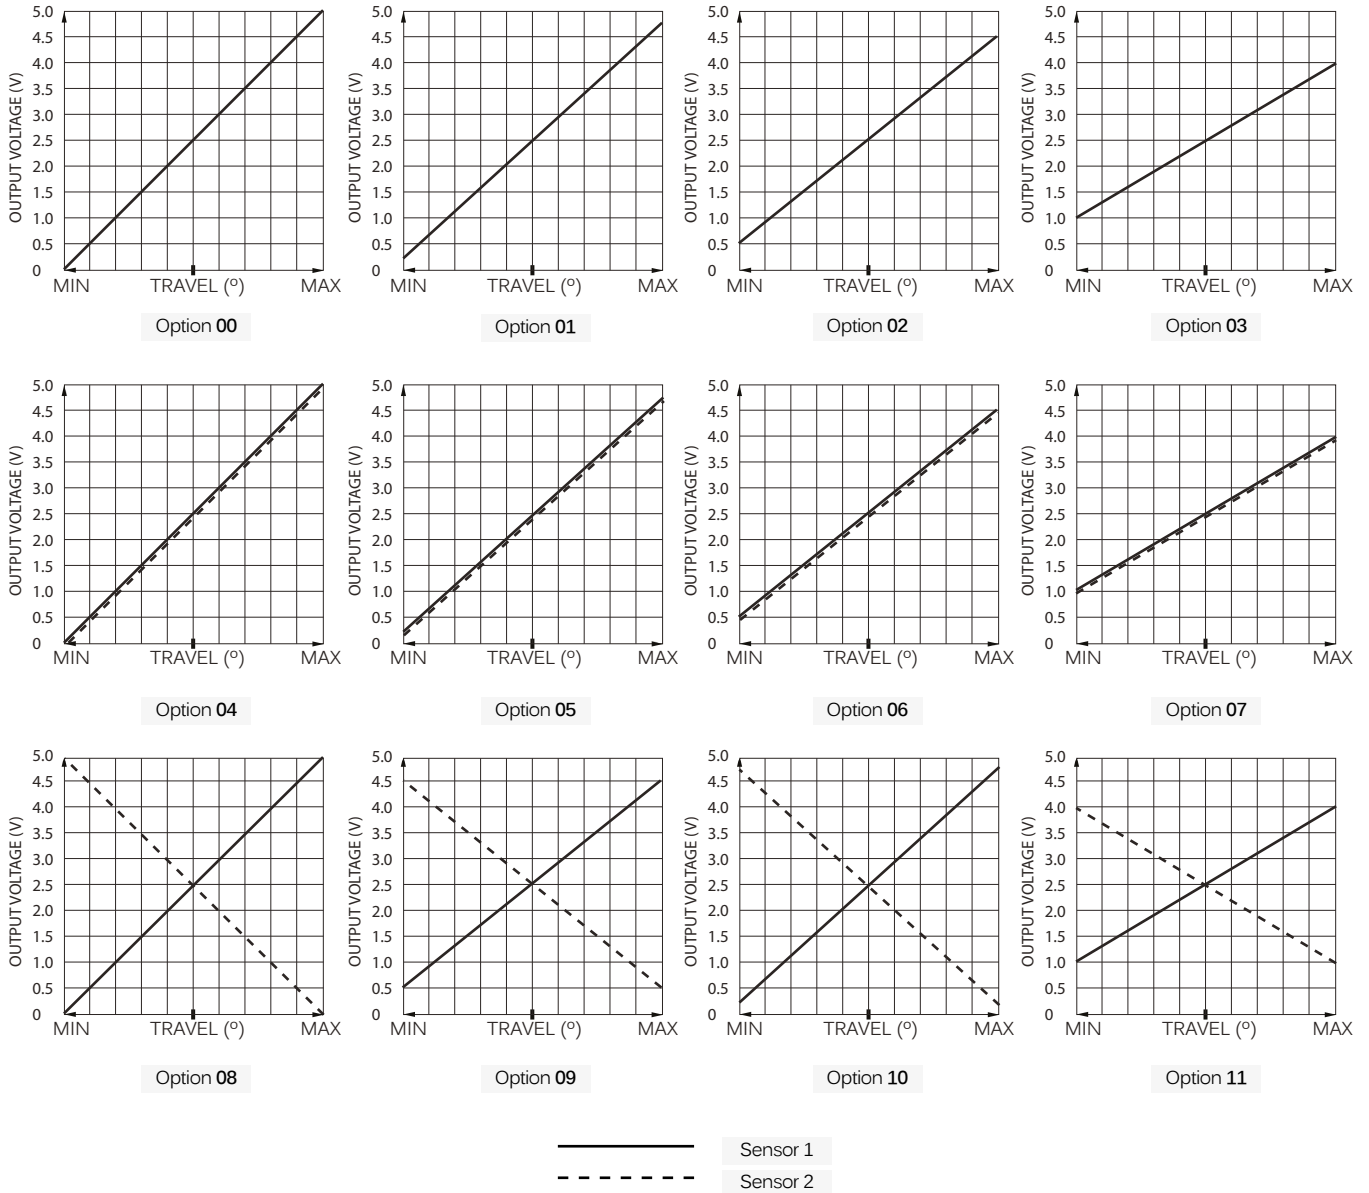

## CONNECTOR TERMINATION OPTION

PINOUT SPECIFICATION		
	TE 3-647166-5	TE 3-647166-7
PIN 1	Y (alpha)	Pushbutton / LED
PIN 2	5 VDC <sup>1</sup>	GND / Pushbutton common / LED common
PIN 3	X (alpha)	X (alpha)
PIN 4	GND/ Pushbutton common / LED common	Y (beta)
PIN 5	Pushbutton / LED	Y (alpha)
PIN 6	-	5 VDC
PIN 7	-	X (beta)

- Single output configurations feature a five position TE 3-647166-5 connector.
- Dual output configurations feature a seven position TE 3-647166-7 connector.
- A mating harness is not included, but may be specified for single output configurations at the time of order for an additional charge.
- The five function harness is part number 505-499.
- The seven function harness is part number 505-500.

<sup>1</sup> Voltage outputs are ratiometric to supply voltage



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.