



MICROWAVE CORPORATION v00.0312



# HMC1044LP3E

## PROGRAMMABLE HARMONIC LOW PASS FILTER

### 1 - 3 GHz 3 dB BANDWIDTH

### Typical Applications

The HMC1044LP3E is ideal for wideband transceiver harmonic filtering applications including:

- Filtering LO Harmonics to Reduce Modulator Sideband Rejection & Demodulator Image Rejection
- Amplifier Harmonic Filtering
- RF Filtering

### Features

Programmable Bandwidth: 1 to 3 GHz

Compatible with Narrowband & Wideband:

- PLLs with Integrated VCOs
- Modulators
- Demodulators

LO Harmonic Rejection: ~20 dB


Improves Modulator/Demodulator Sideband/Image Rejection Performance: 20 dB Typical

Single-Ended or Differential Options

Footprint up to 90% Smaller than Current Discrete Fixed Bandwidth Solutions

16 Lead 3x3 mm SMT Package

### Functional Diagram

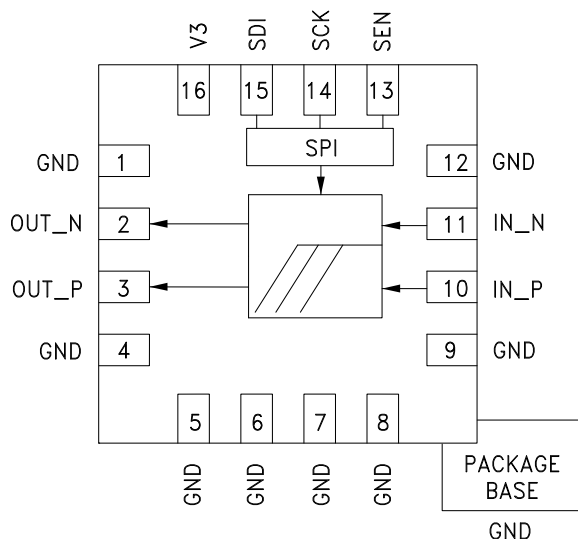

### General Description

The HMC1044LP3E is a programmable bandwidth LPF (Low Pass Filter) targeted at all applications that use quadrature modulators and/or demodulators. The HMC1044LP3E filters out LO harmonics and ensures little or no LO contribution to modulator sideband rejection or demodulator image rejection performance.

Although targeted at LO filtering applications, the HMC1044LP3E can be used to filter all RF harmonics such as the ones generated by amplifiers.

The HMC1044LP3E offers a choice of 16 programmable bands, optimized for high and low cellular bands ranging from 1 to 3 GHz, making the HMC1044LP3E a truly wideband part compatible with wideband PLLs with Integrated VCOs and wideband quadrature modulators and demodulators. It enables wideband multi-standard, multi-carrier designs that are field configurable on-the-fly for each individual application.

The HMC1044LP3E is packaged in a compact 3x3 mm QFN leadless package.

**PROGRAMMABLE HARMONIC LOW PASS FILTER**  
**1 - 3 GHz 3 dB BANDWIDTH**
**Electrical Specifications,  $T_A = +25\text{ }^{\circ}\text{C}$ ,  $V_3 = 3.3\text{ V}$  (3 V to 3.5 V)**

| Parameter                                                   | Min. | Typ. | Max. | Units         |
|-------------------------------------------------------------|------|------|------|---------------|
| <b>Single-Ended</b>                                         |      |      |      |               |
| Passband <sup>[1]</sup>                                     | 250  |      | 3060 | MHz           |
| $f_{\text{cutoff}}$ <sup>[2]</sup> Tuning Range (3 dB Loss) | 1025 |      | 3060 | MHz           |
| Passband Flatness                                           |      | 2.5  |      | dB            |
| Passband Insertion Loss                                     |      | 3    | 5    | dB            |
| Return Loss                                                 |      | 10   |      | dB            |
| Input/Output Impedance                                      |      | 50   |      | $\Omega$      |
| Input IP3 (inband)                                          |      | 43   |      | dBm           |
| <b>Differential</b>                                         |      |      |      |               |
| Passband <sup>[1]</sup>                                     | 250  |      | 3400 | MHz           |
| $f_{\text{cutoff}}$ <sup>[2]</sup> Tuning Range (3 dB Loss) | 970  |      | 3400 | MHz           |
| Passband Flatness                                           |      | 2.5  |      | dB            |
| Passband Insertion Loss                                     |      | 3    | 5    | dB            |
| Return Loss                                                 |      | 10   |      | dB            |
| Input/Output Impedance                                      |      | 100  |      | $\Omega$      |
| Input IP3 (inband)                                          |      | 43   |      | dBm           |
| <b>Supplies</b>                                             |      |      |      |               |
| DC Supply                                                   | 3    | 3.3  | 3.5  | V             |
| Supply Current                                              |      | 1    |      | $\mu\text{A}$ |
| <b>Digital Inputs</b>                                       |      |      |      |               |
| Digital Input Low Level (VIL)                               |      |      | 0.4  | V             |
| Digital Input High Level (VIH)                              | 1.5  |      |      | V             |

[1] Minimum frequency is limited by external DC blocking capacitor. Displayed value corresponds to default evaluation board configuration of 100 pF.

[2]  $f_{\text{cutoff}}$  defined as the point at which the insertion loss is 3 dB below the passband insertion loss @ 500 MHz.



MICROWAVE CORPORATION v00.0312



# HMC1044LP3E PROGRAMMABLE HARMONIC LOW PASS FILTER 1 - 3 GHz 3 dB BANDWIDTH

## Typical Performance Characteristics

Figure 1. Single-Ended Insertion Loss [1]

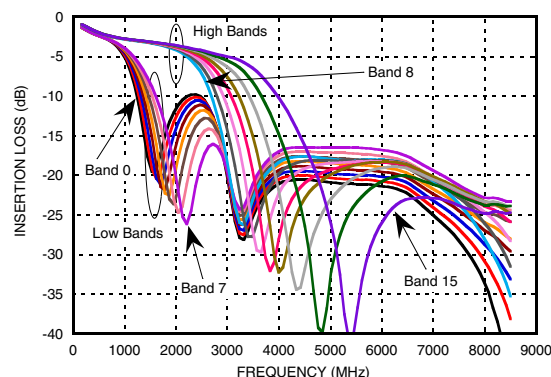


Figure 2. Differential Insertion Loss [1]

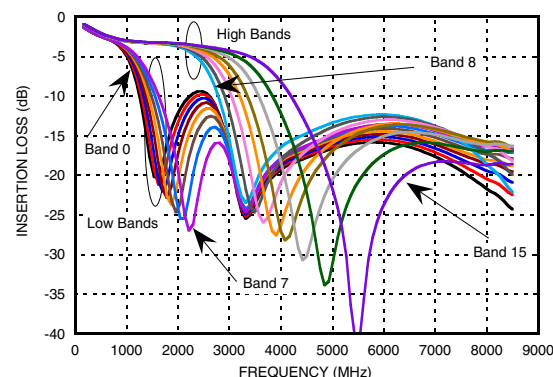


Figure 3. Single-Ended Insertion Loss Over Supply Voltage [1]

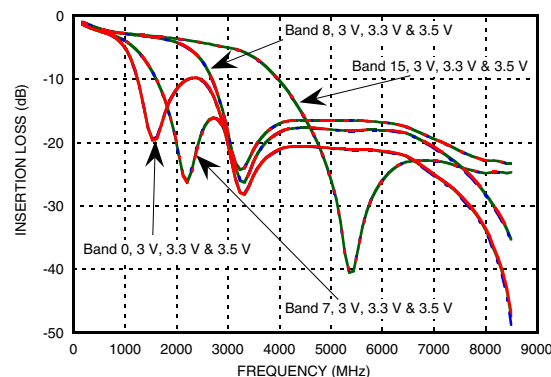


Figure 4. Single-Ended Insertion Loss Over Temperature [1]

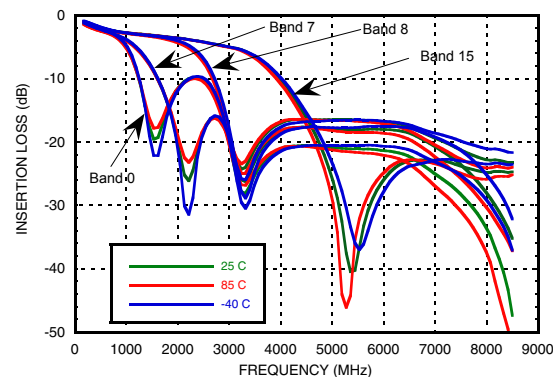


Figure 5. Single-Ended Return Loss [1]


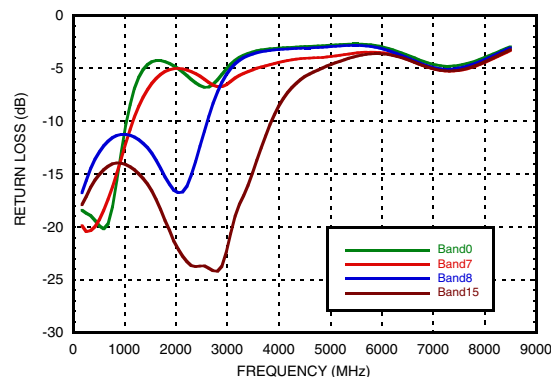



Figure 6. Differential Return Loss [1]

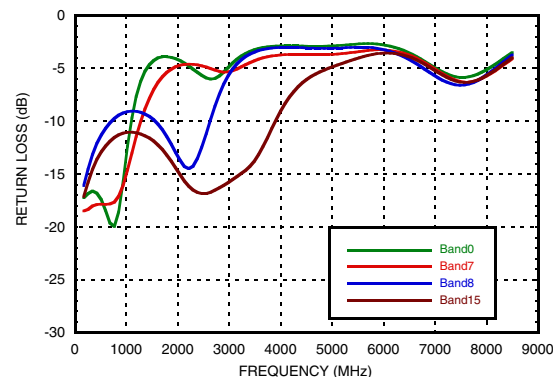


[1] Low frequency performance limited by external DC blocking capacitors at RF input and output.

**PROGRAMMABLE HARMONIC LOW PASS FILTER**  
**1 - 3 GHz 3 dB BANDWIDTH**


**Figure 7. Single-Ended Return Loss vs. V3<sup>[1]</sup>**

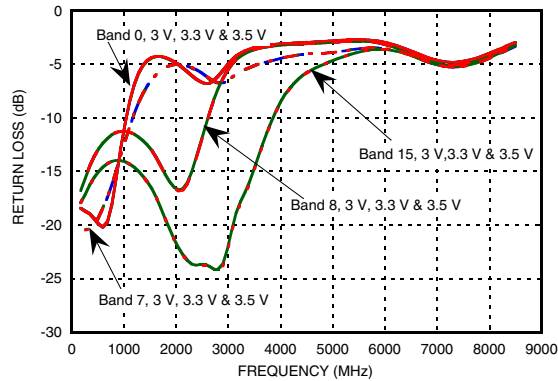

**Figure 8. Single-Ended Return Loss vs. Temperature<sup>[1]</sup>**

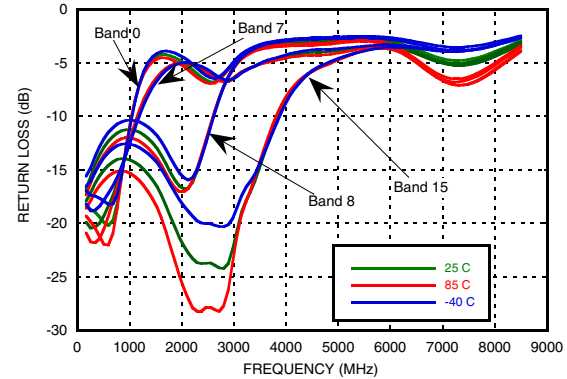

**Figure 9. Single-Ended Filter Group Delay<sup>[1]</sup>**

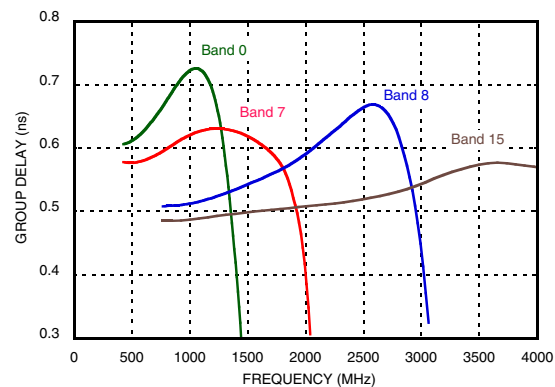

[1] Low frequency performance limited by external DC blocking capacitors at RF input and output.



MICROWAVE CORPORATION v00.0312



# HMC1044LP3E

## PROGRAMMABLE HARMONIC LOW PASS FILTER 1 - 3 GHz 3 dB BANDWIDTH

### HMC1044LP3E Frequency Bands

| HMC1044LP3E Band Setting | Typical 3 dB Cutoff Frequency Relative to 500 MHz |              |
|--------------------------|---------------------------------------------------|--------------|
|                          | Single-Ended                                      | Differential |
| 0                        | 1025                                              | 970          |
| 1                        | 1050                                              | 1000         |
| 2                        | 1075                                              | 1030         |
| 3                        | 1105                                              | 1055         |
| 4                        | 1130                                              | 1085         |
| 5                        | 1160                                              | 1120         |
| 6                        | 1195                                              | 1155         |
| 7                        | 1225                                              | 1195         |
| 8                        | 2230                                              | 2335         |
| 9                        | 2300                                              | 2430         |
| 10                       | 2380                                              | 2530         |
| 11                       | 2465                                              | 2655         |
| 12                       | 2550                                              | 2770         |
| 13                       | 2675                                              | 2940         |
| 14                       | 2805                                              | 3145         |
| 15                       | 3060                                              | 3400         |

# HMC1044LP3E

## PROGRAMMABLE HARMONIC LOW PASS FILTER

### 1 - 3 GHz 3 dB BANDWIDTH

#### Absolute Maximum Ratings

| Parameter                   | Rating         |
|-----------------------------|----------------|
| V3                          | -0.3 to +3.6 V |
| RF Power Input              | 18 dBm         |
| Digital Input Voltage Range | -0.3 to +3.6 V |
| Storage Temperature         | -65 to +150 °C |
| Reflow Soldering            |                |
| Peak Temperature            | 260 °C         |
| Time at Peak Temperature    | 40 sec         |


#### Reliability Information

|                              |               |
|------------------------------|---------------|
| Maximum Junction Temperature | 125 °C        |
| Operating Temperature        | -40 to +85 °C |
| ESD Rating (HBM)             | Class 2       |
| Thermal Resistance           | 90 °C/W       |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

#### Outline Drawing

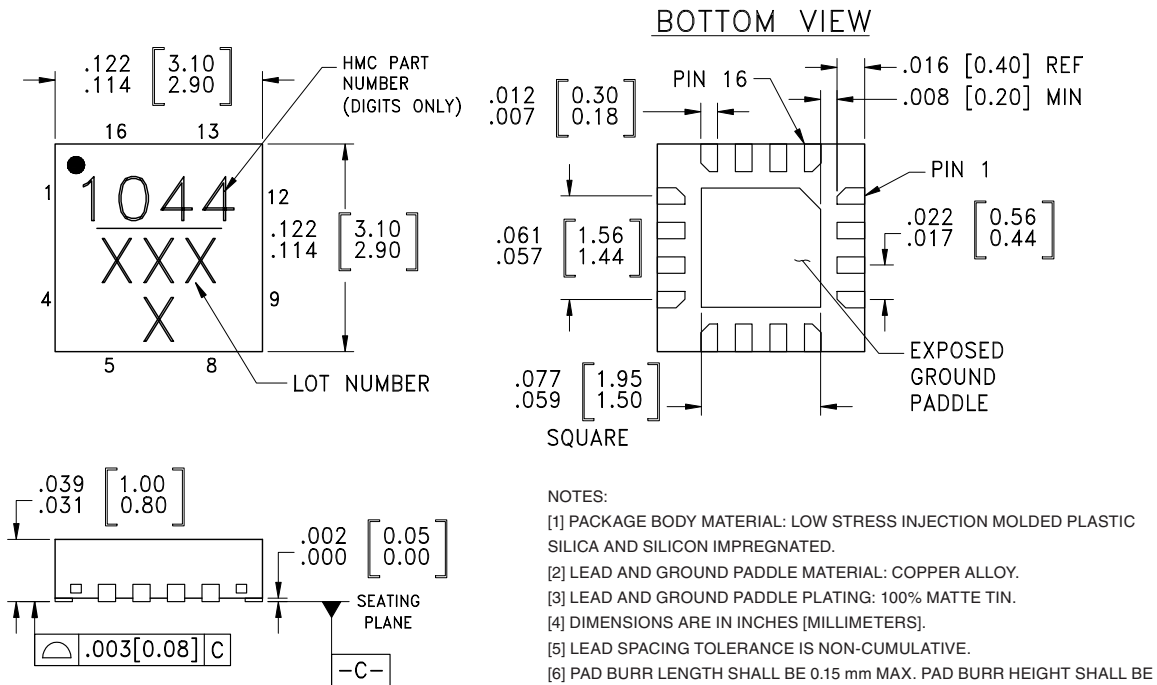

#### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[1]</sup> |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC1044LP3E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | 1044<br>XXXX                   |

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C



MICROWAVE CORPORATION v00.0312

**HMC1044LP3E**

## PROGRAMMABLE HARMONIC LOW PASS FILTER

### 1 - 3 GHz 3 dB BANDWIDTH


#### Pin Descriptions

| Pin Number              | Function | Description                                                                                                     | Interface Schematic |
|-------------------------|----------|-----------------------------------------------------------------------------------------------------------------|---------------------|
| 1, 4, 5, 6, 7, 8, 9, 12 | GND      | These pins and exposed paddle must be connected to RF/DC ground.                                                |                     |
| 2                       | OUT_N    | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin. <sup>[1]</sup> |                     |
| 3                       | OUT_P    | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin. <sup>[1]</sup> |                     |
| 10                      | IN_P     | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin. <sup>[1]</sup> |                     |
| 11                      | IN_N     | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin. <sup>[1]</sup> |                     |
| 13                      | SEN      | Serial Port Enable (CMOS) Logic Input                                                                           |                     |
| 14                      | SCK      | Serial Port Clock (CMOS) Logic Input                                                                            |                     |
| 15                      | SDI      | Serial Port Data (CMOS) Logic Input                                                                             |                     |
| 16                      | V3       | DC Power Supply                                                                                                 |                     |

[1] Although the pins are DC coupled they require external AC coupling for proper operation. Please refer to [Evaluation PCB Schematic](#) for more information.

# **PROGRAMMABLE HARMONIC LOW PASS FILTER** **1 - 3 GHz 3 dB BANDWIDTH**

## **Evaluation PCB**

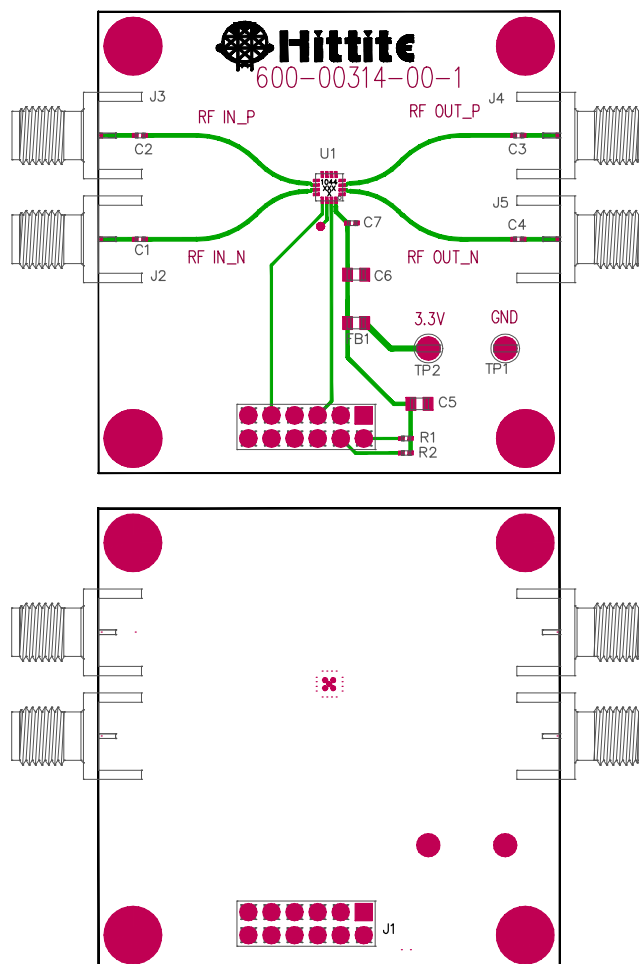

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohms impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.


## **Evaluation Order Information**

| Item                | Contents                                                                                                                                                                 | Part Number        |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Evaluation PCB Only | HMC1044LP3E Evaluation PCB                                                                                                                                               | EVAL01-HMC1044LP3E |
| Evaluation Kit      | HMC1044LP3E Evaluation<br>PCB USB Interface Board<br>6' USB A Male to USB B Female Cable<br>CD ROM (Contains User Manual, Evaluation PCB Schematic, Evaluation Software) | EKIT01-HMC1044LP3E |



**PROGRAMMABLE HARMONIC LOW PASS FILTER**  
**1 - 3 GHz 3 dB BANDWIDTH**

### Evaluation PCB Schematic

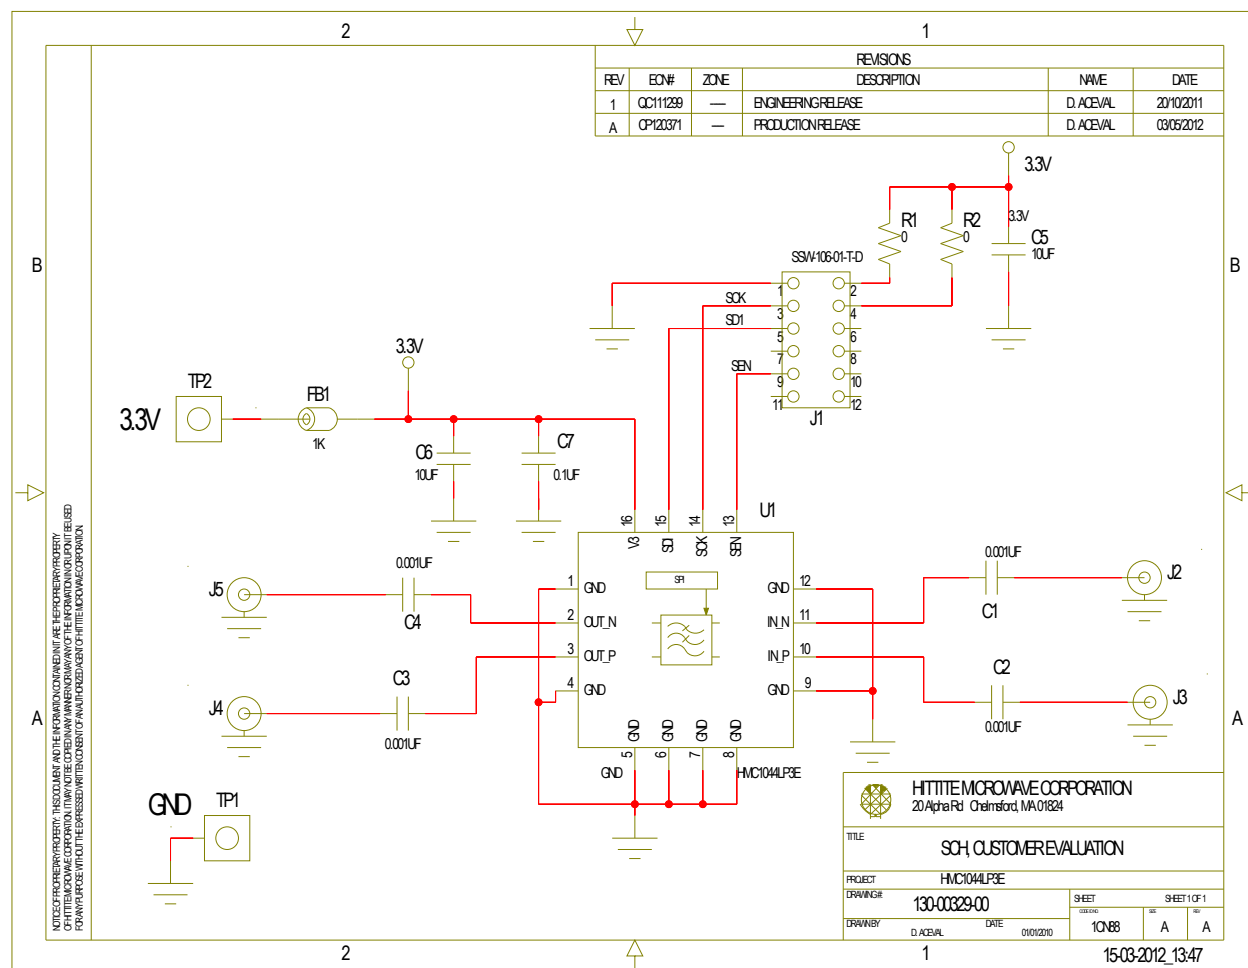

## PROGRAMMABLE HARMONIC LOW PASS FILTER 1 - 3 GHz 3 dB BANDWIDTH

### HMC1044LP3E Application Information

The HMC1044LP3E is an ideal LO harmonic filter for wideband applications featuring quadrature modulators and/or demodulators. The HMC1044LP3E's 16 user programmable bands enable the user to optimally attenuate 2nd and/or 3rd LO harmonics in order to maximize quadrature modulator/demodulator sideband/image rejection performance. Typical diagrams with the HMC1044LP3E are shown in [Figure 10](#) and [Figure 11](#).

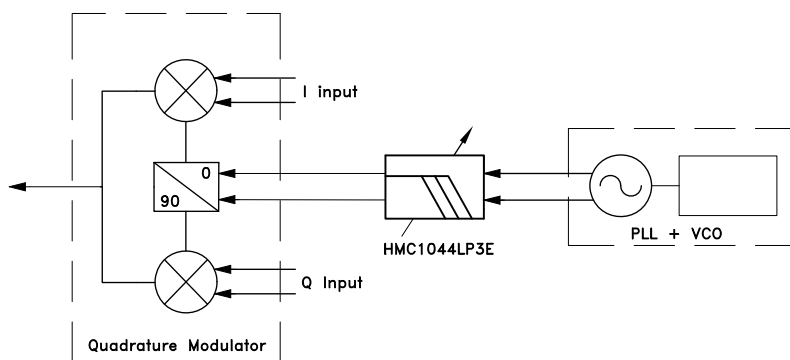


Figure 10. Typical HMC1044LP3E transmitter application

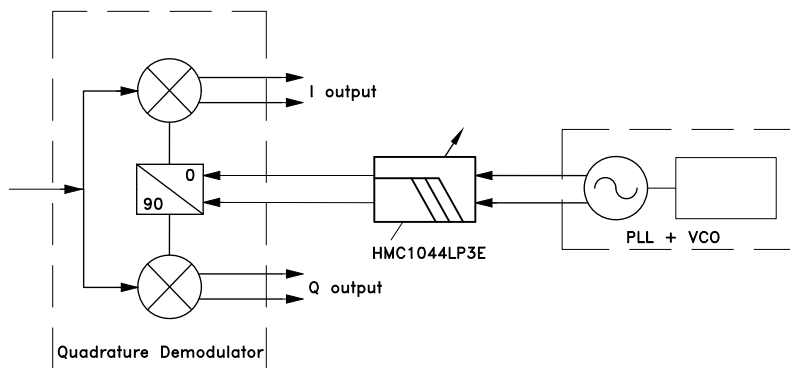


Figure 11. Typical HMC1044LP3E receiver application

### Background, LO Harmonics and Modulator/Demodulator Sideband/Image Rejection

Most wideband quadrature modulators/demodulators in the market use some form of a filter to create the required in-phase and quadrature LO components at the fundamental frequency of the LO (1xLO). Others, less common modulators/demodulators accept LO input at 2xLO frequency and are not based upon filters. The 1xLO types are particularly sensitive to LO 3rd harmonic levels, while the 2xLO types are more sensitive to 2nd harmonic levels.

Harmonics are normally present in all VCOs and especially in RFICs with integrated VCOs. High LO harmonic content causes amplitude and phase mismatches, and ultimately performance degradation in modulator sideband rejection and demodulator image rejection, as shown in [Figure 12](#).



MICROWAVE CORPORATION v00.0312

**HMC1044LP3E**

## PROGRAMMABLE HARMONIC LOW PASS FILTER 1 - 3 GHz 3 dB BANDWIDTH

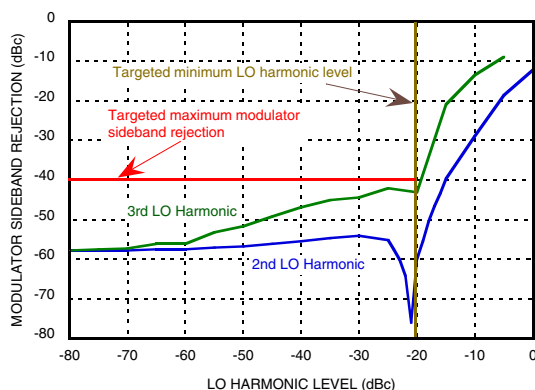


Figure 12. Typical impact of 2nd and 3rd LO harmonic on modulator sideband rejection.[1]

Figure 12 shows a typical modulator with 1xLO input, where both the 2nd and 3rd LO harmonics affect the modulator sideband rejection performance at levels  $> -20$  dBc relative to the LO signal power. It also shows that the 3rd LO harmonic has greater impact on modulator sideband rejection performance than the 2nd, and that there is little effect of the 2nd LO harmonic on modulator sideband rejection once the 2nd LO harmonic is below  $-20$  dBc levels, relative to the LO signal level.

The HMC1044LP3E is designed to ensure that the 2nd and the 3rd LO harmonics are below  $-20$  dBc relative to the LO signal level across the entire operating range of Hittite's wideband PLLs with integrated VCOs. Thereby ensuring little or no LO contribution is added to modulator/demodulator sideband/image rejection performance degradation.

### Using the HMC1044LP3E

Modulator/demodulator sideband/image rejection performance is specific to each individual modulator/demodulator, and depends on a number of other variables including: type (1xLO or 2xLO input), balance (amplitude and phase matching), signal path matching and interface to other components, board layout, input signal bandwidth, and LO harmonics.

Figure 12 shows that typically the LO harmonics stop being a dominant contributor to modulator/demodulator sideband/image rejection performance degradation once they are below approximately  $-20$  dBc relative to the LO signal level. However, the exact level at which harmonics cease being the dominant contributor to sideband/image rejection performance depends on each individual modulator/demodulator and each individual design. Hence, the optimal band selection of the HMC1044LP3E may be different for different designs.

Figure 13 shows optimal 3rd harmonic attenuation achieved with the HMC1044LP3E without optimizing the 2nd harmonic, when the HMC830LP6GE PLL with Integrated VCO is used as an LO to drive the HMC697LP4E quadrature modulator. The corresponding HMC1044LP3E band selections are shown in Figure 14.

[1] Measured with HMC697LP4E direct modulator at 2 GHz, with LO input power = 0 dBm, 1xLO type.

## PROGRAMMABLE HARMONIC LOW PASS FILTER 1 - 3 GHz 3 dB BANDWIDTH

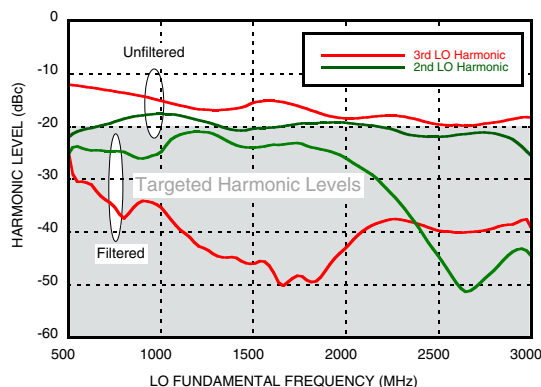


Figure 13. Maximum HMC1044LP3E attenuation of 3rd harmonic of the LO [2]

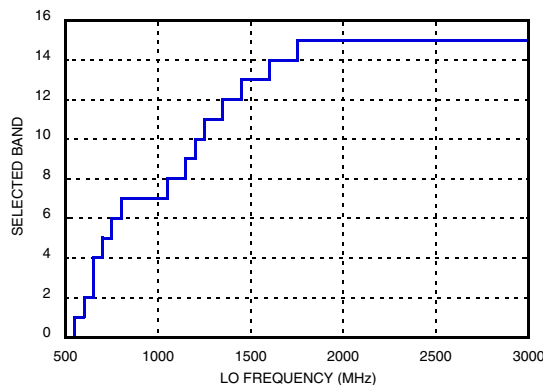


Figure 14. HMC1044LP3E band selection corresponding to Figure 13

Observing the results shown in Figure 13 in the context of targeted performance in Figure 12; It is apparent that the HMC1044LP3E attenuates both the 3rd and the 2nd LO harmonics to well below the targeted maximum LO harmonic level shown in Figure 12, ensuring that the targeted modulator sideband rejection performance is achieved.

Figure 15 shows the optimal 2nd harmonic attenuation achieved with the HMC1044LP3E, when the HMC830LP6GE PLL with Integrated VCO is used as an LO to drive the HMC697LP4E quadrature modulator. The corresponding HMC1044LP3E band selection is shown in Figure 16.

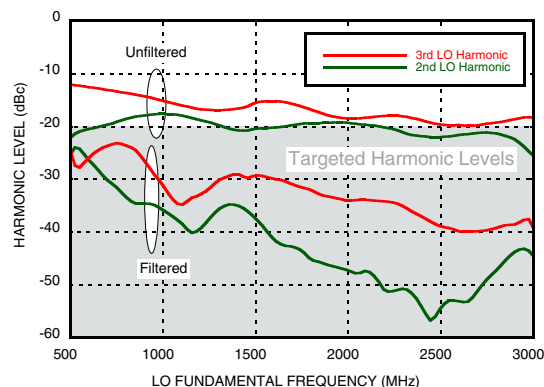


Figure 15. Maximum HMC1044LP3E attenuation of 2nd harmonic of the LO [2]

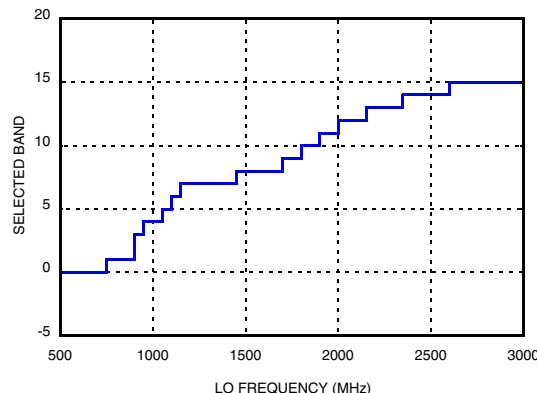


Figure 16. HMC1044LP3E band selection corresponding to Figure 15

Observing the results shown in Figure 15 in the context of the targeted performance in Figure 12; it is apparent that the HMC1044LP3E attenuates both the 3rd and the 2nd LO harmonics to well below the targeted maximum LO harmonic level shown in Figure 12, ensuring that the targeted modulator sideband rejection performance shown in Figure 12 is achieved.

Using the relationship between sideband/image rejection vs. LO harmonic distortion in Figure 12 as a reference, it can be observed that both approaches (maximizing 2nd harmonic attenuation in Figure 13, and maximizing 3rd harmonic attenuation in Figure 14) achieve sideband/image rejection performance improvement, and effectively remove any LO contribution to sideband/image rejection performance degradation. However, Figure 12 suggests that, when using a 1xLO type modulator, more emphasis should be placed on attenuating the 3rd harmonic than the second because the 2nd harmonic ceases to be a contributor at levels  $\sim -20$  dBc, while the 3rd harmonic continues contributing to sideband/image rejection, albeit at a smaller rate for the particular design characterized in Figure 12.

[2] Measured with HMC830LP6GE as an LO and HMC697LP4E modulator. The HMC830LP6GE was used in single-ended output configuration.

# HMC1044LP3E

## PROGRAMMABLE HARMONIC LOW PASS FILTER

### 1 - 3 GHz 3 dB BANDWIDTH

Figure 17 shows the maximum sideband rejection achieved without calibrating the modulator, both with and without the HMC1044LP3E. It is generated by selecting the HMC1044LP3E band that achieves maximum uncalibrated sideband rejection for each particular frequency across a very wide bandwidth. The corresponding HMC1044LP3E band settings are shown in Figure 18.

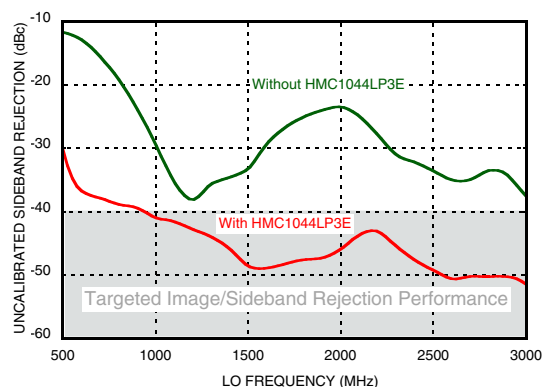


Figure 17. Optimal uncalibrated modulator sideband rejection with and without HMC1044LP3E, single-ended LO configuration[3]

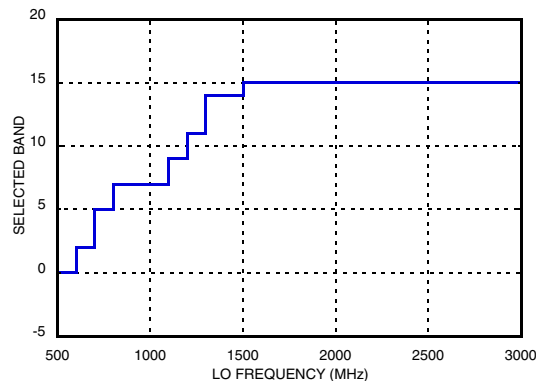


Figure 18. HMC1044LP3E band selection corresponding to Figure 17

Results shown in Figure 17 confirm that the HMC1044LP3E improves modulator sideband rejection ~20 dB across the wideband operation of the modulator and PLL with integrated VCO. Sideband rejection performance improvements less than ~20 dB occur at those frequencies where the LO harmonics are not a dominant contributor to sideband rejection, ie. where sideband rejection performance is already good.

The corresponding HMC1044LP3E band selections shown in Figure 18 are closer to those shown in Figure 14, than those from Figure 16. This confirms the data shown in Figure 12, and the postulation that the 3rd LO harmonic is a greater contributor to modulator sideband rejection degradation than the 2nd for 1xLO type modulators/demodulators.

Another variable that should be considered is the insertion loss of the HMC1044LP3E which can vary ~2.5 dB across the pass band of the selected band setting as shown in Figure 1 and Figure 2. The selected HMC1044LP3E band that results in optimal sideband/image rejection performance also depends on the LO input power at the modulator/demodulator, which is specific to each individual design. It depends on the output power of the PLL with integrated VCO (that is used as an LO) at each frequency, insertion loss of the HMC1044LP3E at the selected band setting, LO frequency, and the required modulator/demodulator LO input power. The harmonic attenuation and sideband rejection graphs in this section were generated by maintaining the minimum LO input power into the HMC697LP4E at  $\geq -3$  dBm across all frequencies, which falls well into the required LO input power specification in the HMC697LP4E data sheet of greater than -6 dBm and less than 6 dBm.

For applications that require a flat output power response, over a wide bandwidth, it should be noted that it is possible to build a low harmonic source with flat output power over a wideband using a leveling loop based upon the HMC830LP6GE wideband PLL with integrated VCO, the HMC1044LP3E variable LPF, and the HMC993LP5E AGC.

[3] Measured with HMC830LP6GE as an LO and HMC697LP4E modulator. The HMC830LP6GE was used in single-ended output configuration.

# PROGRAMMABLE HARMONIC LOW PASS FILTER 1 - 3 GHz 3 dB BANDWIDTH

## Serial Port Interface (SPI)

The HMC1044LP3E SPI has only write and no read capability. It features a three wire serial port for simple communication with the host controller. The HMC1044LP3E has a 3-bit chip address which is fixed as 6b.

## Serial Port WRITE Operation

### Main SPI Timing Characteristics

V3 = 3.3 V (3 V to 3.5 V), GND = 0V

| Parameter      | Conditions                | Min | Typ | Max | Units |
|----------------|---------------------------|-----|-----|-----|-------|
| t <sub>1</sub> | SDI to SCK Setup Time     | 8   |     |     | nsec  |
| t <sub>2</sub> | SDI to SCK Hold Time      | 8   |     |     | nsec  |
| t <sub>3</sub> | SCK High Duration         | 10  |     |     | nsec  |
| t <sub>4</sub> | SCK Low Duration          | 10  |     |     | nsec  |
| t <sub>5</sub> | SEN Low Duration          | 20  |     |     | nsec  |
| t <sub>6</sub> | SEN High Duration         | 20  |     |     | nsec  |
| t <sub>7</sub> | SCK to SEN <sup>[a]</sup> | 8   |     |     | nsec  |

a. SEN must rise after the 16th falling edge of SCK but before the next rising SCK edge. If SCK is shared amongst several devices this timing must be respected.

A typical write cycle is shown in [Figure 19](#).

1. The Master asserts SEN (active low Serial Port Enable) followed by a rising edge of SCK.
2. The HMC1044LP3E reads SDI (the MSB) on the 1st rising edge of SCK after SEN active low.
3. The HMC1044LP3E registers the data bits in the next 8 rising edges of SCK (for a total of 9 data bits).
4. The host places 4 register address bits on the next 4 falling edges of SCK (MSB to LSB) while the HMC1044LP3E reads the address bits on the corresponding rising edge of SCK.
5. The host places 3 chip address bits on the next 3 falling edges of SCK (MSB to LSB). Note the HMC1044LP3E chip address is fixed as '6d' or '110'b.

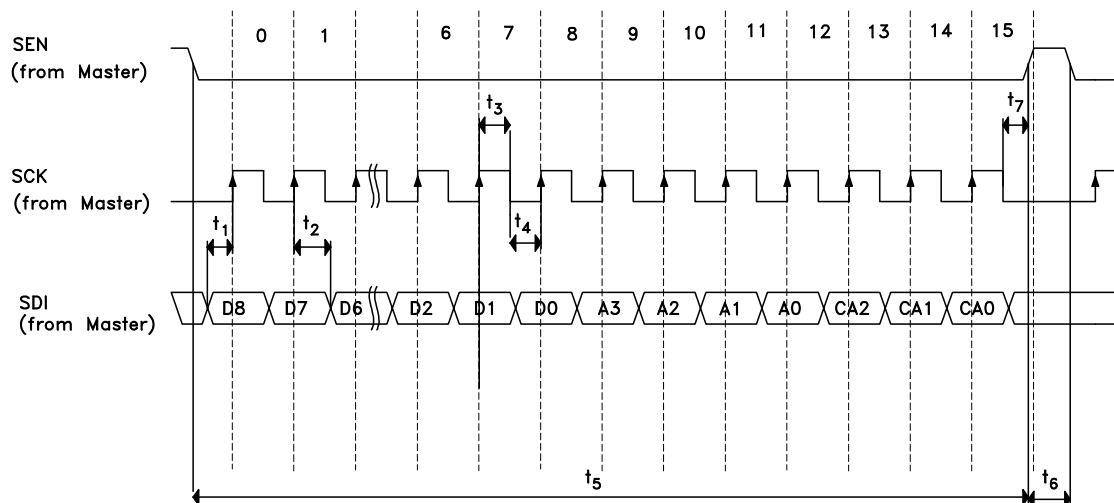


Figure 19. Serial port write timing diagram



MICROWAVE CORPORATION v00.0312



**HMC1044LP3E**

**PROGRAMMABLE HARMONIC LOW PASS FILTER**  
**1 - 3 GHz 3 dB BANDWIDTH**

**Register Map**

**Reg 01h - Autotune**

| Bit    | Name     | Width | Default | Description                                          |
|--------|----------|-------|---------|------------------------------------------------------|
| [15:0] | Autotune | 4     | 15      | Band setting<br>0 - lowest band<br>15 - highest band |



**PROGRAMMABLE HARMONIC LOW PASS FILTER**  
**1 - 3 GHz 3 dB BANDWIDTH**

**NOTES:**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.