# 2mm PITCH METRIC CONNECTORS FOR PCB CONNECTION

## FCN-086 /087 SERIES

### ■ OVERVIEW

Fujitsu's 2mm hard metric connector F-PACK-3 (FCN-086/087 series) are connectors for connecting boards developed to support high-speed transmission/high density packaging of communication equipment, conforms to IEC 917 (DIN 43355) and IEC 61076-4-101, and supports compact PCI. Product meets Bellcor 1217. To support high-speed transmission, these connectors implement low inductance, low cross-talk, and matching characteristic impedance (50 ohms), exhibiting superb transmission characteristics.

Connection with the PCB is solderless (press fit) for both the plug/socket side, making mounting cost effective. Insertion connections are completely unnecessary since a polarity key is supported.

Plug contact has a four level sequence structure that makes connection/disconnection in an active state possible. Terminals have a five level pin length to support various applications. New customized connectors can be supported by freely combining the pin lengths of contacts and terminals.

For shield plate products, which support high-speed transmission based on standard products, 5 row 55, 95, 110, 110 (with key) and 125 contact, plugs support 77, 133, 154 and 175 contacts. The shield plate corresponds to the respective number of contacts, and the standard is post attachment. Sockets can also be shipped with shields pre-attached.

8 row products are also in the series. Consult factory for your requirements.

Fujitsu has developed a new high density power connector (25% denser) to improve operability.

A double press fit, which can connect two printed boards with one connector, greatly contributes to improved mounting and decreasing cost. Consult factory for details.

## ■ SPECIFICATIONS

| Item | Specification | |
|---|---|---|
| | Standard connector | Power connecto r |
| Operating temperature range | -55˚ C to +125˚ C | -40˚ C to +85˚ C |
| Current rating | 1A DC max. (75˚ C) | 7A DC/contact max. (75˚ C) |
| Voltage rating | 500V AC r.m.s | 56V DC |
| Contact resistance | 20mohms max. (DC 20mV,10mA) | 20mohms max. (DC 20mV, 10mA) |
| Insulation resistance | 10,000 Mohms min. (100V DC) | 10,000 Mohms min. (100V DC) |
| Dielectric strength | 750V AC for 1 minute | 600V AC for 1 minute |
| Insertion/Withdrawl life | 125 times | 250 times |
| Insertion force | 0.75N/pin min. | 20N/connector max. |
| Withdrawl force | 0.15N/pin min. | 1N/connector min. |

## ■ CHARACTERISTICS

| Item | Material |
|---|---|
| Characteristic impedance | 50 ohms |
| Transmission speed | 300 MHz |
| Near end cross talk | 4.3 % max. |

## ■ MATERIALS

| Item | Material |
|---|---|
| Insulator | Polyester resin (UL94V-0) |
| Conductor | Copper alloy |
| Plating | Press fit: Solder<br>Press fit other: PAGOS<br>Contact area: Gold (PAGOS)<br>Lead / press fit area: Solder |

## ■ CONFIGURATION OF F&T 2 MM H.M. CONNECTOR

1. Basic configuration of socket/plug

There are five types of sockets: three basic types: type A (110 contacts), type B (125 contacts), and type C (55 contacts), and a 110 contact and 95 contact types. Many coding keys are in the series to prevent insertion errors.

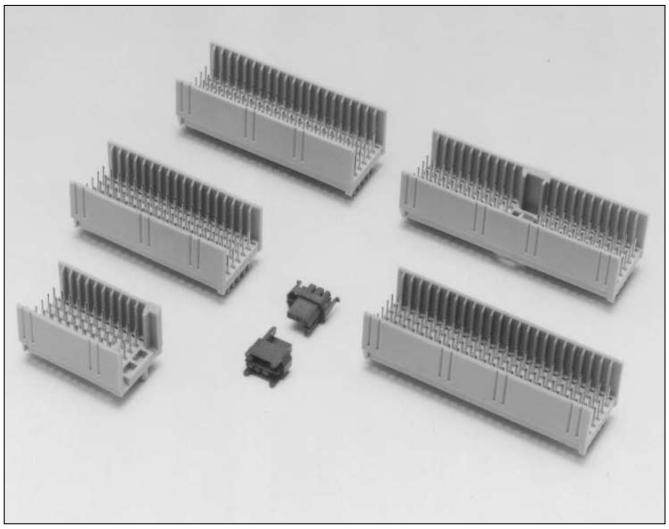

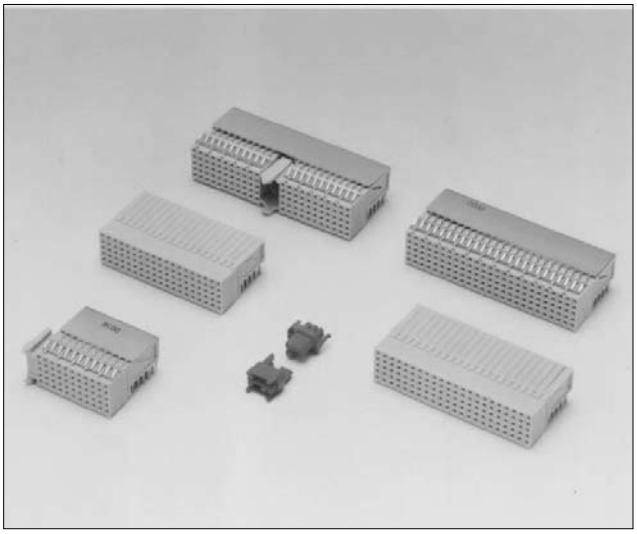

## ■ TERMINAL CONFIGURATION OF PLUG

The contact pins have a three-level sequence structure and can be connected/disconnected in an active state. The terminal side can support various applications with four types of length. These combinations allow 20 types of terminals.

Relationship between housing and terminals
Terminal types in the series

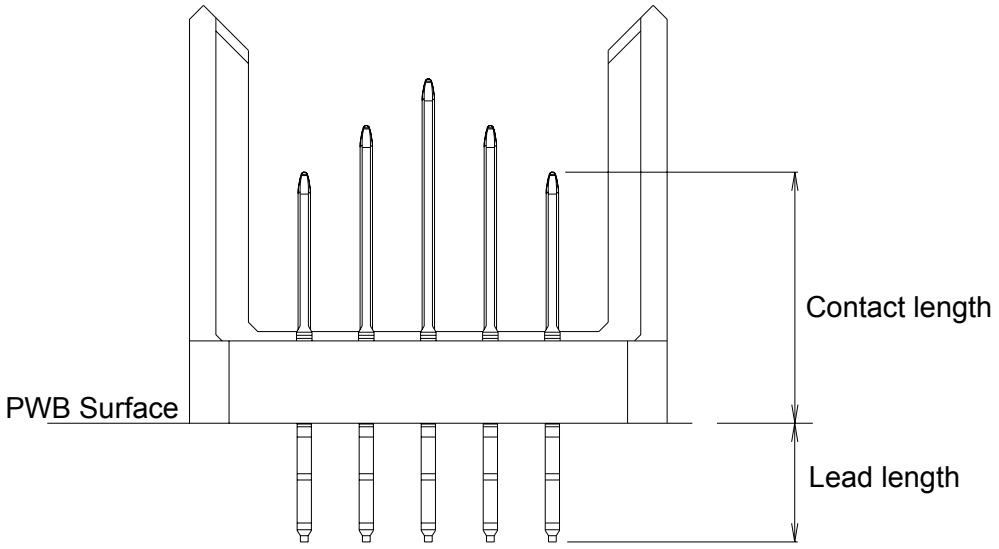


PC Board Face
Contact Types

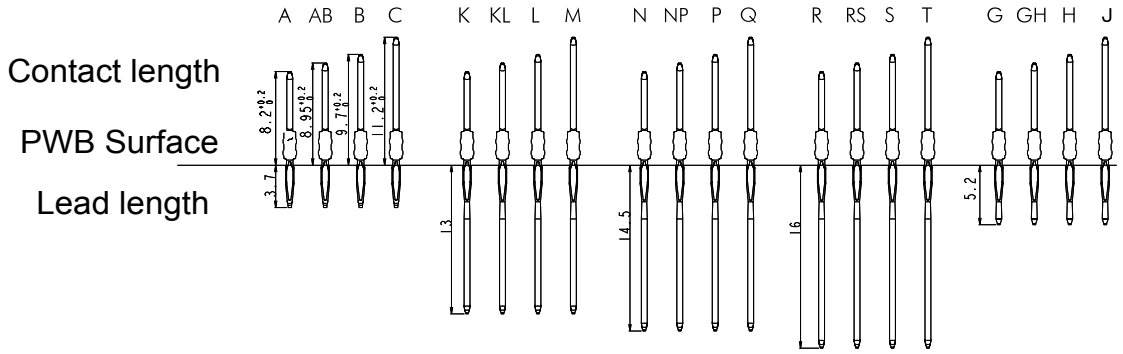

## Request Form for Customer Specific Pin Arrangement for 2mm Connectors

Part of the benefit of using the FCN-086 2mm Backplane connector is the flexibility of creating unique contact loads in the connector body. To define your needs, make a photocopy of the following page(s), select your connector needs, and fill in the blanks with the specific contact designation (see page 5 for available contacts). Forward to Fujitsu for quotation and part number assignment. (Please note that the pin arraignment drawings are "View from the Mating Side").

**1. TYPE A (110 pos. with polarization key) (5+2)**

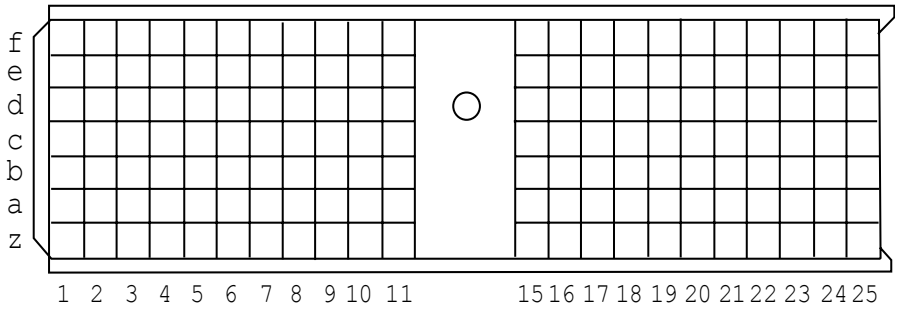


**2. TYPE B (125 pos.) (5+2)**

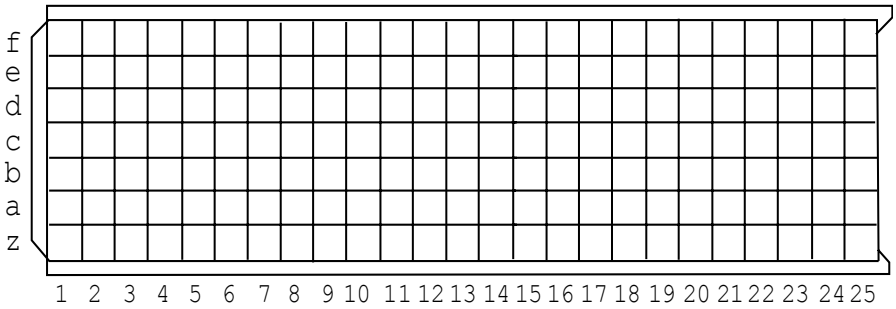


**3. TYPE C (55 pos.) (5+2)**

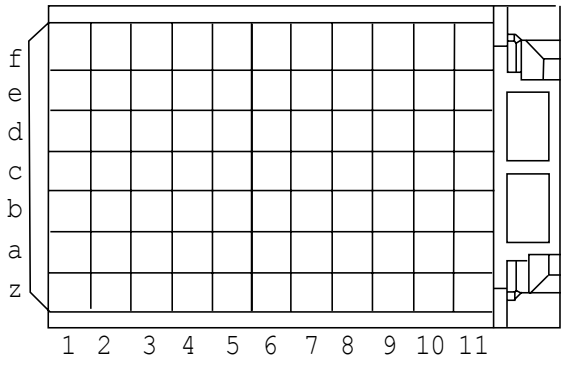


**4. 95 pos. (5+2)**

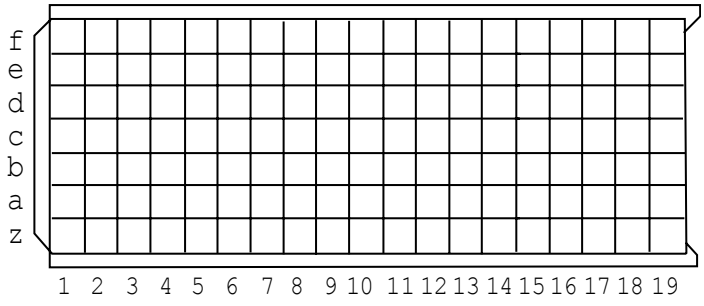

## ■ TRANSMISSION CHARACTERISTICS

The transmission characteristics were designed to an optimum level by repeating various transmission characteristics simulations when the structure was designed, so as to improve the transmission characteristics of this connector. The characteristic impedance and the measurement device of the connector are shown below.

Measurement Point




Measurement Result

| | Fujitsu Components | | | |
|---|---|---|---|---|
| At Start | 100 ps | 300 ps | 500 ps | 1 ns |
| Frequency: Hz | 1.75 GHz | 580 MHz | 350 MHz | 175 MHz |
| Characteristic Impedance (Ω) | 45.3 to 64.0 | 48.2 to 56.8 | 49.2 to 54.6 | 49.3 to 52.8 |
| Near/Far end cross talk: % | 1.96/1.14 | 1.49/0.78 | 1.06/0.51 | 0.71/0.27 |

| | Other Supplier | | | |
|---|---|---|---|---|
| At Start | 100 ps | 300 ps | 500 ps | 1 ns |
| Frequency: Hz | 1.75 GHz | 580 MHz | 350 MHz | 175 MHz |
| Characteristic Impedance (Ω) | 47.4 to 66.1 | 48.2 to 56.8 | 49.5 to 59.2 | 47.7 to 53.5 |
| Near/Far end cross talk: % | 2.24/1.41 | 1.57/0.98 | 1.14/0.67 | 0.78/0.35 |

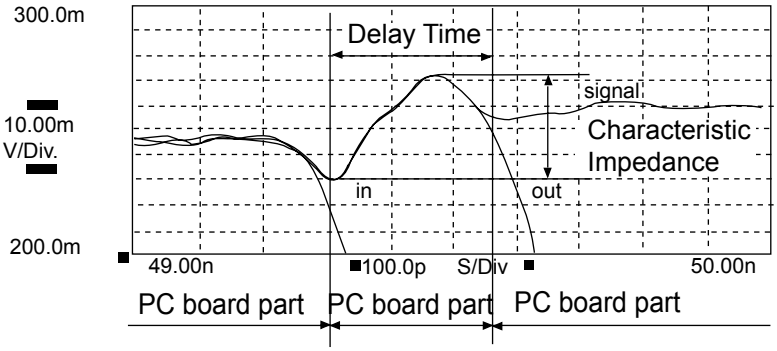


1.Measurement voltage: Vin = 5.0V
2.Rise time: Tr = 100ps, 300ps, 500ps, 1ns
3.Measurement device: TDR measurement device CSA803 and SD24 (Tektronix)
4.Measurement system

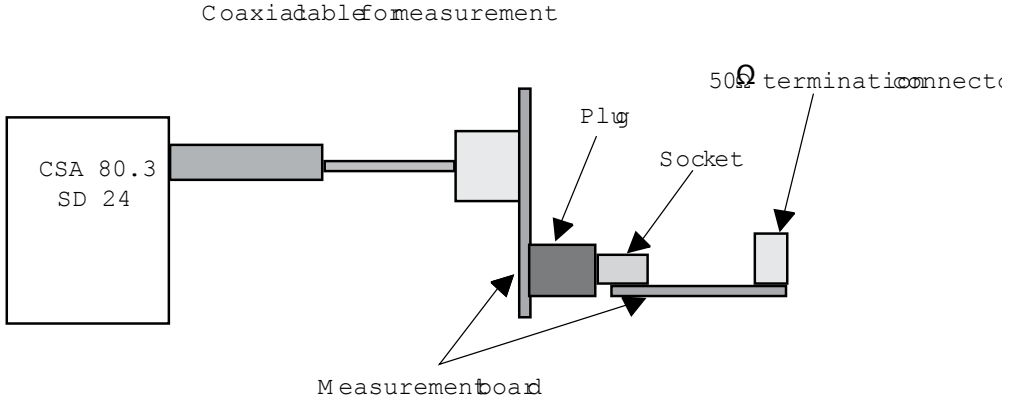

## ■ STANDARD AND HOT SWAP PART NUMBERS

Coding Keys for Daughter Card

FCN-086B1278 - 3.3V
or
FCN-086B2348 - 5.0V
J1

Coding Keys for Midplane/Backplane

FCN-086A3456 - 3.3V
or
FCN-086A2348 - 5.0V
P1

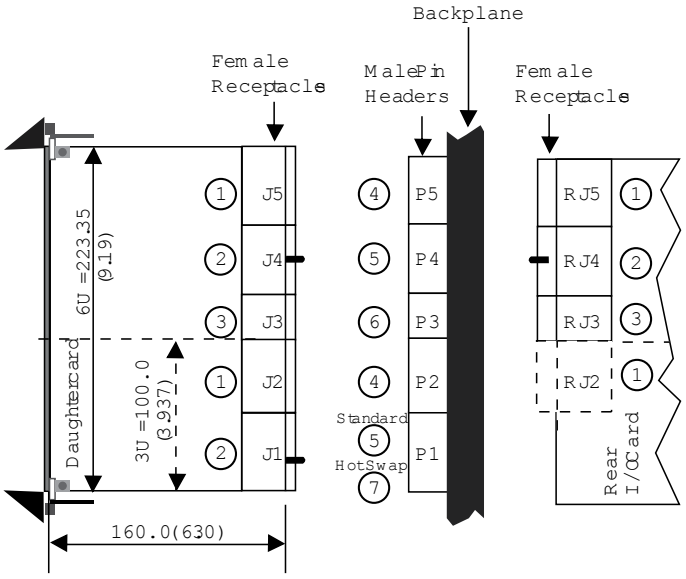


| Reference Number | Part Number | Designations |
|---|---|---|
| 1 | FCN-086J110-G111A-BCR | J5, J2, RJ5, RJ2 |
| 2 | FCN-086J110-G111-BCR | J4, J1, RJ4 |
| 3 | FCN-086J095-G111A-BCR | J3, RJ3 |
| 4 | FCN-086P154-G/111A-BCR | P5, P2 |
| 5 | FCN-086P154-G/104-BCR | P4, P1 |
| 6 | FCN-086P133-G/111A-BCR | P3 |
| 7 | FCN-086P154-G/114-BCR | P1 |
| 8 | Future Products | J4, P5 |
| 9 | FCN-086P154-G/516-BCR | P4 |

## ■ COMPUTER TELEPHONY PART NUMBERS

Coding Keys for Daughter Card

FCN-086B1278 - 3.3V
or
FCN-086B2348 - 5.0V
FCN-086B3567 - J4
J1

Coding Keys for Midplane/ Backplane

FCN-086A3456 - 3.3V
or
FCN-086A2348 - 5.0V
FCN-086B1248 - P4
P1

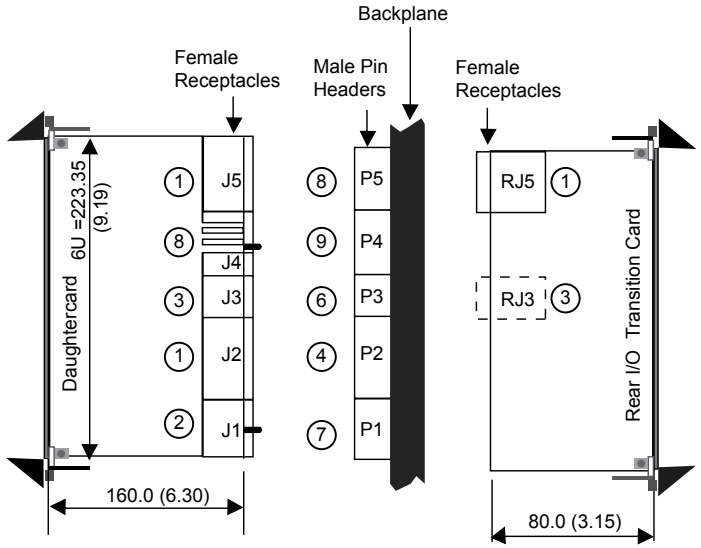

## P3 TYPE 3

## STRAIGHT PLUG (133 POSITIONS)

### ■ DIMENSIONS

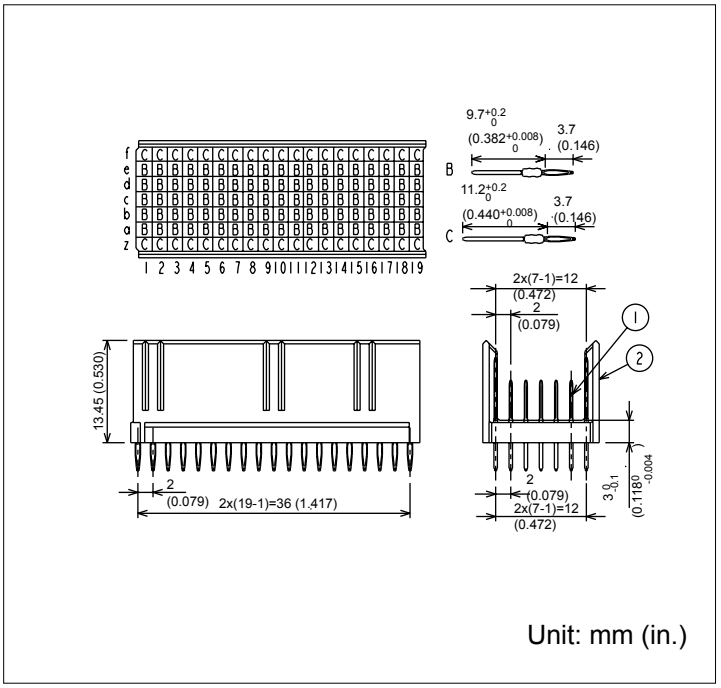


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: $\phi 0.7^{\pm 0.025}$ mm (.028 in.)
Through hole diameter (after plating): $\phi 0.6^{\pm 0.05}$ mm (.024)

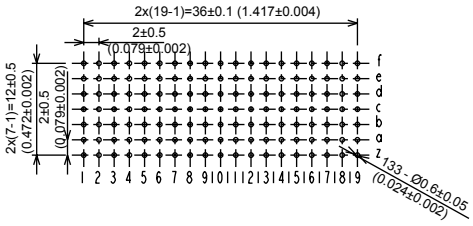


Unit: mm (in.)

### ■ ORDERING PART NUMBER: FCN-086P133-G/111A-BCR

## P3 TYPE B MALE FEED THROUGH

## STRAIGHT PLUG (133 POSITIONS)

### ■ DIMENSIONS

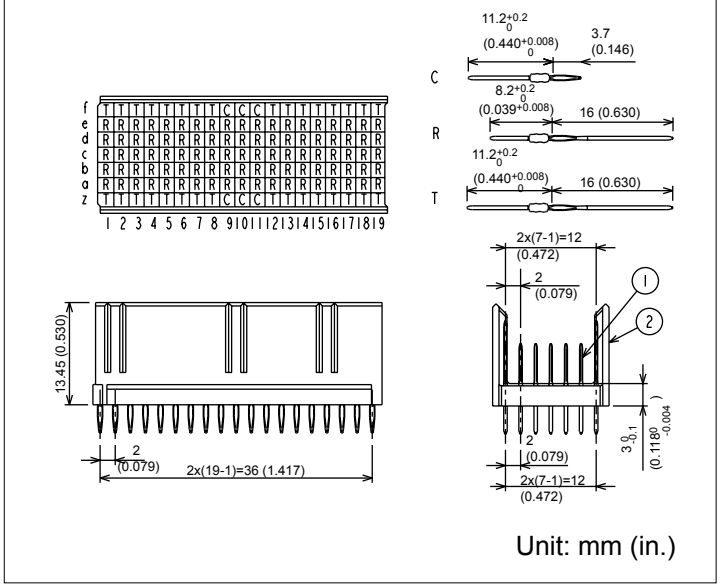


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: $\phi 0.7^{\pm 0.025}$ mm (.028 in.)

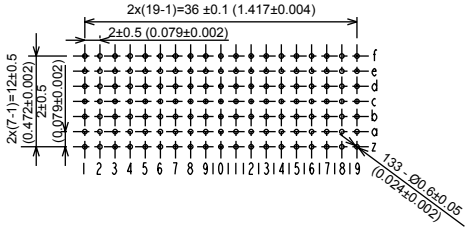


Unit: mm (in.)

### ■ ORDERING PART NUMBER: FCN-086P133-G/502A-BCR

## P1/P4 TYPE A
## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

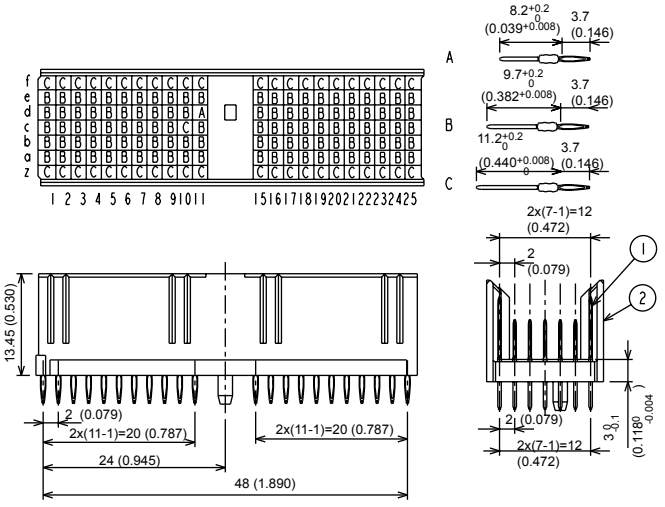


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating): Ø0.6±0.05 mm (.024)

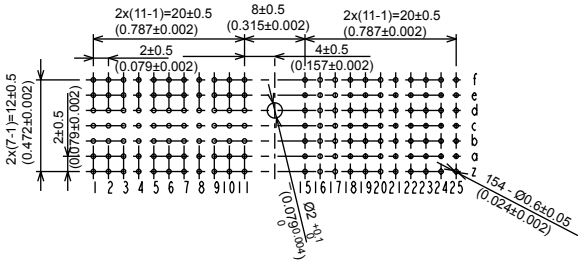


Unit: mm (in.)

■ **ORDERING PART NUMBER:** FCN-086P154-G/104-BCR

## P2/P5 TYPE B
## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

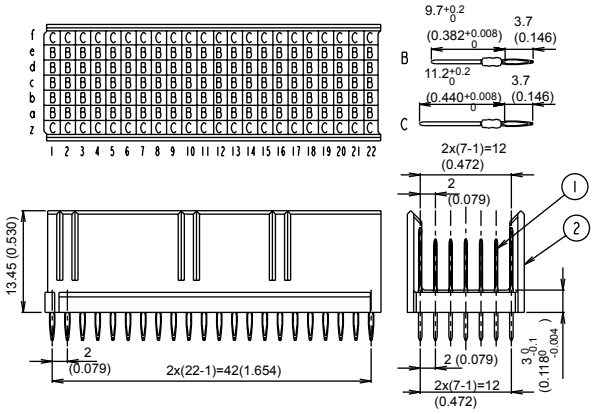


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating): Ø0.6±0.05 mm (.024)

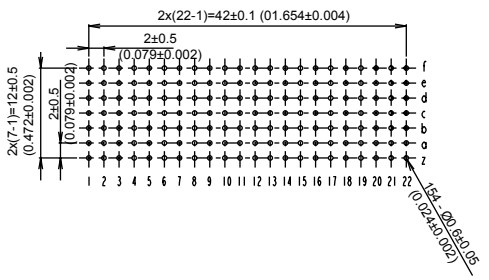


Unit: mm (in.)

■ **ORDERING PART NUMBER:** FCN-086P154-G/111A-BCR

## P1 TYPE A HOT SWAP 110 SIGNAL CONNECTOR
## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

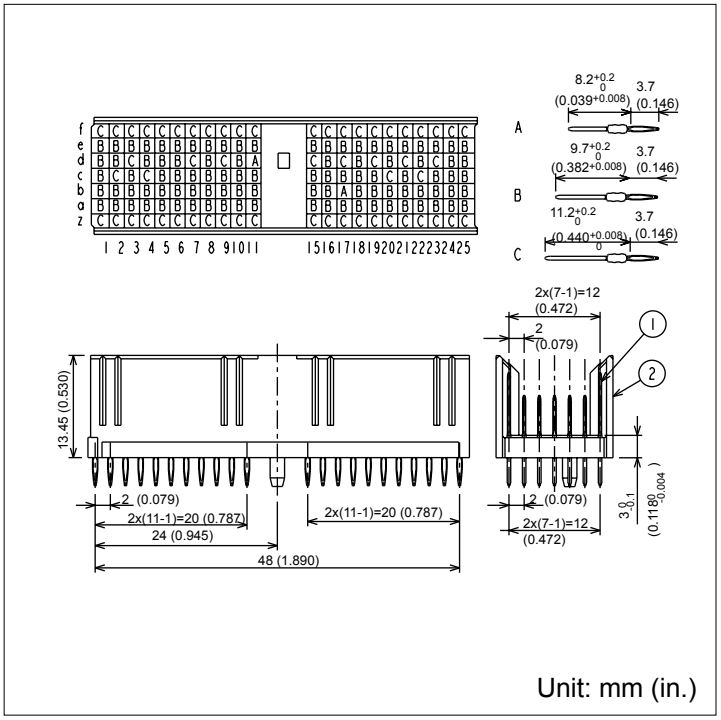


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating): Ø0.6±0.05 mm (.024)

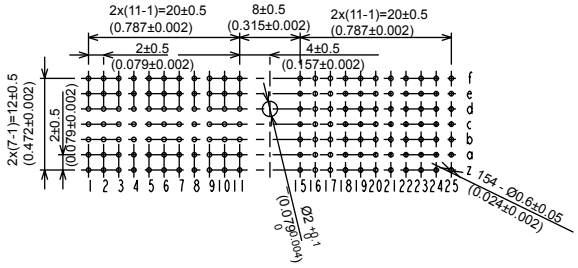


Unit: mm (in.)

■ **ORDERING PART NUMBER:** FCN-086P154-G/114-BCR

## P4 TYPE A MALE FEED THROUGH
## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

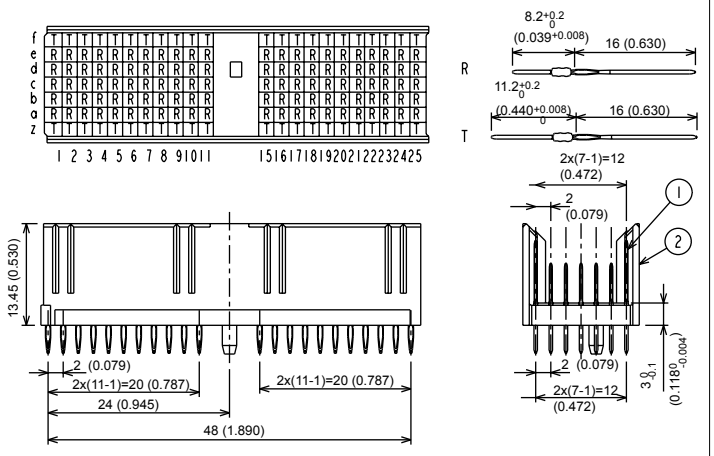


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating): Ø0.6±0.05 mm (.024)

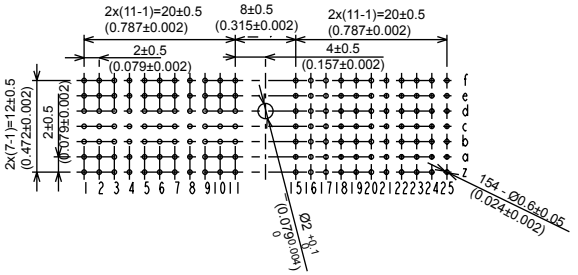


Unit: mm (in.)

■ **ORDERING PART NUMBER:** FCN-086P154G/401-BCR

## TYPE 2 FEED THROUGH
## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

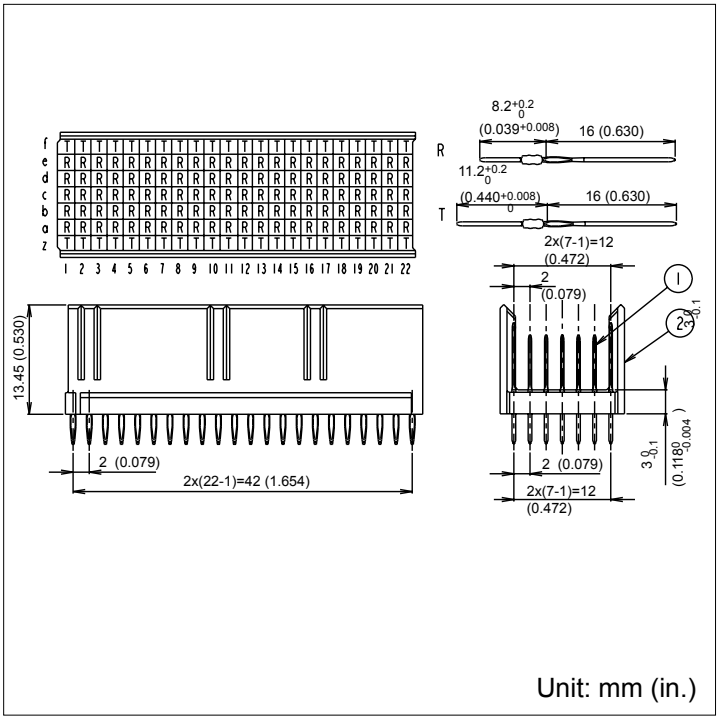


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating):
Ø0.6±0.05 mm (.024)

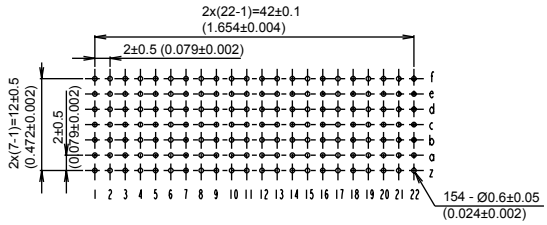


Unit: mm (in.)

■ **ORDERING PART NUMBER:** FCN-086P154-G/401A-BCR

## TYPE 2 FEED THROUGH
## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

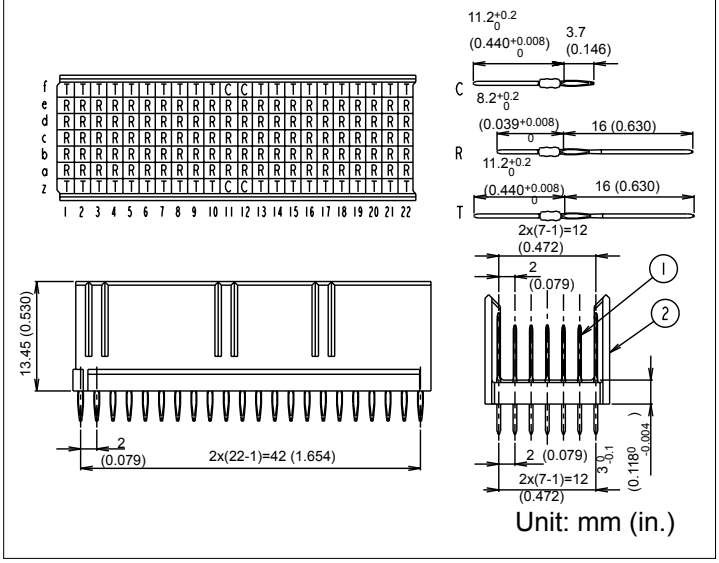


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating):
Ø0.6±0.05 mm (.024)

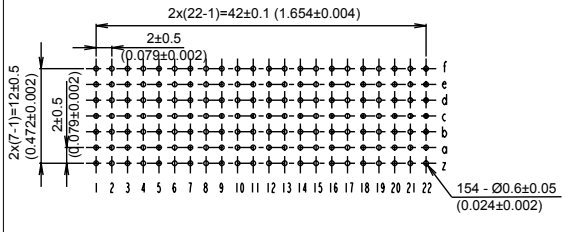


Unit: mm (in.)

■ **ORDERING PART NUMBER:** FCN-086P154-G/502A-BCR

## P5 TYPE B FEED THRU COMPUTER TELEPHONY CONNECTOR

## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

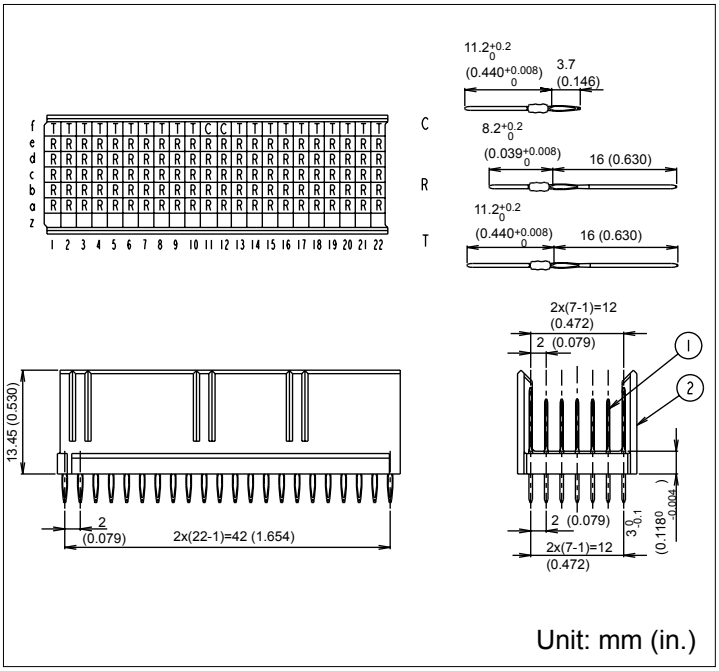


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating): Ø0.6±0.05 mm (.024)

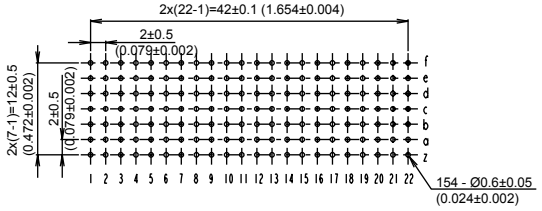


Unit: mm (in.)

### ■ ORDERING PART NUMBER: FCN-086P154-G/503A-BCR

## P4 TYPE A COMPUTER TELEPHONY CONNECTOR

## STRAIGHT PLUG (154 POSITIONS)

### ■ DIMENSIONS

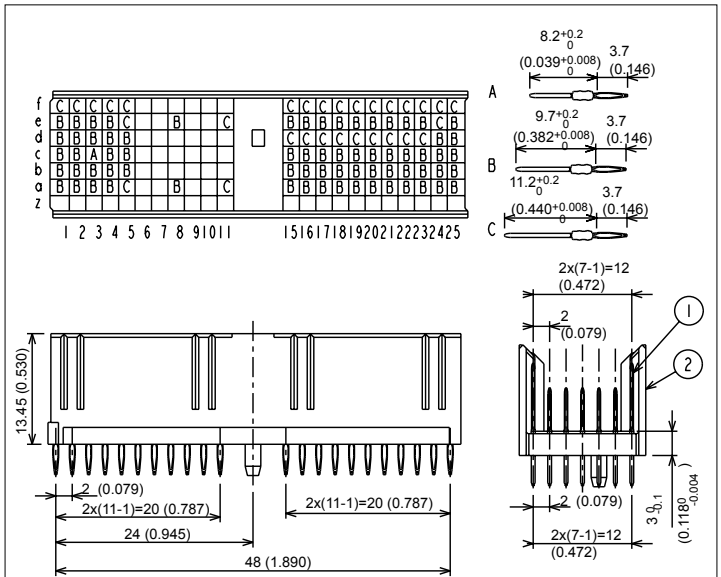


Unit: mm (in.)

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 5.6 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7±0.025 mm (.028 in.)
Through hole diameter (after plating): Ø0.6±0.05 mm (.024)

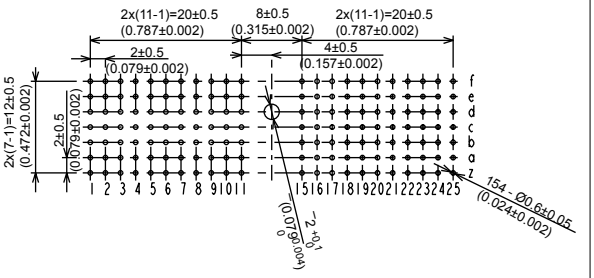


Unit: mm (in.)

### ■ ORDERING PART NUMBER: FCN-086P154-G/516-BCR

## SOCKET: 55 CONTACTS

### ■ DIMENSIONS

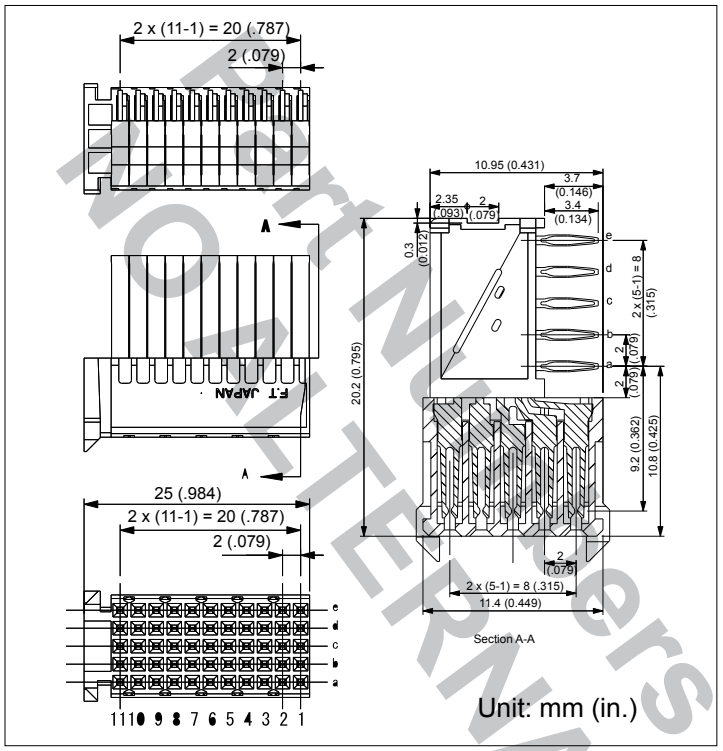


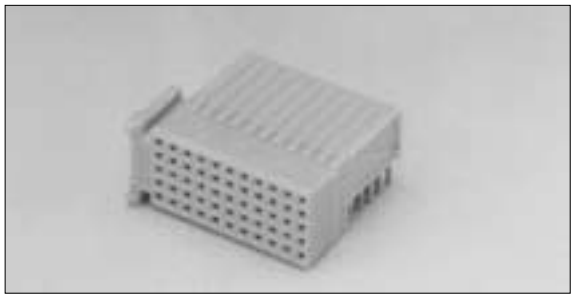

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 2.0 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7$^{\pm 0.025}$ mm (.028 in.)
Through hole diameter (after plating): Ø0.6$^{\pm 0.05}$ mm (.024)

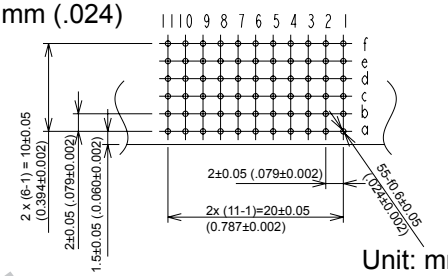


### ■ ORDERING PART NUMBER: FCN-086J055-G/101-BCR

FCN-086J055-G/111-BCR (with pre-attached upper shield)

## SHIELD PLATE

### ■ DIMENSIONS

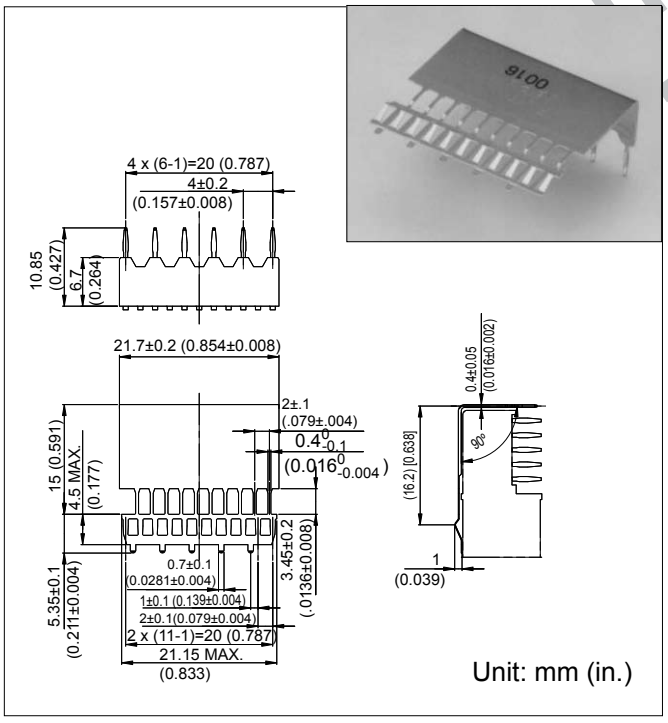


### ■ ORDERING PART NUMBER:

FCN-086J055-G/USD-BCR (top shield plate)

### ■ DIMENSIONS

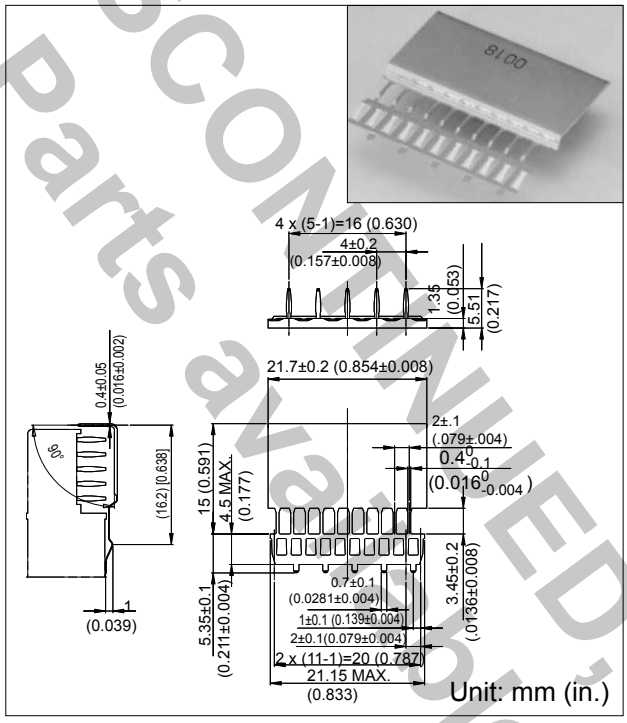


### ■ ORDERING PART NUMBER:

FCN-086J055-G/LSD-BCR (bottom shield plate)

Part Numbers DISCONTINUED
NOT FOR NEW DESIGN
Parts available

Part Numbers Discontinued, NO ALTERNATE Parts available

## SOCKET: 95 CONTACTS

### ■ DIMENSIONS

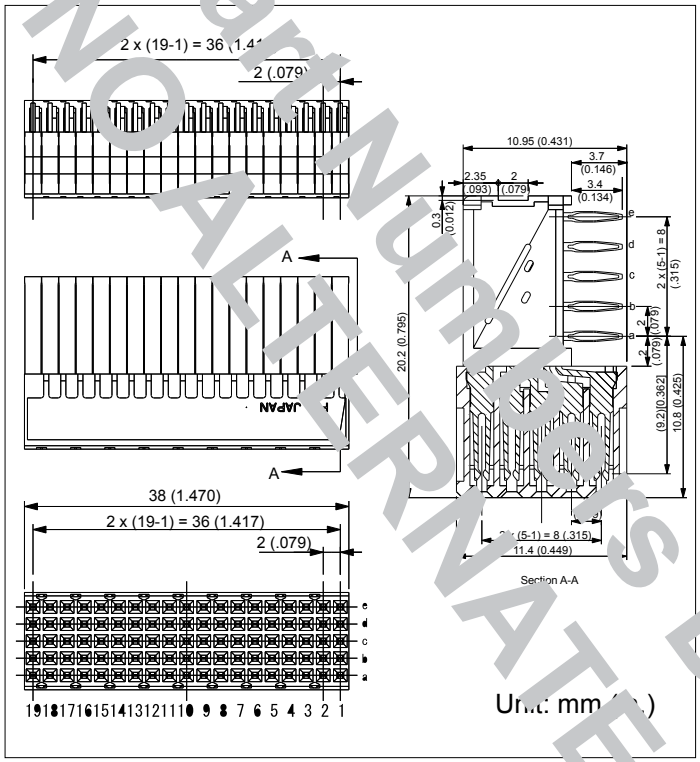


Unit: mm (in.)

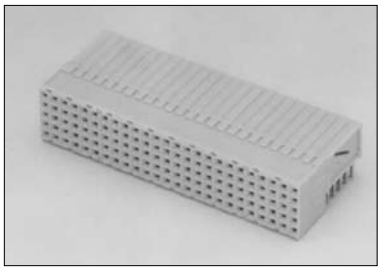

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 2.0 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7$^{\pm 0.025}$ mm (.028 in.)
Through hole diameter (after plating): Ø0.6$^{\pm 0.05}$ mm (.024)

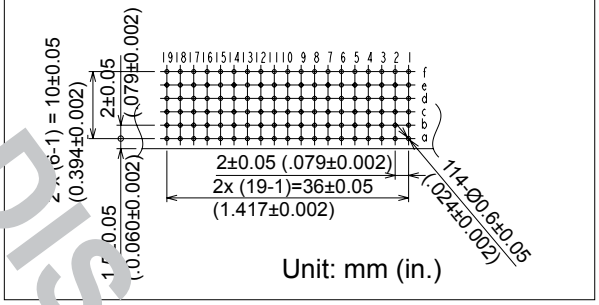


Unit: mm (in.)

### ■ ORDERING PART NUMBER:

FCN-086J095-G/[illegible]-BCR
FCN-086J095-G/11[illegible]A-BCR (with pre-attached upper shield)

## SHIELD PLATE

### ■ DIMENSIONS

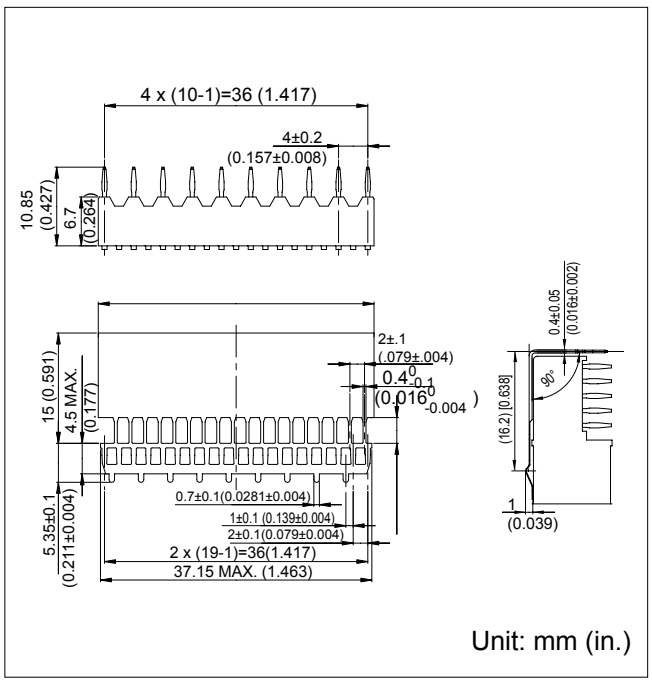


Unit: mm (in.)

### ■ DIMENSIONS

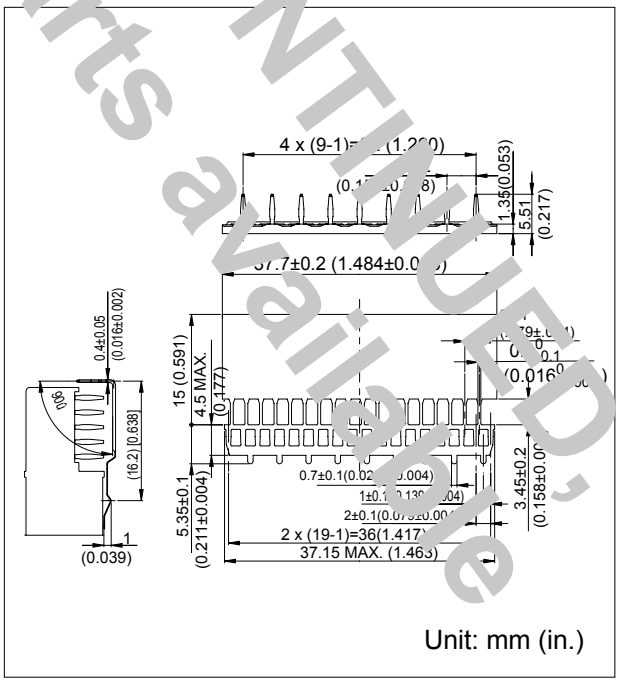


Unit: mm (in.)

### ■ ORDERING PART NUMBER:

FCN-086J095-G/VSD-BCR (top shield plate)

### ■ ORDERING PART NUMBER:

FCN-086J095-G/MSD-BCR (bottom shield plate)

**SOCKET: 110 CONTACTS**

■ **DIMENSIONS**

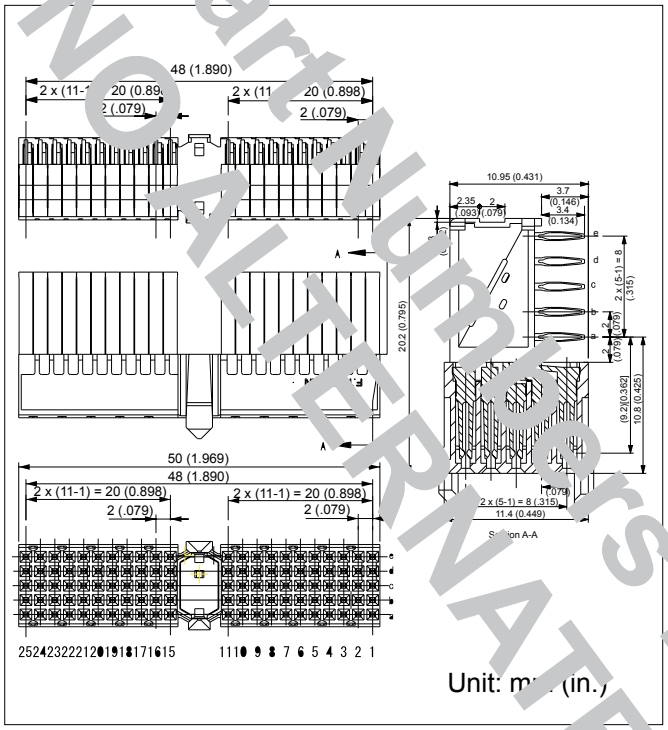


Unit: mm (in.)

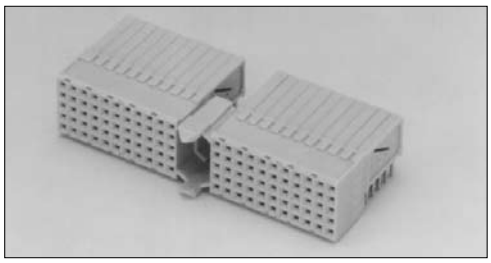

■ **MOUNTING HOLE LAYOUT**

Thickness: 1.4 to 2.0 mm (.055 to .220 in.)
Drill hole Diameter: Ø0.7$^{\pm 0.025}$ mm (.028 in.)
Through hole diameter (after plating): Ø0.6$^{\pm 0.05}$ mm (.024)

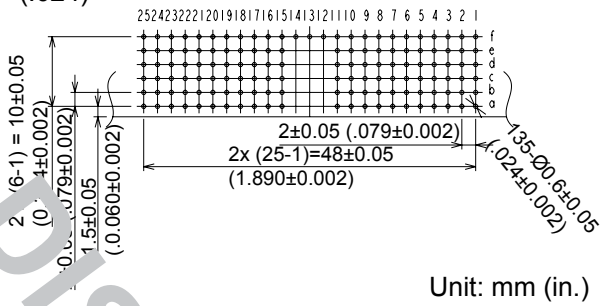


Unit: mm (in.)

■ **ORDERING PART NUMBER:** FCN-086J110-G/111-BCR

FCN-086J110-G/111-BCR (with pre-attached upper shield)

**SHIELD PLATE**

■ **DIMENSIONS**

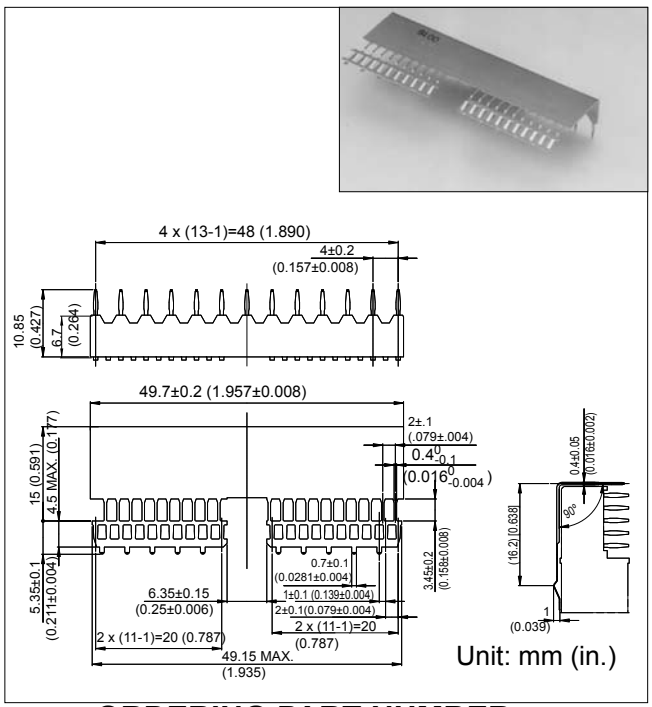


Unit: mm (in.)

■ **ORDERING PART NUMBER:**

FCN-086J110-G/USD-BCR (with key, top shield plate)

■ **DIMENSIONS**

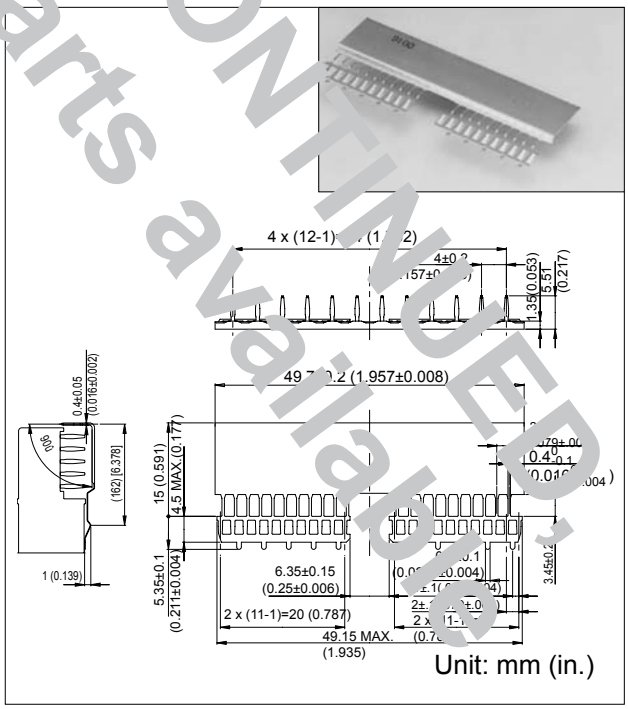


Unit: mm (in.)

■ **ORDERING PART NUMBER:**

FCN-086J110-G/LSD-BCR (with key, bottom, shield plate)

Part Numbers Discontinued.
NO ALTERNATE Parts available

## SOCKET: 10 CONTACTS WITHOUT KEY

### ■ DIMENSIONS

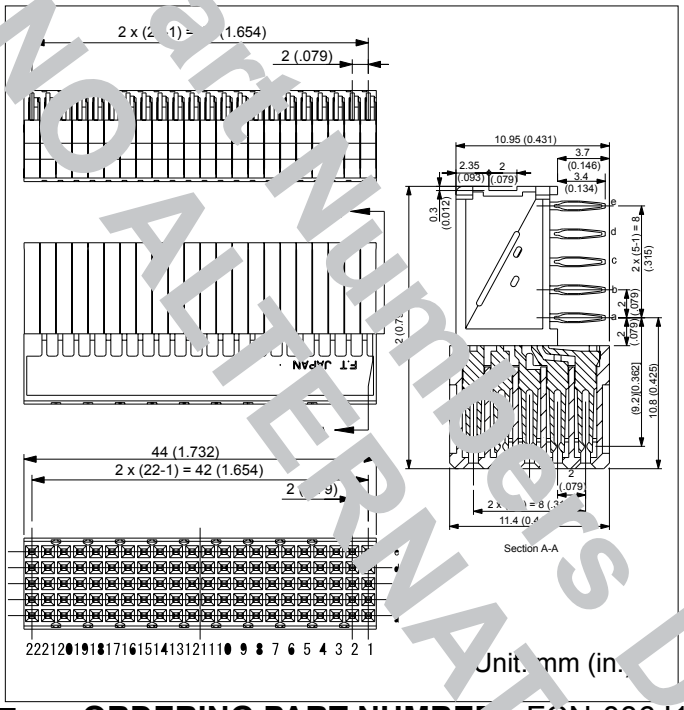




### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 2.0 mm (.055 to .220 in.)
Drill hole Diameter: ∅0.7$^{\pm 0.025}$ mm (.028 in.)
Through hole diameter (after plating):
∅0.6$^{\pm 0.05}$ mm (.024)

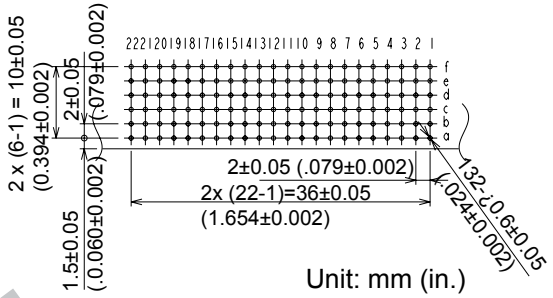


### ■ ORDERING PART NUMBER: FCN-086J110-G/101A-BCR

FCN-086J110-G/101A-BCR (with pre-attached upper shield)

## SHIELD PLATE

### ■ DIMENSIONS

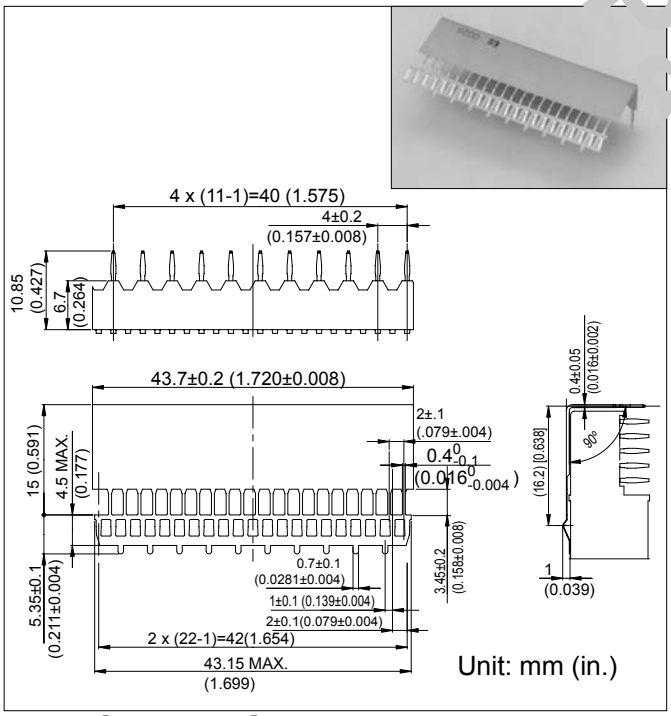


### ■ ORDERING PART NUMBER:

FCN-086J110-G/VSD-BCR (without key, top shield plate)

### ■ DIMENSIONS

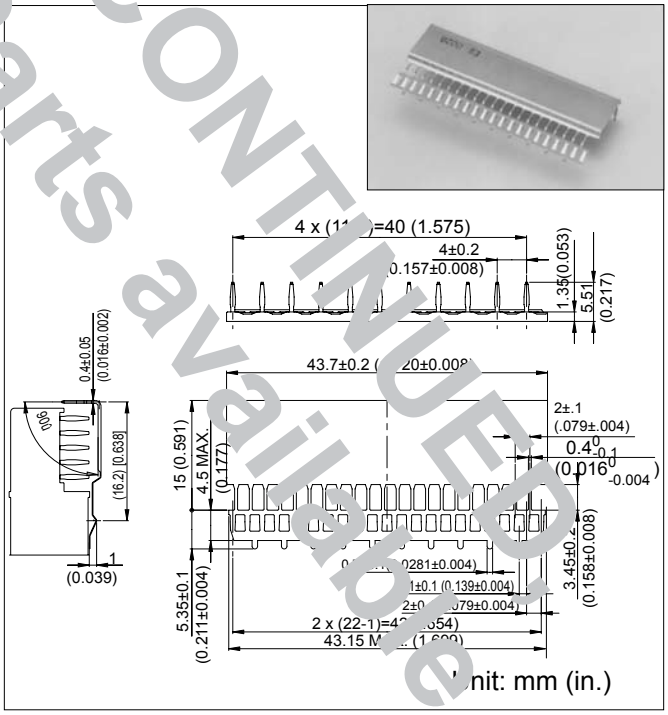


### ■ ORDERING PART NUMBER:

FCN-086J110-G/MSD-BCR (without key, bottom shield plate)

Part Numbers Discontinued
NO ALTERNATE Parts available

Part Numbers DISCONTINUED, NO ALTERNATE Parts available

## SOCKET: 125 CONTACTS

### ■ DIMENSIONS

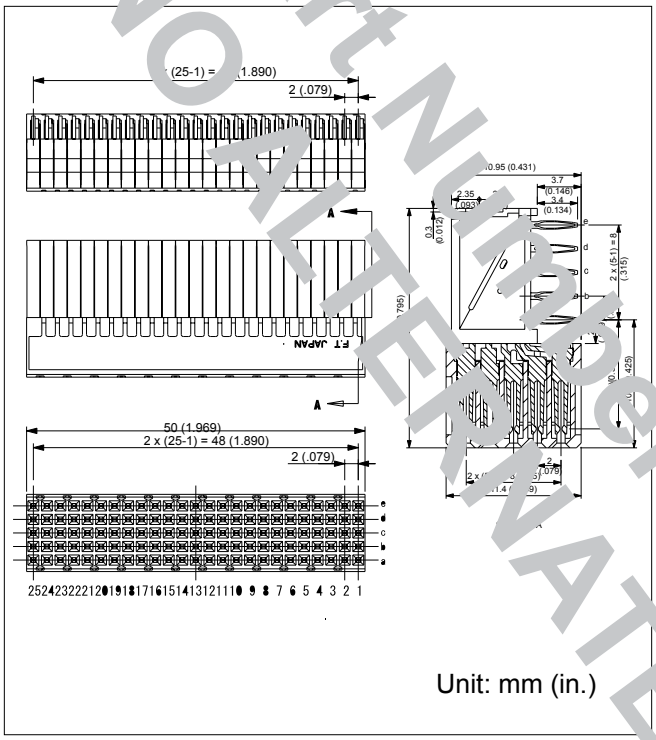


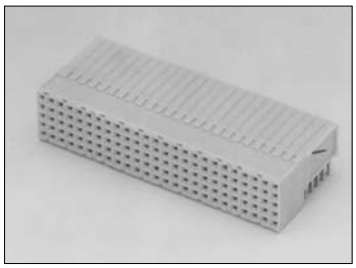

### ■ MOUNTING HOLE LAYOUT

Thickness: 1.4 to 2.0 mm (.055 to .220 in.)
Drill hole Diameter: ∅$0.7^{\pm 0.025}$ mm (.028 in.)
Through hole diameter (after plating):
∅$0.6^{\pm 0.05}$ mm (.024)

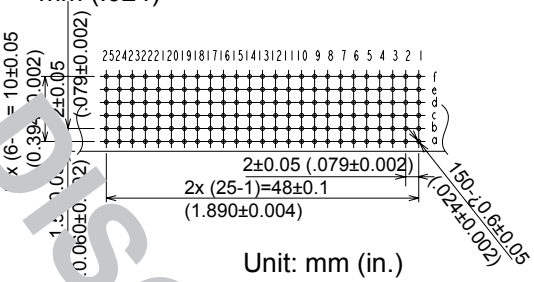


### ■ ORDERING PART NUMBER: FCN-086J125-G/101-BCR

FCN-086J125-G/111-BCR (with pre-attached upper shield)

## SHIELD PLATE

### ■ DIMENSIONS

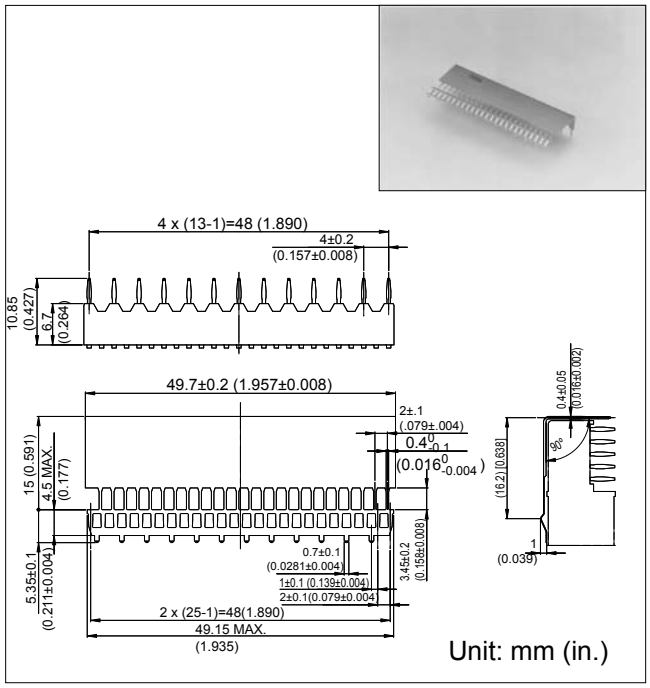


### ■ ORDERING PART NUMBER:

FCN-086J125-G/USD-BCR (top shield plate)

### ■ DIMENSIONS

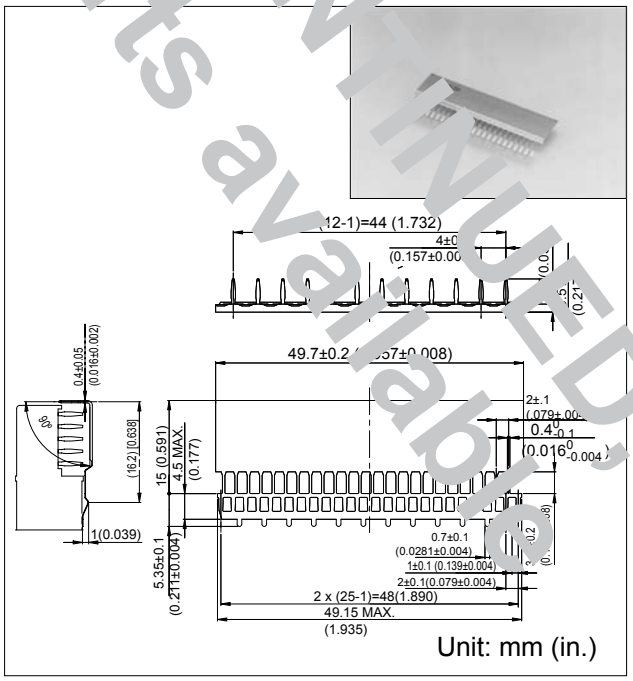


### ■ ORDERING PART NUMBER:

FCN-086J125-G/LSD-BCR (bottom shield plate)

## CODING KEY

### ■ DIMENSIONS

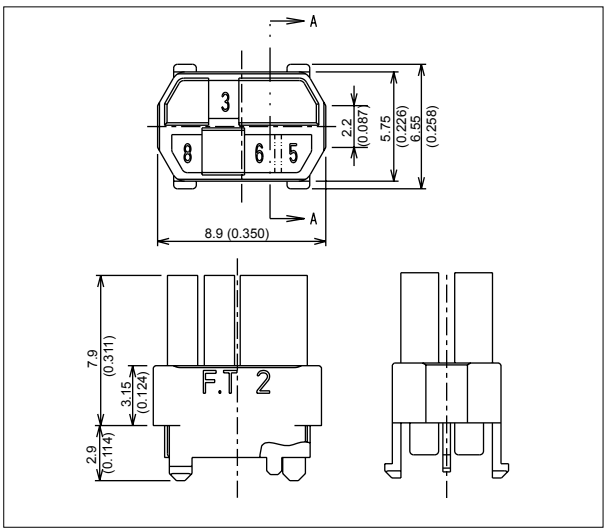


### ■ DIMENSIONS

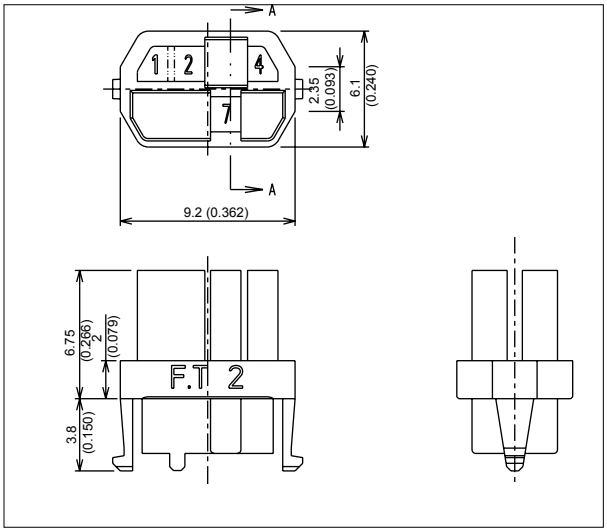


### ■ ORDERING PART NUMBER:

FCN-086A3568

Quanties: 50 pieces/package; minium order quanity: 500 piecs

### ■ ORDERING PART NUMBER:

FCN-086B1247

### ■ COMBINATION OF CODING KEYS

| Plug | Jack | Color |
|---|---|---|
| 1236 | 4578 | Nut brown |
| 1238 | 4567 | Ultramarine blue |
| 1248 | 3567 | Strawberry red |
| 1268 | 3457 | Olive yellow |
| 1567 | 2348 | Brilliant blue |

| Plug | Jack | Color |
|---|---|---|
| 2578 | 1346 | Reseda green |
| 3467 | 1258 | Slate gray |
| 3567 | 1248 | Antique pink |
| 3568 | 1247 | Pastel orange |

### ■ ORDERING PART NUMBERs:

Plug Coding Key: FCN-086A****

Jack Coding Key: FCN-086B****

****: Add Coding Key number: eg: FCN-086A1268

## Fujitsu Components International Headquarter Offices

**Japan**
Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

**North and South America**
Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: http://us.fujitsu.com/components/

**Europe**
Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

**Asia Pacific**
Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: http://www.fujitsu.com/sg/services/micro/components/

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. August 15, 2007

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.




**Как с нами связаться**

**Телефон:** 8 (812) 309 58 32 (многоканальный)
**Факс:** 8 (812) 320-02-42
**Электронная почта:** org@eplast1.ru
**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.