


ABC200 Series

AC-DC Open Frame Power Supplies

ABC200 Series is a family of compact and efficient AC-DC power supplies suited for telecom datacom and many other industrial applications.

This family meets the international information technology safety standards with the CE-Mark for the European Low Voltage Directive (LVD).

Their high efficiency allows a very minimal power loss in end equipment, resulting in higher reliability, ease of thermal management and regulatory approvals for an environmentally friendly end product.

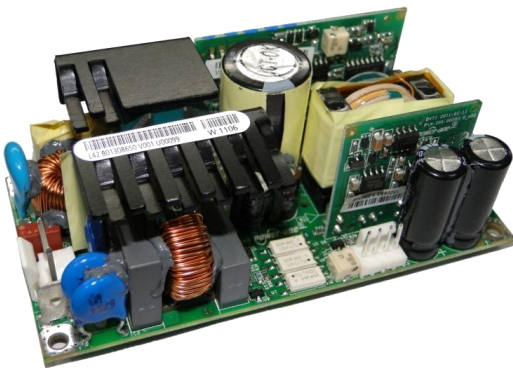

Key Features & Benefits

- High Efficiency up to 91% at 230 VAC
- Universal AC Input Voltage Range: 90-264 VAC
- Active Power Factor Correction
- Over temperature, output overvoltage, overcurrent and short circuit protection
- Low Conducted and Radiated EMI (EN 55022 cl A)
- Safety approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1
- High Power Density Design: 15 W/in³
- Compact Size: 2.0 (W) x 4.0 (L) x 1.5 (H) inches
- RoHS Compliant
- CE Marked

Applications

- Industrial Applications
- Telecom
- Daracom



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belpowersolutions.com

1. MODEL SELECTION

| MODEL | INPUT VOLTAGE | OUTPUT VOLTAGE | NOM OUTPUT CURRENT | # OF OUTPUTS | OUTPUT POWER |
|--------------|---------------|----------------|--------------------|--------------|--------------|
| ABC200-1012G | 90 – 264 VAC | 12 VDC | 15 A | 1 | 200 W |
| ABC200-1024G | 90 – 264 VAC | 24 VDC | 8.5 A | 1 | 200 W |
| ABC200-1048G | 90 – 264 VAC | 48 VDC | 4.2 A | 1 | 200 W |

2. OVERVIEW

The ABC200-10XXG is a high efficiency and high power With 1 m/s system air cooling, the ABC200-1012G can density AC to DC power supply. It incorporates boundary deliver up to 180 W continuous output power, and 204W for conduction mode (BCM) PFC converter and soft-switching ABC200-1024G and the ABC200-1048G. LLC converter, providing increased system reliability and high efficiency.

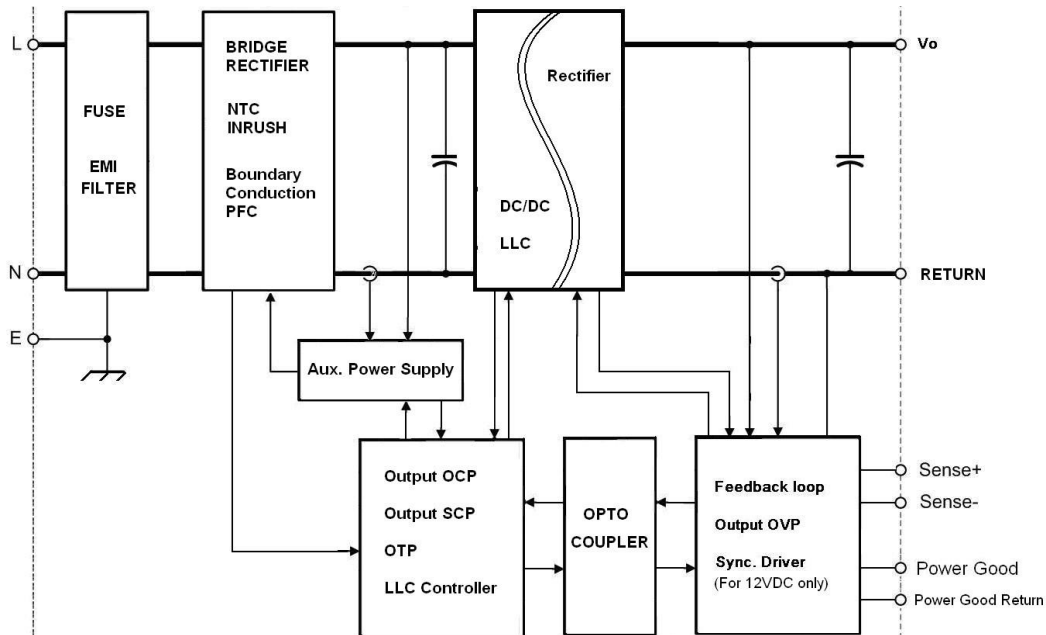


Figure 1. ABC200-10XXG block diagram

3. ABSOLUTE MAXIMUM RATINGS

Stresses in excess of the absolute maximum ratings may cause performance degradation, adversely affect long-term reliability, and cause permanent damage to the supply.

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | NOM | MAX | UNIT |
|-------------|--------------------------|-----|-----|-----|------|
| $V_{I\max}$ | Max Continuous Input | | | 264 | VAC |
| | Transient, 60 ms | | | 300 | VAC |

4. INPUT SPECIFICATIONS

General Condition: $T_A = -10... 50\text{ }^\circ\text{C}$ unless otherwise noted. Active fan air cooling required: 200 LFM (1 m/s)

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | NOM | MAX | UNIT | | |
|------------|-------------------------------------|-----------------------------------------------------------------------------------------|-------|------|-----------|----|-----|
| V_{nom} | Nominal Input Voltage | 100 | | 240 | VAC | | |
| V_I | Input Voltage Ranges | Normal operating ($V_{I,min}$ to $V_{I,max}$) | | 264 | VAC | | |
| I_{max} | Max Input Current | At 90 VAC input and max rating | | 2.75 | A_{rms} | | |
| I_p | Inrush Current Limitation | $V_{nom} = 115\text{ VAC}, T = 25^\circ\text{C}$ (see Figure 2) | | 40 | A_p | | |
| | | $V_{nom} = 230\text{ VAC}, T = 25^\circ\text{C}$ (see Figure 3) | | 80 | | | |
| f_I | Input Frequency | 47 | 50/60 | 63 | Hz | | |
| PF | Power Factor | Normal input, half load and above | | 0.9 | | | |
| V_{on} | Turn-On Input Voltage ¹ | Ramping up | | 85 | 87 | 90 | VAC |
| V_{off} | Turn-Off Input Voltage ¹ | Ramping down | | 80 | 83 | 85 | VAC |
| η | Efficiency | $V_{nom} = 230\text{ VAC}, 0.5 \cdot I_{o,nom}, V_o, T_A = 25\text{ }^\circ\text{C}$ | | 89 | | % | |
| | | $V_{nom} = 230\text{ VAC}, 1.0 \cdot I_{o,nom}, V_o, T_A = 25\text{ }^\circ\text{C}$ | | 91 | | | |
| T_{hold} | Hold-Up Time | After last AC zero point, V_o within regulation, $V_I = 115\text{ VAC}, P_{o,nom}$ | | 10 | | ms | |

1) The power supply is provided with the hysteresis loop (about 4.5V) during turn-on and turn-off within the ranges.

4.1 INPUT FUSE

A slow-blow 5A input fuse (5 × 20 mm) in series with live line inside the power supply protects against severe defects. The fuse and a VDR form together with the input filter an effective protection against high input transients.

4.2 INRUSH CURRENT

The AC-DC power supply exhibits an X-capacitance of only about 1.0 μF , resulting in a low and short peak current, when the supply is connected to the mains. The internal bulk capacitor will be charged through a NTC resistor which will limit the inrush current (see Figure 2 and 3).

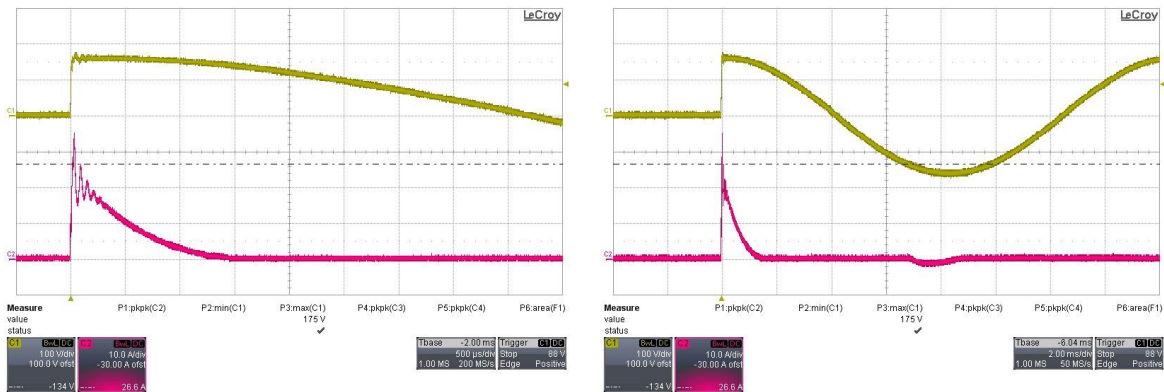


Figure 2. Inrush current, $V_{in} = 115\text{ Vac}, 90^\circ$ CH1: V_{in} (100V/div), CH2: I_{in} (10A/div)

¹ The power supply is provided with the hysteresis loop (about 4.5V) during turn-on and turn-off within the ranges.



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

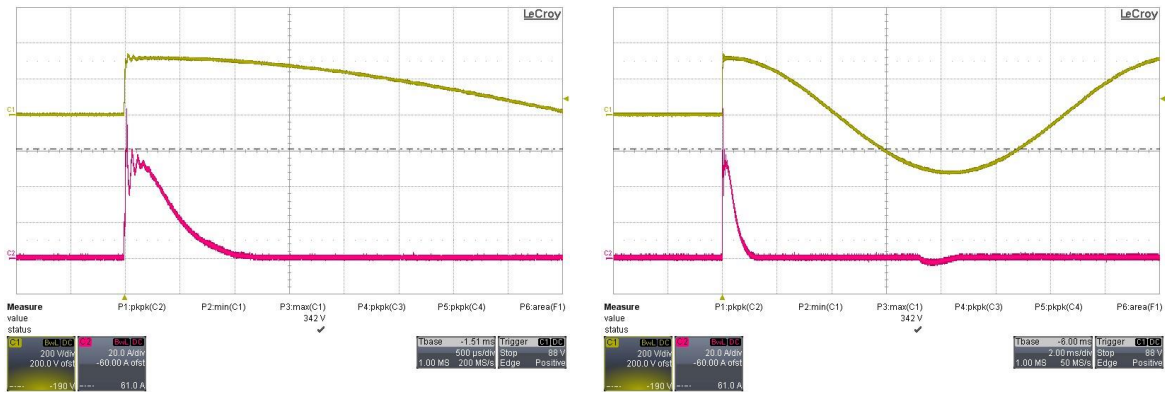


Figure 3. Inrush current, $V_{in} = 230Vac$, 90° CH1: V_{in} (200V/div), CH2: I_{in} (20A/div)

4.3 INPUT UNDER-VOLTAGE


If the sinusoidal input voltage stays below the input under voltage lockout threshold V_{on} , the supply will be inhibited. Once the input voltage returns within the normal operating range, the supply will return to normal operation again.

4.4 POWER FACTOR CORRECTION

Power factor correction (PFC) is achieved by controlling the input current waveform synchronously with the input voltage. A specified PFC controller is implemented in the boundary conduction mode topology giving outstanding PFC results over a wide input voltage and load ranges. The input current will follow the shape of the input voltage.

4.5 EFFICIENCY

The high efficiency (see Figure 4) is achieved by using soft switching LLC technology with boundary conduction mode PFC topology minimizing switching losses. Synchronous rectifiers on the output reduce the losses in the high current A Schottky or ultra fast diode is used as the rectifier in the output path for ABC200-1012G. ABC200-1024G and ABC200-1048G because of the high output voltage level.

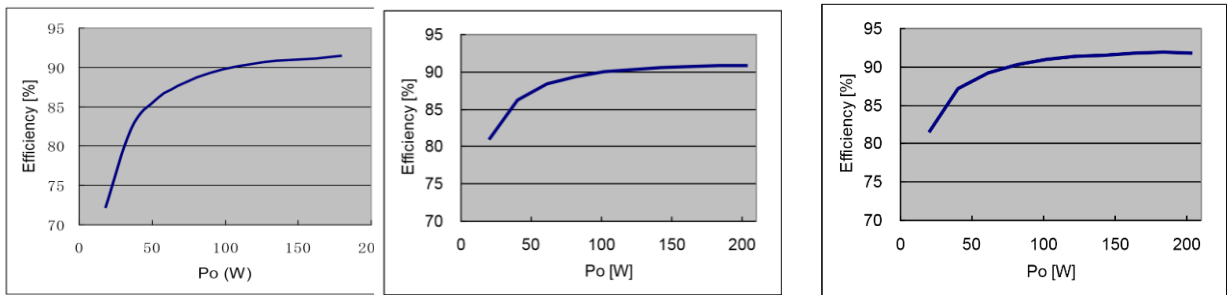

Efficiency vs. Output Power at 230VAC, ABC200-1012G Efficiency vs. Output Power at 230VAC, ABC200-1024G Efficiency vs. Output Power at 230VAC, ABC200-1048G

Figure 4. Efficiency Curves

5 OUTPUT SPECIFICATIONS

General Condition: $T_A = -10$ to $+50^\circ\text{C}$ unless otherwise noted. Derate linearly from 50°C to 50% at 70°C .
Active fan air cooling required: 200 LFM (1 m/s).

| PARAMETER | CONDITIONS / DESCRIPTION | | MIN | NOM | MAX | UNIT |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|------|-------|---------------|
| Main Output V_O | | | | | | |
| V_O Nominal Output Voltage | $0.5 \cdot I_O, T_{\text{amb}} = 25^\circ\text{C},$ | ABC200-1012G | | 12.0 | | |
| | | ABC200-1024G | | 24.0 | | VDC |
| | | ABC200-1048G | | 48.0 | | |
| V_O set Output Setpoint Accuracy | $0.5 \cdot I_O, T_{\text{amb}} = 25^\circ\text{C}$ | ABC200-1012G | 11.95 | | 12.05 | |
| | | ABC200-1024G | 23.90 | | 24.10 | VDC |
| | | ABC200-1048G | 47.80 | | 48.20 | |
| P_O Nominal Output Power | | ABC200-1012G | | 180 | | W |
| | | ABC200-1024G | | 204 | | W |
| | | ABC200-1048G | | 204 | | W |
| I_O Nominal Output Current | | ABC200-1012G | | 13 | 15 | ADC |
| | | ABC200-1024G | | 7.5 | 8.5 | ADC |
| | | ABC200-1048G | | 3.5 | 4.25 | ADC |
| V_O ripple Output Ripple & Noise | V_O nom, I_O nom, 20 MHz BW | ABC200-1012G | | | 120 | mV |
| | | ABC200-1024G | | | 240 | mV |
| | | ABC200-1048G | | | 480 | mV |
| d V_O Load Regulation | $I = I$ nom, 0 - 100% I_O nom, | ABC200-1012G | | 60 | 120 | mV |
| | | ABC200-1024G | | 120 | 240 | mV |
| | | ABC200-1048G | | 240 | 480 | mV |
| d I Line Line Regulation | $I = I$ min... I max, | ABC200-1012G | | 12 | 120 | mV |
| | | ABC200-1024G | | 24 | 240 | mV |
| | | ABC200-1048G | | 96 | 480 | mV |
| d V_{dyn} Dynamic Load Regulation | $\Delta I_O = 50\% I_{O \text{ nom}},$ $I_O = 50 \dots 100\% I_{O \text{ max}},$ $dI_O/dt = 1 \text{ A}/\mu\text{s},$ recovery within 5% of $V_{O \text{ nom}}$ | ABC200-1012G | | | 0.6 | VDC |
| | | ABC200-1024G | | | 1.2 | VDC |
| | | ABC200-1048G | | | 2.4 | VDC |
| T_{rec} Recovery Time | | ABC200-10XXG | | | 2 | ms |
| t_{Delay} Turn On Delay Time | See Figure 5 and Figure 6 | | 0 | 1.5 | 2.5 | sec |
| t_{rise} Rise Time | $V_O = 10\dots 90\% V_{O \text{ nom}}$ (see Figure 10) Note: For ABC200-1048G, maximum rise time is 30 ms | | | | 20 | ms |
| C_{Load} Capacitive Loading | $T_{\text{amb}} = 25^\circ\text{C}$ | ABC200-1012G | | | 3300 | μF |
| | | ABC200-1024G | | | 1800 | μF |
| | | ABC200-1048G | | | 1000 | μF |

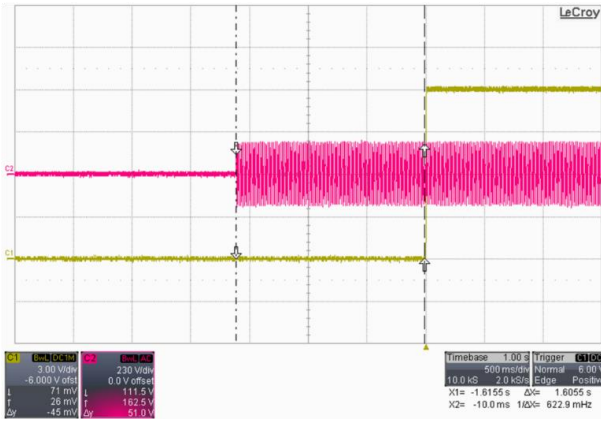


Figure 5. Turn-On AC Line 115 VAC, full load (500 ms/div)
CH1: VO (3 V/div) CH2: Vin (230 V/div)

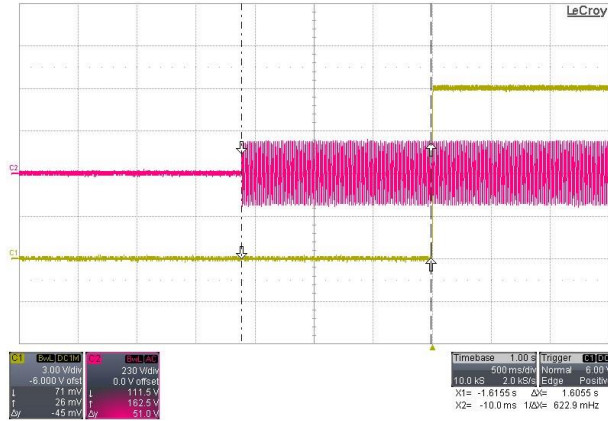


Figure 6. Turn-On AC Line 230 VAC, full load (500 ms/div)
CH1: VO (3 V/div) CH2: Vin (350 V/div)

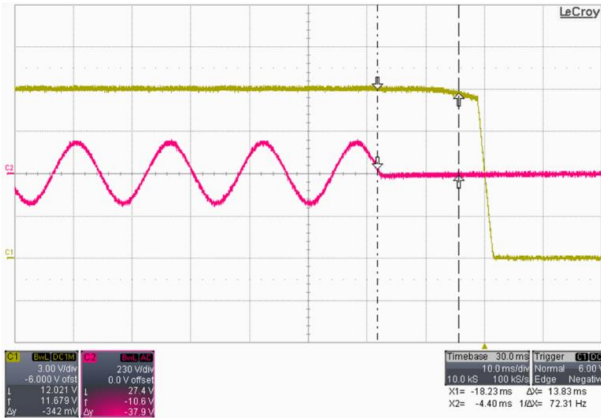


Figure 7. Turn-Off AC Line 115 VAC, full load (10 ms/div)
CH1: VO (3 V/div) CH2: Vin (230 V/div)

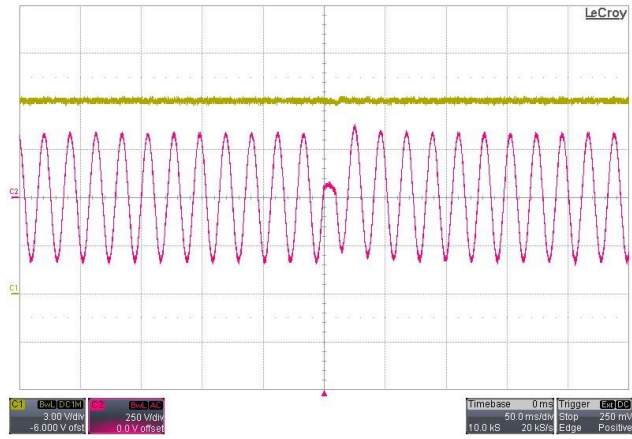


Figure 8. AC drop out 10ms (50 ms/div)
CH1: VO (3 V/div) CH2: Vin (250 V/div)

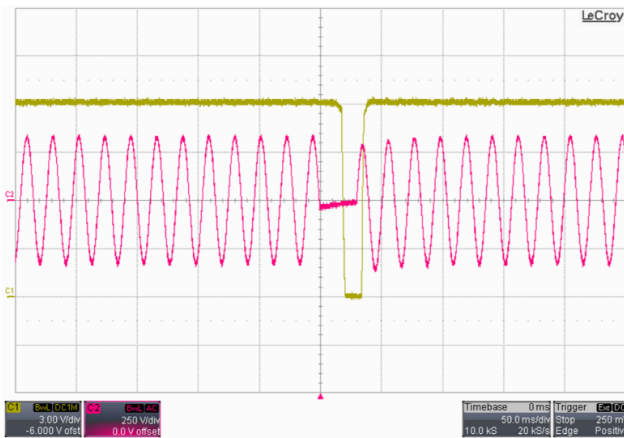


Figure 9. AC drop out 30ms (50 ms/div), VO restart
CH1: VO (3 V/div) CH2: Vin (250 V/div)

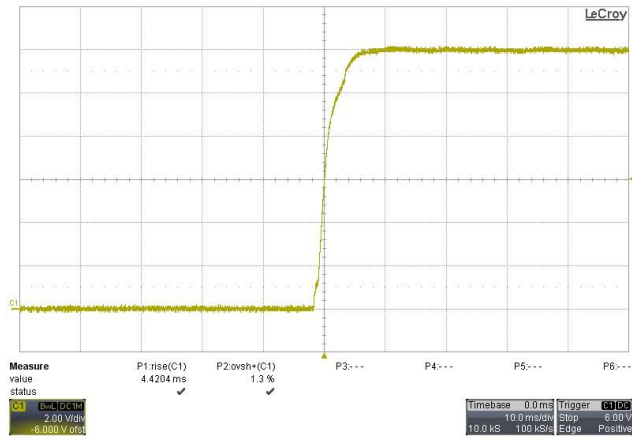


Figure 10. VO rise time at 115VAC CH1: VO (2 V/div)

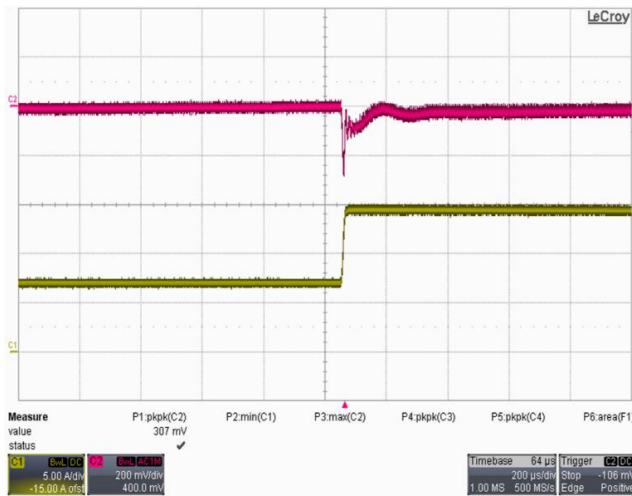


Figure 11. Load transient VO, 7.5A to 15A (200 us/div), CH1: IO (5 A/div) CH2: VO (200 mV/div)

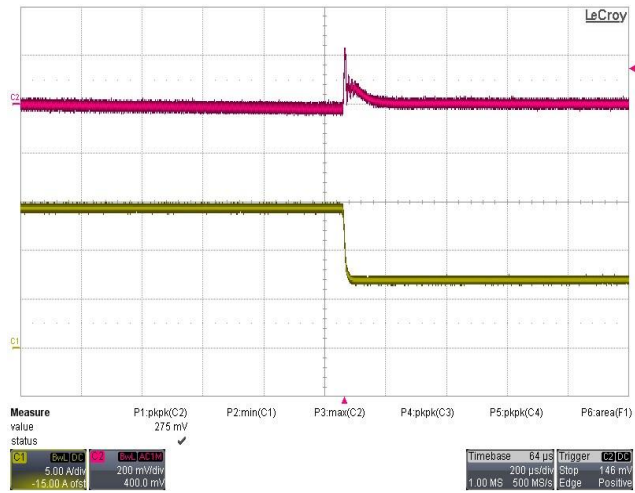


Figure 12. Load transient VO, 15A to 7 A (200 us/div) CH1: IO (5 A/div) CH2: VO (200 mV/div)

6 ENVIRONMENTAL SPECIFICATIONS

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | NOM | MAX | UNIT |
|---------------------|--------------------------|-------------------------------------------------------------------------|-----|-----|------|
| T_A | Ambient temperature | $V_{i \min}$ to $V_{i \max}$, $I_o \text{ nom}$, $I_{SB \text{ nom}}$ | | | |
| $T_{A \text{ ext}}$ | Extended temp range | | | | |
| T_S | Storage temperature | | | | |

7 PROTECTION

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | NOM | MAX | UNIT | |
|-------------------|--------------------------------|-----------------------------------------------------------------------------------------|------|------|------------------|-----|
| F | Input Fuses Rating | Not user accessible, time lag characteristic | | | | |
| $V_o \text{ ov}$ | OV Trigger Point | ABC200-1012G | 14.0 | 15.0 | 16.0 | VDC |
| | | ABC200-1024G | 28.0 | 30.0 | 32.0 | VDC |
| | | ABC200-1048G | 53.0 | 55.0 | 57.0 | VDC |
| $I_o \text{ lim}$ | Current Limit | $V_i > 90 \text{ VAC}$, $-10 \text{ }^\circ\text{C} < T_a < 50 \text{ }^\circ\text{C}$ | | | | |
| | | ABC200-1012G | | 18.0 | | A |
| | | ABC200-1024G | | 9.0 | | A |
| ABC200-1048G | | 4.5 | | A | | |
| T_{SD} | Over Temperature on Heat Sinks | Automatic shut-down, automatic recovery after cool down. | | | | |
| | | | 105 | | $^\circ\text{C}$ | |



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

7.1 OVERVOLTAGE PROTECTION

The AC-DC power supply provides a fixed threshold overvoltage (OV) protection implemented with a HW comparator. Once an OV condition has been triggered, the supply will shut down and latch the fault condition. The latch can be unlocked by disconnecting the supply from the AC mains only.

7.2 CURRENT LIMITATION

The main output current limitation will decrease with linear derating to 50% at 70 °C if the ambient (inlet) temperature increases beyond 50 °C (see Figure 13).


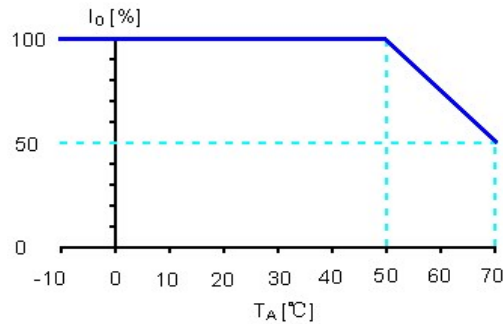


Figure 13. Output Current Capacity Derating

8 POWER GOOD SIGNAL

The Out-OK output gives a status indication of the converter and the output voltages. It can be used for control functions such as data protection, central system monitoring or as a part of a self-testing system. Connecting the Out-OK as shown in Figure 14, $V_{OK} < 1.0$ V indicates the output voltage(s) of the converter are within the range.

Note: Using the potentiometer, the monitor level tracks the programmed output voltage. In an error condition, if the output voltage is out of range due to overload or an external over voltage, V_{OK} will approach V_p . The output is formed by an NPN transistor. The signal is isolated from the output.

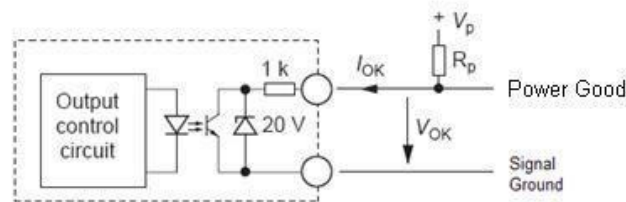

O/P V OK - Signal Low, Opto conducting, (max sink current 0.5 mA)

O/P V Bad - Signal High, Opto open, (max leakage current 25 μ A)

Figure 14. Power Good signal

9 ELECTROMAGNETIC COMPATIBILITY

9.1 IMMUNITY

NOTE: Most of the immunity requirements are derived from EN 55024:1998/A2:2003.

| TEST | STANDARD / DESCRIPTION | CRITERIA |
|--------------------------------|------------------------|----------|
| ESD Contact Discharge | EN 61000-4-2, Level 2 | A |
| RF Susceptibility | EN 61000-4-3, Level 3 | A |
| Fast Transient/Burst | EN 61000-4-4, Level 3 | B |
| Surge | EN 61000-4-5, Class 3 | B |
| RF Conducted Immunity | EN 61000-4-6, Class 3 | A |
| Voltage Dips and Interruptions | EN 61000-4-11 | C |
| Magnetic Fields | EN 61000-4-8, Level 3 | A |

9.2 EMISSION

| TEST | STANDARD / DESCRIPTION | CRITERIA |
|---------------------------------|--------------------------------------------------------------|----------|
| Conducted Emission | EN55022 / CISPR 22: 0.15 ... 30 MHz, QP and AVG, single unit | Class A |
| Radiated Emission | EN55022 / CISPR 22: 30 MHz ... 1 GHz, QP, single unit | Class A |
| Harmonic Emissions | IEC61000-3-2, Vin = 100 VAC/ 60 Hz, 100% Load | Class A |
| | IEC61000-3-2, Vin = 240 VAC/ 50 Hz, 100% Load | Class A |
| Voltage Fluctuation and Flicker | EN61000-3-3 | PASS |

10 SAFETY SPECIFICATIONS

Maximum electric strength testing is performed in the factory according to IEC/EN 60950, and UL 60950. Input-to-output electric strength tests should not be repeated in the field. Bel Power Solutions will not honor any warranty claims resulting from electric strength field tests.

| PARAMETER | DESCRIPTION / CONDITIONS | MIN | NOM | MAX | UNIT |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------------|-----|------|
| Safety Approvals | Safety approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1. CE Mark for LVD CB Approval | | | | |
| | Input / Case | | Basic | | |
| Insulation Safety Rating | Input / Output | | Reinforced | | |
| | Output / Case | | Functional | | |
| d_c Creepage / Clearance | Primary (L/N) to protective earth (PE) | | According to | | mm |
| | Primary to secondary | | safety standard | | mm |
| Electrical Strength Test | Input to case | | 2121 | | VDC |
| | Input to output | | 4242 | | VDC |
| | Output and Signals to case | | 500 | | VDC |



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

11 MECHANICAL SPECIFICATIONS

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | NOM | MAX | UNIT |
|------------|--------------------------|-----|-------|-----|------|
| Dimensions | Width | | 50.8 | | mm |
| | Height | | 36.6 | | mm |
| | Depth | | 101.6 | | mm |
| M | Weight | | 0.2 | | kg |

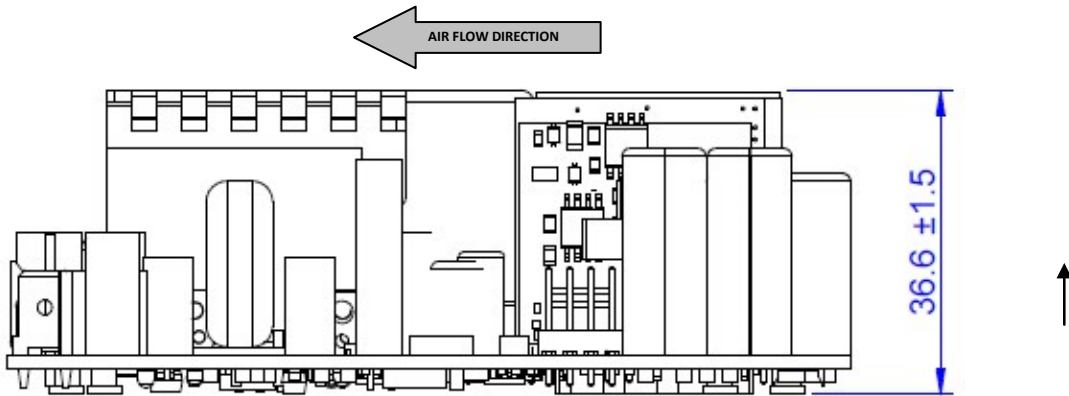


Figure 15. Side view 1

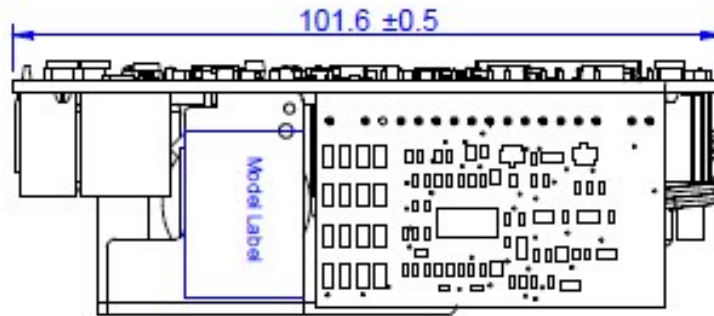


Figure 16. Side view 2

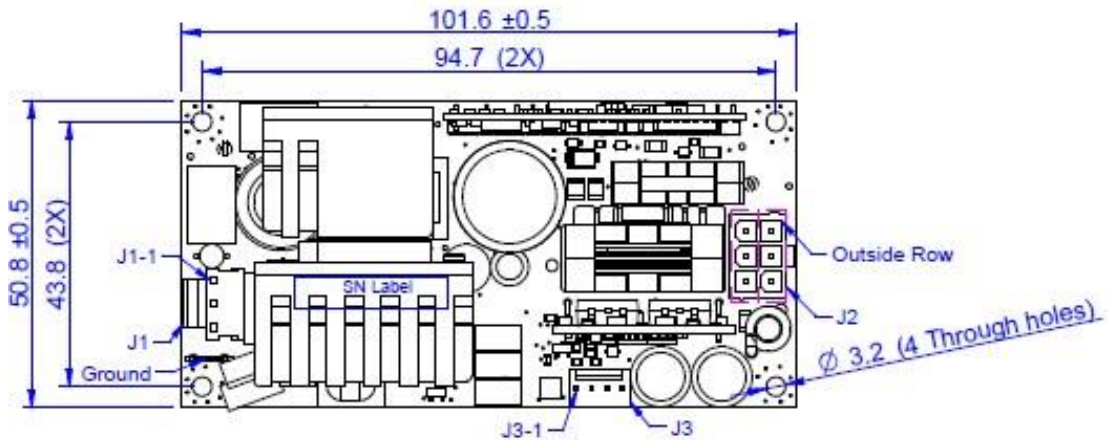


Figure 17. Top view

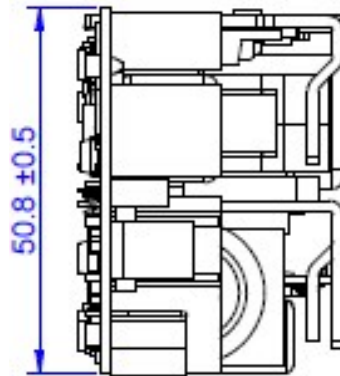


Figure 18. Front view

NOTE: A 3D step file of the power supply casing is available on request.

12 CONNECTIONS

| PIN | NAME | DESCRIPTION |
|----------------------|----------------|----------------------------------|
| Input J1 | | |
| J1-1 | Live | AC Input Live |
| J1-2 | NA | NA |
| J1-3 | Neutral | AC Input Neutral |
| Output J2 | | |
| Pin 1-3(Insider Row) | -Vo | +12V / +24V / +48V output return |
| Pin 4-6(Outside Row) | +Vo | +12V / +24V / +48V output |
| Signal J3 | | |
| J3-1 | Power Good RTN | Power OK signal output return |
| J3-2 | Power Good | Power OK signal output |
| J3-3 | Vo Sense + | Main output positive sense |
| J3-4 | Vo Sense - | Main output negative sense |

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.