



■ Features of the IMST® Hybrid ICs

■ Excellent heat dissipation

- One of the most influential factors determining reliability of electronic devices is "heat". The IMST substrate is most suitable for the field of power electronics, dissipating heat efficiently.

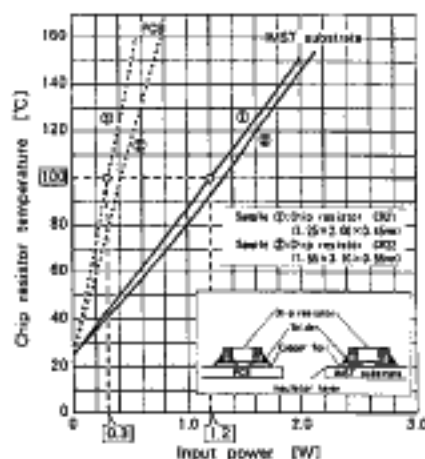


Comparison of chip resistor temperature rises
【IMST®'s values are about 1/4 of PCB's.】

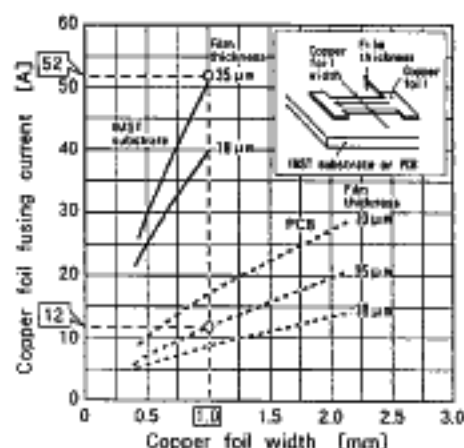

Comparison of copper foil fusing currents
【IMST®'s values are about 4 times of PCB's.】

■ High reliability

- Wiring is applied by mounting semiconductor bare chips directly and bonding aluminum wires. This reduces number of soldering points assuring high reliability.

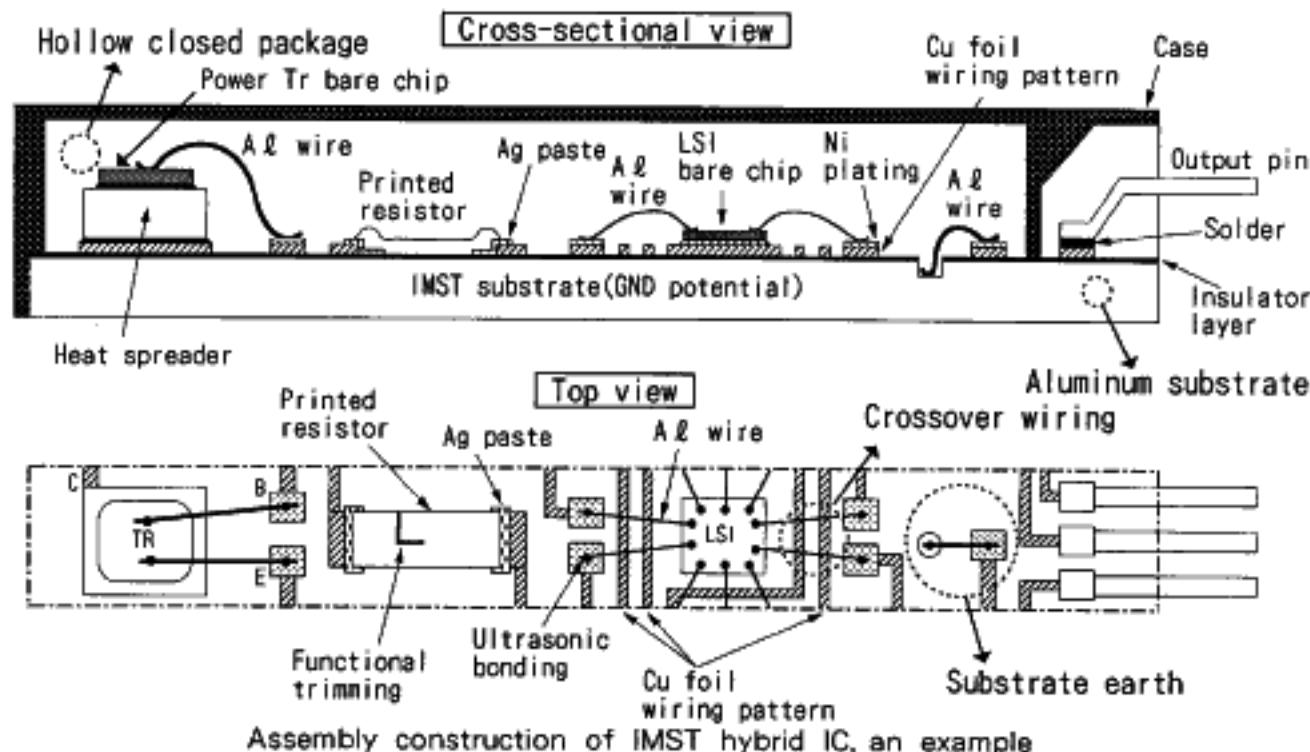

■ Excellent electromagnetic shielding

- Excellent electromagnetic shielding can be attained by putting the entire substrate on the ground potential because the base substrate is made of aluminum. This eliminates noise errors in the digitalized electronic devices.

■ Features of STK Series Audio Power ICs

■ Ample lineup

- STK series lineup is ample and standard based whereas the current hybrid IC market tends to customization.


Output power (per channel)	: 5 to 200W
Total harmonic distortion	: 10 to 0.005 %
Number of channels	: 1 to 3ch.
Load impedance	: 1 to 8 Ω

■ Pin compatibility

- The design takes pin compatibility of the hybrid IC output pin important so that a same PCB can be used for various set grades such as output capacity and distortion factor.

■ Excellent thermal stability

- The IMST substrate of excellent heat dissipation naturally assures excellent thermal conductivity. Temperature of the output transistor can be almost the same as the temperature compensating transistor, preventing thermal runaway.

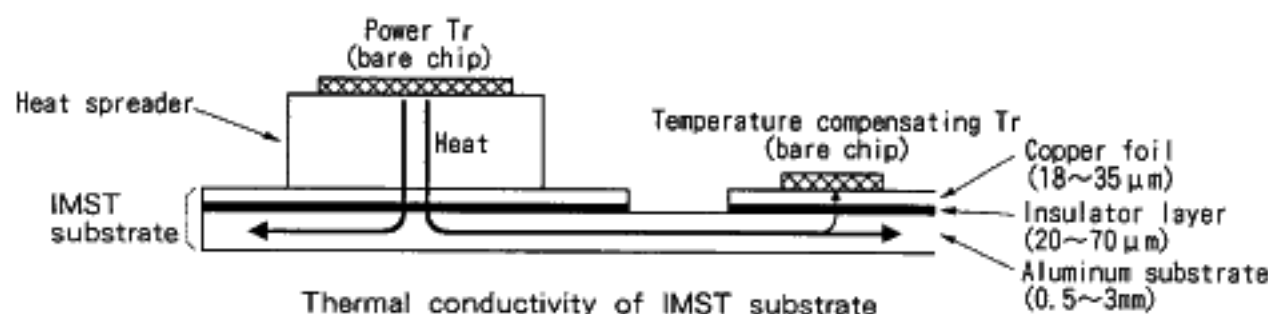

■ Decreasing adjustment processes

- Adjustments of the neutral voltage of the power output stage and the quiescent current are done by functional trimming inside the hybrid IC.
This eliminates adjustment processes saving on the production procedure.

■ Reducing the term for design

- The audio output stage remains analog however digitalization technology may advance. Design of the analog power output stage, which is considered requiring the designer's experience and skill, can be simplified by employing hybrid ICs.
This reduces the term for design and saves on the design procedure.

■ Decreasing number of parts

- The product of STK series decreases the total number of parts required for a unit, allowing to reduce its size, certain assembly manpower, simplify material control, improve serviceability and reduce cost.

■ No smoke for fire

- Since the product of STK series is designed so to emit no smoke nor fire in any abnormality, it facilitates to obtain safety approvals.

Line - up of Audio power Amplifier ICs

Power Supply	+Power Supply		±Power Supply							
Channel Number	1ch	2ch	1ch	2ch						
Load	1~8 Ω		4~8 Ω							
THD	10%	1%	0.4%	0.08%	0.008%	0.4%	0.08%	0.4%	0.08%	
Pin-compatible	←-----→		←-----→		←-----→		←-----→		←-----→	

Series name	STK4065 (Page 7)	STK4017 (Page 7)	STK4332 (Page 7)	STK4024 II (Page 8)	STK4024 V (Page 8)	STK4028 X (Page 8)	STK4036 XI (Page 8)	STK4144MK2 (Page 9)	STK4144MK5 (Page 9)	STK4145MK2 (Page 9)	STK4145MK5 (Page 9)
-------------	---------------------	---------------------	---------------------	------------------------	-----------------------	-----------------------	------------------------	------------------------	------------------------	------------------------	------------------------

Output Power/channel	STK4065 (Page 7)	STK4017 (Page 7)	STK4332 (Page 7)	STK4024 II (Page 8)	STK4024 V (Page 8)	STK4028 X (Page 8)	STK4036 XI (Page 8)	STK4144MK2 (Page 9)	STK4144MK5 (Page 9)	STK4145MK2 (Page 9)	STK4145MK5 (Page 9)
5W			STK4332								
7W		STK4017	STK4362								
10W		STK4019	STK4362								
12W			STK4372								
15W		STK4021	STK4392								
20W		STK4023	STK4412	STK4024 II	STK4024 V						
25W		STK4025	STK4432	STK4026 II	STK4026 V			STK4144MK2	STK4144MK5	STK4145MK2	STK4145MK5
30W				STK4028 II	STK4028 V	STK4028 X		STK4154MK2	STK4154MK5	※ STK4155MK2	※ STK4155MK5
35W	STK4065			STK4030 II	STK4030 V			STK4164MK2	STK4164MK5	STK4165MK2	※ STK4165MK5
40W				STK4032 II		STK4032 X		STK4174MK2	※ STK4174MK5	※ STK4175MK2	※ STK4175MK5
45W						STK4034 X		STK4184MK2	STK4184MK5	STK4185MK2	※ STK4185MK5
50W				STK4036 II	STK4036 V	STK4036 X	STK4036 XI	※ STK4194MK2	STK4194MK5	※ STK4195MK2	STK4195MK5
60W	STK4067			STK4038 II			STK4038 XI	STK4204MK2	STK4204MK5	STK4205MK2	※ STK4205MK5
70W				STK4040 II	STK4040 V	STK4040 X	STK4040 XI	STK4214MK2	※ STK4214MK5	STK4215MK2	※ STK4215MK5
80W				STK4042 II	STK4042 V		STK4042 XI	※ STK4224MK2	STK4224MK5	STK4225MK2	※ STK4225MK5
100W				STK4044 II	STK4044 V	STK4044 X	STK4044 XI	STK4234MK2	STK4234MK5	STK4235MK2	※ STK4235MK5
120W					STK4046 V		STK4046 XI				
150W				STK4048 II	STK4048 V		STK4048 XI				
200W				STK4050 II	STK4050 V						

※: Under development

Car-use
BTL

Pure -
com.

Built - in
Self recovery type
Protection circuit

Built - in
Latch type
Protection circuit

±Power Supply		±Power Supply×2		±Power Supply		Power Supply							
2ch		3ch		2ch		Channel Number							
3~6 Ω		4~8 Ω		2~8 Ω		Load							
0.4 %	0.08 %	0.4 %	0.08 %	0.4 %	0.08 %	0.4 %	0.08 %	0.02 %	0.05 %	0.005 %	THD		
											Pin-compatible		
STK401-010 (Page 10)	STK401-210 (Page 10)	STK400-010 (Page 11)	STK400-210 (Page 11)	STK400-450 (Page 11)	STK400-650 (Page 11)	STK4102 II (Page 12)	STK4201 II (Page 12)	STK4121 V (Page 12)	STK4141 X (Page 12)	STK4196 X (Page 12)	STK350-000 (Page 7)	Series name	
						STK4102 II						5W	
												7W	
※ STK401-010	※ STK401-210	※ STK400-010	※ STK400-210			STK4112 II						10W	
												12W	
STK401-020	STK401-220	STK400-020	※ STK400-220			STK4122 II		STK4121 V				15W	
STK401-030	※ STK401-230	※ STK400-030	※ STK400-230			STK4132 II		STK4131 V				20W	
STK401-040	※ STK401-240	※ STK400-040	※ STK400-240			STK4142 II		STK4141 V	STK4141 X			25W	
STK401-050	※ STK401-250	※ STK400-050	※ STK400-250	※ STK400-450 (L, Rch. 15W)	※ STK400-650 (L, Rch. 15W)	STK4152 II		STK4151 V	STK4151 X			30W	
STK401-060	※ STK401-260	※ STK400-060	※ STK400-260	※ STK400-460 (L, Rch. 15W)	※ STK400-660 (L, Rch. 15W)	STK4162 II		STK4161 V				35W	
STK401-070	※ STK401-270	※ STK400-070	※ STK400-270	※ STK400-470 (L, Rch. 20W)	※ STK400-670 (L, Rch. 20W)	STK4172 II		STK4171 V	STK4171 X		STK350-000	40W	
STK401-080	※ STK401-280	※ STK400-080	※ STK400-280	※ STK400-480 (L, Rch. 20W)	※ STK400-680 (L, Rch. 20W)	STK4182 II		STK4181 V			STK350-000	45W	
STK401-090	※ STK401-290	※ STK400-090	※ STK400-290	※ STK400-490 (L, Rch. 25W)	※ STK400-690 (L, Rch. 25W)	STK4192 II		STK4191 V	STK4191 X	STK4196 X	STK350-000	50W	
STK401-100	※ STK401-300	※ STK400-100	※ STK400-300	※ STK400-500 (L, Rch. 30W)	※ STK400-700 (L, Rch. 30W)		STK4201 II	STK4201 V	STK4201 X		STK350-010	60W	
STK401-110	※ STK401-310	※ STK400-110	※ STK400-310	※ STK400-510 (L, Rch. 35W)	※ STK400-710 (L, Rch. 35W)		STK4211 II	STK4211 V	STK4211 X	STK4216 X	STK350-010	70W	
STK401-120	※ STK401-320			※ STK400-520 (L, Rch. 40W)	※ STK400-720 (L, Rch. 40W)		STK4221 II	STK4221 V			STK350-020	80W	
STK401-130	※ STK401-330			※ STK400-530 (L, Rch. 50W)	※ STK400-730 (L, Rch. 50W)		STK4231 II	STK4231 V			STK350-030	100W	
STK401-140	※ STK401-340						STK4241 II	STK4241 V			STK350-040	120W	
											STK350-050	150W	
												200W	
※: Under development													
3ch. Same output power				3ch. Different output power (2ch + Center ch.)				Built-in Muting circuit				2 Ω Load	Voltage amplifier

■ Main Characteristics

■ STK4065 series

Type Number	Output power P_o [W]			THD[%]	$V_{cc\ max}$ [V]	V_{cc} [V]	Case outline	Features
	$R_L = 4\ \Omega$	$R_L = 2\ \Omega$	$R_L = 1\ \Omega$					
STK4065	23	35	—	10	18	13.2	46.5×25.5×8.5 (No. 4081)	◆Car-stereo use ◆BTL ◆Pin-compatible
STK4067	23	40	60				64×31×8.5 (No. 4131)	

■ STK4017 series

Type Number	Output power Po[W]	THD[%]	Vcc max[V]	Vcc [V]		Case outline	Features
				RL = 8 Ω	RL = 4 Ω		
STK4017	6.5	1.0	45	26.4	26.4	46.5×25.5×8.5 (No. 4021B)	◆1ch./1package ◆+power supply ◆Pin-compatible
STK4019	10.0		54	32.0	29.0		
STK4021	15.0		64	38.0	34.0		
STK4023	20.0		73	44.0	38.0	59.2×31×8.5 (No. 4070)	
STK4025	25.0		80	48.0	44.0		

■ STK4332 series

Type Number	Output power Po[W]	THD[%]	Vcc max[V]	Vcc [V]		Case outline	Features
				RL = 8 Ω	RL = 4 Ω		
STK4332	5 + 5	1.0	32	23	21	59.2×25.5×8.5 (No. 4032A)	◆2ch./1package ◆+power supply ◆Pin-compatible
STK4352	7 + 7		39	27	25		
STK4362	10 + 10		50	33	28	59.2×31×8.5 (No. 4033)	
STK4372	12 + 12		54	35	31		
STK4392	15 + 15		56	39	36		
STK4412	20 + 20		63	44	40		
STK4432	25 + 25		70	49	44		

■ STK350 - 000 series


Type Number	Output power P_o [W]	THD[%]	$V_{cc\ max}$ [V]	V_{cc} [V]	Case outline	Features
				$R_L = 8\ \Omega$		
STK350 - 000	40 ~ 60	0.005	± 55	± 36	53×22×9 (No. 4147)	◆Voltage amplifier ◆Pin-compatible
STK350 - 010	60 ~ 80		± 59	± 41		
STK350 - 020	80 ~ 90		± 65	± 47		
STK350 - 030	90 ~ 100		± 75	± 50		
STK350 - 040	100 ~ 120		± 80	± 55		
STK350 - 050	120 ~ 150		± 90	± 60		

※:Under development

■ STK4024 II series / STK4024 V series / STK4028 X series / STK4036 XI series

Type Number	Output power Po[W]	THD[%]	Vcc max[V]	Vcc [V]		Case outline	Features
				R _L = 8 Ω	R _L = 4 Ω		
STK4024 II	20	0.4	± 34.5	± 23.0	± 20.0	59.2×31×8.5 (No. 4033)	◆1ch./1package ◆±Power supply ◆Pin-compatible with STK4036XI series
STK4026 II	25		± 38.0	± 26.0	± 22.0		
STK4028 II	30		± 42.0	± 27.5	± 25.0		
STK4030 II	35		± 45.0	± 30.0	± 27.0		
STK4032 II	40		± 48.0	± 32.0	± 29.0		
STK4036 II	50		± 52.0	± 35.0	± 31.0		
STK4038 II	60		± 57.0	± 38.0	± 32.5	64×36.5×8.5 (No. 4075)	
STK4040 II	70		± 60.0	± 42.0	—		
STK4042 II	80		± 65.0	± 45.0	—		
STK4044 II	100		± 73.0	± 51.0	—	78×44×9 (No. 4051A)	
STK4048 II	150	± 86.0	± 59.0	—			
STK4050 II	200	± 95.0	± 66.0	—			
STK4024 V	20	0.08	± 37.0	± 24.5	± 21.5	64×31×8.5 (No. 4062)	
STK4026 V	25		± 39.0	± 26.0	± 22.0		
STK4028 V	30		± 42.0	± 27.5	± 25.0		
STK4030 V	35		± 46.0	± 30.0	± 27.0		
STK4036 V	50		± 52.0	± 35.0	± 31.0		
STK4040 V	70		± 62.0	± 42.0	± 36.0		
STK4042 V	80		± 65.0	± 45.0	—	64×36.5×8.5 (No. 4075)	
STK4044 V	100		± 73.0	± 51.0	—		
STK4046 V	120		± 80.0	± 55.0	—		
STK4048 V	150		± 87.0	± 60.0	—	78×44×9 (No. 4051A)	
STK4050 V	200	± 95.0	± 66.0	—			
STK4028 X	30	0.008	± 42.0	± 29.0	± 26.0		
STK4032 X	40		± 49.0	± 33.5	± 30.0		
STK4034 X	45		± 50.0	± 35.0	± 31.0		
STK4036 X	50		± 52.0	± 36.5	± 31.5		
STK4040 X	70		± 62.0	± 42.5	± 36.0		
STK4044 X	100	0.018	± 74.0	± 51.0	—	64×36.5×8.5 (No. 4075)	◆1ch./1package ◆±Power supply ◆Pure-complimentary ◆Pin-compatible with STK4024 II series, STK4024 V series, STK4028 X series
STK4036 XI	50	0.008	± 53.5	± 37.0	—	64×36.5×8.5 (No. 4075)	
STK4038 XI	60		± 58.0	± 40.0	—		
STK4040 XI	70		± 63.0	± 43.5	—		
STK4042 XI	80		± 67.0	± 46.5	—		
STK4044 XI	100		± 74.0	± 51.0	—		
STK4046 XI	120		± 80.0	± 55.0	—	78×44×9 (No. 4151A)	
STK4048 XI	150		± 87.0	± 60.0	—		

【Pin - compatibility of Output pins】

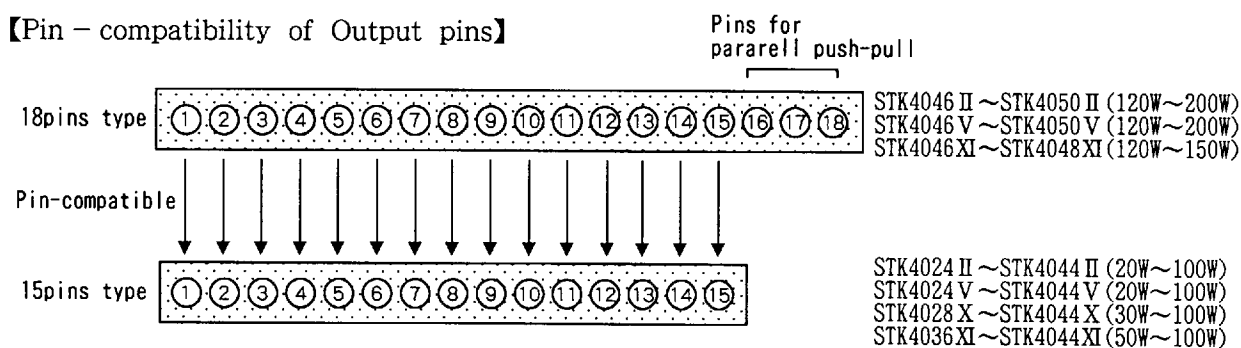

Main Characteristics

■ STK4144MK2 series / STK4144MK5 series / STK4145MK2 series / STK4145MK5 series


Type Number	Output power Po[W]	THD[%]	Vcc max[V]	Vcc [V]		Equivalent circuit	Case outline	Features	
				RL = 8 Ω	RL = 4 Ω				
STK4144MK2	25 + 25	0.4	± 40.0	± 27.0	± 22.0	Fig.1	78×44×9 (No. 4086A)	◆Built-in Self recovery type Protection circuit ◆2ch. /1package ◆±Power supply ◆Pin-compatible with STK4145MK2 series, STK4145MK5 series	
STK4154MK2	30 + 30		± 42.0	± 28.0	± 25.0				
STK4164MK2	35 + 35		± 45.0	± 30.5	± 26.5				
STK4174MK2	40 + 40		± 48.0	± 32.0	± 28.0				
STK4184MK2	45 + 45		± 50.0	± 33.5	± 30.0	Fig.2	90×53×8.5 (No. 4110A)		
※ STK4194MK2	50 + 50		± 52.5	± 35.0	± 32.0				
STK4204MK2	60 + 60		± 55.0	± 38.5	—				
STK4214MK2	70 + 70		± 60.0	± 42.0	—				
※ STK4224MK2	80 + 80	± 65.0	± 45.0	—	Fig.3	78×44×9 (No. 4086A)			
STK4234MK2	100 + 100	± 75.0	± 51.0	—					
STK4144MK5	25 + 25	± 40.5	± 27.0	± 24.0					
STK4154MK5	30 + 30	± 42.0	± 28.5	± 25.0					
STK4164MK5	35 + 35	± 46.0	± 30.5	± 26.5					
※ STK4174MK5	40 + 40	± 49.0	± 32.5	± 28.0					
STK4184MK5	45 + 45	± 51.0	± 34.0	± 30.0					
STK4194MK5	50 + 50	± 53.0	± 35.5	± 32.0			Fig.4		90×53×8.5 (No. 4110A)
STK4204MK5	60 + 60	± 57.0	± 39.0	—					
※ STK4214MK5	70 + 70	± 62.0	± 43.0	—					
STK4224MK5	80 + 80	± 65.0	± 45.0	—					
STK4234MK5	100 + 100	± 75.0	± 51.0	—	Fig.5	78×44×9 (No. 4086A)			
STK4145MK2	25 + 25	± 40.0	± 27.0	± 22.0					
※ STK4155MK2	30 + 30	± 42.0	± 28.0	± 25.0					
STK4165MK2	35 + 35	± 45.0	± 30.5	± 26.5					
※ STK4175MK2	40 + 40	± 48.0	± 32.0	± 28.0					
STK4185MK2	45 + 45	± 50.0	± 33.5	± 30.0					
※ STK4195MK2	50 + 50	± 52.5	± 35.0	± 32.0					
STK4205MK2	60 + 60	± 55.0	± 38.5	—			Fig.6	90×53×8.5 (No. 4110A)	
STK4215MK2	70 + 70	± 60.0	± 42.0	—					
STK4225MK2	80 + 80	± 65.0	± 45.0	—					
STK4235MK2	100 + 100	± 75.0	± 51.0	—					
STK4145MK5	25 + 25	0.4	± 40.5	± 27.0	± 24.0	Fig.7	78×44×9 (No. 4086A)	◆Built-in Latch type Protection circuit ◆2ch. /1package ◆±Power supply ◆Pin-compatible with STK4144MK2 series, STK4144MK5 series	
※ STK4155MK5	30 + 30		± 42.0	± 28.5	± 25.0				
※ STK4165MK5	35 + 35		± 46.0	± 30.5	± 26.5				
※ STK4175MK5	40 + 40		± 49.0	± 32.5	± 28.0				
※ STK4185MK5	45 + 45		± 51.0	± 34.0	± 30.0				
STK4195MK5	50 + 50		± 53.0	± 35.5	± 32.0				
※ STK4205MK5	60 + 60		0.08	± 57.0	± 39.0	—	Fig.8		90×53×8.5 (No. 4110A)
※ STK4215MK5	70 + 70			± 62.0	± 43.0	—			
※ STK4225MK5	80 + 80			± 65.0	± 45.0	—			
※ STK4235MK5	100 + 100			± 75.0	± 51.0	—			

※: Under development

【Pin - compatibility of Output pins】


Pins for phase correction

26pins type



Pin-compatible

22pins type



STK4204~STK4234
STK4205~STK4235
(60W/ch~100W/ch)


STK4144~STK4194
STK4145~STK4195
(25W/ch~50W/ch)

■ STK401 - 010 series / STK401 - 210 series

Type Number	Output power Po[W]	THD[%]	Vcc max[V]	Vcc [V]		Equivalent circuit	Case outline	Features
				RL = 6 Ω	RL = 3 Ω			
※ STK401 - 010	10 + 10	0.4	± 26	± 17.0	± 14	Fig.9	64×36.5×8.5 (No. 4134)	◆RL=6/3Ω ◆2ch./1package ◆±Power supply ◆Pin-compatible with STK400-010 series, STK400-210 series, STK400-450 series, STK400-650 series
STK401 - 020	15 + 15		± 29	± 20.0	± 16			
STK401 - 030	20 + 20		± 34	± 23.0	± 19			
STK401 - 040	25 + 25		± 36	± 25.0	± 21			
STK401 - 050	30 + 30		± 39	± 26.0	± 22			
STK401 - 060	35 + 35		± 41	± 28.0	± 23			
STK401 - 070	40 + 40		± 44	± 30.0	± 24			
STK401 - 080	45 + 45		± 45	± 31.0	± 25			
STK401 - 090	50 + 50		± 47	± 32.0	± 26			
STK401 - 100	60 + 60		± 51	± 35.0	± 27			
STK401 - 110	70 + 70		± 56	± 38.0	—			
STK401 - 120	80 + 80		± 61	± 42.0	—	Fig.11		
STK401 - 130	100 + 100		± 65	± 45.0	—			
STK401 - 140	120 + 120		± 74	± 51.0	—			
※ STK401 - 210	10 + 10	0.08	± 26	± 17.5	± 14	Fig.12	64×36.5×8.5 (No. 4134)	
STK401 - 220	15 + 15		± 29	± 20.0	± 16			
※ STK401 - 230	20 + 20		± 34	± 23.0	± 19			
※ STK401 - 240	25 + 25		± 36	± 25.0	± 21			
※ STK401 - 250	30 + 30		± 39	± 26.0	± 22			
※ STK401 - 260	35 + 35		± 41	± 28.0	± 23			
※ STK401 - 270	40 + 40		± 44	± 30.0	± 24			
※ STK401 - 280	45 + 45		± 45	± 31.0	± 25			
※ STK401 - 290	50 + 50		± 47	± 32.0	± 26			
※ STK401 - 300	60 + 60		± 51	± 35.0	± 27	Fig.13		
※ STK401 - 310	70 + 70		± 56	± 38.0	—			
※ STK401 - 320	80 + 80		± 61	± 42.0	—	Fig.14	78×44×9 (No. 4029)	
※ STK401 - 330	100 + 100		± 65	± 45.0	—			
※ STK401 - 340	120 + 120		± 74	± 51.0	—			

※:Under development

【Pin - compatibility of Output pins】

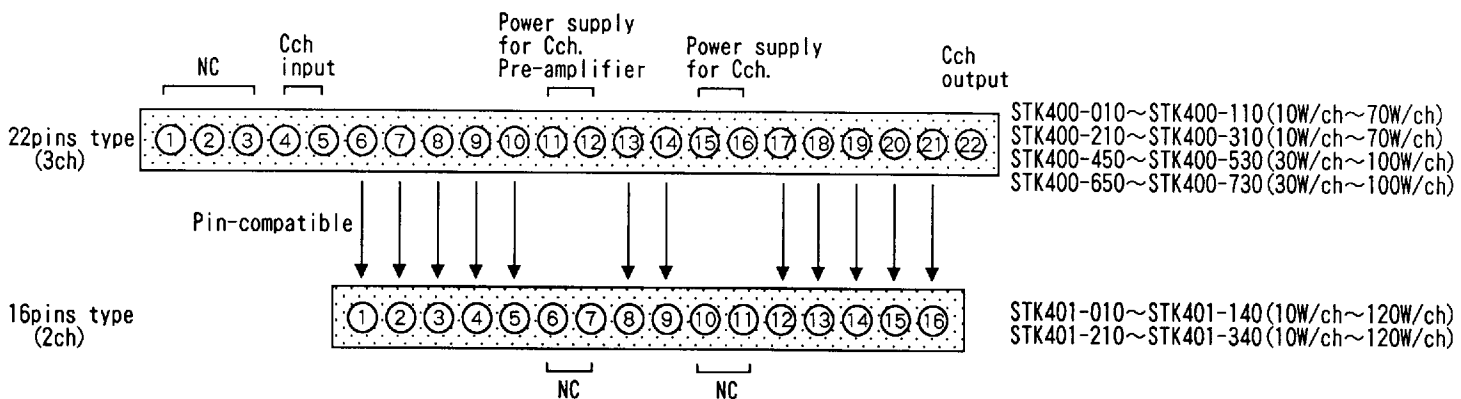

Main Characteristics

■ STK400 - 010 series / STK400 - 210 series / STK400 - 450 series / STK400 - 650 series

Type Number	Output power Po[W]	THD[%]	Vcc max[V]	Vcc [V]		Equivalent circuit	Case outline	Features
				RL = 6 Ω	RL = 3 Ω			
※ STK400 - 010	10 + 10 + 10	0.4	± 26	± 17.0	± 14	Fig.15	78×44×9 (No. 4086A)	◆RL=6/3Ω ◆3ch. /1package (Same output power) ◆±Power supply ◆Pin-compatible with STK401-010 series, STK401-210 series, STK400-450 series, STK400-650 series
STK400 - 020	15 + 15 + 15		± 29	± 20.0	± 16			
※ STK400 - 030	20 + 20 + 20		± 34	± 23.0	± 19			
STK400 - 040	25 + 25 + 25		± 36	± 25.0	± 21			
STK400 - 050	30 + 30 + 30		± 39	± 26.0	± 22			
※ STK400 - 060	35 + 35 + 35		± 41	± 28.0	± 23			
※ STK400 - 070	40 + 40 + 40		± 44	± 30.0	± 24			
※ STK400 - 080	45 + 45 + 45		± 45	± 31.0	± 25			
STK400 - 090	50 + 50 + 50		± 47	± 32.0	± 26			
※ STK400 - 100	60 + 60 + 60		± 51	± 35.0	± 27	Fig.16	90×53×8.5 (No. 4145)	
※ STK400 - 110	70 + 70 + 70		± 56	± 38.0	—			
※ STK400 - 210	10 + 10 + 10	0.08	± 26	± 17.5	± 14	Fig.17	78×44×9 (No. 4086A)	
※ STK400 - 220	15 + 15 + 15		± 29	± 20.0	± 16			
※ STK400 - 230	20 + 20 + 20		± 34	± 23.0	± 19			
※ STK400 - 240	25 + 25 + 25		± 36	± 25.0	± 21			
※ STK400 - 250	30 + 30 + 30		± 39	± 26.0	± 22			
※ STK400 - 260	35 + 35 + 35		± 41	± 28.0	± 23			
※ STK400 - 270	40 + 40 + 40		± 44	± 30.0	± 24			
※ STK400 - 280	45 + 45 + 45		± 45	± 31.0	± 25			
STK400 - 290	50 + 50 + 50		± 47	± 32.0	± 26			
※ STK400 - 300	60 + 60 + 60		± 51	± 35.0	± 27	Fig.18	90×53×8.5 (No. 4145)	
※ STK400 - 310	70 + 70 + 70		± 56	± 38.0	—			
※ STK400 - 450	15 + 30 + 15	0.4	± 39	± 26.0	± 22.0	Fig.15	78×44×9 (No. 4086A)	
※ STK400 - 460	15 + 35 + 15		± 41	± 28.0	± 23.0			
※ STK400 - 470	20 + 40 + 20		± 44	± 30.0	± 24.0			
※ STK400 - 480	20 + 45 + 20		± 45	± 31.0	± 25.0			
※ STK400 - 490	25 + 50 + 25		± 47	± 32.0	± 26.0	Fig.19	90×53×8.5 (No. 4145)	
※ STK400 - 500	30 + 60 + 30		± 51	± 35.0	± 27.0			
※ STK400 - 510	35 + 70 + 35		± 56	± 38.0	—	Fig.20		
※ STK400 - 520	40 + 80 + 40		± 61	± 42.0	—			
※ STK400 - 530	50 + 100 + 50		± 65	± 45.0	—			
※ STK400 - 650	15 + 30 + 15	0.08	± 39	± 26.0	± 22.0	Fig.17	78×44×9 (No. 4086A)	
※ STK400 - 660	15 + 35 + 15		± 41	± 28.0	± 23.0			
※ STK400 - 670	20 + 40 + 20		± 44	± 30.0	± 24.0			
※ STK400 - 680	20 + 45 + 20		± 45	± 31.0	± 25.0			
※ STK400 - 690	25 + 50 + 25		± 47	± 32.0	± 26.0	Fig.21	90×53×8.5 (No. 4145)	
※ STK400 - 700	30 + 60 + 30		± 51	± 35.0	± 27.0			
※ STK400 - 710	35 + 70 + 35		± 56	± 38.0	—	Fig.22		
※ STK400 - 720	40 + 80 + 40		± 61	± 42.0	—			
※ STK400 - 730	50 + 100 + 50		± 65	± 45.0	—			


※:Under development

【Caution】 In case of 3 channel different output STK400 - 450, STK400 - 650 series, maximum power supply Vccmax and recommend power supply Vcc in the list shows numerical value of power supply of center channel. The numerical value of the power supply for L, R channel is same as 2 channel amplifier STK401 - 010 series which is same output.

■ STK4102 II series / STK4201 II series / STK4121 V series /
STK4141 X series / STK4196 X series

Type Number	Output power Po[W]	THD[%]	Vcc max[V]	Vcc [V]		Equivalent circuit	Case outline	Features
				RL = 8 Ω	RL = 4 Ω			
STK4102 II	6 + 6	0.4	± 20.5	± 13.2	± 12.0	Fig.23	64×31×8.5 (No. 4083)	◆2ch. /1package ◆±Power supply ◆Built-in muting circuit ◆Pin-compatible ◆RL=2Ω (STK4196X series)
STK4112 II	10 + 10		± 26.0	± 17.0	± 14.0			
STK4122 II	15 + 15		± 30.5	± 20.0	± 17.0			
STK4132 II	20 + 20		± 34.5	± 23.0	± 20.0			
STK4142 II	25 + 25		± 39.0	± 26.0	± 22.0			
STK4152 II	30 + 30		± 42.0	± 27.5	± 25.0			
STK4162 II	35 + 35		± 45.0	± 30.0	± 27.0			
STK4172 II	40 + 40		± 48.0	± 32.0	± 29.0			
STK4182 II	45 + 45		± 50.0	± 33.5	± 30.5			
STK4192 II	50 + 50		± 52.5	± 35.0	± 31.0			
STK4201 II	60 + 60	0.4	± 55.0	± 38.0	—	Fig.24	78×44×9 (No. 4086A)	
STK4211 II	70 + 70		± 60.0	± 42.0	—			
STK4221 II	80 + 80		± 65.0	± 45.0	—			
STK4231 II	100 + 100		± 75.0	± 51.0	—			
STK4241 II	120 + 120		± 77.0	± 53.0	—			
STK4121 V	15 + 15	0.08	± 32.0	± 21.5	± 19.0	Fig.25	64×36.5×8.5 (No. 4040)	
STK4131 V	20 + 20		± 36.0	± 24.5	± 22.0			
STK4141 V	25 + 25		± 40.5	± 27.0	± 24.0			
STK4151 V	30 + 30		± 42.0	± 28.0	± 25.0			
STK4161 V	35 + 35		± 46.0	± 30.5	± 26.5			
STK4171 V	40 + 40		± 49.0	± 32.5	± 28.0			
STK4181 V	45 + 45		± 51.0	± 34.0	± 30.0			
STK4191 V	50 + 50		± 53.0	± 35.5	± 32.0			
STK4201 V	60 + 60		± 57.0	± 39.0	—	Fig.26	78×44×9 (No. 4086A)	
STK4211 V	70 + 70		± 62.0	± 43.0	—			
STK4221 V	80 + 80		± 65.0	± 45.0	—			
STK4231 V	100 + 100		± 75.0	± 51.0	—			
STK4241 V	120 + 120		± 78.0	± 54.0	—			
STK4141 X	25 + 25	0.02	± 41.0	± 27.5	± 24.5	Fig.27	105×32×8.5 (No. 4146)	
STK4151 X	30 + 30		± 42.5	± 29.0	± 25.5			
STK4171 X	40 + 40		± 49.5	± 33.0	± 28.5			
STK4191 X	50 + 50		± 53.5	± 36.0	± 32.5			
STK4201 X	60 + 60		± 57.5	± 39.5	—			
STK4211 X	70 + 70		± 62.5	± 43.5	—			
STK4196 X	50 + 50	0.05	± 53.5	—	± 29.0	Fig.28		
STK4216 X	70 + 70		± 62.5	—	± 34.0			

【Pin – compatibility of Output pins】

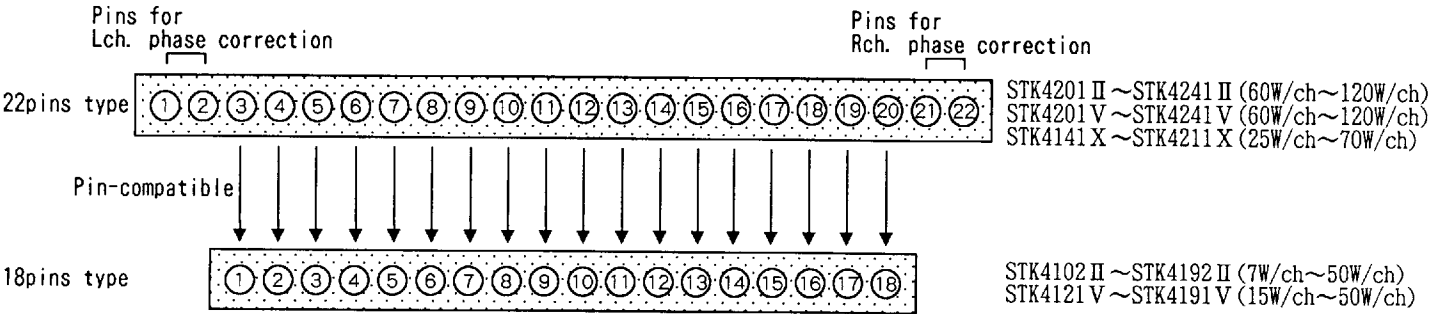

Equivalent Circuit

Figure 1

STK4144MK2 to STK4194MK2

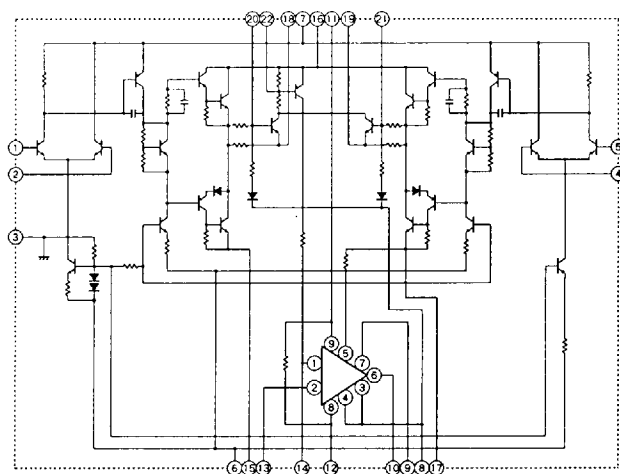


Figure 2

STK4204MK2 to STK4234MK2

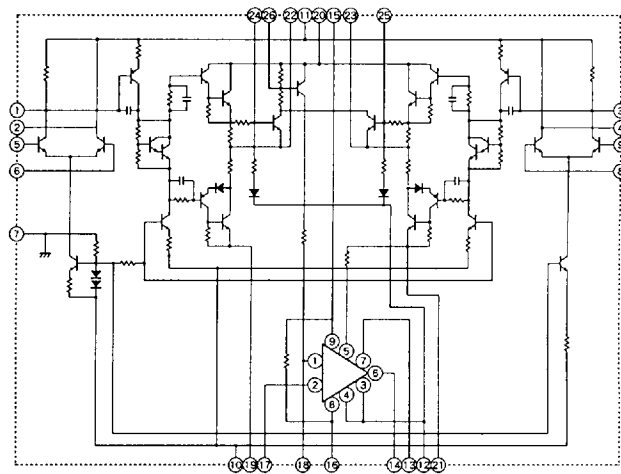


Figure 3

STK4144MK5 to STK4194MK5

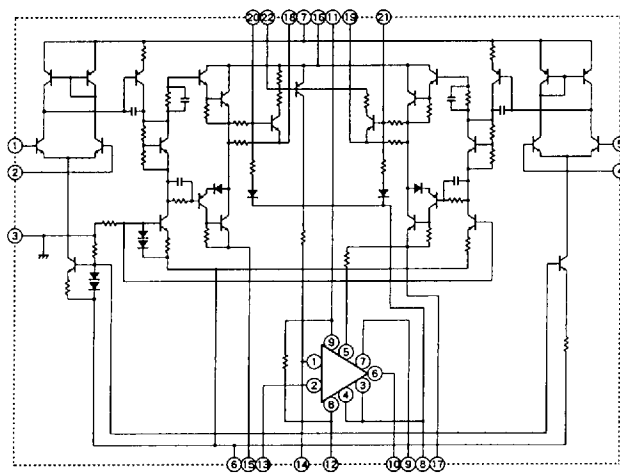


Figure 4

STK4204MK5 to STK4234MK5

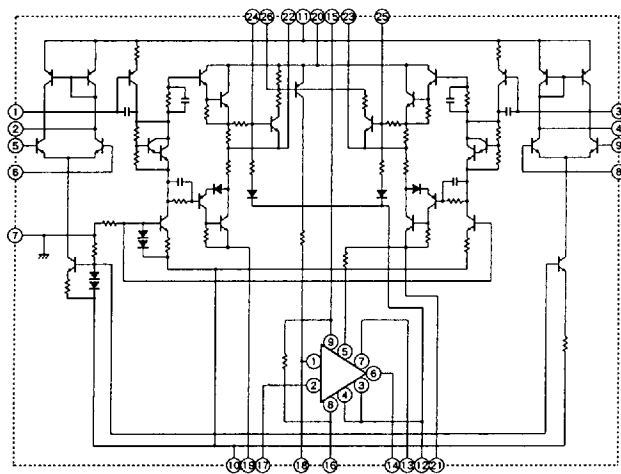


Figure 5

STK4145MK2 to STK4195MK2








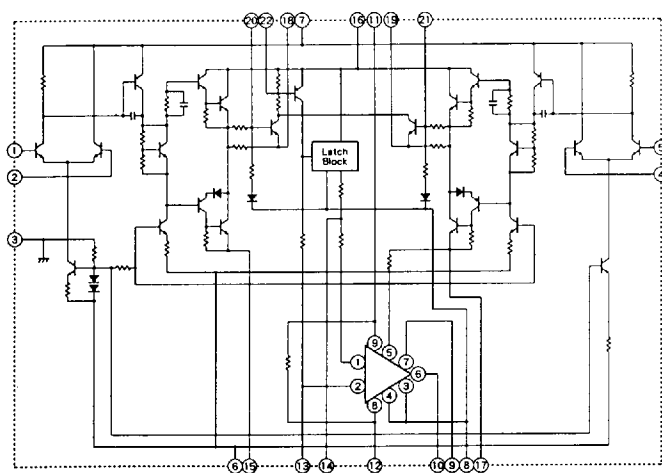


Figure 6

STK4205MK2 to STK4235MK2

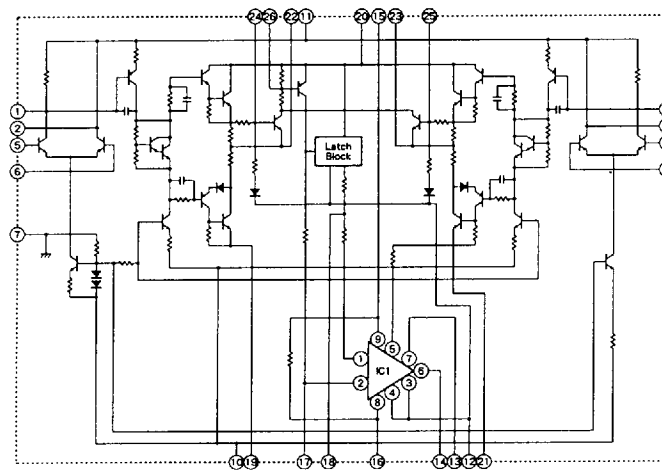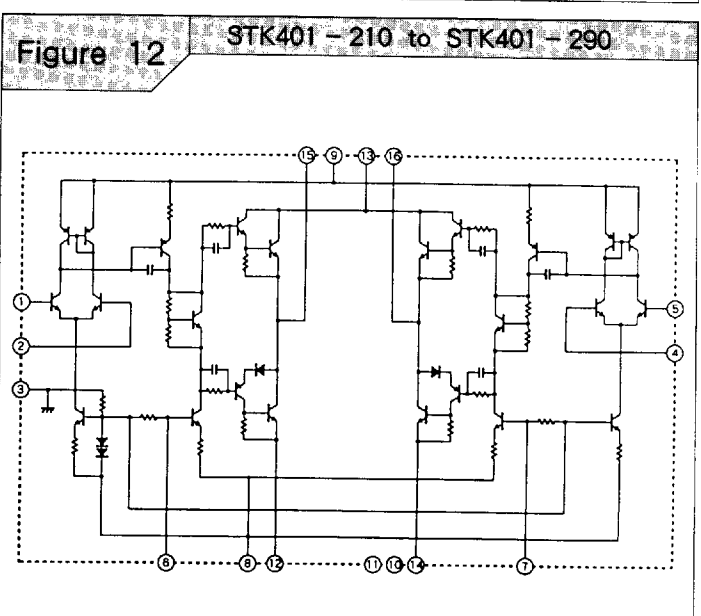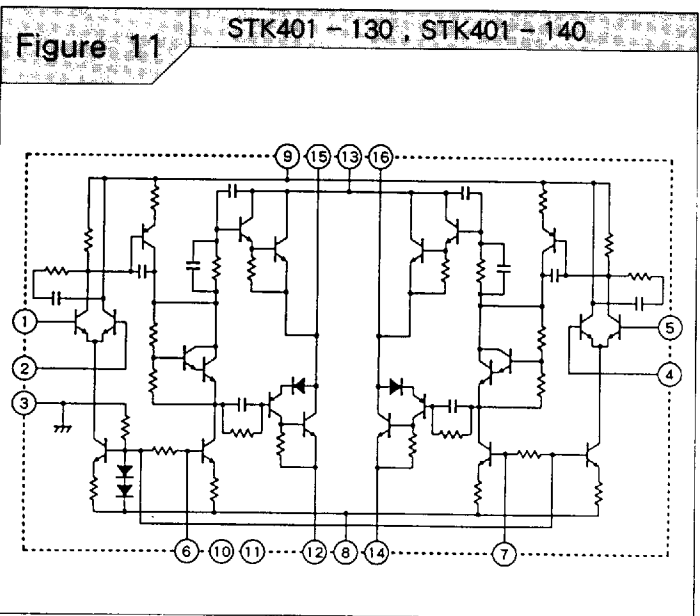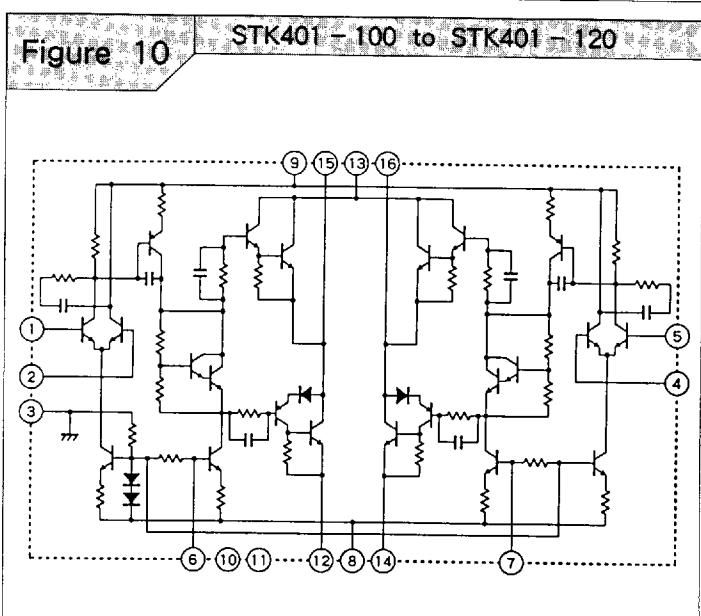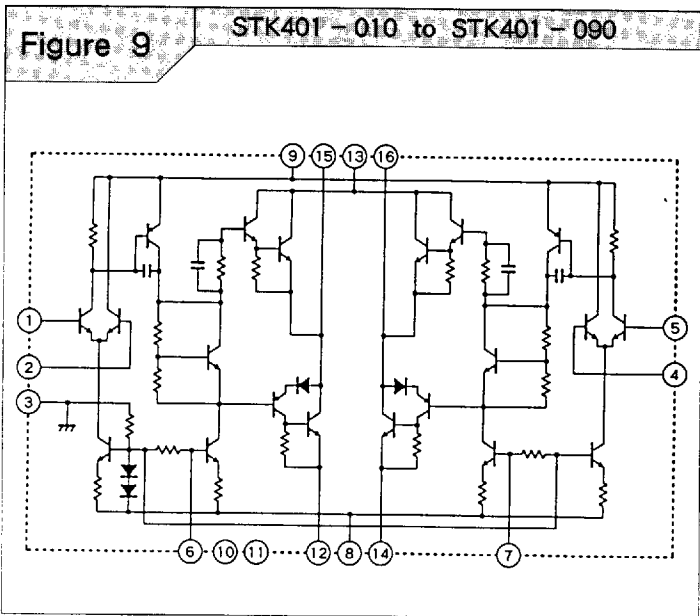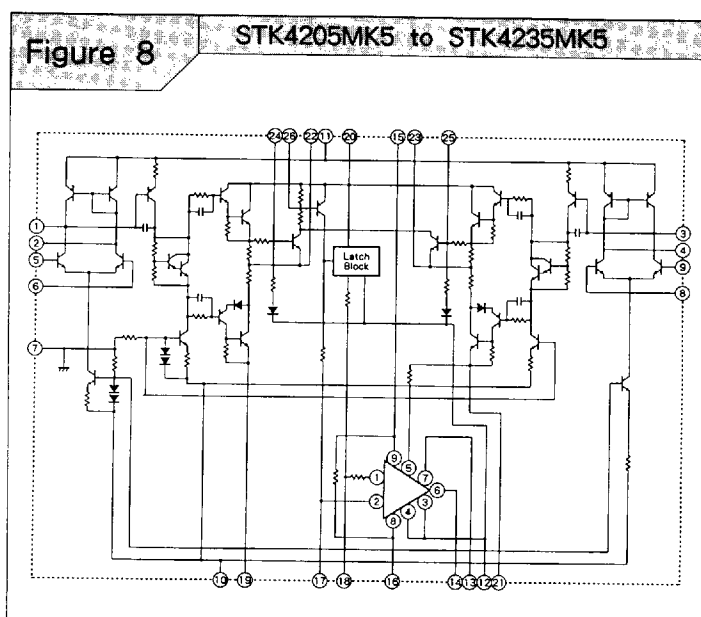

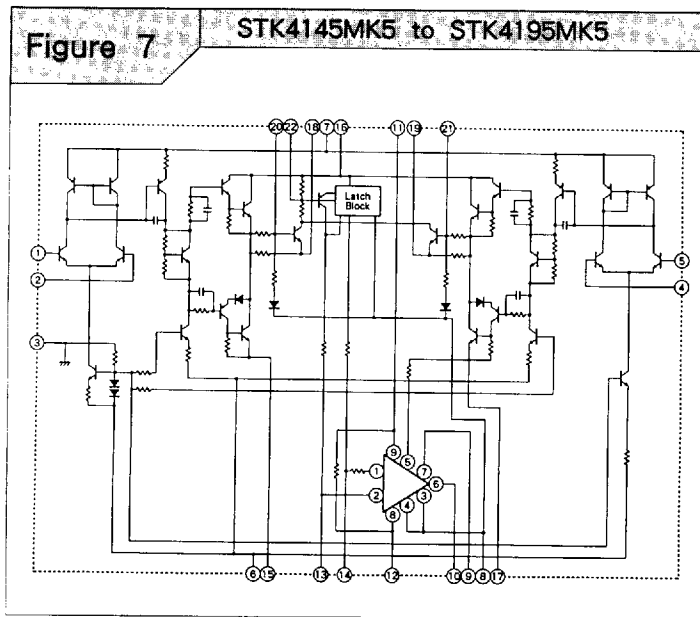

■ Equivalent Circuit

Figure 13

STK401 - 300 to STK401 - 310

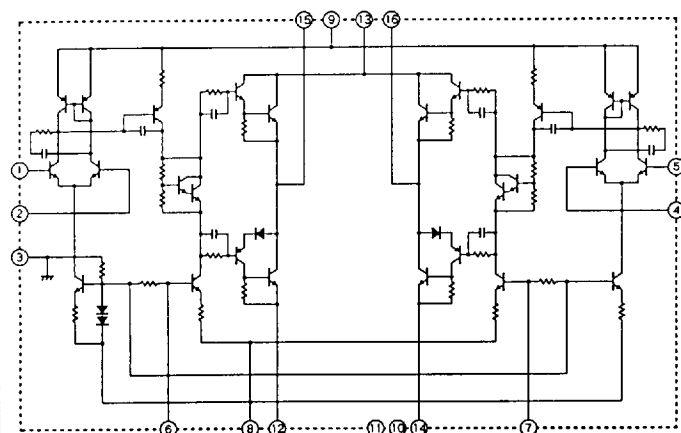


Figure 14

STK401 - 320 to STK401 - 340

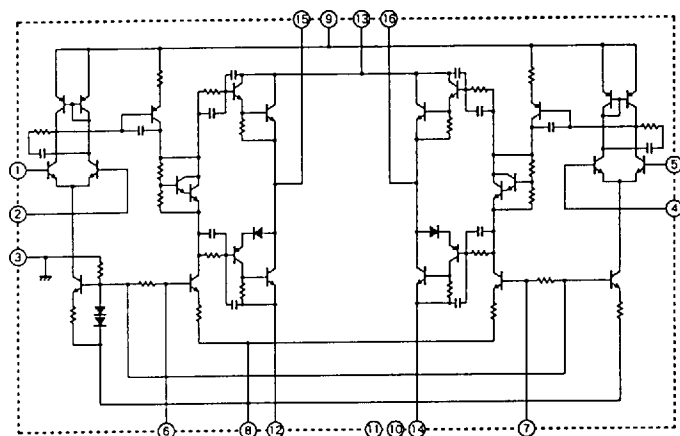


Figure 15

STK400 - 010 to STK400 - 090 , STK400 - 450 to STK400 - 490

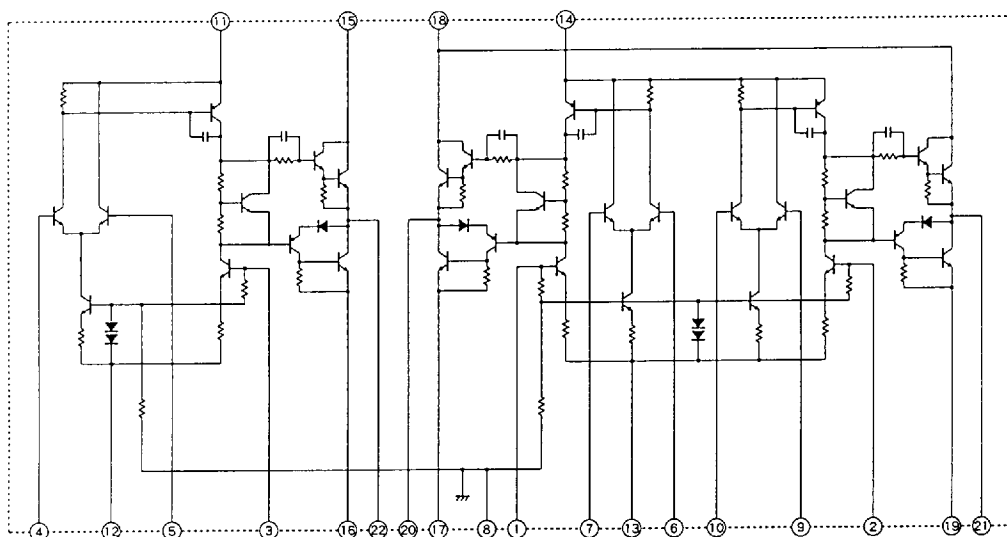


Figure 16

STK400 - 100 , STK400 - 110

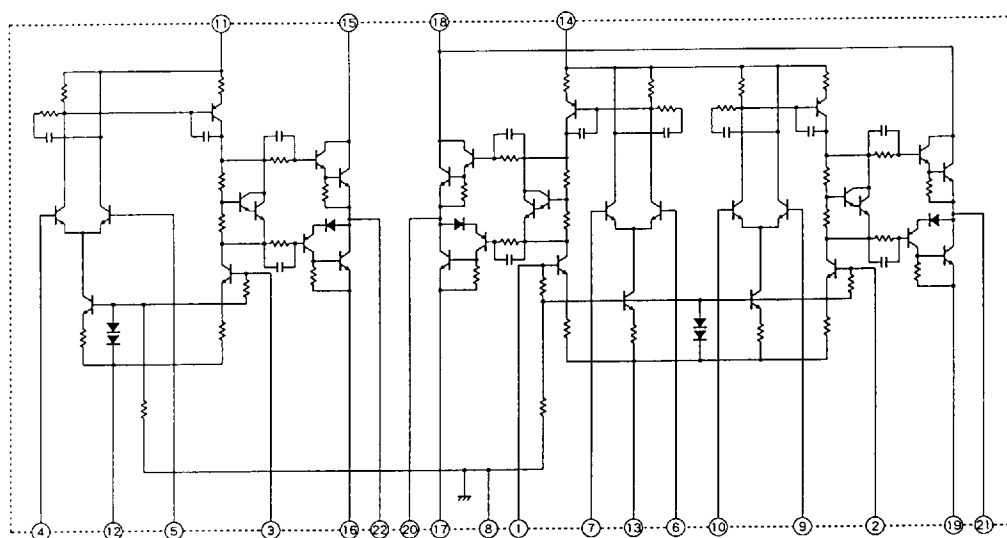


Figure 17

STK400 - 210 to STK400 - 290 , STK400 - 650 to STK400 - 690

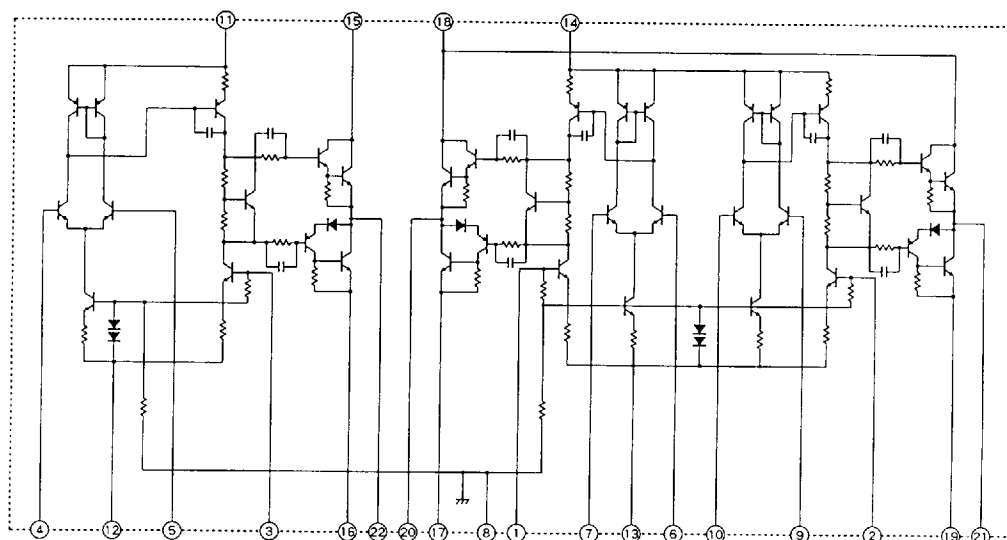


Figure 18

STK400 - 300 , STK400 - 310


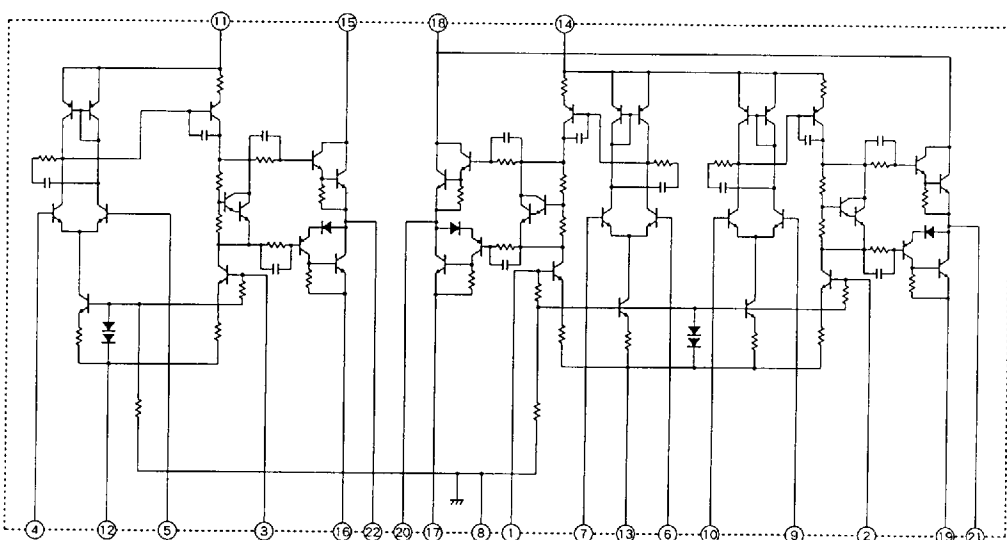


Figure 19

STK400 - 500 to STK400 - 520

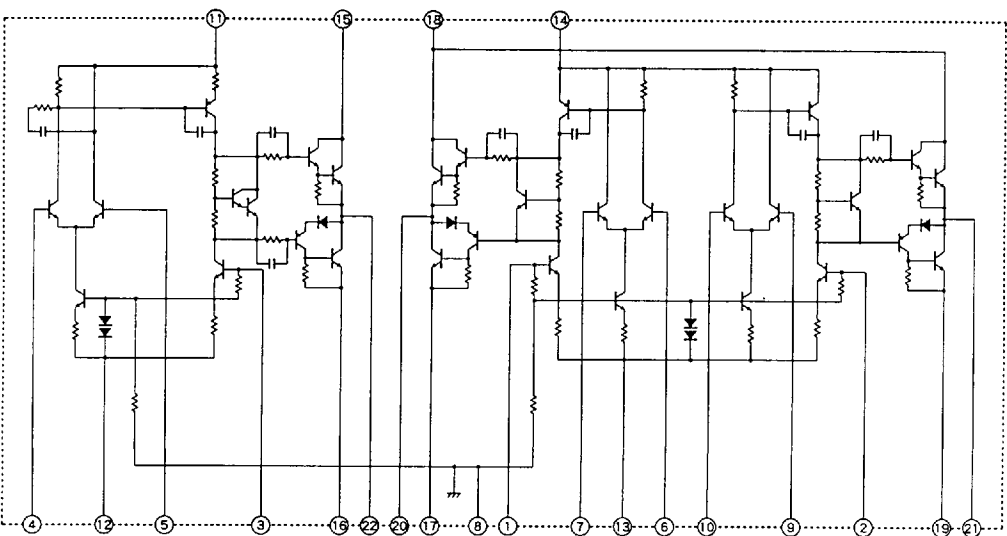

Equivalent Circuit

Figure 20

STK400 - 530

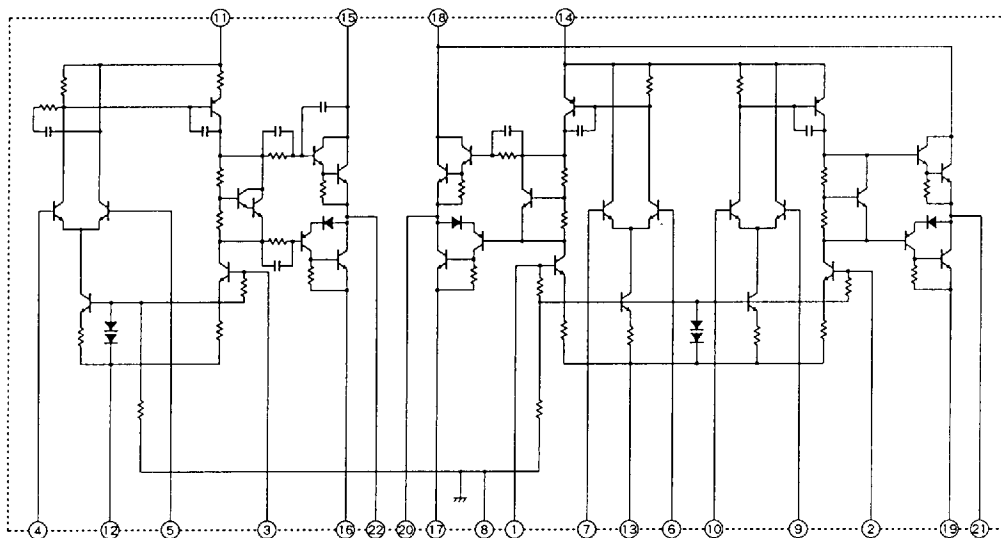


Figure 21

STK400 - 700 , STK400 - 710

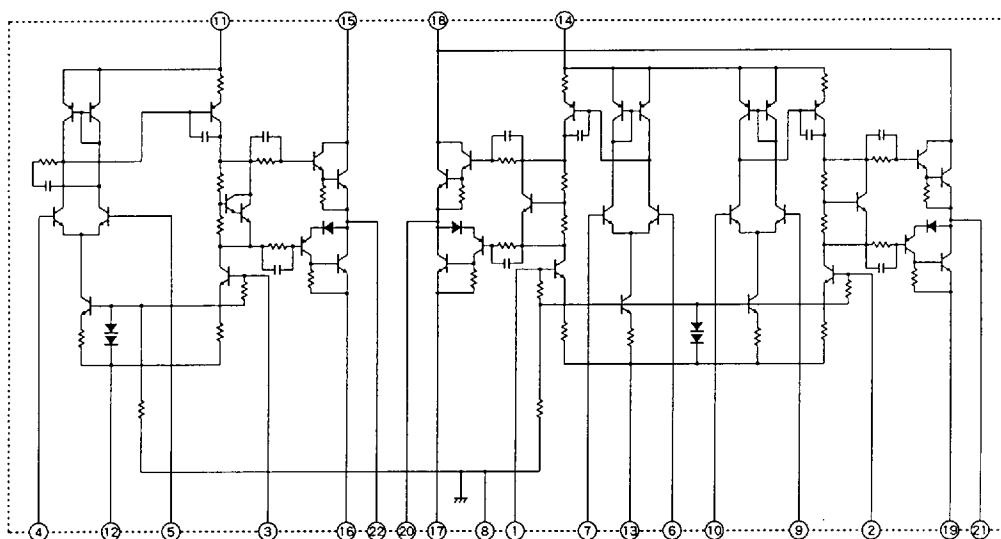


Figure 22

STK400 - 720 , STK400 - 730

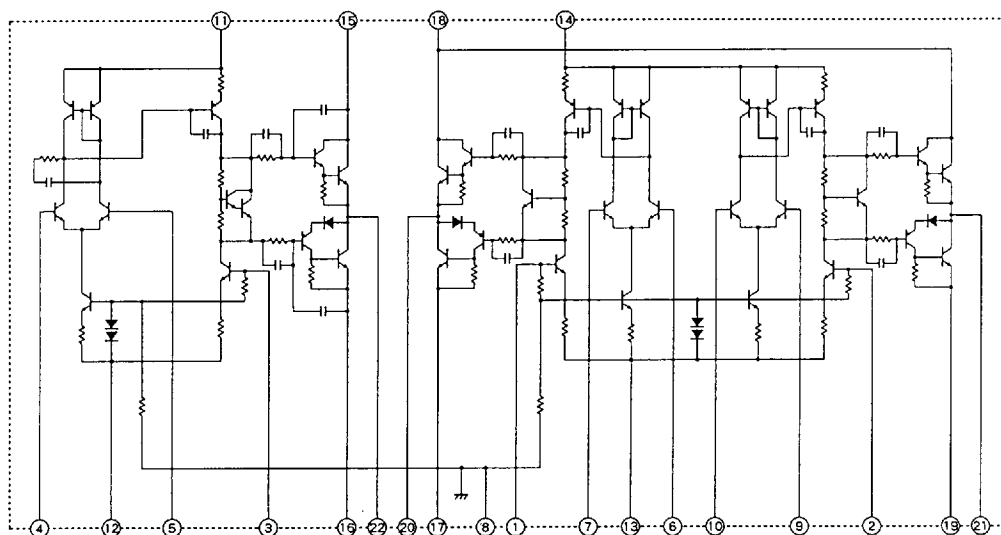


Figure 23

STK4102 II to STK4192 II

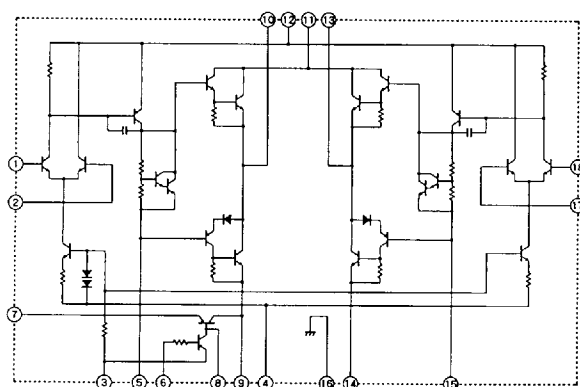


Figure 24

STK4201 II to STK4241 II

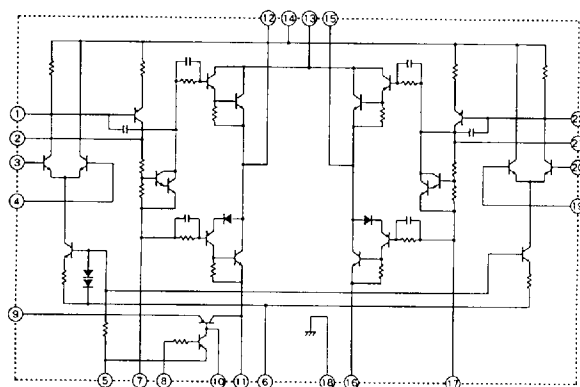


Figure 25

STK4121 V to STK4191 V

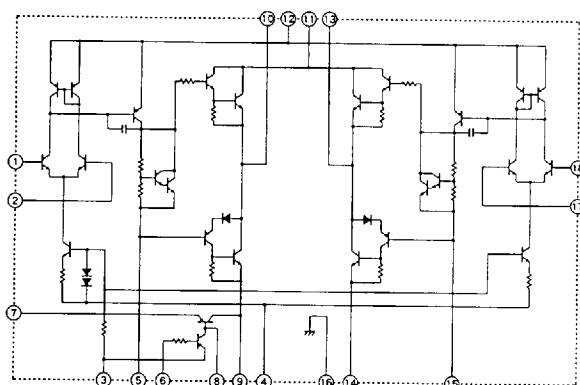


Figure 26

STK4201 V to STK4241 V

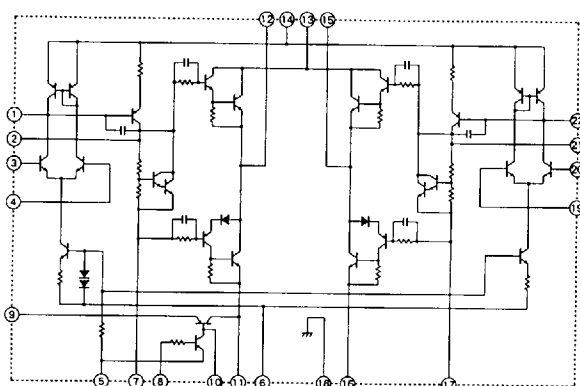


Figure 27

STK4141 X to STK4211 X








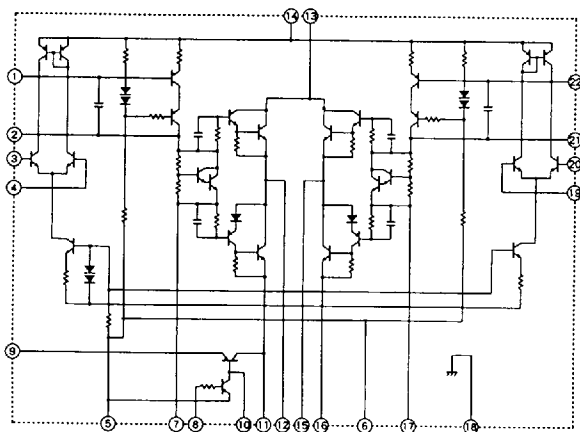








Figure 28

STK4196 X to STK4216 X

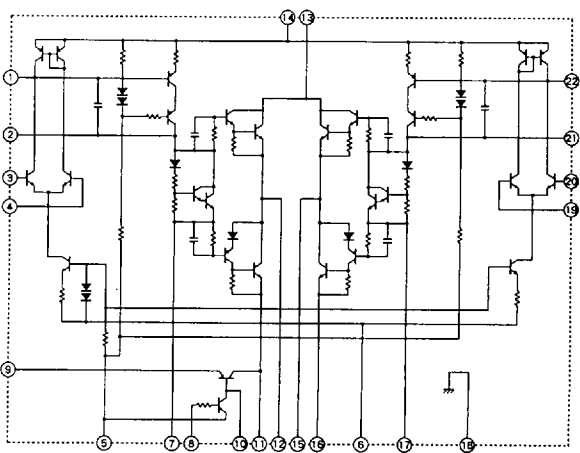
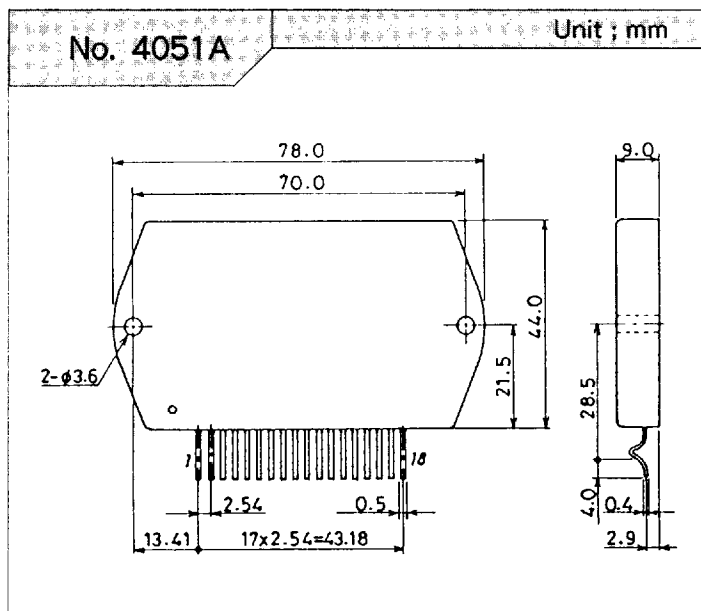
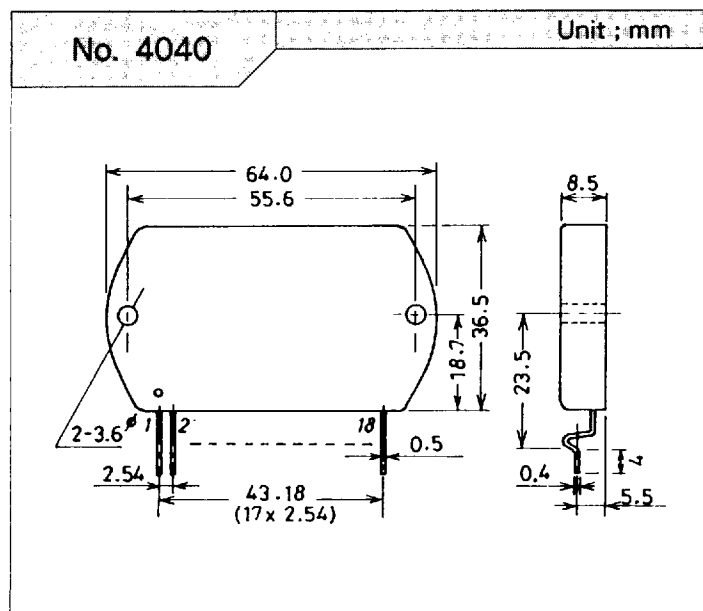
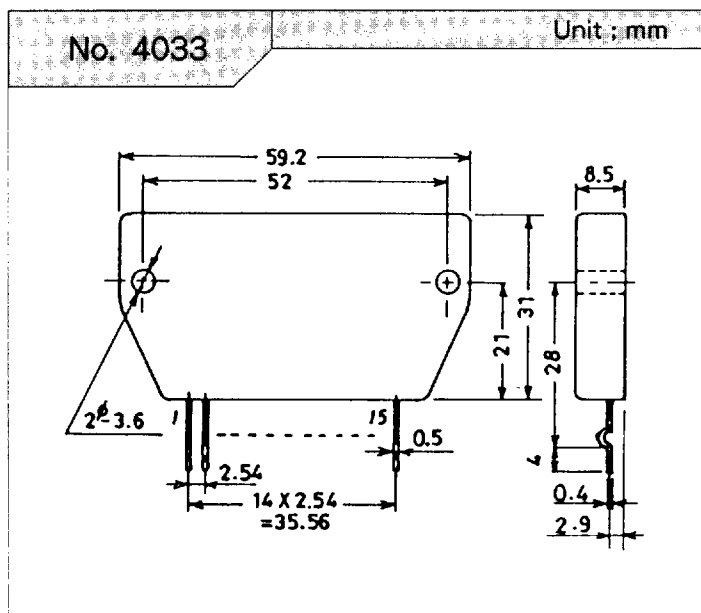
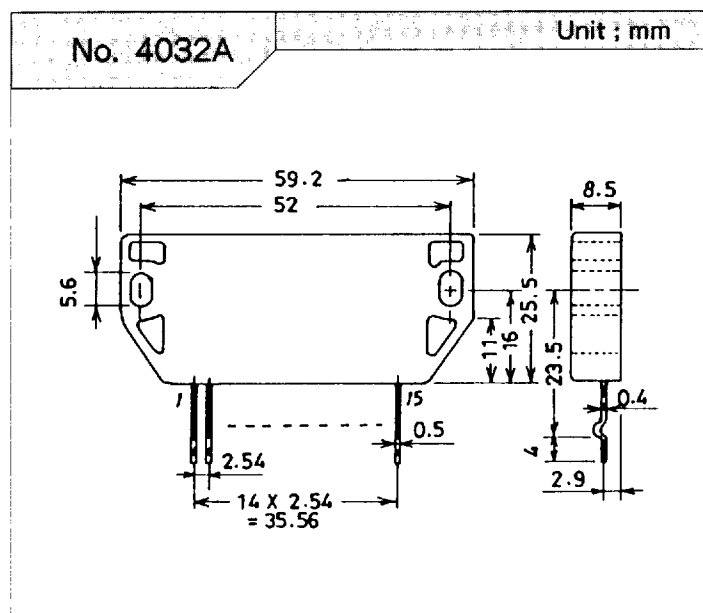
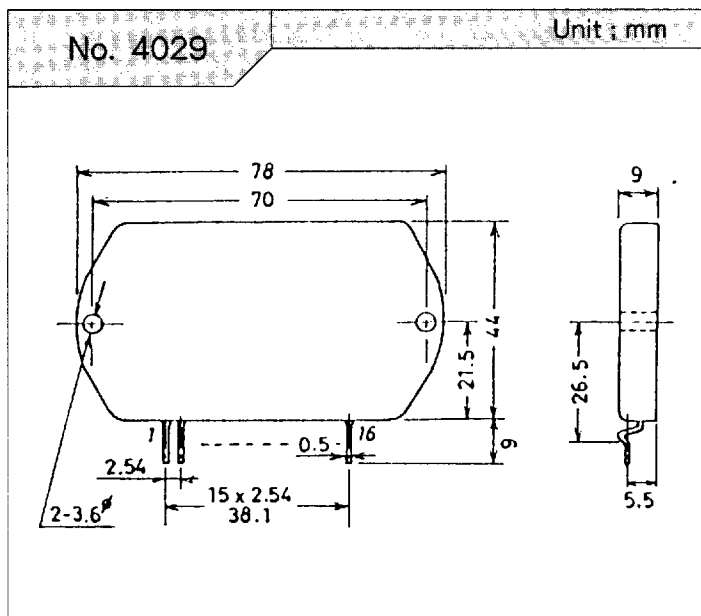


Case Outline

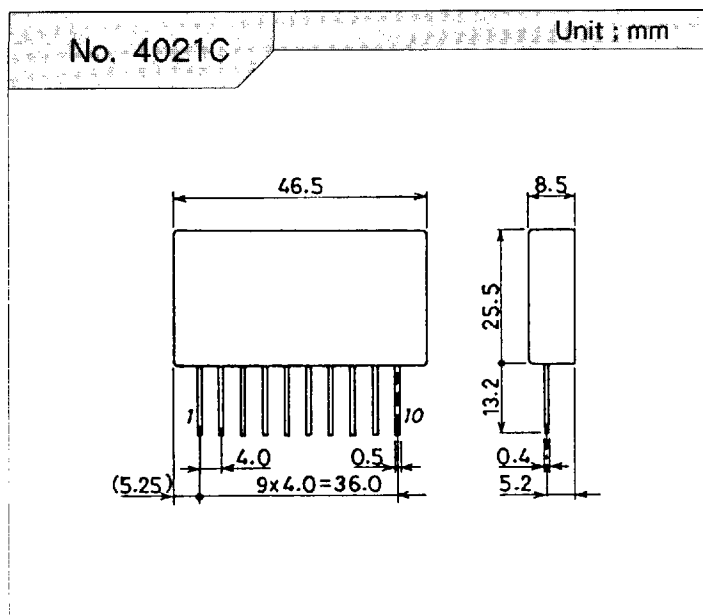

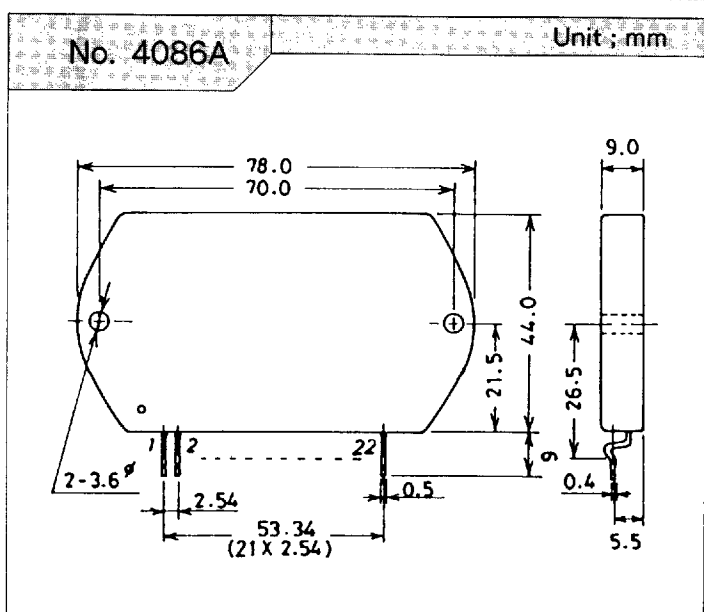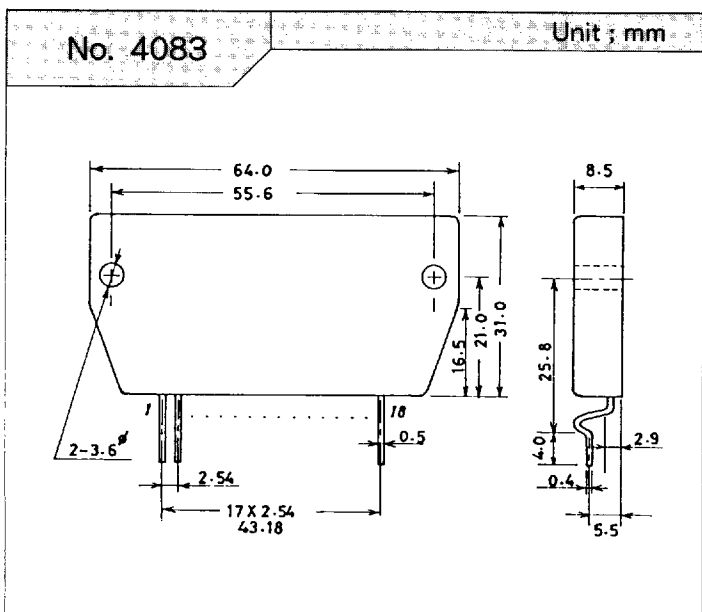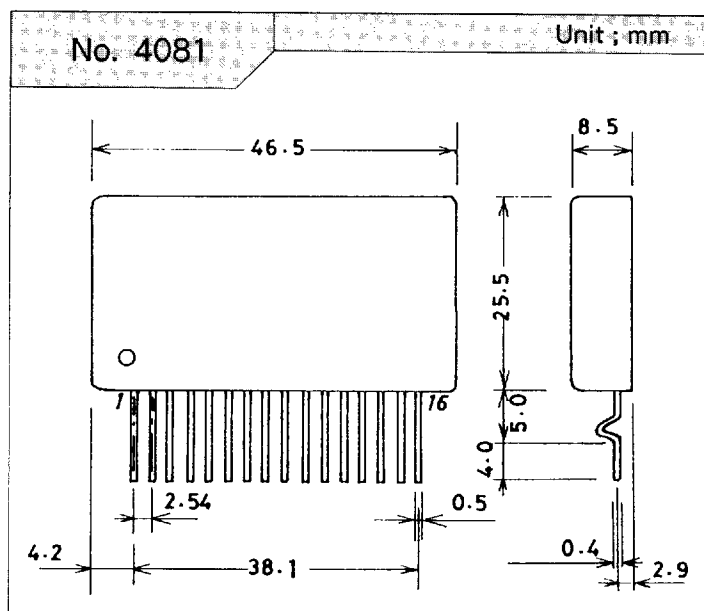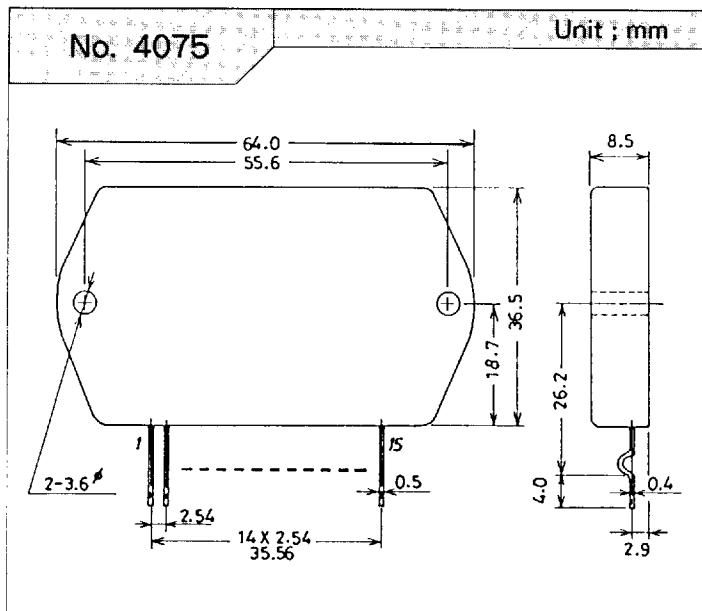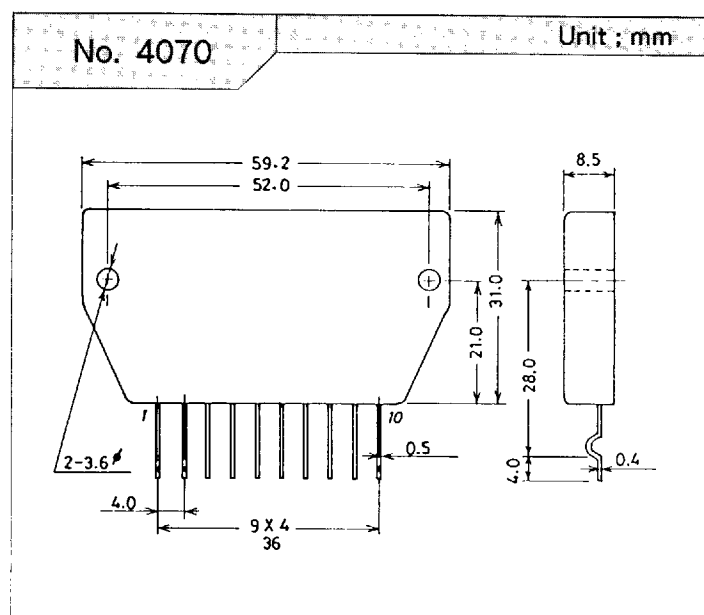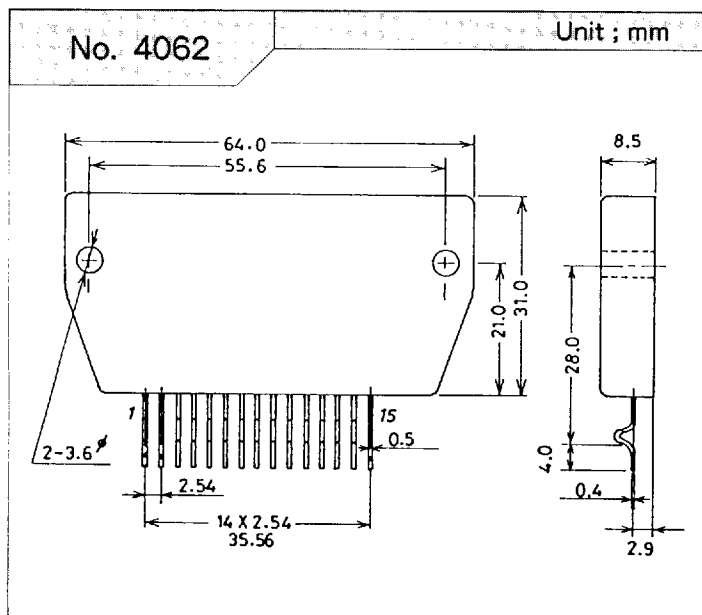

■ Case Outline

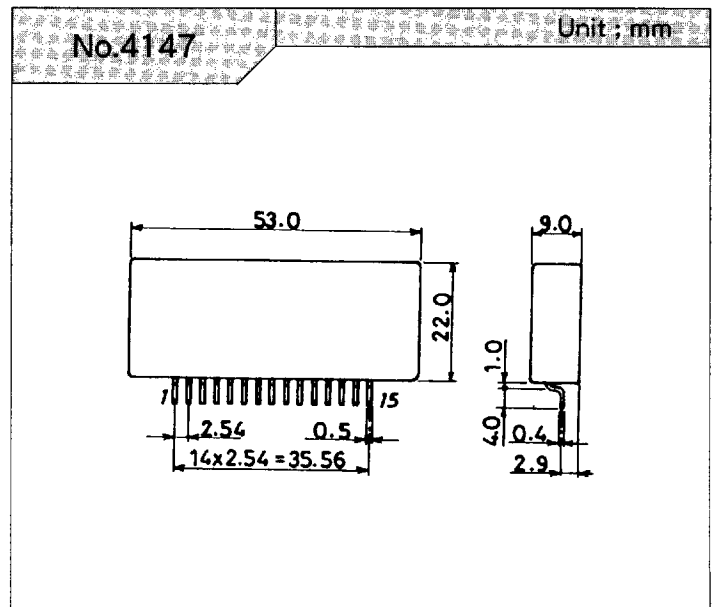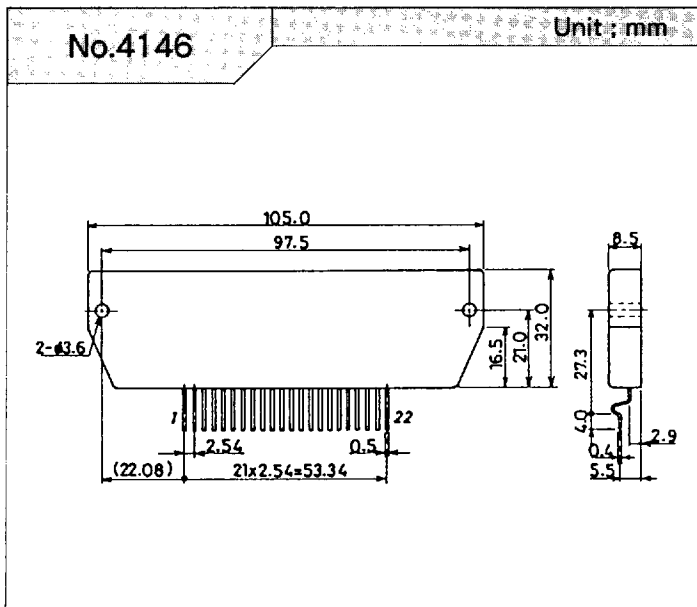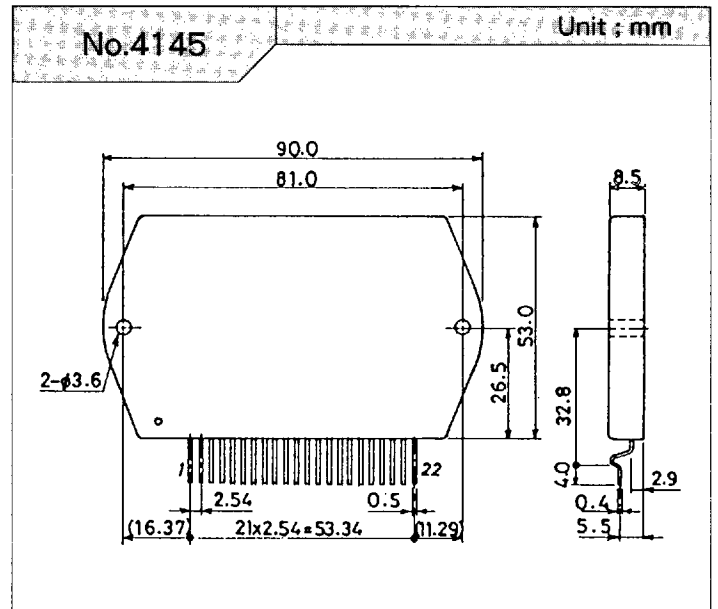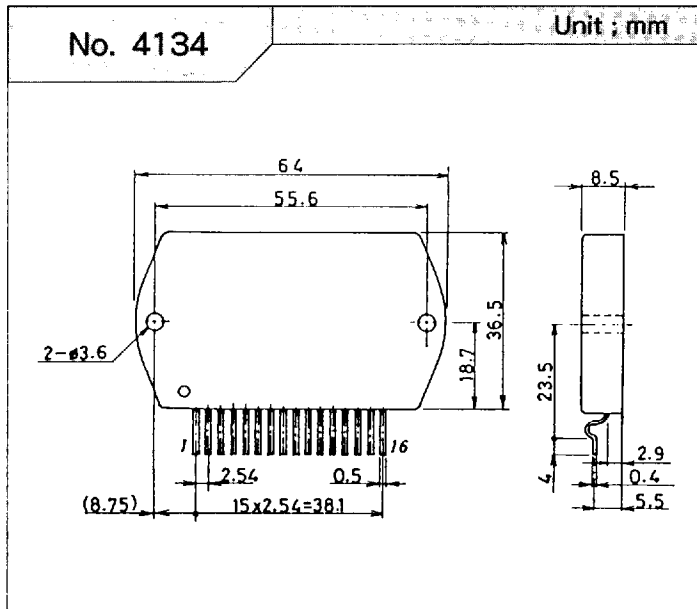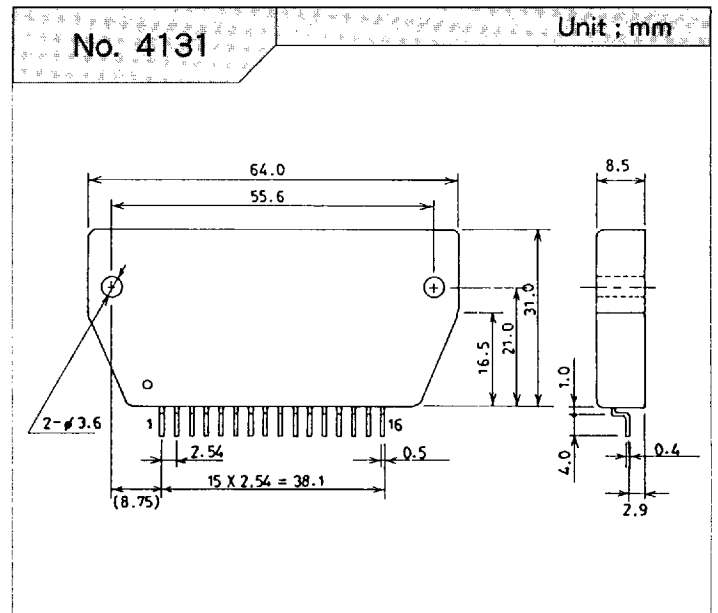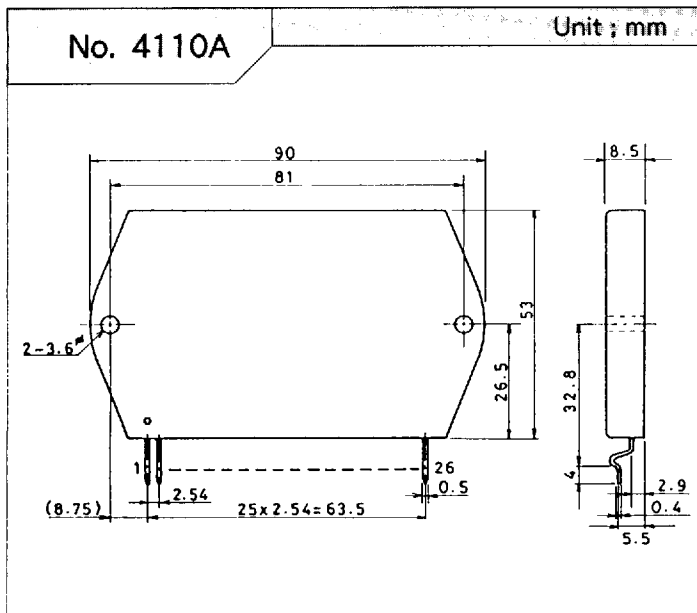



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.