

165-Bump BGA Commercial Temp Industrial Temp

# 2M x 18, 1M x 32, 1M x 36 36Mb Sync Burst SRAMs

400 MHz-150 MHz 2.5 V or 3.3 V V<sub>DD</sub> 2.5 V or 3.3 V I/O

#### **Features**

- FT pin for user-configurable flow through or pipeline operation
- Single Cycle Deselect (SCD) operation
- IEEE 1149.1 JTAG-compatible Boundary Scan
- 2.5 V or 3.3 V +10%/-10% core power supply
- 2.5 V or 3.3 V I/O supply
- **LBO** pin for Linear or Interleaved Burst mode
- Internal input resistors on mode pins allow floating mode pins
- Byte Write  $(\overline{BW})$  and/or Global Write  $(\overline{GW})$  operation
- Internal self-timed write cycle
- Automatic power-down for portable applications
- JEDEC-standard 165-bump BGA package
- RoHS-compliant 165-bump BGA package available

# **Functional Description**

## **Applications**

The GS832118/32/36AD is a 37,748,736-bit high performance synchronous SRAM with a 2-bit burst address counter. Although of a type originally developed for Level 2 Cache applications supporting high performance CPUs, the device now finds application in synchronous SRAM applications, ranging from DSP main store to networking chip set support.

#### Controls

Addresses, data I/Os, chip enable  $(\overline{E1})$ , address burst control inputs  $(\overline{ADSP}, \overline{ADSC}, \overline{ADV})$  and write control inputs  $(\overline{Bx}, \overline{BW}, \overline{GW})$  are synchronous and are controlled by a positive-edge-triggered clock input (CK). Output enable  $(\overline{G})$  and power down control (ZZ) are asynchronous inputs. Burst cycles can be initiated with either  $\overline{ADSP}$  or  $\overline{ADSC}$  inputs. In Burst mode, subsequent burst addresses are generated internally and are controlled by  $\overline{ADV}$ . The burst address counter may be configured to count in either linear or interleave order with the

Linear Burst Order ( $\overline{LBO}$ ) input. The Burst function need not be used. New addresses can be loaded on every cycle with no degradation of chip performance.

## Flow Through/Pipeline Reads

The function of the Data Output register can be controlled by the user via the  $\overline{FT}$  mode pin (Pin 14). Holding the  $\overline{FT}$  mode pin low places the RAM in Flow Through mode, causing output data to bypass the Data Output Register. Holding  $\overline{FT}$  high places the RAM in Pipeline mode, activating the rising-edge-triggered Data Output Register.

## **SCD Pipelined Reads**

The GS832118/32/36AD is a SCD (Single Cycle Deselect) pipelined synchronous SRAM. DCD (Dual Cycle Deselect) versions are also available. SCD SRAMs pipeline deselect commands one stage less than read commands. SCD RAMs begin turning off their outputs immediately after the deselect command has been captured in the input registers.

#### Byte Write and Global Write

Byte write operation is performed by using Byte Write enable  $(\overline{BW})$  input combined with one or more individual byte write signals  $(\overline{Bx})$ . In addition, Global Write  $(\overline{GW})$  is available for writing all bytes at one time, regardless of the Byte Write control inputs.

#### Sleep Mode

Low power (Sleep mode) is attained through the assertion (High) of the ZZ signal, or by stopping the clock (CK). Memory data is retained during Sleep mode.

## Core and Interface Voltages

The GS832118/32/36AD operates on a 3.3 V or 2.5 V power supply. All input are 3.3 V and 2.5 V compatible. Separate output power ( $V_{\rm DDQ}$ ) pins are used to decouple output noise from the internal circuits and are 3.3 V and 2.5 V compatible.

## **Parameter Synopsis**

		-400	-375	-333	-250	-200	-150	Unit
Pipeline	t <sub>KQ</sub> tCycle	2.5 2.5	2.5 2.66	2.5 3.3	2.5 4.0	3.0 5.0	3.8 6.7	ns ns
3-1-1-1	Curr (x18) Curr (x32/x36)	395 475	390 455	355 415	280 335	240 280	205 230	mA mA
Flow Through _ 2-1-1-1	t <sub>KQ</sub> tCycle	4.0 4.0	4.2 4.2	4.5 4.5	5.5 5.5	6.5 6.5	7.5 7.5	ns ns
	Curr (x18) Curr (x32/x36)	290 335	275 320	260 305	235 270	200 240	190 220	mA mA

Rev: 1.03 8/2013 1/32 © 2011, GSI Technology



# 165 Bump BGA—x18 Common I/O—Top View (Package D)

	1	2	3	4	5	6	7	8	9	10	11	
Α	NC	А	E1	BB	NC	E3	BW	ADSC	ADV	Α	А	А
В	NC	Α	E2	NC	BA	CK	GW	G	ADSP	Α	NC	В
С	NC	NC	V <sub>DDQ</sub>	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DDQ}$	NC	DQPA	С
D	NC	DQB	V <sub>DDQ</sub>	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	DQA	D
Е	NC	DQB	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	DQA	Е
F	NC	DQB	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	DQA	F
G	NC	DQB	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	DQA	G
Н	FT	MCL	NC	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	NC	NC	ZZ	Н
J	DQB	NC	V <sub>DDQ</sub>	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	NC	J
K	DQB	NC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	NC	K
L	DQB	NC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	NC	L
M	DQB	NC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	NC	М
N	DQPB	NC	$V_{DDQ}$	$V_{SS}$	NC	А	NC	$V_{SS}$	$V_{DDQ}$	NC	NC	N
Р	NC	NC	А	А	TDI	A1	TDO	А	А	Α	А	Р
R	LBO	A19	А	А	TMS	A0	TCK	А	А	Α	А	R

11 x 15 Bump BGA—13 mm x 15 mm Body—1.0 mm Bump Pitch



# 165 Bump BGA—x32 Common I/O—Top View (Package D)

	1	2	3	4	5	6	7	8	9	10	11	
Α	NC	Α	E1	BC	BB	E3	BW	ADSC	ADV	Α	NC	А
В	NC	Α	E2	BD	BA	CK	GW	G	ADSP	Α	NC	В
С	NC	NC	V <sub>DDQ</sub>	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	V <sub>DDQ</sub>	NC	NC	С
D	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQB	DQB	D
E	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQB	DQB	Е
F	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQB	DQB	F
G	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQB	DQB	G
Н	FT	MCL	NC	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	NC	NC	ZZ	Н
J	DQD	DQD	V <sub>DDQ</sub>	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	J
K	DQD	DQD	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	K
L	DQD	DQD	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	L
М	DQD	DQD	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	M
N	NC	NC	$V_{DDQ}$	$V_{SS}$	NC	А	NC	$V_{SS}$	$V_{DDQ}$	NC	NC	N
Р	NC	NC	А	Α	TDI	A1	TDO	Α	А	А	А	Р
R	LBO	А	А	Α	TMS	A0	TCK	А	Α	Α	А	R

11 x 15 Bump BGA—13 mm x 15 mm Body—1.0 mm Bump Pitch



# 165 Bump BGA—x36 Common I/O—Top View (Package D)

	1	2	3	4	5	6	7	8	9	10	11	
Α	NC	А	E1	BC	BB	E3	BW	ADSC	ADV	Α	NC	А
В	NC	А	E2	BD	BA	CK	GW	G	ADSP	Α	NC	В
С	DQPC	NC	V <sub>DDQ</sub>	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	V <sub>DDQ</sub>	NC	DQPB	С
D	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQB	DQB	D
E	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQB	DQB	E
F	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQB	DQB	F
G	DQC	DQC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{\rm DDQ}$	DQB	DQB	G
Н	FT	MCL	NC	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	NC	NC	ZZ	Н
J	DQD	DQD	V <sub>DDQ</sub>	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	J
K	DQD	DQD	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	K
L	DQD	DQD	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	L
M	DQD	DQD	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	DQA	DQA	М
N	DQPD	NC	$V_{DDQ}$	$V_{SS}$	NC	Α	NC	$V_{SS}$	$V_{DDQ}$	NC	DQPA	N
Р	NC	NC	А	А	TDI	A1	TDO	Α	Α	Α	Α	Р
R	LBO	А	А	А	TMS	A0	TCK	Α	Α	Α	Α	R

11 x 15 Bump BGA—13 mm x 15 mm Body—1.0 mm Bump Pitch




# GS832118/32/36AD 165-Bump BGA Pin Description

Symbol	Туре	Description
Ao, A1	I	Address field LSBs and Address Counter Preset Inputs
А	I	Address Inputs
DQA DQB DQc DQD	I/O	Data Input and Output pins
Ba, Bb, Bc, Bd	I	Byte Write Enable for DQA, DQB, DQc, DQD I/Os; active low
СК	I	Clock Input Signal; active high
BW	I	Byte Write—Writes all enabled bytes; active low
GW	I	Global Write Enable—Writes all bytes; active low
E <sub>1</sub>	I	Chip Enable; active low
E <sub>3</sub>	I	Chip Enable; active low
E <sub>2</sub>	I	Chip Enable; active high
G	I	Output Enable; active low
ADV	I	Burst address counter advance enable; active I0w
ADSC, ADSP	I	Address Strobe (Processor, Cache Controller); active low
ZZ	I	Sleep mode control; active high
FT	1	Flow Through or Pipeline mode; active low
LBO	I	Linear Burst Order mode; active low
TMS	I	Scan Test Mode Select
TDI	I	Scan Test Data In
TDO	0	Scan Test Data Out
TCK	I	Scan Test Clock
MCL	_	Must Connect Low
V <sub>DD</sub>	I	Core power supply
$V_{SS}$	I	I/O and Core Ground
V <sub>DDQ</sub>	I	Output driver power supply
NC	_	No Connect



# GS832118/32/36A Block Diagram

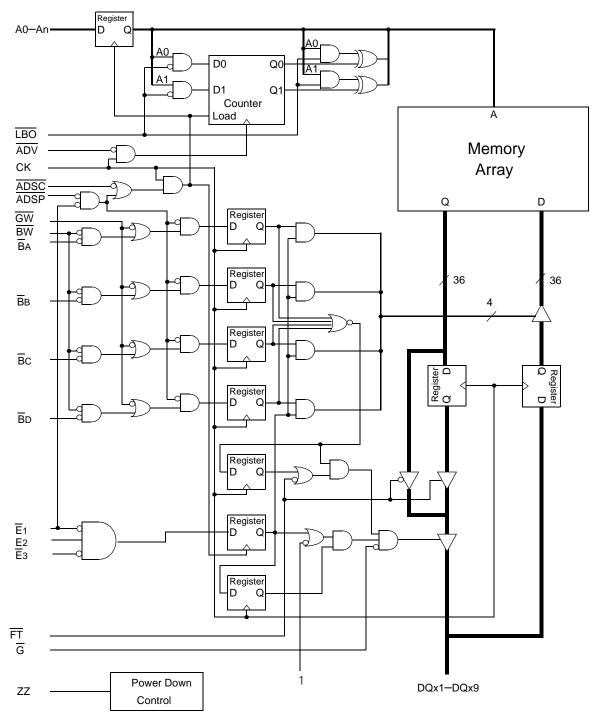

Note: Only x36 version shown for simplicity.



# **Mode Pin Functions**

Mode Name	Pin Name	State	Function
Burst Order Control	LBO	L	Linear Burst
Buist Order Control	LBO	Н	Interleaved Burst
Output Register Control	FT	L	Flow Through
Output Register Control		H or NC	Pipeline
Dower Down Control	77	L or NC	Active
Power Down Control	ZZ	Н	Standby, I <sub>DD</sub> = I <sub>SB</sub>

#### Note:

There is a pull-up device on the  $\overline{FT}$  pin and a pull-down device on the ZZ pin , so this input pin can be unconnected and the chip will operate in the default states as specified in the above tables.

## **Burst Counter Sequences**

# **Linear Burst Sequence**

	A[1:0]	A[1:0]	A[1:0]	A[1:0]
1st address	00	01	10	11
2nd address	01	10	11	00
3rd address	10	11	00	01
4th address	11	00	01	10

## Note:

The burst counter wraps to initial state on the 5th clock.

# **Interleaved Burst Sequence**

	A[1:0]	A[1:0]	A[1:0]	A[1:0]
1st address	00	01	10	11
2nd address	01	00	11	10
3rd address	10	11	00	01
4th address	11	10	01	00

## Note:

The burst counter wraps to initial state on the 5th clock.



# Byte Write Truth Table

Function	GW	BW	- Ba	- B <sub>B</sub>	Bc	BD	Notes
Read	Н	Н	Х	Х	Х	Х	1
Write No Bytes	Н	L	Н	Н	Н	Н	1
Write byte a	Н	L	L	Н	Н	Н	2, 3
Write byte b	Н	L	Н	L	Н	Н	2, 3
Write byte c	Н	L	Н	Н	L	Н	2, 3, 4
Write byte d	Н	L	Н	Н	Н	L	2, 3, 4
Write all bytes	Н	L	L	L	L	L	2, 3, 4
Write all bytes	L	Х	Х	Х	Х	Х	

- 1. All byte outputs are active in read cycles regardless of the state of Byte Write Enable inputs,  $\overline{BA}$ ,  $\overline{BB}$ ,  $\overline{BC}$  and/or  $\overline{BD}$ .
- 2. Byte Write Enable inputs BA, BB, BC and/or BD may be used in any combination with BW to write single or multiple bytes.
- 3. All byte I/Os remain High-Z during all write operations regardless of the state of Byte Write Enable inputs.
- 4. Bytes "C" and "D" are only available on the x32 and x36 versions.




# Synchronous Truth Table

Operation	Address Used	State Diagram Key	E1	E2	E3	ADSP	ADSC	ADV	$\overline{w}$	DQ <sup>3</sup>
Deselect Cycle, Power Down	None	Х	L	Х	Н	Х	L	Х	Х	High-Z
Deselect Cycle, Power Down	None	Х	L	L	Х	Х	L	Х	Х	High-Z
Deselect Cycle, Power Down	None	Х	L	Х	Н	L	Х	Х	Х	High-Z
Deselect Cycle, Power Down	None	Х	L	L	Х	L	Х	Х	Х	High-Z
Deselect Cycle, Power Down	None	Х	Н	Х	Х	Х	L	Х	Х	High-Z
Read Cycle, Begin Burst	External	R	L	Н	L	L	Х	Х	Х	Q
Read Cycle, Begin Burst	External	R	L	Н	L	Н	L	Х	F	Q
Write Cycle, Begin Burst	External	W	L	Н	L	Н	L	Х	T	D
Read Cycle, Continue Burst	Next	CR	Χ	Χ	Χ	Н	Н	L	F	Q
Read Cycle, Continue Burst	Next	CR	Н	Х	Χ	Χ	Н	L	F	Q
Write Cycle, Continue Burst	Next	CW	Χ	Χ	Х	Н	Н	L	Т	D
Write Cycle, Continue Burst	Next	CW	Н	Х	Х	Х	Н	L	T	D
Read Cycle, Suspend Burst	Current		Х	Х	Х	Н	Н	Н	F	Q
Read Cycle, Suspend Burst	Current		Н	Х	Х	Х	Н	Н	F	Q
Write Cycle, Suspend Burst	Current		Х	Х	Х	Н	Н	Н	T	D
Write Cycle, Suspend Burst	Current		Н	Х	Х	Х	Н	Н	T	D

- 1. X = Don't Care, H = High, L = Low
- 2. E = T (True) if  $E_2 = 1$  and  $\overline{E}_1 = \overline{E}_3 = 0$ ; E = F (False) if  $E_2 = 0$  or  $\overline{E}_1 = 1$  or  $\overline{E}_3 = 1$
- 3. W = T (True) and F (False) is defined in the Byte Write Truth Table preceding.
- 4.  $\overline{G}$  is an asynchronous input.  $\overline{G}$  can be driven high at any time to disable active output drivers.  $\overline{G}$  low can only enable active drivers (shown as "Q" in the Truth Table above).
- 5. All input combinations shown above are tested and supported. Input combinations shown in gray boxes need not be used to accomplish basic synchronous or synchronous burst operations and may be avoided for simplicity.
- 6. Tying ADSP high and ADSC low allows simple non-burst synchronous operations. See **BOLD** items above.
- 7. Tying ADSP high and ADV low while using ADSC to load new addresses allows simple burst operations. See *ITALIC* items above.




# **Simplified State Diagram**

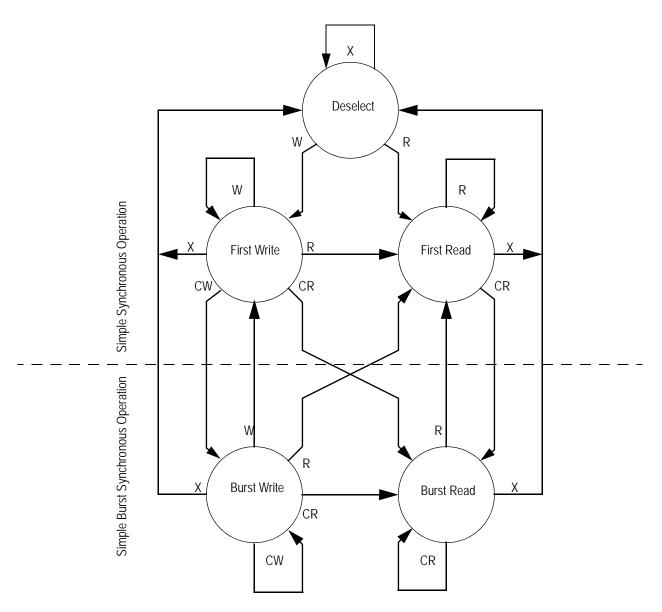

- The diagram shows only supported (tested) synchronous state transitions. The diagram  $\underline{\text{presumes }\overline{G}\text{ is }}\underline{\text{tied low.}}$  The  $\underline{\text{upper portion of the diagram}}$  assumes active use of only the Enable (E1) and Write (BA, BB, BC, BD, BW, and GW) control inputs, and that ADSP is tied high and ADSC is tied low.
- The upper and lower portions of the diagram together assume active use of only the Enable, Write, and ADSC control inputs, and 3. assumes ADSP is tied high and ADV is tied low.



# Simplified State Diagram with $\overline{G}$

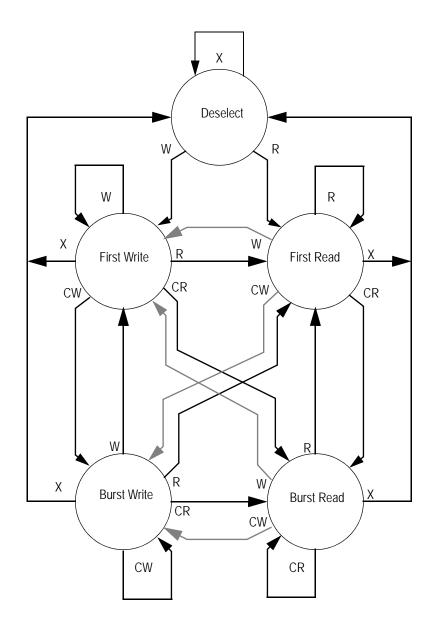

- 1. The diagram shows supported (tested) synchronous state transitions plus supported transitions that depend upon the use of  $\overline{G}$ .
- 2. Use of "Dummy Reads" (Read Cycles with  $\overline{G}$  High) may be used to make the transition from read cycles to write cycles without passing through a deselect cycle. Dummy read cycles increment the address counter just like normal read cycles.
- Transitions shown in gray tone assume G has been pulsed high long enough to turn the RAM's drivers off and for incoming data to meet
  Data Input Set Up Time.



# Absolute Maximum Ratings

(All voltages reference to  $V_{SS}$ )

Symbol	Description	Value	Unit
V <sub>DD</sub>	Voltage on V <sub>DD</sub> Pins	-0.5 to 4.6	V
V <sub>DDQ</sub>	Voltage in V <sub>DDQ</sub> Pins	–0.5 to V <sub>DD</sub>	V
V <sub>I/O</sub>	Voltage on I/O Pins	$-0.5$ to V <sub>DD</sub> +0.5 ( $\leq$ 4.6 V max.)	V
V <sub>IN</sub>	Voltage on Other Input Pins	$-0.5$ to $V_{DD} + 0.5 \ (\le 4.6 \text{ V max.})$	V
I <sub>IN</sub>	Input Current on Any Pin	+/20	mA
I <sub>OUT</sub>	Output Current on Any I/O Pin	+/20	mA
$P_{D}$	Package Power Dissipation	1.5	W
T <sub>STG</sub>	Storage Temperature	-55 to 125	oC
T <sub>BIAS</sub>	Temperature Under Bias	-55 to 125	oC

#### Note:

Permanent damage to the device may occur if the Absolute Maximum Ratings are exceeded. Operation should be restricted to Recommended Operating Conditions. Exposure to conditions exceeding the Absolute Maximum Ratings, for an extended period of time, may affect reliability of this component.

# **Power Supply Voltage Ranges**

Parameter	Symbol	Min.	Тур.	Max.	Unit
3.3 V Supply Voltage	$V_{DD3}$	3.0	3.3	3.6	V
2.5 V Supply Voltage	V <sub>DD2</sub>	2.3	2.5	2.7	V
3.3 V V <sub>DDQ</sub> I/O Supply Voltage	V <sub>DDQ3</sub>	3.0	3.3	3.6	V
2.5 V V <sub>DDQ</sub> I/O Supply Voltage	V <sub>DDQ2</sub>	2.3	2.5	2.7	V

# V<sub>DD3</sub> Range Logic Levels

Parameter	Symbol	Min.	Тур.	Max.	Unit
Input High Voltage	V <sub>IH</sub>	2.0	_	V <sub>DD</sub> + 0.3	V
Input Low Voltage	$V_{IL}$	-0.3	_	0.8	V

## Notes:

- 1. V<sub>IH</sub> (max) must be met for any instantaneous value of V<sub>DD</sub>.
- 2.  $V_{DD}$  needs to power-up before or at the same time as  $V_{DDQ}$  to make sure  $V_{IH}$  (max) is not exceeded.



# V<sub>DD2</sub> Range Logic Levels

Parameter	Symbol	Min.	Тур.	Max.	Unit
Input High Voltage	V <sub>IH</sub>	0.6*V <sub>DD</sub>	_	V <sub>DD</sub> + 0.3	V
Input Low Voltage	V <sub>IL</sub>	-0.3	_	0.3*V <sub>DD</sub>	V

#### Notes:

- 1. V<sub>IH</sub> (max) must be met for any instantaneous value of V<sub>DD</sub>.
- 2.  $V_{DD}$  needs to power-up before or at the same time as  $V_{DDO}$  to make sure  $V_{IH}$  (max) is not exceeded.

# **Operating Temperature**

Parameter	Symbol	Min.	Тур.	Max.	Unit
Junction Temperature (Commercial Range Versions)	TJ	0	25	85	°C
Junction Temperature (Industrial Range Versions)*	TJ	-40	25	100	°C

#### Note:


# Thermal Impedance

Package	Test PCB Substrate	Substrate Airflow = 0 m/s Airflow		θ JA (C°/W) Airflow = 2 m/s	θ JB (C°/W)	θ JC (C°/W)
165 BGA	4-layer	24.4	21.0	20.0	11.6	3.7


## Notes:

- 1. Thermal Impedance data is based on a number of of samples from mulitple lots and should be viewed as a typical number.
- 2. Please refer to JEDEC standard JESD51-6.
- 3. The characteristics of the test fixture PCB influence reported thermal characteristics of the device. Be advised that a good thermal path to the PCB can result in cooling or heating of the RAM depending on PCB temperature.

## **Undershoot Measurement and Timing**



## Overshoot Measurement and Timing



#### Note:

Input Under/overshoot voltage must be -2 V > Vi < V<sub>DDn</sub>+2 V not to exceed 4.6 V maximum, with a pulse width not to exceed 20% tKC.

<sup>\*</sup> The part numbers of Industrial Temperature Range versions end with the character "I". Unless otherwise noted, all performance specifications quoted are evaluated for worst case in the temperature range marked on the device.



# Capacitance

 $(T_A = 25^{o}C, f = 1 \text{ MHz}, V_{DD} = 2.5 \text{ V})$ 

Parameter	Symbol	Test conditions	Тур.	Max.	Unit
Input Capacitance	C <sub>IN</sub>	V <sub>IN</sub> = 0 V	4	5	pF
Input/Output Capacitance	C <sub>I/O</sub>	V <sub>OUT</sub> = 0 V	6	7	pF


#### Note:

These parameters are sample tested.

## **AC Test Conditions**

Parameter	Conditions
Input high level	V <sub>DD</sub> – 0.2 V
Input low level	0.2 V
Input slew rate	1 V/ns
Input reference level	V <sub>DD</sub> /2
Output reference level	V <sub>DDQ</sub> /2
Output load	Fig. 1

- 1. Include scope and jig capacitance.
- 2. Test conditions as specified with output loading as shown in Fig. 1 unless otherwise noted.
- 3. Device is deselected as defined by the Truth Table.





# **DC Electrical Characteristics**

Parameter	Symbol	Test Conditions	Min	Max
Input Leakage Current (except mode pins)	I <sub>IL</sub>	V <sub>IN</sub> = 0 to V <sub>DD</sub>	–1 uA	1 uA
ZZ Input Current	I <sub>IN1</sub>	$V_{DD} \ge V_{IN} \ge V_{IH}$ $0 \ V \le V_{IN} \le V_{IH}$	−1 uA −1 uA	1 uA 100 uA
FT Input Current	I <sub>IN2</sub>	$V_{DD} \ge V_{IN} \ge V_{IL}$ $0 \ V \le V_{IN} \le V_{IL}$	−100 uA −1 uA	1 uA 1 uA
Output Leakage Current	I <sub>OL</sub>	Output Disable, $V_{OUT} = 0$ to $V_{DD}$	−1 uA	1 uA
Output High Voltage	V <sub>OH2</sub>	$I_{OH} = -8 \text{ mA}, V_{DDQ} = 2.375 \text{ V}$	1.7 V	_
Output High Voltage	V <sub>OH3</sub>	$I_{OH} = -8 \text{ mA}, V_{DDQ} = 3.135 \text{ V}$	2.4 V	_
Output Low Voltage	V <sub>OL</sub>	I <sub>OL</sub> = 8 mA	_	0.4 V



					1					1		
	i.	5	mA	mA	mA	mA	mA	mA	mA	mA		
-150	-40	to 85°C	220 30	210 30	210	195 15	75	75	120	120		
<u>-</u>	0	to 70°C	200	190 30	190 15	175 15	55		100	100		
-200	-40	to 85°C	260 40	225 35	240	205 15	75	75	120	120		
-2	0	to 70°C	240 40	205 35	220	185 15	22	22	100	100		
-250	-40	to 85°C	305 50	250 40	275 25	235 20	75	75	120	120		
-2	0	to 70°C	285 50	230	255 25	215 20	22	22	100	100		
-333	-40	to 85°C	365	280 45	340 35	255 25	75	75	120	120		
-3	0	to 70°C	345 70	260 45	320 35	235 25	22	22	100	100		
-375	-40	to 85°C	400	290	370 40	270 25	75	75	120	120		
-53	0	to 70°C	380 75	270 50	350 40	250 25	55	55	100	100		
-400	-40	to 85°C	415 80	305 50	375 40	285 25	75	75	120	120		
14-	0	to 70°C	395 80	285 50	355 40	265 25	22	22	100	100		
	Symbol	5	aa <sub>l</sub>	aa <sub>l</sub>	0a <sub>1</sub>	امم <sup>ا</sup> معما	lSB	<sup>8S</sup> I	aa <sub>l</sub>	aa <sub>l</sub>		
	Mode		Pipeline	Flow Through	Pipeline	Flow Through	Pipeline	Flow Through	Pipeline	Flow Through		
			(x32/	x36)	(6)	(o x)		I		I		
	Test Conditions			Device Selected; All other inputs	$\geq V_{IH}$ or $\leq V_{IL}$ Output open			$ZZ \ge V_{DD} - 0.2 \text{ V}$	Device Deselected;	All other inputs $\geq V_{   }$ or $\leq V_{   }$		
	Parameter			Operating Current Current Current Current								

 $I_{DD}$  and  $I_{DDQ}$  apply to any combination of  $V_{DD3},\,V_{DD2},\,V_{DDQ3},\,and\,V_{DDQ2}$  operation. All parameters listed are worst case scenario.




# **AC Electrical Characteristics**

	Parameter	Symbol	-4	00	-3	75	-33	33	-2!	50	-20	00	-1	50	Unit
	Faranietei	Symbol	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Ď
	Clock Cycle Time	tKC	2.5	_	2.66	_	3.3	_	4.0	_	5.0	_	6.7	_	ns
	Clock to Output Valid	tKQ	_	2.5	_	2.5	_	2.5	_	2.5	_	3.0	_	3.8	ns
Dinalina	Clock to Output Invalid	tKQX	1.5	_	1.5	_	1.5	_	1.5	_	1.5	_	1.5		ns
Pipeline	Clock to Output in Low-Z	tLZ <sup>1</sup>	1.5	_	1.5	_	1.5	_	1.5	_	1.5	_	1.5		ns
	Setup time	tS	0.9	_	0.9	_	1.0	_	1.2	_	1.4	_	1.5	_	ns
	Hold time	tH	0.1	_	0.1	_	0.1	_	0.2	_	0.4	_	0.5	_	ns
	Clock Cycle Time	tKC	4.0	_	4.2	_	4.5	_	5.5	_	6.5	_	7.5	_	ns
	Clock to Output Valid	tKQ	_	4.0	_	4.2	_	4.5	_	5.5	_	6.5	_	7.5	ns
Flow	Clock to Output Invalid	tKQX	2.0	_	2.0	_	2.0	_	2.0	_	2.0	_	2.0		ns
Through	Clock to Output in Low-Z	tLZ <sup>1</sup>	2.0	_	2.0	_	2.0	_	2.0	_	2.0	_	2.0	_	ns
	Setup time	tS	1.2	_	1.2	_	1.3	_	1.5	_	1.5	_	1.5	_	ns
	Hold time	tH	0.2	_	0.2	_	0.3	_	0.5	_	0.5	_	0.5		ns
	Clock HIGH Time	tKH	0.9	_	0.9	_	1.0	_	1.3	_	1.3	_	1.5		ns
	Clock LOW Time	tKL	1.1	_	1.1	_	1.2	_	1.5	_	1.5	_	1.7		ns
	Clock to Output in High-Z	tHZ <sup>1</sup>	1.5	2.5	1.5	2.5	1.5	2.5	1.5	2.5	1.5	3.0	1.5	3.8	ns
	G to Output Valid	tOE	_	2.5	_	2.5	_	2.5	_	2.5	_	3.0	_	3.8	ns
	G to output in Low-Z	tOLZ <sup>1</sup>	0	_	0	_	0	_	0	_	0	_	0	_	ns
	G to output in High-Z	tOHZ <sup>1</sup>	_	2.5	_	2.5	_	2.5	_	2.5	_	3.0	_	3.8	ns
	ZZ setup time	tZZS <sup>2</sup>	5		5	_	5	_	5	_	5	_	5	_	ns
	ZZ hold time	tZZH <sup>2</sup>	1	_	1	_	1	_	1	_	1	_	1	_	ns
	ZZ recovery	tZZR	20	_	20	_	20	_	20	_	20	_	20		ns

- 1. These parameters are sampled and are not 100% tested.
- 2. ZZ is an asynchronous signal. However, In order to be recognized on any given clock cycle, ZZ must meet the specified setup and hold times as specified above.




# **Pipeline Mode Timing**

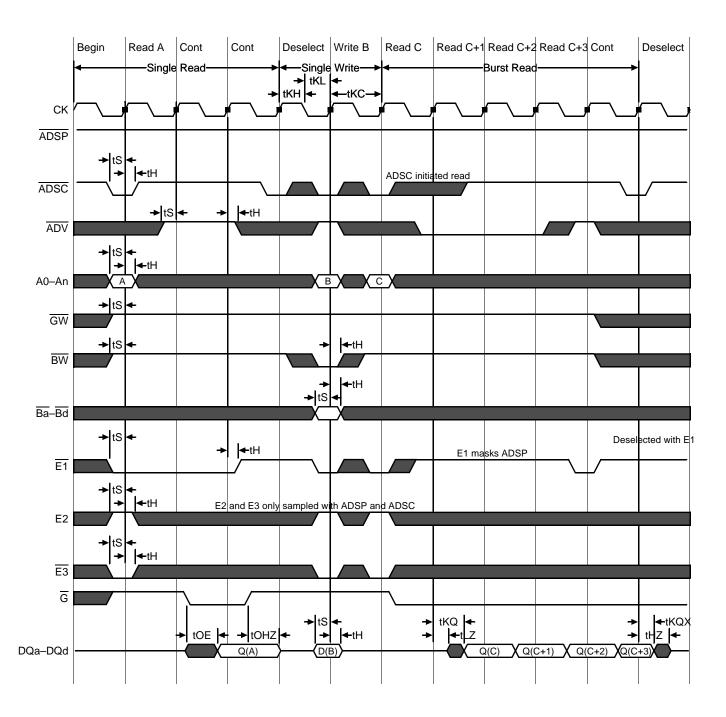



# Flow Through Mode Timing

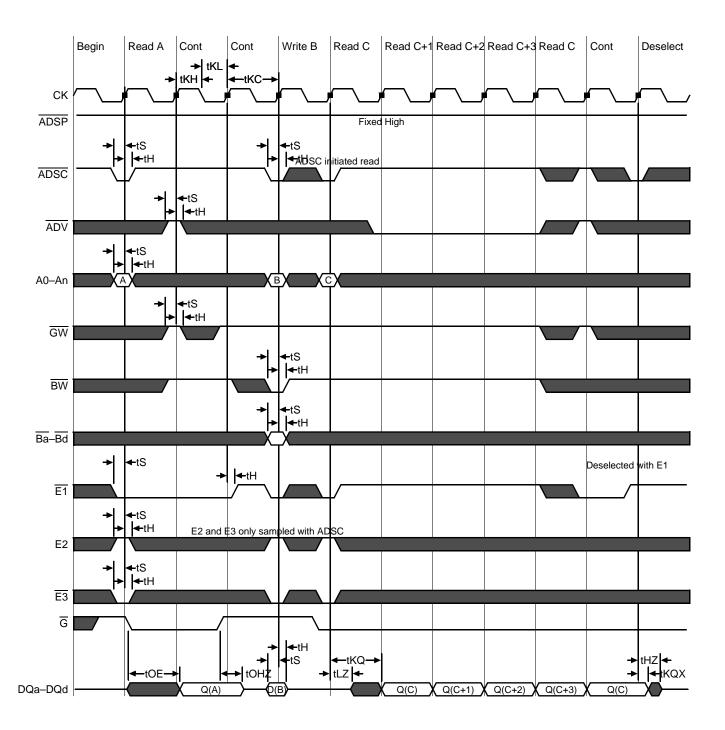




## Sleep Mode

During normal operation, ZZ must be pulled low, either by the user or by its internal pull down resistor. When ZZ is pulled high, the SRAM will enter a Power Sleep mode after 2 cycles. At this time, internal state of the SRAM is preserved. When ZZ returns to low, the SRAM operates normally after ZZ recovery time.

Sleep mode is a low current, power-down mode in which the device is deselected and current is reduced to  $I_{SB}2$ . The duration of Sleep mode is dictated by the length of time the ZZ is in a High state. After entering Sleep mode, all inputs except ZZ become disabled and all outputs go to High-Z The ZZ pin is an asynchronous, active high input that causes the device to enter Sleep mode. When the ZZ pin is driven high,  $I_{SB}2$  is guaranteed after the time tZZI is met. Because ZZ is an asynchronous input, pending operations or operations in progress may not be properly completed if ZZ is asserted. Therefore, Sleep mode must not be initiated until valid pending operations are completed. Similarly, when exiting Sleep mode during tZZR, only a Deselect or Read commands may be applied while the SRAM is recovering from Sleep mode.

## Sleep Mode Timing Diagram

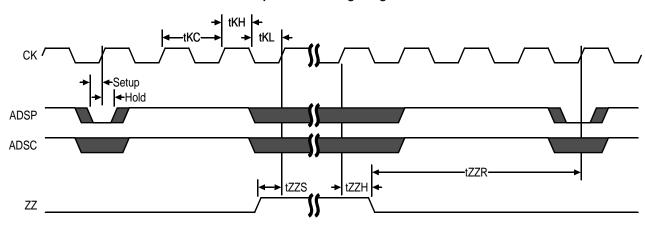

## **Application Tips**

#### Single and Dual Cycle Deselect

SCD devices (like this one) force the use of "dummy read cycles" (read cycles that are launched normally but that are ended with the output drivers inactive) in a fully synchronous environment. Dummy read cycles waste performance but their use usually assures there will be no bus contention in transitions from reads to writes or between banks of RAMs. DCD SRAMs do not waste bandwidth on dummy cycles and are logically simpler to manage in a multiple bank application (wait states need not be inserted at bank address boundary crossings) but greater care must be exercised to avoid excessive bus contention.

# **JTAG Port Operation**

#### Overview

The JTAG Port on this RAM operates in a manner that is compliant with IEEE Standard 1149.1-1990, a serial boundary scan interface standard (commonly referred to as JTAG). The JTAG Port input interface levels scale with  $V_{DD}$ . The JTAG output drivers are powered by  $V_{DDO}$ .

## Disabling the JTAG Port

It is possible to use this device without utilizing the JTAG port. The port is reset at power-up and will remain inactive unless clocked. TCK, TDI, and TMS are designed with internal pull-up circuits. To assure normal operation of the RAM with the JTAG Port unused, TCK, TDI, and TMS may be left floating or tied to either  $V_{DD}$  or  $V_{SS}$ . TDO should be left unconnected.



## **JTAG Pin Descriptions**

Pin	Pin Name	I/O	Description
TCK	Test Clock	In	Clocks all TAP events. All inputs are captured on the rising edge of TCK and all outputs propagate from the falling edge of TCK.
TMS	Test Mode Select	In	The TMS input is sampled on the rising edge of TCK. This is the command input for the TAP controller state machine. An undriven TMS input will produce the same result as a logic one input level.
TDI	Test Data In	In	The TDI input is sampled on the rising edge of TCK. This is the input side of the serial registers placed between TDI and TDO. The register placed between TDI and TDO is determined by the state of the TAP Controller state machine and the instruction that is currently loaded in the TAP Instruction Register (refer to the TAP Controller State Diagram). An undriven TDI pin will produce the same result as a logic one input level.
TDO	Test Data Out	Out	Output that is active depending on the state of the TAP state machine. Output changes in response to the falling edge of TCK. This is the output side of the serial registers placed between TDI and TDO.

#### Note:

This device does not have a TRST (TAP Reset) pin. TRST is optional in IEEE 1149.1. The Test-Logic-Reset state is entered while TMS is held high for five rising edges of TCK. The TAP Controller is also reset automaticly at power-up.

# JTAG Port Registers

#### Overview

The various JTAG registers, refered to as Test Access Port orTAP Registers, are selected (one at a time) via the sequences of 1s and 0s applied to TMS as TCK is strobed. Each of the TAP Registers is a serial shift register that captures serial input data on the rising edge of TCK and pushes serial data out on the next falling edge of TCK. When a register is selected, it is placed between the TDI and TDO pins.

#### Instruction Register

The Instruction Register holds the instructions that are executed by the TAP controller when it is moved into the Run, Test/Idle, or the various data register states. Instructions are 3 bits long. The Instruction Register can be loaded when it is placed between the TDI and TDO pins. The Instruction Register is automatically preloaded with the IDCODE instruction at power-up or whenever the controller is placed in Test-Logic-Reset state.

#### **Bypass Register**


The Bypass Register is a single bit register that can be placed between TDI and TDO. It allows serial test data to be passed through the RAM's JTAG Port to another device in the scan chain with as little delay as possible.

#### **Boundary Scan Register**

The Boundary Scan Register is a collection of flip flops that can be preset by the logic level found on the RAM's input or I/O pins. The flip flops are then daisy chained together so the levels found can be shifted serially out of the JTAG Port's TDO pin. The Boundary Scan Register also includes a number of place holder flip flops (always set to a logic 1). The relationship between the device pins and the bits in the Boundary Scan Register is described in the Scan Order Table following. The Boundary Scan Register, under the control of the TAP Controller, is loaded with the contents of the RAMs I/O ring when the controller is in Capture-DR state and then is placed between the TDI and TDO pins when the controller is moved to Shift-DR state. SAMPLE-Z, SAMPLE/PRELOAD and EXTEST instructions can be used to activate the Boundary Scan Register.



# JTAG TAP Block Diagram

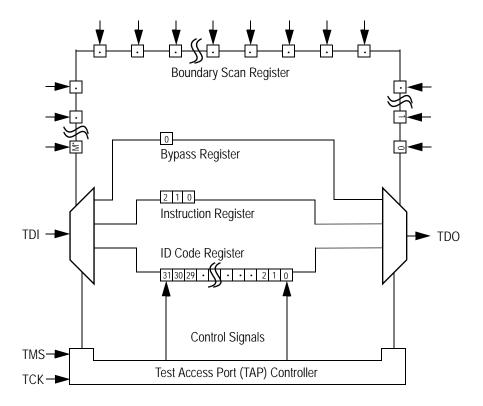

<sup>\*</sup> For the value of M, see the BSDL file, which is available at by contacting us at <a href="mailto:apps@gsitechnology.com">apps@gsitechnology.com</a>.

## Identification (ID) Register

The ID Register is a 32-bit register that is loaded with a device and vendor specific 32-bit code when the controller is put in Capture-DR state with the IDCODE command loaded in the Instruction Register. The code is loaded from a 32-bit on-chip ROM. It describes various attributes of the RAM as indicated below. The register is then placed between the TDI and TDO pins when the controller is moved into Shift-DR state. Bit 0 in the register is the LSB and the first to reach TDO when shifting begins.

# **ID Register Contents**

									ı	Not I	Used	i												ED	EC	hnd Ve Cod	ndo					Presence Register
Bit #	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	0	0	0	1	1	0	1	1	0	0	1	1



## **Tap Controller Instruction Set**

## Overview

There are two classes of instructions defined in the Standard 1149.1-1990; the standard (Public) instructions, and device specific (Private) instructions. Some Public instructions are mandatory for 1149.1 compliance. Optional Public instructions must be implemented in prescribed ways. The TAP on this device may be used to monitor all input and I/O pads, and can be used to load address, data or control signals into the RAM or to preload the I/O buffers.

When the TAP controller is placed in Capture-IR state the two least significant bits of the instruction register are loaded with 01. When the controller is moved to the Shift-IR state the Instruction Register is placed between TDI and TDO. In this state the desired instruction is serially loaded through the TDI input (while the previous contents are shifted out at TDO). For all instructions, the TAP executes newly loaded instructions only when the controller is moved to Update-IR state. The TAP instruction set for this device is listed in the following table.

# Test Logic Reset Run Test Idle Select DR Select IR 0 0 Capture DR Capture IR 0 Shift DR Shift IR Exit1 DR Exit1 IR 0 0 Pause DR Pause IR 1 Exit2 DR Exit2 IR Update DR Update IR

# JTAG Tap Controller State Diagram

#### **Instruction Descriptions**

## **BYPASS**

When the BYPASS instruction is loaded in the Instruction Register the Bypass Register is placed between TDI and TDO. This occurs when the TAP controller is moved to the Shift-DR state. This allows the board level scan path to be shortened to facilitate testing of other devices in the scan path.





#### SAMPLE/PRELOAD

SAMPLE/PRELOAD is a Standard 1149.1 mandatory public instruction. When the SAMPLE / PRELOAD instruction is loaded in the Instruction Register, moving the TAP controller into the Capture-DR state loads the data in the RAMs input and I/O buffers into the Boundary Scan Register. Boundary Scan Register locations are not associated with an input or I/O pin, and are loaded with the default state identified in the Boundary Scan Chain table at the end of this section of the datasheet. Because the RAM clock is independent from the TAP Clock (TCK) it is possible for the TAP to attempt to capture the I/O ring contents while the input buffers are in transition (i.e. in a metastable state). Although allowing the TAP to sample metastable inputs will not harm the device, repeatable results cannot be expected. RAM input signals must be stabilized for long enough to meet the TAPs input data capture set-up plus hold time (tTS plus tTH). The RAMs clock inputs need not be paused for any other TAP operation except capturing the I/O ring contents into the Boundary Scan Register. Moving the controller to Shift-DR state then places the boundary scan register between the TDI and TDO pins.

#### **EXTEST**

EXTEST is an IEEE 1149.1 mandatory public instruction. It is to be executed whenever the instruction register is loaded with all logic 0s. The EXTEST command does not block or override the RAM's input pins; therefore, the RAM's internal state is still determined by its input pins.

Typically, the Boundary Scan Register is loaded with the desired pattern of data with the SAMPLE/PRELOAD command. Then the EXTEST command is used to output the Boundary Scan Register's contents, in parallel, on the RAM's data output drivers on the falling edge of TCK when the controller is in the Update-IR state.

Alternately, the Boundary Scan Register may be loaded in parallel using the EXTEST command. When the EXTEST instruction is selected, the sate of all the RAM's input and I/O pins, as well as the default values at Scan Register locations not associated with a pin, are transferred in parallel into the Boundary Scan Register on the rising edge of TCK in the Capture-DR state, the RAM's output pins drive out the value of the Boundary Scan Register location with which each output pin is associated.

#### **IDCODE**

The IDCODE instruction causes the ID ROM to be loaded into the ID register when the controller is in Capture-DR mode and places the ID register between the TDI and TDO pins in Shift-DR mode. The IDCODE instruction is the default instruction loaded in at power up and any time the controller is placed in the Test-Logic-Reset state.

#### SAMPLE-Z

If the SAMPLE-Z instruction is loaded in the instruction register, all RAM outputs are forced to an inactive drive state (high-Z) and the Boundary Scan Register is connected between TDI and TDO when the TAP controller is moved to the Shift-DR state.

## RFU

These instructions are Reserved for Future Use. In this device they replicate the BYPASS instruction.



# **JTAG TAP Instruction Set Summary**

Instruction	Code	Description	Notes
EXTEST	000	Places the Boundary Scan Register between TDI and TDO.	1
IDCODE	001	Preloads ID Register and places it between TDI and TDO.	1, 2
SAMPLE-Z	010	Captures I/O ring contents. Places the Boundary Scan Register between TDI and TDO. Forces all RAM output drivers to High-Z.	1
RFU	011	Do not use this instruction; Reserved for Future Use. Replicates BYPASS instruction. Places Bypass Register between TDI and TDO.	1
SAMPLE/ PRELOAD	100	Captures I/O ring contents. Places the Boundary Scan Register between TDI and TDO.	1
GSI	101	GSI private instruction.	1
RFU	110	Do not use this instruction; Reserved for Future Use. Replicates BYPASS instruction. Places Bypass Register between TDI and TDO.	1
BYPASS	111	Places Bypass Register between TDI and TDO.	1

- 1. Instruction codes expressed in binary, MSB on left, LSB on right.
- 2. Default instruction automatically loaded at power-up and in test-logic-reset state.



# JTAG Port Recommended Operating Conditions and DC Characteristics (2.5/3.3 V Version)

Parameter	Symbol	Min.	Max.	Unit	Notes
2.5 V Test Port Input High Voltage	V <sub>IHJ2</sub>	0.6 * V <sub>DD2</sub>	V <sub>DD2</sub> +0.3	V	1
2.5 V Test Port Input Low Voltage	$V_{\rm ILJ2}$	-0.3	0.3 * V <sub>DD2</sub>	V	1
3.3 V Test Port Input High Voltage	V <sub>IHJ3</sub>	2.0	V <sub>DD3</sub> +0.3	V	1
3.3 V Test Port Input Low Voltage	V <sub>ILJ3</sub>	-0.3	0.8	V	1
TMS, TCK and TDI Input Leakage Current	I <sub>INHJ</sub>	-300	1	uA	2
TMS, TCK and TDI Input Leakage Current	I <sub>INLJ</sub>	-1	100	uA	3
TDO Output Leakage Current	I <sub>OLJ</sub>	-1	1	uA	4
Test Port Output High Voltage	V <sub>OHJ</sub>	1.7		V	5, 6
Test Port Output Low Voltage	V <sub>OLJ</sub>		0.4	V	5, 7
Test Port Output CMOS High	V <sub>OHJC</sub>	V <sub>DDQ</sub> – 100 mV	_	V	5, 8
Test Port Output CMOS Low	V <sub>OLJC</sub>	_	100 mV	V	5, 9

#### Notes:


- 1. Input Under/overshoot voltage must be -2 V < Vi < V<sub>DDn</sub> +2 V not to exceed 4.6 V maximum, with a pulse width not to exceed 20% tTKC.
- 2.  $V_{ILJ} \le V_{IN} \le V_{DDn}$
- 3.  $0 \text{ V} \leq V_{IN} \leq V_{ILJn}$
- 4. Output Disable,  $V_{OUT} = 0$  to  $V_{DDn}$
- 5. The TDO output driver is served by the  $V_{\mbox{\scriptsize DDQ}}$  supply.
- 6.  $I_{OHJ} = -4 \text{ mA}$
- 7.  $I_{OLJ} = + 4 \text{ mA}$
- 8.  $I_{OHJC} = -100 \text{ uA}$
- 9.  $I_{OLJC} = +100 \text{ uA}$

## JTAG Port AC Test Conditions

Parameter	Conditions
Input high level	V <sub>DD</sub> – 0.2 V
Input low level	0.2 V
Input slew rate	1 V/ns
Input reference level	V <sub>DDQ</sub> /2
Output reference level	V <sub>DDQ</sub> /2

#### Notes:


- 1. Include scope and jig capacitance.
- 2. Test conditions as shown unless otherwise noted.



\* Distributed Test Jig Capacitance



# **JTAG Port Timing Diagram**

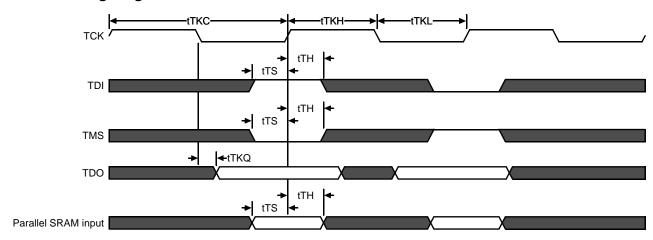

# JTAG Port AC Electrical Characteristics


Parameter	Symbol	Min	Max	Unit
TCK Cycle Time	tTKC	50	-	ns
TCK Low to TDO Valid	tTKQ	_	20	ns
TCK High Pulse Width	tTKH	20	_	ns
TCK Low Pulse Width	tTKL	20	_	ns
TDI & TMS Set Up Time	tTS	10	_	ns
TDI & TMS Hold Time	tTH	10	_	ns

## Boundary Scan (BSDL Files)

For information regarding the Boundary Scan Chain, or to obtain BSDL files for this part, please contact our Applications Engineering Department at: <a href="mailto:apps@gsitechnology.com">apps@gsitechnology.com</a>.



# Package Dimensions—165-Bump FPBGA (Package D)

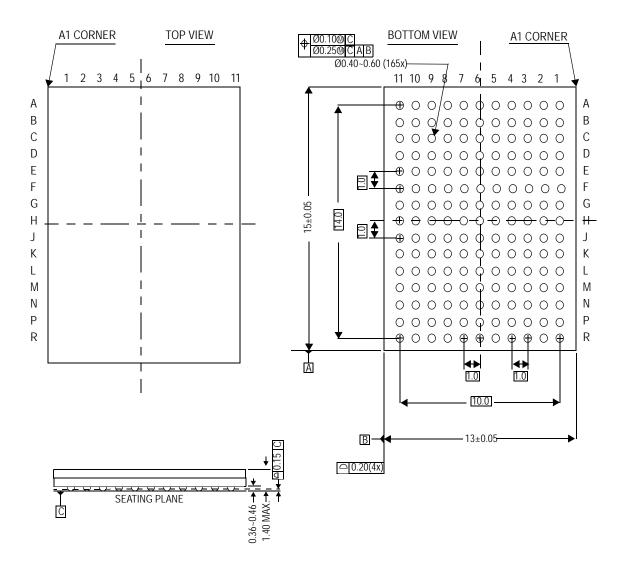



# Ordering Information for GSI Synchronous Burst RAMs

Org	Part Number <sup>1</sup>	Туре	Package	Speed <sup>2</sup> (MHz/ns)	T <sub>J</sub> <sup>3</sup>
2M x 18	GS832118AD-400	Pipeline/Flow Through	165 BGA	400/4.0	С
2M x 18	GS832118AD-375	Pipeline/Flow Through	165 BGA	375/4.2	С
2M x 18	GS832118AD-333	Pipeline/Flow Through	165 BGA	333/4.5	С
2M x 18	GS832118AD-250	Pipeline/Flow Through	165 BGA	250/5.5	С
2M x 18	GS832118AD-200	Pipeline/Flow Through	165 BGA	200/6.5	С
2M x 18	GS832118AD-150	Pipeline/Flow Through	165 BGA	150/7.5	С
1M x 32	GS832132AD-400	Pipeline/Flow Through	165 BGA	333/4.5	С
1M x 32	GS832132AD-375	Pipeline/Flow Through	165 BGA	333/4.5	С
1M x 32	GS832132AD-333	Pipeline/Flow Through	165 BGA	333/4.5	С
1M x 32	GS832132AD-250	Pipeline/Flow Through	165 BGA	250/5.5	С
1M x 32	GS832132AD-200	Pipeline/Flow Through	165 BGA	200/6.5	С
1M x 32	GS832132AD-150	Pipeline/Flow Through	165 BGA	150/7.5	С
1M x 36	GS832136AD-400	Pipeline/Flow Through	165 BGA	333/4.5	С
1M x 36	GS832136AD-375	Pipeline/Flow Through	165 BGA	333/4.5	С
1M x 36	GS832136AD-333	Pipeline/Flow Through	165 BGA	333/4.5	С
1M x 36	GS832136AD-250	Pipeline/Flow Through	165 BGA	250/5.5	С
1M x 36	GS832136AD-200	Pipeline/Flow Through	165 BGA	200/6.5	С
1M x 36	GS832136AD-150	Pipeline/Flow Through	165 BGA	150/7.5	С
2M x 18	GS832118AD-400I	Pipeline/Flow Through	165 BGA	333/4.5	I
2M x 18	GS832118AD-375I	Pipeline/Flow Through	165 BGA	333/4.5	I
2M x 18	GS832118AD-333I	Pipeline/Flow Through	165 BGA	333/4.5	I
2M x 18	GS832118AD-250I	Pipeline/Flow Through	165 BGA	250/5.5	I
2M x 18	GS832118AD-200I	Pipeline/Flow Through	165 BGA	200/6.5	I
2M x 18	GS832118AD-150I	Pipeline/Flow Through	165 BGA	150/7.5	I

## Notes:

- 1. Customers requiring delivery in Tape and Reel should add the character "T" to the end of the part number. Example: GS832118AD-200IT.
- 2. The speed column indicates the cycle frequency (MHz) of the device in Pipeline mode and the latency (ns) in Flow Through mode. Each device is Pipeline/Flow Through mode-selectable by the user.
- 3. C = Commercial Temperature Range. I = Industrial Temperature Range.
- 4. GSI offers other versions this type of device in many different configurations and with a variety of different features, only some of which are covered in this data sheet. See the GSI Technology web site (<a href="www.gsitechnology.com">www.gsitechnology.com</a>) for a complete listing of current offerings.



# Ordering Information for GSI Synchronous Burst RAMs

Org	Part Number <sup>1</sup>	Туре	Package	Speed <sup>2</sup> (MHz/ns)	T <sub>J</sub> <sup>3</sup>
1M x 32	GS832132AD-400I	Pipeline/Flow Through	165 BGA	333/4.5	I
1M x 32	GS832132AD-375I	Pipeline/Flow Through	165 BGA	333/4.5	I
1M x 32	GS832132AD-333I	Pipeline/Flow Through	165 BGA	333/4.5	I
1M x 32	GS832132AD-250I	Pipeline/Flow Through	165 BGA	250/5.5	I
1M x 32	GS832132AD-200I	Pipeline/Flow Through	165 BGA	200/6.5	I
1M x 32	GS832132AD-150I	Pipeline/Flow Through	165 BGA	150/7.5	I
1M x 36	GS832136AD-400I	Pipeline/Flow Through	165 BGA	333/4.5	ı
1M x 36	GS832136AD-375I	Pipeline/Flow Through	165 BGA	333/4.5	I
1M x 36	GS832136AD-333I	Pipeline/Flow Through	165 BGA	333/4.5	I
1M x 36	GS832136AD-250I	Pipeline/Flow Through	165 BGA	250/5.5	I
1M x 36	GS832136AD-200I	Pipeline/Flow Through	165 BGA	200/6.5	I
1M x 36	GS832136AD-150I	Pipeline/Flow Through	165 BGA	150/7.5	I
2M x 18	GS832118AGD-400	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
2M x 18	GS832118AGD-375	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
2M x 18	GS832118AGD-333	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
2M x 18	GS832118AGD-250	Pipeline/Flow Through	RoHS-compliant 165 BGA	250/5.5	С
2M x 18	GS832118AGD-200	Pipeline/Flow Through	RoHS-compliant 165 BGA	200/6.5	С
2M x 18	GS832118AGD-150	Pipeline/Flow Through	RoHS-compliant 165 BGA	150/7.5	С
1M x 32	GS832132AGD-400	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
1M x 32	GS832132AGD-375	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
1M x 32	GS832132AGD-333	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
1M x 32	GS832132AGD-250	Pipeline/Flow Through	RoHS-compliant 165 BGA	250/5.5	С
1M x 32	GS832132AGD-200	Pipeline/Flow Through	RoHS-compliant 165 BGA	200/6.5	С
1M x 32	GS832132AGD-150	Pipeline/Flow Through	RoHS-compliant 165 BGA	150/7.5	С
1M x 36	GS832136AGD-400	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С

#### Notes:

- 1. Customers requiring delivery in Tape and Reel should add the character "T" to the end of the part number. Example: GS832118AD-200IT.
- 2. The speed column indicates the cycle frequency (MHz) of the device in Pipeline mode and the latency (ns) in Flow Through mode. Each device is Pipeline/Flow Through mode-selectable by the user.
- 3. C = Commercial Temperature Range. I = Industrial Temperature Range.
- 4. GSI offers other versions this type of device in many different configurations and with a variety of different features, only some of which are covered in this data sheet. See the GSI Technology web site (<a href="www.qsitechnology.com">www.qsitechnology.com</a>) for a complete listing of current offerings.



# Ordering Information for GSI Synchronous Burst RAMs

Org	Part Number <sup>1</sup>	Туре	Package	Speed <sup>2</sup> (MHz/ns)	T <sub>J</sub> <sup>3</sup>
1M x 36	GS832136AGD-375	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
1M x 36	GS832136AGD-333	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	С
1M x 36	GS832136AGD-250	Pipeline/Flow Through	RoHS-compliant 165 BGA	250/5.5	С
1M x 36	GS832136AGD-200	Pipeline/Flow Through	RoHS-compliant 165 BGA	200/6.5	С
1M x 36	GS832136AGD-150	Pipeline/Flow Through	RoHS-compliant 165 BGA	150/7.5	С
2M x 18	GS832118AGD-400I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
2M x 18	GS832118AGD-375I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
2M x 18	GS832118AGD-333I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
2M x 18	GS832118AGD-250I	Pipeline/Flow Through	RoHS-compliant 165 BGA	250/5.5	I
2M x 18	GS832118AGD-200I	Pipeline/Flow Through	RoHS-compliant 165 BGA	200/6.5	I
2M x 18	GS832118AGD-150I	Pipeline/Flow Through	RoHS-compliant 165 BGA	150/7.5	I
1M x 32	GS832132AGD-400I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
1M x 32	GS832132AGD-375I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
1M x 32	GS832132AGD-333I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
1M x 32	GS832132AGD-250I	Pipeline/Flow Through	RoHS-compliant 165 BGA	250/5.5	ı
1M x 32	GS832132AGD-200I	Pipeline/Flow Through	RoHS-compliant 165 BGA	200/6.5	I
1M x 32	GS832132AGD-150I	Pipeline/Flow Through	RoHS-compliant 165 BGA	150/7.5	I
1M x 36	GS832136AGD-400I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
1M x 36	GS832136AGD-375I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
1M x 36	GS832136AGD-333I	Pipeline/Flow Through	RoHS-compliant 165 BGA	333/4.5	I
1M x 36	GS832136AGD-250I	Pipeline/Flow Through	RoHS-compliant 165 BGA	250/5.5	I
1M x 36	GS832136AGD-200I	Pipeline/Flow Through	RoHS-compliant 165 BGA	200/6.5	I
1M x 36	GS832136AGD-150I	Pipeline/Flow Through	RoHS-compliant 165 BGA	150/7.5	I

- 1. Customers requiring delivery in Tape and Reel should add the character "T" to the end of the part number. Example: GS832118AD-200IT.
- 2. The speed column indicates the cycle frequency (MHz) of the device in Pipeline mode and the latency (ns) in Flow Through mode. Each device is Pipeline/Flow Through mode-selectable by the user.
- 3. C = Commercial Temperature Range. I = Industrial Temperature Range.
- 4. GSI offers other versions this type of device in many different configurations and with a variety of different features, only some of which are covered in this data sheet. See the GSI Technology web site (<a href="www.qsitechnology.com">www.qsitechnology.com</a>) for a complete listing of current offerings.



# 36Mb Sync SRAM Datasheet Revision History

File Name	Types of Changes Format or Content	Page;Revisions;Reason
8321xxA_r1		Creation of new datasheet
8321xxA_r1_01	Content	Updated Absolute Maximum Ratings     Added thermal information
8321xxA_r1_02	Content	Updated to reflect MP status
8321xxA_r1_03	Content	Updated Op current numbers



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

## Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов:
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001:
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина,

дом 2, корпус 4, литера А.