
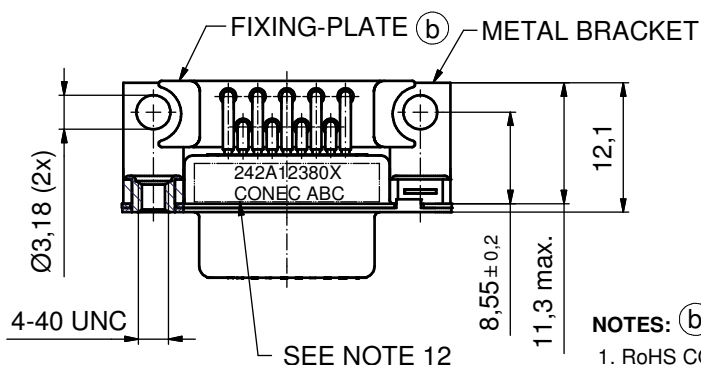
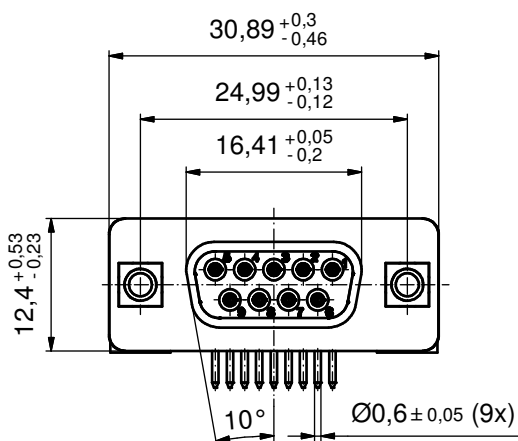
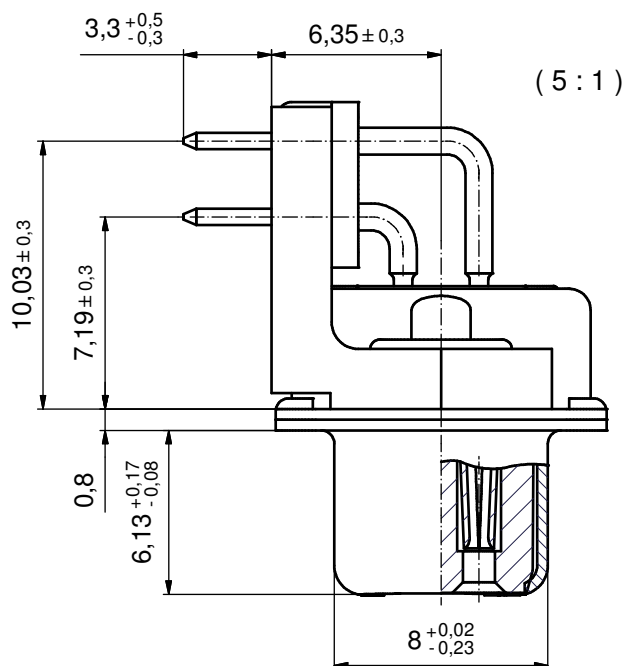
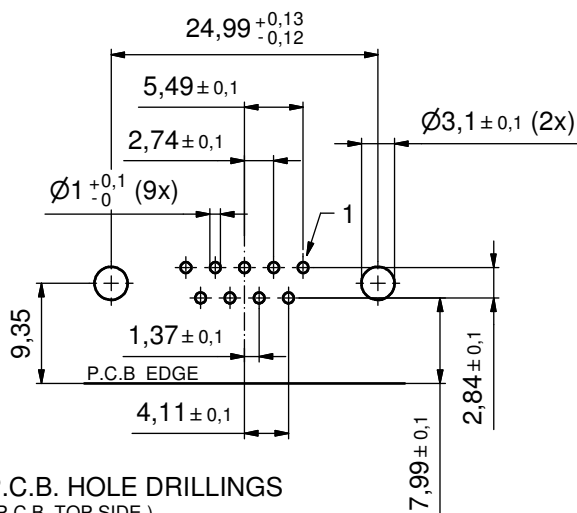

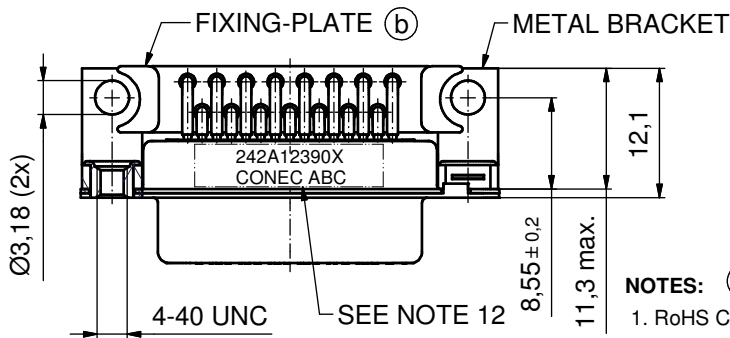
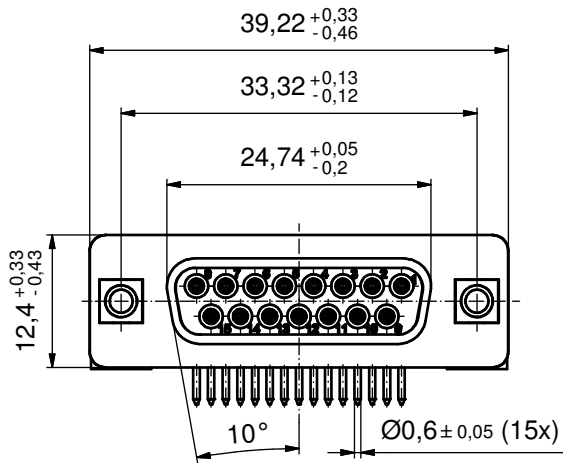
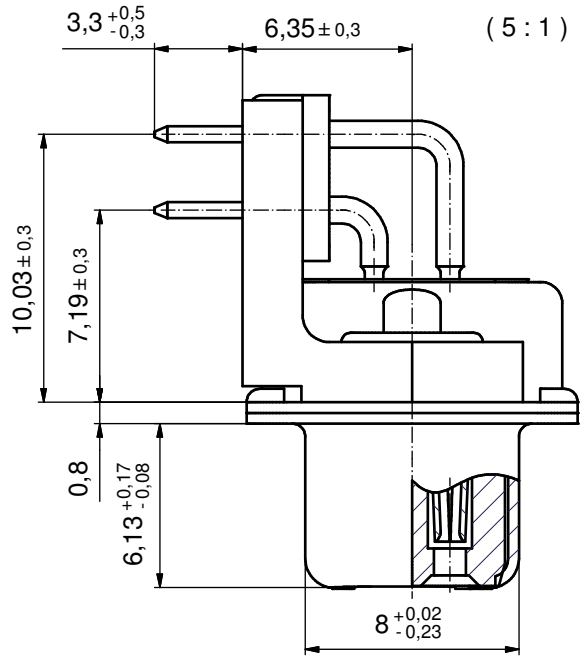


NOTES: (b)

1. RoHS COMPLIANT
2. FOR WAVE SOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
3. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
4. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
5. CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
6. METAL BRACKETS: STEEL; min. 320µm TIN over 80µm NICKEL
7. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
8. FIXING PLATE: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
9. CAPACITANCE: 1300pF ± 20%
10. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
11. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
12. CONNECTOR IS PART MARKED: 242A12380X CONEC ABC


Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale:		2:1 (5:1)				
							material:		SEE NOTES				
				DO NOT ALTER CAD DRAWING BY HAND				date		name		title: D-SUB FILTER FEMALE 90° 9pos. SOLDER PIN ANGLED 0.318inch with threaded insert and metal bracket	
								drawn	01.08.01	Parei			
appd.	01.08.01	Mickenbecker											
norm		DIN 41652											
				d-old				dwg no: 24K1A154A part no: 242A12380X					
				3 x b		Ä3838				14.12.10		K.H.	
				a		Origin							
				rev.		description				date		name	
								DIN-A3 sh:1/6					

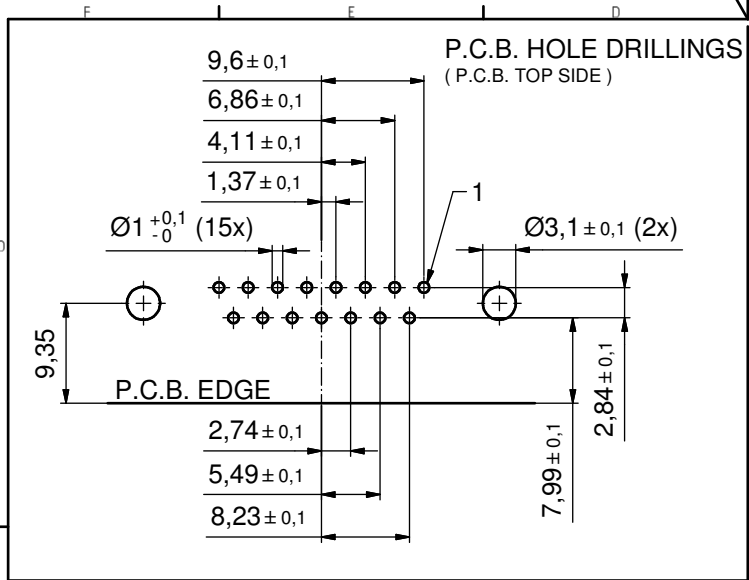

NOTES: (b)




1. RoHS COMPLIANT
2. FOR WAVE SOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
3. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
4. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
5. CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
6. METAL BRACKETS: STEEL; min. 320µm TIN over 80µm NICKEL
7. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
8. FIXING PLATE: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
9. CAPACITANCE: 1300pF ±20%
10. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
11. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
12. CONNECTOR IS PART MARKED: 242A12390X CONEC ABC

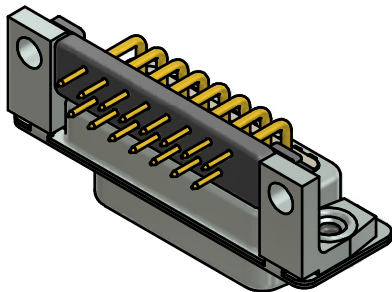

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1 (5:1)		
								material: SEE NOTES		
						date	name		title: D-SUB FILTER FEMALE 90° 15pos. SOLDER PIN ANGLED 0.318inch with threaded insert and metal bracket	
					drawn	01.08.01	Parei			
					appd.	01.08.01	Mickenbecker			
					norm	DIN 41652				
					d-old			dwg no:		DIN-A3  sh: 2/6
	3 x b	Ä38138	14.12.10	K.H.						
	a	Origin					part no: 242A12390X			
	rev.	description	date	name						


CONEC

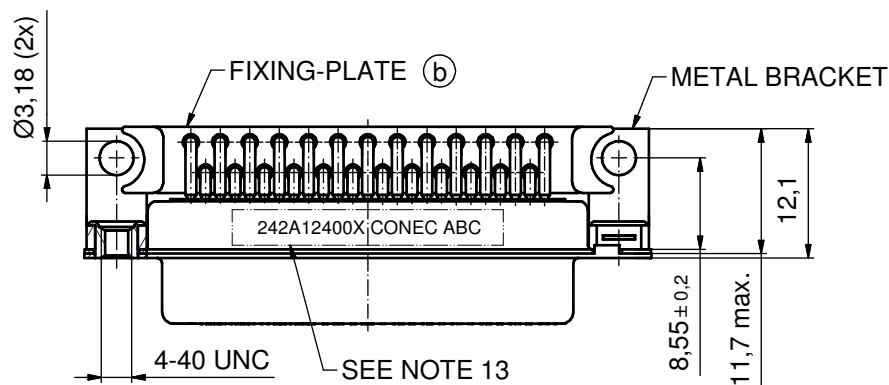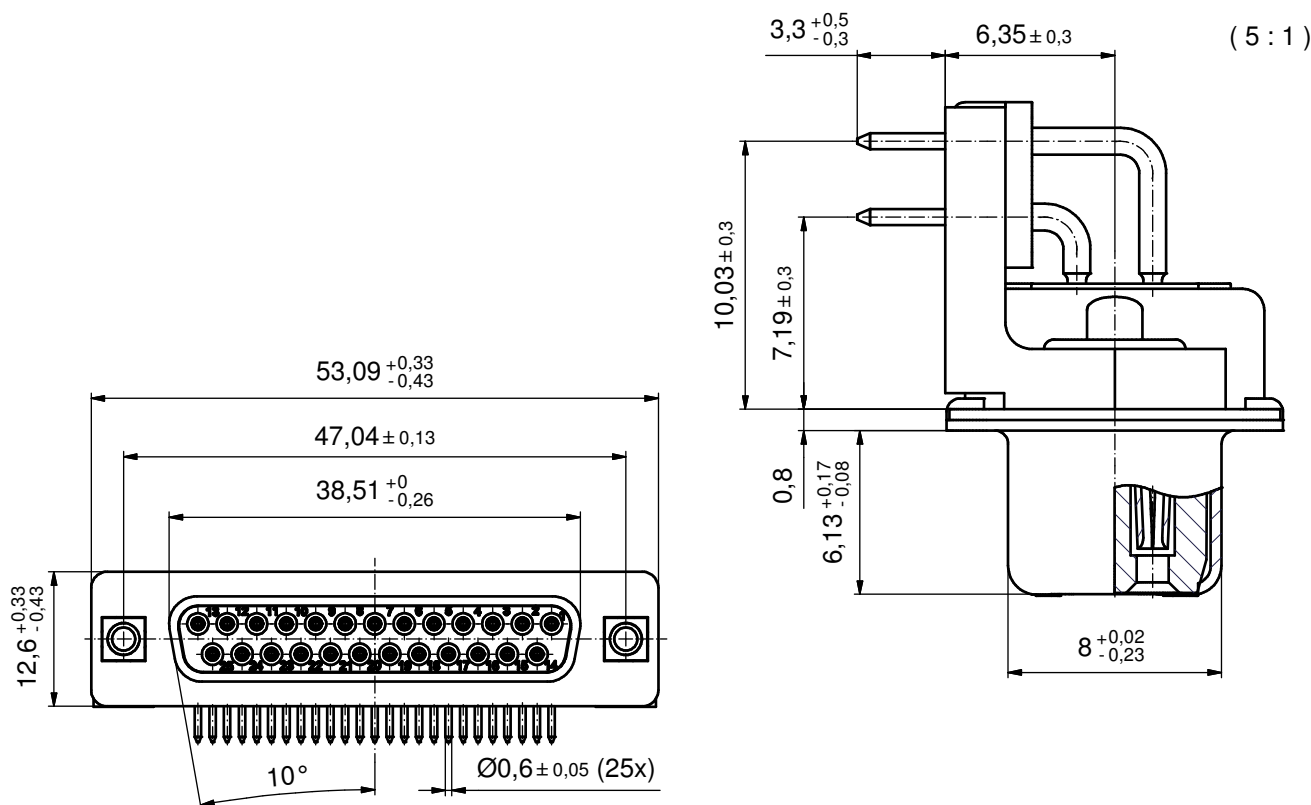

NOTES:

(b)

1. RoHS COMPLIANT
2. FOR WAVESOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
5. CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
6. METAL BRACKETS: STEEL; min. 320µin TIN over 80µin NICKEL
7. THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
8. FIXING PLATE: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
9. CAPACITANCE: 1300pF $\pm$ 20%
10. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
11. P.C.B. HOLE DRILLINGS ON SHEET 4
12. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
13. CONNECTOR IS PART MARKED: 242A12400X CONEC ABC

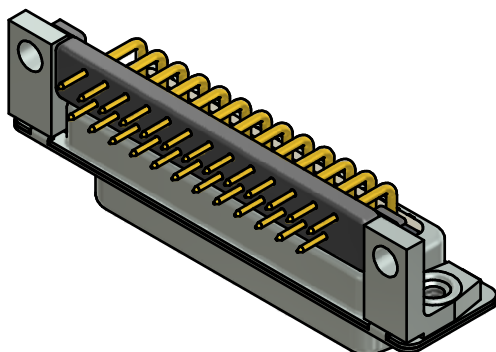


Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance			 dim. in mm	scale:	2:1 (5:1)				
								material:		SEE NOTES			
				DO NOT ALTER CAD DRAWING BY HAND								title: D-SUB FILTER FEMALE 90° 25pos. SOLDER PIN ANGLED 0.318inch with threaded insert and metal bracket	
date		name											
drawn	01.08.01	Parei											
				appd.		01.08.01	Mickenbecker	dwg no:					
				norm		DIN 41652					DIN-A3 sh: 3/6		
				d-old									
3 x b		Ä3838	14.12.10	K.H.				24K1A154A		(b)			
a		Origin											
rev.		description	date	name							part no:		242A12400X

CONEC®

P.C.B. HOLE DRILLINGS






(P.C.B. TOP SIDE)

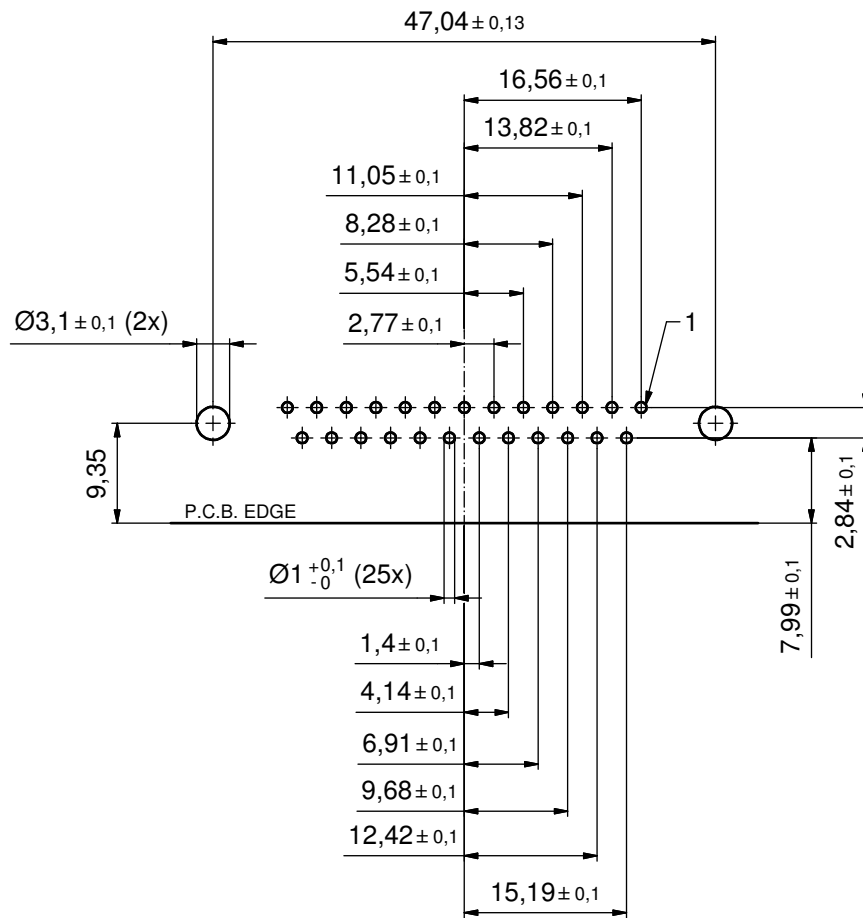

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1				
							material: SEE SHEET3				
								date	name	title: P.C.B. HOLE DRILLINGS D-SUB Filter Female 25pos. 0.318inch with threaded insert and metal bracket	
								drawn 01.08.10	Parei		
								appd. 01.08.10	Mickenbecker		
								norm			
								d-old		dwg no: 24K1A154A DIN-A3 sh: 4/6	
				a	Origin						
				rev.	description	date	name			part no: SEE SHEET3	

CONEC®

DIN-A3
sh: 4/6

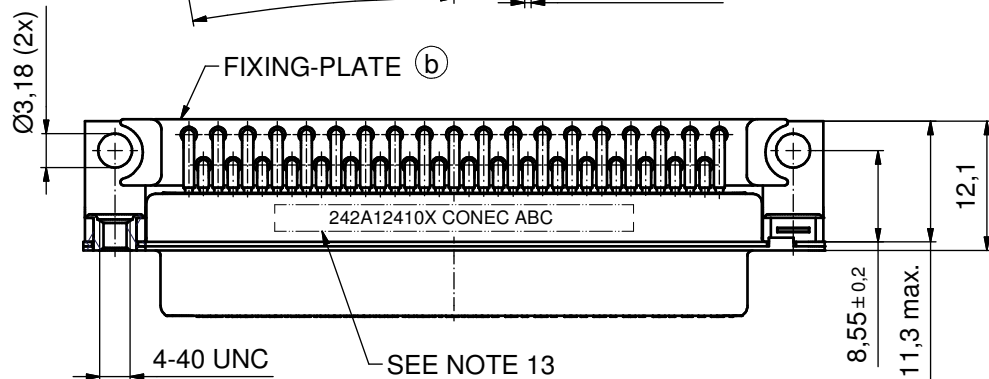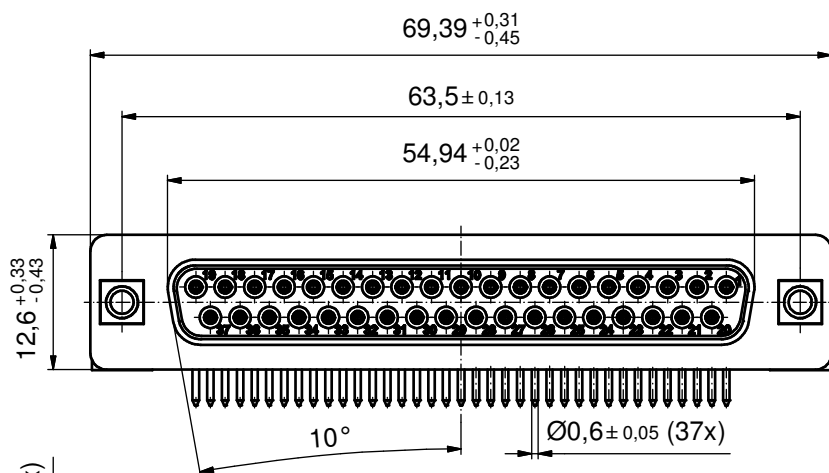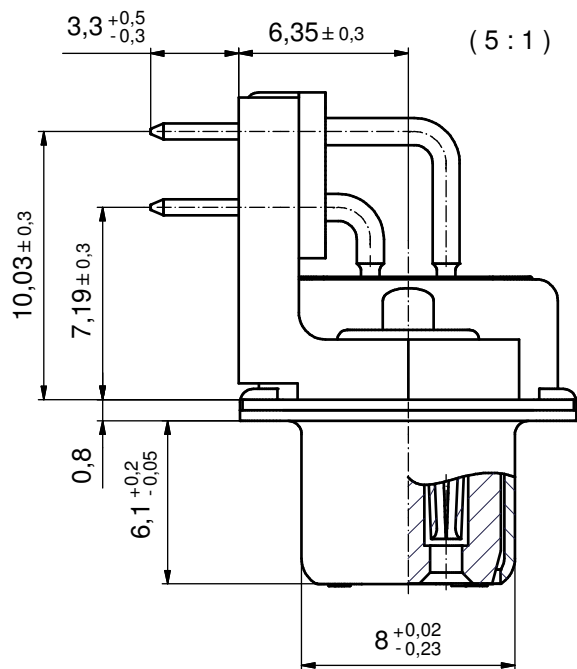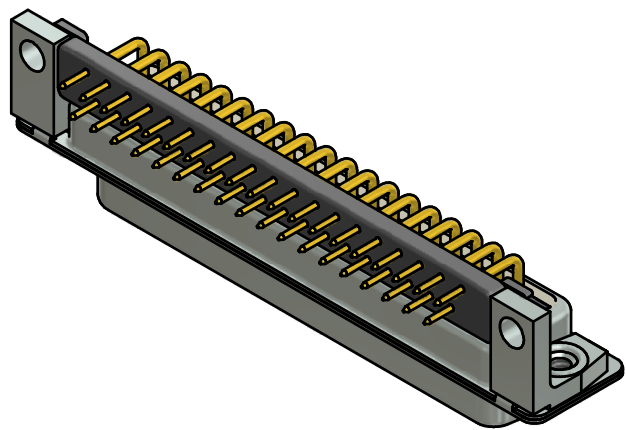

NOTES: (b)

1. RoHS COMPLIANT
2. FOR WAVESOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
5. CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
6. METAL BRACKETS: STEEL; min. 320µin TIN over 80µin NICKEL
7. THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
8. FIXING PLATE: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
9. CAPACITANCE: 1300pF ± 20%
10. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
11. P.C.B. HOLE DRILLINGS ON SHEET 6
12. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
13. CONNECTOR IS PART MARKED: 242A12410X CONEC ABC


Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance			scale: 2:1 (5:1)				
				dim. in mm			material: SEE NOTES				
						date		name		title: D-SUB FILTER FEMALE 90° 37pos. SOLDER PIN ANGLED 0.318inch with threaded insert and metal bracket	
						drawn 28.09.01		Parei			
						appd. 28.09.01		Mickenbecker			
		norm				dwg no: 24K1A154A		 sh: 5/6			
		d-old									
3 x b		Ä3838		15.12.10		K.H.					
a		Origin									
rev.		description		date		name					
								part no: 242A12410X			

(b) sh: 5/6

P.C.B. HOLE DRILLINGS

(P.C.B. TOP SIDE)

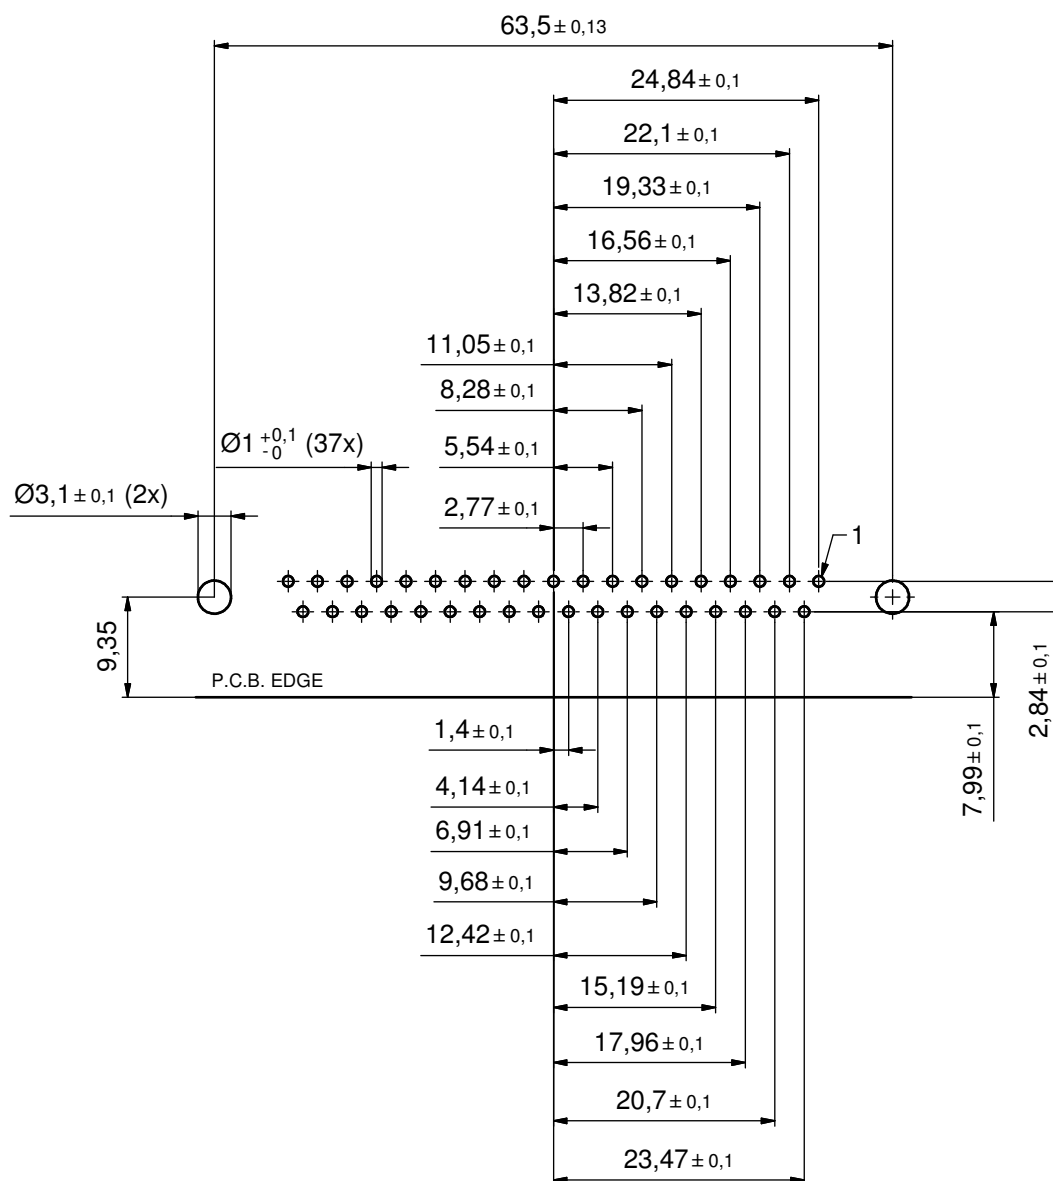

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
				date	name	
			drawn	28.09.01	Parei	
			appd.	28.09.10	Mickenbecker	
			norm			
			d-old			
a	Origin					
rev.	description	date	name			

CONEC[®]

scale: 2:1	
material: SEE SHEET 5	
title: P.C.B. HOLE DRILLINGS D-SUB Filter Female 37pos. 0.318inch with threaded insert and metal bracket	
dwg no:	DIN-A3
24K1A154A	
part no:	sh: 6/6
SEE SHEET 5	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.