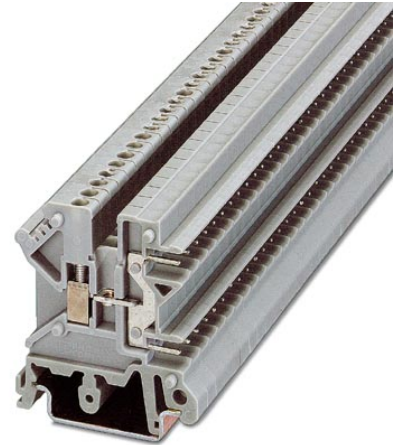


## UK 3-MSTB-5,08

Order No.: 3002034

The illustration shows a combination as a 55-pos. version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3002034>

Feed-through modular terminal block, Type of connection: Special and hybrid connection, Screw connection, Cross section: 0.2 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG 24 - 12, Width: 5.08 mm, Color: gray, Mounting type: NS 32, NS 35/15, NS 35/7,5

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918090050      |
| Pack                     | 50 pcs.            |
| Customs tariff           | 85369010           |
| Weight/Piece             | 0.007125 KG        |
| Catalog page information | Page 322 (CL-2005) |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

|                       |   |
|-----------------------|---|
| Number of levels      | 2 |
| Number of connections | 3 |

|                                    |      |
|------------------------------------|------|
| Color                              | gray |
| Insulating material                | PA   |
| Inflammability class acc. to UL 94 | V2   |

**Technical data**

|                                |   |
|--------------------------------|---|
| Maximum load current           | 12 A (with 4 mm <sup>2</sup> conductor cross section) |
| Rated surge voltage            | 4 kV  |
| Pollution degree               | 3   |
| Surge voltage category         | III   |
| Insulating material group      | I   |
| Nominal current I <sub>N</sub> | 12 A  |
| Nominal voltage U <sub>N</sub> | 250 V   |

**Connection data**

|   |                           |
|---|---------------------------|
| Connection labeling   | 2nd level connection left |
| Conductor cross section solid min.  | 0.2 mm <sup>2</sup>       |
| Conductor cross section solid max.  | 4 mm <sup>2</sup>         |
| Conductor cross section stranded min.   | 0.2 mm <sup>2</sup>       |
| Conductor cross section stranded max.   | 2.5 mm <sup>2</sup>       |
| Conductor cross section AWG/kcmil min.  | 24                        |
| Conductor cross section AWG/kcmil max   | 12                        |
| Conductor cross section stranded, with ferrule without plastic sleeve min.            | 0.25 mm <sup>2</sup>      |
| Conductor cross section stranded, with ferrule without plastic sleeve max.            | 2.5 mm <sup>2</sup>       |
| Conductor cross section stranded, with ferrule with plastic sleeve min.               | 0.25 mm <sup>2</sup>      |
| Conductor cross section stranded, with ferrule with plastic sleeve max.               | 1.5 mm <sup>2</sup>       |
| 2 conductors with same cross section, solid min.                                      | 0.2 mm <sup>2</sup>       |
| 2 conductors with same cross section, solid max.                                      | 1.5 mm <sup>2</sup>       |
| 2 conductors with same cross section, stranded min.                                   | 0.2 mm <sup>2</sup>       |
| 2 conductors with same cross section, stranded max.                                   | 1 mm <sup>2</sup>         |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 0.25 mm <sup>2</sup>      |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 0.5 mm <sup>2</sup>       |

|   |                               |
|---|-------------------------------|
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup>           |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1 mm <sup>2</sup>             |
| Type of connection  | Special and hybrid connection |
| Stripping length  | 8 mm                          |
| Internal cylindrical gage   | A3                            |
| Screw thread  | M3                            |
| Tightening torque, min  | 0.5 Nm                        |
| Tightening torque max   | 0.6 Nm                        |

### Certificates / Approvals



Certification CB, CSA, CUL, GOST, UL, VDE-PZI

#### CSA

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 20 A  |
| AWG/kcmil             | 28-12 |

#### CUL

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 20 A  |
| AWG/kcmil             | 30-12 |

#### UL

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 20 A  |
| AWG/kcmil             | 30-12 |

| <b>Accessories</b> |                               |  |
|--------------------|-------------------------------|--|
| Item               | Designation                   | Description  |
| <b>Assembly</b>    |                               |  |
| 3022218            | CLIPFIX 35                    | Snap-on end bracket, for 35 mm NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 8 and ZB 8/27, terminal strip marker KLM 2 and KLM, width: 9.5 mm, color: gray |
| 3002047            | D-UK 3-MSTB                   | End cover, Length: 42.5 mm, Width: 2.5 mm, Height: 47 mm, Color: gray  |
| 3002322            | D-UK 3-MSTB-5,08-F            | End cover, Length: 39.3 mm, Width: 5.1 mm, Height: 47 mm, Color: gray  |
| 1201442            | E/UK                          | End clamp, for assembly on NS 32 or NS 35/7,5 DIN rail   |
| 1201028            | NS 32 AL UNPERF 2000MM        | G rail 32 mm (NS 32)   |
| 1201280            | NS 32 CU/120QMM UNPERF 2000MM | G-profile DIN rail, deep-drawn, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m  |
| 1201358            | NS 32 CU/35QMM UNPERF 2000MM  | G-profile DIN rail, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m  |
| 1201002            | NS 32 PERF 2000MM             | G-profile DIN rail, material: Steel, perforated, height 15 mm, width 32 mm, length 2 m   |
| 1201015            | NS 32 UNPERF 2000MM           | G-profile DIN rail, material: Steel, unperforated, height 15 mm, width 32 mm, length 2 m   |
| 0801762            | NS 35/ 7,5 CU UNPERF 2000MM   | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m  |
| 0801733            | NS 35/ 7,5 PERF 2000MM        | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m   |
| 0801681            | NS 35/ 7,5 UNPERF 2000MM      | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m   |
| 1201756            | NS 35/15 AL UNPERF 2000MM     | DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m  |
| 1201895            | NS 35/15 CU UNPERF 2000MM     | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m   |
| 1201730            | NS 35/15 PERF 2000MM          | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m  |
| 1201714            | NS 35/15 UNPERF 2000MM        | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m  |
| 1201798            | NS 35/15-2,3 UNPERF 2000MM    | DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m  |
| 2770215            | TS-KK 3                       | Separating plate, Color: gray  |
| <b>Bridges</b>     |                               |  |
| 2303145            | EBL 2- 5                      | Cross connector/bridge, Number of positions: 2, Color: gray  |
| 2303158            | EBL 3- 5                      | Cross connector/bridge, Number of positions: 3, Color: gray  |

|         |             |  |
|---------|-------------|--|
| 2770642 | FBRI 10-5 N | Cross connector/bridge, Number of positions: 10, Color: silver   |
| 3000434 | FBRI 12-5 N | Cross connector/bridge, Number of positions: 12, Color: aluminum |
| 3000476 | FBRI 16-5 N | Cross connector/bridge, Number of positions: 16, Color: aluminum |
| 3000515 | FBRI 20-5 N | Cross connector/bridge, Number of positions: 20, Color: aluminum |
| 3006823 | FBRI 40-5 N | Cross connector/bridge, Number of positions: 40, Color: aluminum |
| 2303239 | USBR 2-7    | Cross connector/bridge, Color: silver                            |

**Marking**

|         |                    |  |
|---------|--------------------|--|
| 1007219 | SBS 5:UNBEDRUCKT   | Marker cards for modular terminal blocks, color: white   |
| 0809793 | ZB 5,08:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack |

**Tools**

|         |             |  |
|---------|-------------|--|
| 1205053 | SZS 0,6X3,5 | Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm <sup>2</sup> connection cross section, blade: 0.6 x 3.5 mm, without VDE approval |
|---------|-------------|--|

**Additional products**

| Item           | Designation         | Description  |
|----------------|---------------------|--|
| <b>General</b> |                     |  |
| 1873058        | FKC 2,5/ 2-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Spring-cage conn., Color: green |
| 1873207        | FKC 2,5/ 2-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Spring-cage conn., Color: green |
| 1873210        | FKC 2,5/ 3-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Spring-cage conn., Color: green |
| 1873074        | FKC 2,5/ 4-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Spring-cage conn., Color: green |
| 1873223        | FKC 2,5/ 4-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Spring-cage conn., Color: green |
| 1873087        | FKC 2,5/ 5-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Spring-cage conn., Color: green |
| 1873236        | FKC 2,5/ 5-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Spring-cage conn., Color: green |

|         |                            |   |
|---------|----------------------------|---|
| 1873249 | FKC 2,5/ 6-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Spring-cage conn., Color: green  |
| 1873100 | FKC 2,5/ 7-ST-5,08         | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Spring-cage conn., Color: green  |
| 1873252 | FKC 2,5/ 7-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Spring-cage conn., Color: green  |
| 1873265 | FKC 2,5/ 8-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Spring-cage conn., Color: green  |
| 1873126 | FKC 2,5/ 9-ST-5,08         | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Spring-cage conn., Color: green  |
| 1873278 | FKC 2,5/ 9-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Spring-cage conn., Color: green  |
| 1873139 | FKC 2,5/10-ST-5,08         | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Spring-cage conn., Color: green |
| 1873281 | FKC 2,5/10-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Spring-cage conn., Color: green |
| 1873294 | FKC 2,5/11-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Spring-cage conn., Color: green |
| 1873304 | FKC 2,5/12-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 12, Connection type: Spring-cage conn., Color: green |
| 1873317 | FKC 2,5/13-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Spring-cage conn., Color: green |
| 1873320 | FKC 2,5/14-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Spring-cage conn., Color: green |
| 1873333 | FKC 2,5/15-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Spring-cage conn., Color: green |
| 1873346 | FKC 2,5/16-STF-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Spring-cage conn., Color: green |
| 1777808 | FRONT-MSTB 2,5/ 2-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Screw connection, Color: green   |
| 1777293 | FRONT-MSTB 2,5/ 3-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Screw connection, Color: green   |

---

|         |                            |  |
|---------|----------------------------|--|
| 1777811 | FRONT-MSTB 2,5/ 3-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Screw connection, Color: green  |
| 1777303 | FRONT-MSTB 2,5/ 4-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Screw connection, Color: green  |
| 1777824 | FRONT-MSTB 2,5/ 4-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Screw connection, Color: green  |
| 1777316 | FRONT-MSTB 2,5/ 5-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Screw connection, Color: green  |
| 1777840 | FRONT-MSTB 2,5/ 6-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Screw connection, Color: green  |
| 1777332 | FRONT-MSTB 2,5/ 7-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Screw connection, Color: green  |
| 1777853 | FRONT-MSTB 2,5/ 7-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Screw connection, Color: green  |
| 1777358 | FRONT-MSTB 2,5/ 9-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Screw connection, Color: green  |
| 1777879 | FRONT-MSTB 2,5/10-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Screw connection, Color: green |
| 1777374 | FRONT-MSTB 2,5/11-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Screw connection, Color: green |
| 1777918 | FRONT-MSTB 2,5/14-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Screw connection, Color: green |
| 1777413 | FRONT-MSTB 2,5/15-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Screw connection, Color: green |
| 1777921 | FRONT-MSTB 2,5/15-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Screw connection, Color: green |
| 1777426 | FRONT-MSTB 2,5/16-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Screw connection, Color: green |
| 1777934 | FRONT-MSTB 2,5/16-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Screw connection, Color: green |
| 1777439 | FRONT-MSTB 2,5/17-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 17, Connection type: Screw connection, Color: green |

---

|         |                            |  |
|---------|----------------------------|--|
| 1777947 | FRONT-MSTB 2,5/17-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 17, Connection type: Screw connection, Color: green |
| 1777442 | FRONT-MSTB 2,5/18-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Screw connection, Color: green |
| 1777950 | FRONT-MSTB 2,5/18-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Screw connection, Color: green |
| 1777455 | FRONT-MSTB 2,5/19-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 19, Connection type: Screw connection, Color: green |
| 1777963 | FRONT-MSTB 2,5/19-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 19, Connection type: Screw connection, Color: green |
| 1777976 | FRONT-MSTB 2,5/20-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 20, Connection type: Screw connection, Color: green |
| 1777471 | FRONT-MSTB 2,5/21-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 21, Connection type: Screw connection, Color: green |
| 1777507 | FRONT-MSTB 2,5/24-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 24, Connection type: Screw connection, Color: green |
| 1777989 | MSTB 2,5/ 2-STF-5,08       | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Screw connection, Color: green  |
| 1777992 | MSTB 2,5/ 3-STF-5,08       | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Screw connection, Color: green  |
| 1778001 | MSTB 2,5/ 4-STF-5,08       | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Screw connection, Color: green  |
| 1778014 | MSTB 2,5/ 5-STF-5,08       | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Screw connection, Color: green  |
| 1776142 | MSTB 2,5/ 5-STZ-5,08       | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Screw connection, Color: green  |
| 1757051 | MSTB 2,5/ 6-ST-5,08        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Screw connection, Color: green  |
| 1778027 | MSTB 2,5/ 6-STF-5,08       | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Screw connection, Color: green  |
| 1776126 | MSTB 2,5/ 6-STZ-5,08       | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Screw connection, Color: green  |



|         |                      |  |
|---------|----------------------|--|
| 1778030 | MSTB 2,5/ 7-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Screw connection, Color: green  |
| 1757077 | MSTB 2,5/ 8-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Screw connection, Color: green  |
| 1778043 | MSTB 2,5/ 8-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Screw connection, Color: green  |
| 1757080 | MSTB 2,5/ 9-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Screw connection, Color: green  |
| 1778056 | MSTB 2,5/ 9-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Screw connection, Color: green  |
| 1778069 | MSTB 2,5/10-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Screw connection, Color: green |
| 1757103 | MSTB 2,5/11-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Screw connection, Color: green |
| 1778072 | MSTB 2,5/11-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Screw connection, Color: green |
| 1778085 | MSTB 2,5/12-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 12, Connection type: Screw connection, Color: green |
| 1757129 | MSTB 2,5/13-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Screw connection, Color: green |
| 1778098 | MSTB 2,5/13-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Screw connection, Color: green |
| 1757132 | MSTB 2,5/14-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Screw connection, Color: green |
| 1778108 | MSTB 2,5/14-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Screw connection, Color: green |
| 1764264 | MSTB 2,5/14-STZ-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Screw connection, Color: green |
| 1778111 | MSTB 2,5/15-STF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Screw connection, Color: green |
| 1757158 | MSTB 2,5/16-ST-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Screw connection, Color: green |

|         |                        |  |
|---------|------------------------|--|
| 1778124 | MSTB 2,5/16-STF-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Screw connection, Color: green |
| 1778137 | MSTB 2,5/17-STF-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 17, Connection type: Screw connection, Color: green |
| 1757174 | MSTB 2,5/18-ST-5,08    | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Screw connection, Color: green |
| 1778140 | MSTB 2,5/18-STF-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Screw connection, Color: green |
| 1757187 | MSTB 2,5/19-ST-5,08    | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 19, Connection type: Screw connection, Color: green |
| 1778153 | MSTB 2,5/19-STF-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 19, Connection type: Screw connection, Color: green |
| 1757190 | MSTB 2,5/20-ST-5,08    | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 20, Connection type: Screw connection, Color: green |
| 1778166 | MSTB 2,5/20-STF-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 20, Connection type: Screw connection, Color: green |
| 1757200 | MSTB 2,5/21-ST-5,08    | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 21, Connection type: Screw connection, Color: green |
| 1757213 | MSTB 2,5/22-ST-5,08    | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 22, Connection type: Screw connection, Color: green |
| 1808816 | MSTBC 2,5/ 2-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Crimp connection, Color: green  |
| 1809501 | MSTBC 2,5/ 2-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Crimp connection, Color: green  |
| 1809734 | MSTBC 2,5/ 2-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Crimp connection, Color: green  |
| 1808829 | MSTBC 2,5/ 3-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Crimp connection, Color: green  |
| 1809514 | MSTBC 2,5/ 3-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Crimp connection, Color: green  |
| 1809747 | MSTBC 2,5/ 3-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Crimp connection, Color: green  |

|         |                        |   |
|---------|------------------------|---|
| 1808832 | MSTBC 2,5/ 4-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Crimp connection, Color: green |
| 1809527 | MSTBC 2,5/ 4-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Crimp connection, Color: green |
| 1809750 | MSTBC 2,5/ 4-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Crimp connection, Color: green |
| 1808845 | MSTBC 2,5/ 5-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Crimp connection, Color: green |
| 1809530 | MSTBC 2,5/ 5-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Crimp connection, Color: green |
| 1809763 | MSTBC 2,5/ 5-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Crimp connection, Color: green |
| 1808858 | MSTBC 2,5/ 6-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Crimp connection, Color: green |
| 1809543 | MSTBC 2,5/ 6-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Crimp connection, Color: green |
| 1809776 | MSTBC 2,5/ 6-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Crimp connection, Color: green |
| 1808861 | MSTBC 2,5/ 7-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Crimp connection, Color: green |
| 1809556 | MSTBC 2,5/ 7-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Crimp connection, Color: green |
| 1809789 | MSTBC 2,5/ 7-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Crimp connection, Color: green |
| 1808874 | MSTBC 2,5/ 8-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Crimp connection, Color: green |
| 1809569 | MSTBC 2,5/ 8-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Crimp connection, Color: green |
| 1809792 | MSTBC 2,5/ 8-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Crimp connection, Color: green |
| 1808887 | MSTBC 2,5/ 9-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Crimp connection, Color: green |

|         |                        |  |
|---------|------------------------|--|
| 1809572 | MSTBC 2,5/ 9-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Crimp connection, Color: green  |
| 1809802 | MSTBC 2,5/ 9-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Crimp connection, Color: green  |
| 1808890 | MSTBC 2,5/10-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Crimp connection, Color: green |
| 1809585 | MSTBC 2,5/10-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Crimp connection, Color: green |
| 1809815 | MSTBC 2,5/10-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Crimp connection, Color: green |
| 1808900 | MSTBC 2,5/11-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Crimp connection, Color: green |
| 1809598 | MSTBC 2,5/11-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Crimp connection, Color: green |
| 1809828 | MSTBC 2,5/11-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Crimp connection, Color: green |
| 1808913 | MSTBC 2,5/12-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 12, Connection type: Crimp connection, Color: green |
| 1809608 | MSTBC 2,5/12-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 12, Connection type: Crimp connection, Color: green |
| 1809831 | MSTBC 2,5/12-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 12, Connection type: Crimp connection, Color: green |
| 1808926 | MSTBC 2,5/13-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Crimp connection, Color: green |
| 1809611 | MSTBC 2,5/13-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Crimp connection, Color: green |
| 1809844 | MSTBC 2,5/13-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Crimp connection, Color: green |
| 1808939 | MSTBC 2,5/14-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Crimp connection, Color: green |
| 1809624 | MSTBC 2,5/14-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Crimp connection, Color: green |

|         |                        |  |
|---------|------------------------|--|
| 1809857 | MSTBC 2,5/14-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Crimp connection, Color: green |
| 1808942 | MSTBC 2,5/15-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Crimp connection, Color: green |
| 1809637 | MSTBC 2,5/15-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Crimp connection, Color: green |
| 1809860 | MSTBC 2,5/15-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Crimp connection, Color: green |
| 1808955 | MSTBC 2,5/16-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Crimp connection, Color: green |
| 1809640 | MSTBC 2,5/16-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Crimp connection, Color: green |
| 1809873 | MSTBC 2,5/16-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Crimp connection, Color: green |
| 1808968 | MSTBC 2,5/17-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 17, Connection type: Crimp connection, Color: green |
| 1809653 | MSTBC 2,5/17-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 17, Connection type: Crimp connection, Color: green |
| 1809886 | MSTBC 2,5/17-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 17, Connection type: Crimp connection, Color: green |
| 1808971 | MSTBC 2,5/18-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Crimp connection, Color: green |
| 1809666 | MSTBC 2,5/18-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Crimp connection, Color: green |
| 1809899 | MSTBC 2,5/18-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Crimp connection, Color: green |
| 1808984 | MSTBC 2,5/19-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 19, Connection type: Crimp connection, Color: green |
| 1809679 | MSTBC 2,5/19-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 19, Connection type: Crimp connection, Color: green |
| 1809909 | MSTBC 2,5/19-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 19, Connection type: Crimp connection, Color: green |

|         |                        |  |
|---------|------------------------|--|
| 1808997 | MSTBC 2,5/20-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 20, Connection type: Crimp connection, Color: green |
| 1809682 | MSTBC 2,5/20-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 20, Connection type: Crimp connection, Color: green |
| 1809912 | MSTBC 2,5/20-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 20, Connection type: Crimp connection, Color: green |
| 1809006 | MSTBC 2,5/21-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 21, Connection type: Crimp connection, Color: green |
| 1809695 | MSTBC 2,5/21-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 21, Connection type: Crimp connection, Color: green |
| 1809925 | MSTBC 2,5/21-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 21, Connection type: Crimp connection, Color: green |
| 1809019 | MSTBC 2,5/22-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 22, Connection type: Crimp connection, Color: green |
| 1809705 | MSTBC 2,5/22-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 22, Connection type: Crimp connection, Color: green |
| 1809938 | MSTBC 2,5/22-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 22, Connection type: Crimp connection, Color: green |
| 1809022 | MSTBC 2,5/23-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 23, Connection type: Crimp connection, Color: green |
| 1809718 | MSTBC 2,5/23-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 23, Connection type: Crimp connection, Color: green |
| 1809941 | MSTBC 2,5/23-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 23, Connection type: Crimp connection, Color: green |
| 1809035 | MSTBC 2,5/24-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 24, Connection type: Crimp connection, Color: green |
| 1809721 | MSTBC 2,5/24-STZ-5,08  | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 24, Connection type: Crimp connection, Color: green |
| 1809954 | MSTBC 2,5/24-STZF-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 24, Connection type: Crimp connection, Color: green |
| 1769049 | MSTBP 2,5/ 5-ST-5,08   | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Screw connection, Color: green  |

|         |                      |   |
|---------|----------------------|---|
| 1769094 | MSTBP 2,5/10-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Screw connection, Color: green                          |
| 1769104 | MSTBP 2,5/11-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Screw connection, Color: green                          |
| 1769117 | MSTBP 2,5/12-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 12, Connection type: Screw connection, Color: green                          |
| 1769133 | MSTBP 2,5/14-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Screw connection, Color: green                          |
| 1769159 | MSTBP 2,5/16-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Screw connection, Color: green                          |
| 1769175 | MSTBP 2,5/18-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Screw connection, Color: green                          |
| 1769191 | MSTBP 2,5/20-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 20, Connection type: Screw connection, Color: green                          |
| 1769696 | MSTBP 2,5/24-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 24, Connection type: Screw connection, Color: green                          |
| 1883255 | QC 1/ 2-ST-5,08      | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883352 | QC 1/ 2-STF-5,08     | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883268 | QC 1/ 3-ST-5,08      | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883365 | QC 1/ 3-STF-5,08     | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883271 | QC 1/ 4-ST-5,08      | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883378 | QC 1/ 4-STF-5,08     | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 4, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883284 | QC 1/ 5-ST-5,08      | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883381 | QC 1/ 5-STF-5,08     | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 5, Connection type: Insulation displacement connection QUICKON, Color: green |

|         |                  |  |
|---------|------------------|--|
| 1883297 | QC 1/ 6-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883394 | QC 1/ 6-STF-5,08 | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883307 | QC 1/ 7-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883404 | QC 1/ 7-STF-5,08 | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883310 | QC 1/ 8-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883417 | QC 1/ 8-STF-5,08 | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883323 | QC 1/ 9-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883420 | QC 1/ 9-STF-5,08 | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Insulation displacement connection QUICKON, Color: green  |
| 1883336 | QC 1/10-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883433 | QC 1/10-STF-5,08 | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 10, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883349 | QC 1/11-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883446 | QC 1/11-STF-5,08 | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883705 | QC 1/12-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 12, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883815 | QC 1/13-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883857 | QC 1/13-STF-5,08 | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 13, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883828 | QC 1/14-ST-5,08  | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Insulation displacement connection QUICKON, Color: green |




|         |                      |  |
|---------|----------------------|--|
| 1883831 | QC 1/15-ST-5,08      | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883886 | QC 1/15-STF-5,08     | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 15, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883844 | QC 1/16-ST-5,08      | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1883899 | QC 1/16-STF-5,08     | Plug component, Nominal current: 10 A, Nom. voltage: 500 V, Pitch: 5.08 mm, Number of positions: 16, Connection type: Insulation displacement connection QUICKON, Color: green |
| 1826283 | SMSTB 2,5/ 2-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 2, Connection type: Screw connection, Color: green                            |
| 1826296 | SMSTB 2,5/ 3-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 3, Connection type: Screw connection, Color: green                            |
| 1826322 | SMSTB 2,5/ 6-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 6, Connection type: Screw connection, Color: green                            |
| 1826335 | SMSTB 2,5/ 7-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 7, Connection type: Screw connection, Color: green                            |
| 1826348 | SMSTB 2,5/ 8-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 8, Connection type: Screw connection, Color: green                            |
| 1826351 | SMSTB 2,5/ 9-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 9, Connection type: Screw connection, Color: green                            |
| 1826377 | SMSTB 2,5/11-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 11, Connection type: Screw connection, Color: green                           |
| 1826403 | SMSTB 2,5/14-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 14, Connection type: Screw connection, Color: green                           |
| 1850563 | SMSTB 2,5/17-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 17, Connection type: Screw connection, Color: green                           |
| 1850576 | SMSTB 2,5/18-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 18, Connection type: Screw connection, Color: green                           |
| 1850602 | SMSTB 2,5/21-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 21, Connection type: Screw connection, Color: green                           |
| 1850615 | SMSTB 2,5/22-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 22, Connection type: Screw connection, Color: green                           |

|         |                      |  |
|---------|----------------------|--|
| 1850628 | SMSTB 2,5/23-ST-5,08 | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 23, Connection type: Screw connection, Color: green |
|---------|----------------------|--|

**Diagrams/Drawings**

Dimensioned drawing

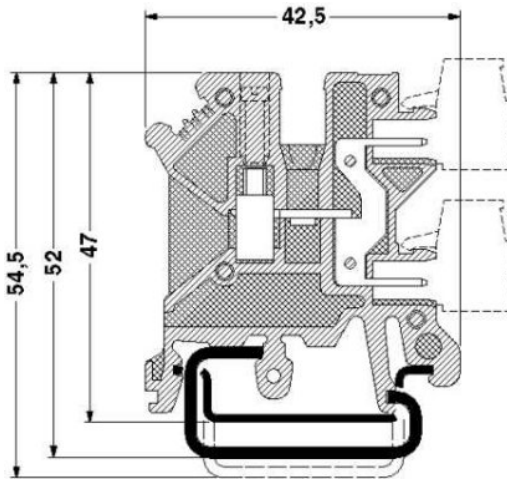

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.