



**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**



MICROWAVE CORPORATION v08.0809



# HMC424LP3 / 424LP3E


## 0.5dB LSB GaAs MMIC 6-BIT DIGITAL ATTENUATOR, DC - 13 GHz

### Typical Applications

The HMC424LP3 / HMC424LP3E is ideal for:

- Basestation Infrastructure
- Fiber Optics & Broadband Telecom
- Microwave & VSAT Radios
- Military & Space
- Test Instrumentation

### Functional Diagram

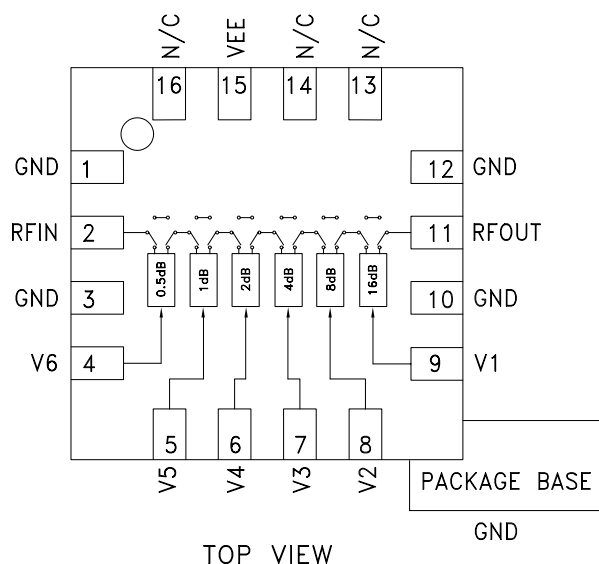

### Features

- 0.5 dB LSB Steps to 31.5 dB
- Single Control Line Per Bit
- $\pm 0.5$  dB Typical Bit Error
- 9mm<sup>2</sup> Leadless SMT Plastic Package

### General Description

The HMC424LP3 & HMC424LP3E are broadband 6-bit GaAs IC digital attenuators in low cost leadless surface mount packages. Covering DC to 13 GHz, the insertion loss is less than 4 dB typical. The attenuator bit values are 0.5 (LSB), 1, 2, 4, 8, and 16 dB for a total attenuation of 31.5 dB. Attenuation accuracy is excellent at  $\pm 0.5$  dB typical step error with an IIP3 of +32 dBm. Six control voltage inputs, toggled between 0 and -5V, are used to select each attenuation state. A single Vee bias of -5V allows operation at frequencies down to DC.

### Electrical Specifications, $T_A = +25^\circ \text{C}$ , With Vee = -5V & VCTL = 0/-5V

| Parameter                                                                     | Frequency (GHz)      | Min.                                            | Typ. | Max. | Units |
|-------------------------------------------------------------------------------|----------------------|-------------------------------------------------|------|------|-------|
| Insertion Loss                                                                | DC - 4 GHz           |                                                 | 3.1  | 3.8  | dB    |
|                                                                               | 4.0 - 8.0 GHz        |                                                 | 3.5  | 4.0  | dB    |
|                                                                               | 8.0 - 13.0 GHz       |                                                 | 4.0  | 4.6  | dB    |
| Attenuation Range                                                             | DC - 13.0 GHz        |                                                 | 31.5 |      | dB    |
| Return Loss (RF1 & RF2, All Atten. States)                                    | DC - 13.0 GHz        | 9                                               | 12   |      | dB    |
| Attenuation Accuracy: (Referenced to Insertion Loss)                          | 0.5 - 15.5 dB States | $\pm (0.3 + 3\% \text{ of Atten. Setting})$ Max |      |      | dB    |
|                                                                               | 16 - 31.5 dB States  | $\pm (0.3 + 5\% \text{ of Atten. Setting})$ Max |      |      | dB    |
| Input Power for 0.1 dB Compression                                            | 1.0 - 13.0 GHz       |                                                 | 22   |      | dBm   |
| Input Third Order Intercept Point<br>(Two-Tone Input Power = 0 dBm Each Tone) | REF State            |                                                 | 46   |      | dBm   |
|                                                                               | All Other States     |                                                 | 32   |      | dBm   |
| Switching Characteristics                                                     | DC - 13.0 GHz        |                                                 |      |      |       |
| tRISE, tFALL (10/90% RF)                                                      |                      |                                                 | 30   |      | ns    |
| tON/tOFF (50% CTL to 10/90% RF)                                               |                      |                                                 | 50   |      | ns    |


For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)


## 0.5dB LSB GaAs MMIC 6-BIT DIGITAL ATTENUATOR, DC - 13 GHz

### Insertion Loss

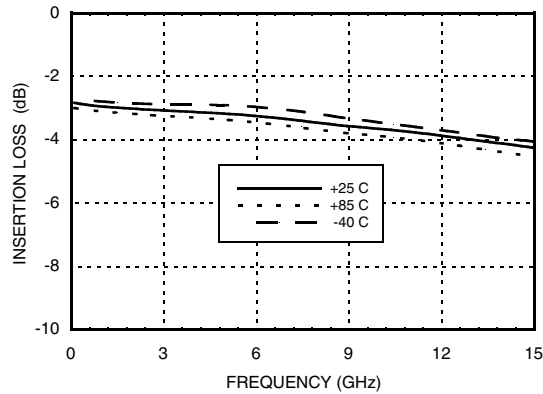


### Return Loss RF1, RF2

(Only Major States are Shown)

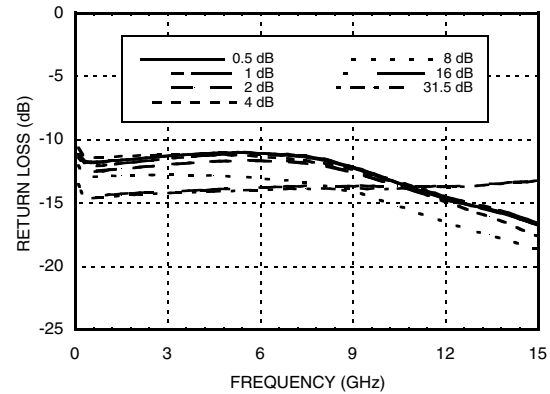


### Normalized Attenuation

(Only Major States are Shown)

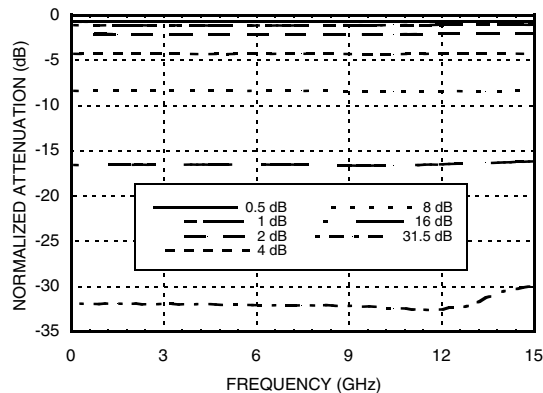


### Bit Error vs. Attenuation State

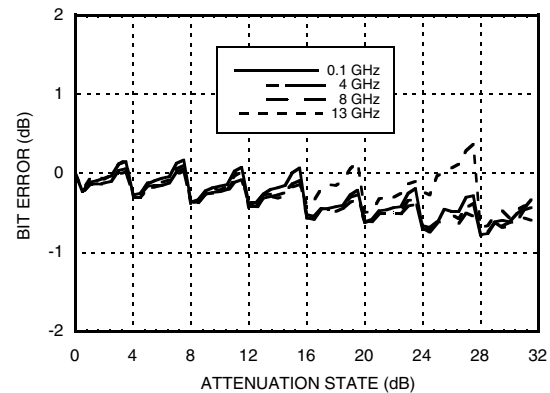


### Bit Error vs. Frequency

(Only Major States are Shown)

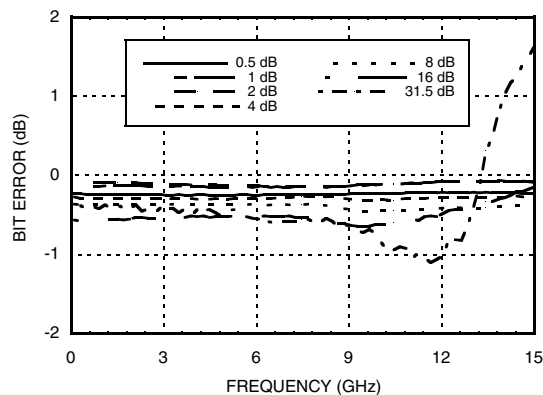


### Relative Phase vs. Frequency

(Only Major States are Shown)

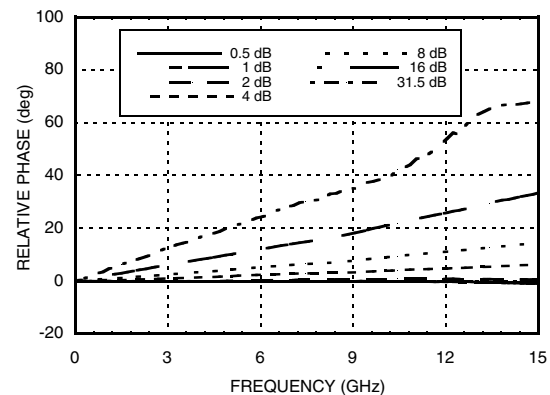



MICROWAVE CORPORATION v08.0809

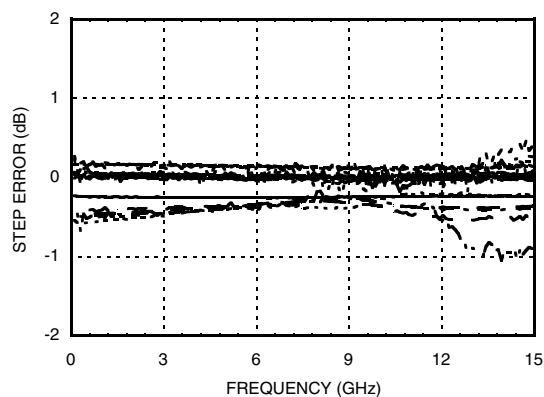**HMC424LP3E****0.5dB LSB GaAs MMIC 6-BIT DIGITAL  
ATTENUATOR, DC - 13 GHz****Worst Case Step Error  
Between Successive Attenuation States****Bias Voltage & Current**

| Vee Range= -5 Vdc $\pm$ 10% |                 |                 |
|-----------------------------|-----------------|-----------------|
| Vee (VDC)                   | Iee (Typ.) (mA) | Iee (Max.) (mA) |
| -5                          | 2               | 5               |

**Control Voltage**

| State | Bias Condition                    |
|-------|-----------------------------------|
| Low   | 0 to -3V @ 35 $\mu$ A Typ.        |
| High  | Vee to Vee +0.8V @ 5 $\mu$ A Typ. |

**Truth Table**

| Control Voltage Input |            |            |            |            |              | Attenuation<br>State<br>RF1 - RF2 |
|-----------------------|------------|------------|------------|------------|--------------|-----------------------------------|
| V1<br>16 dB           | V2<br>8 dB | V3<br>4 dB | V4<br>2 dB | V5<br>1 dB | V6<br>0.5 dB |                                   |
| Low                   | Low        | Low        | Low        | Low        | Low          | Reference<br>I.L.                 |
| Low                   | Low        | Low        | Low        | Low        | High         | 0.5 dB                            |
| Low                   | Low        | Low        | Low        | High       | Low          | 1 dB                              |
| Low                   | Low        | Low        | High       | Low        | Low          | 2 dB                              |
| Low                   | Low        | High       | Low        | Low        | Low          | 4 dB                              |
| Low                   | High       | Low        | Low        | Low        | Low          | 8 dB                              |
| High                  | Low        | Low        | Low        | Low        | Low          | 16 dB                             |
| High                  | High       | High       | High       | High       | High         | 31.5 dB                           |

Any Combination of the above states will provide an attenuation approximately equal to the sum of the bits selected.

## 0.5dB LSB GaAs MMIC 6-BIT DIGITAL ATTENUATOR, DC - 13 GHz


### Absolute Maximum Ratings

|                               |                 |
|-------------------------------|-----------------|
| Control Voltage (V1 to V6)    | Vee - 0.5 Vdc   |
| Bias Voltage (Vee)            | -7 Vdc          |
| Channel Temperature           | 150 °C          |
| Thermal Resistance            | 330 °C/W        |
| Storage Temperature           | -65 to + 150 °C |
| Operating Temperature         | -55 to +85 °C   |
| RF Input Power (0.5 - 13 GHz) | +25 dBm         |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

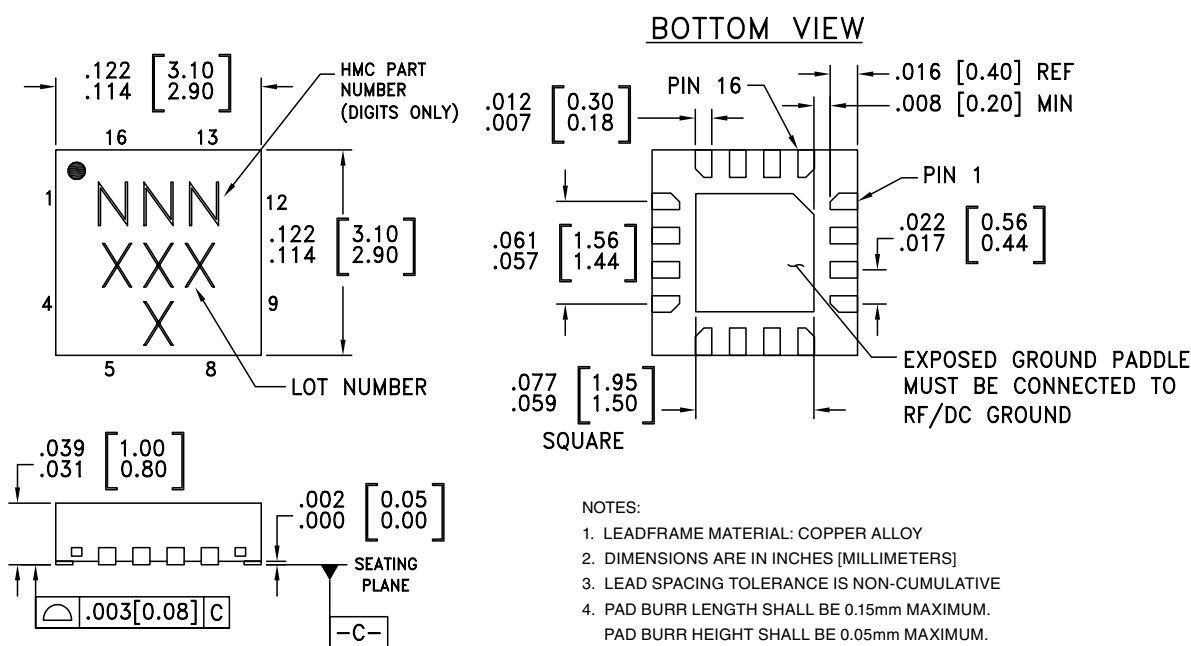

#### NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
4. PAD BURR LENGTH SHALL BE 0.15mm MAXIMUM.  
PAD BURR HEIGHT SHALL BE 0.05mm MAXIMUM.
5. PACKAGE WARP SHALL NOT EXCEED 0.05mm.
6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.
7. REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED LAND PATTERN.

### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC424LP3   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | 424<br>XXXX                    |
| HMC424LP3E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | 424<br>XXXX                    |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX




MICROWAVE CORPORATION

v08.0809

**HMC424LP3E****0.5dB LSB GaAs MMIC 6-BIT DIGITAL ATTENUATOR, DC - 13 GHz****Pin Description**

| Pad Number       | Function    | Description                                                                                                             | Interface Schematic |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------|---------------------|
| 1, 3, 10, 12     | GND         | Package bottom has an exposed metal paddle that must also be connected to RF ground                                     |                     |
| 2, 11            | RFIN, RFOUT | This pin is DC coupled and matched to 50 Ohm. Blocking capacitors are required if RF line potential is not equal to 0V. |                     |
| 4, 5, 6, 7, 8, 9 | V6 - V1     | See truth table and control voltage table.                                                                              |                     |
| 13, 14, 16       | N/C         | This pin should be connected to PCB RF ground to maximize performance                                                   |                     |
| 15               | VEE         | Supply Voltage -5V $\pm$ 10%                                                                                            |                     |

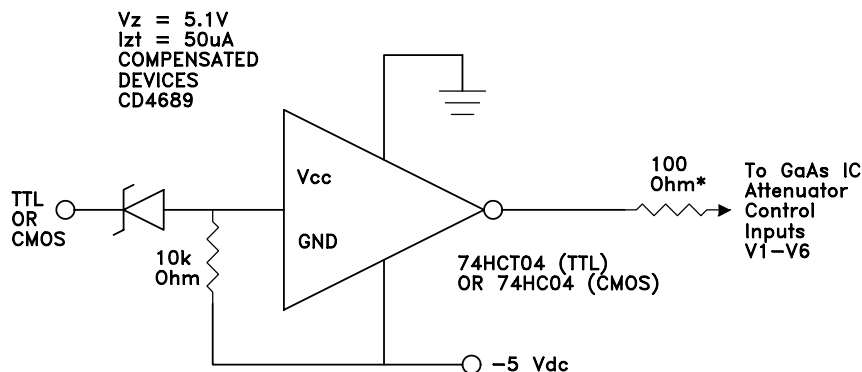**Suggested Driver Circuit** (One Circuit Required Per Bit Control Input)

Simple driver using inexpensive standard logic ICs provides fast switching using minimum DC current.


\* Recommended value to suppress unwanted RF signals at V1 - V6 control lines.

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)

### Evaluation PCB

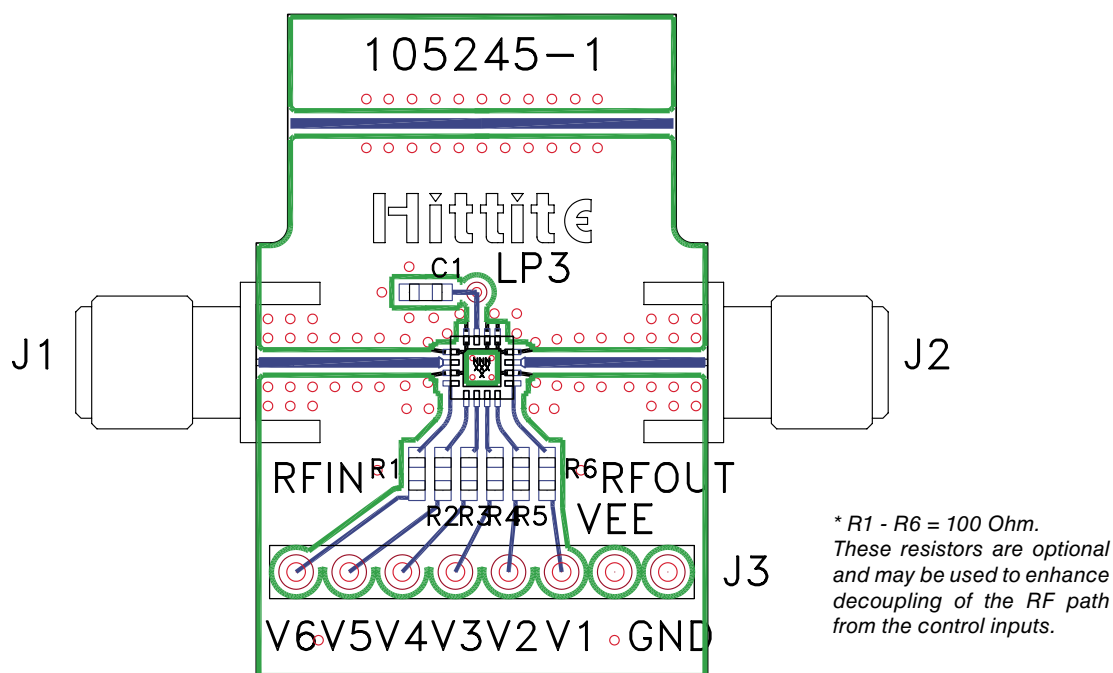

### List of Materials for Evaluation PCB 105406 <sup>[1]</sup>

| Item               | Description                               |
|--------------------|-------------------------------------------|
| J1 - J2            | PCB Mount SMA Connector                   |
| J3                 | 8 Pin DC Connector                        |
| C1                 | 0.01 $\mu$ F Capacitor, 0603 Pkg.         |
| R1 - R6            | 100 Ohm Resistor, 0603 Pkg.               |
| U1                 | HMC424LP3 / HMC424LP3E Digital Attenuator |
| PCB <sup>[2]</sup> | 105245 Evaluation PCB                     |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.