

HIGH POWER SPDT SWITCH FOR WiMAX™

DESCRIPTION

The μ PG2409T6X is a GaAs MMIC high power SPDT (Single Pole Double Throw) switch which were designed for WiMAX.

This device can operate frequency from 0.05 to 6.0 GHz, having the low insertion loss and high isolation.

This device is housed in a 6-pin plastic TSON (Thin Small Out-line Non-leaded) (T6X) package. And this package is suitable for high-density surface mounting.

FEATURES

- Switch control voltage : $V_{\text{cont (H)}} = 3.0 \text{ V TYP.}$
: $V_{\text{cont (L)}} = 0 \text{ V TYP.}$
- Low insertion loss : $L_{\text{ins}} = 0.45 \text{ dB TYP. @ } f = 2.5 \text{ GHz}$
: $L_{\text{ins}} = 0.55 \text{ dB TYP. @ } f = 3.8 \text{ GHz}$
: $L_{\text{ins}} = 0.65 \text{ dB TYP. @ } f = 6.0 \text{ GHz}$
- High isolation : $ISL = 30 \text{ dB TYP. @ } f = 2.5 \text{ GHz}$
: $ISL = 30 \text{ dB TYP. @ } f = 3.8 \text{ GHz}$
: $ISL = 27 \text{ dB TYP. @ } f = 6.0 \text{ GHz}$
- Handling power : $P_{\text{in (1 dB)}} = +36.0 \text{ dBm TYP. @ } f = 0.05 \text{ to } 6.0 \text{ GHz}$
- High-density surface mounting : 6-pin plastic TSON (T6X) package ($1.5 \times 1.5 \times 0.37 \text{ mm}$)

APPLICATIONS

- WiMAX and wireless LAN (IEEE802.11a/b/g/n)

ORDERING INFORMATION

Part Number	Order Number	Package	Marking	Supplying Form
μ PG2409T6X-E2	μ PG2409T6X-E2-A	6-pin plastic TSON (T6X) (Pb-Free)	G5R	• Embossed tape 8 mm wide • Pin 1, 6 face the perforation side of the tape • Qty 3 kpcs/reel


Remark To order evaluation samples, please contact your nearby sales office.

Part number for sample order: μ PG2409T6X-A

Caution Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions must be employed at all times.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM

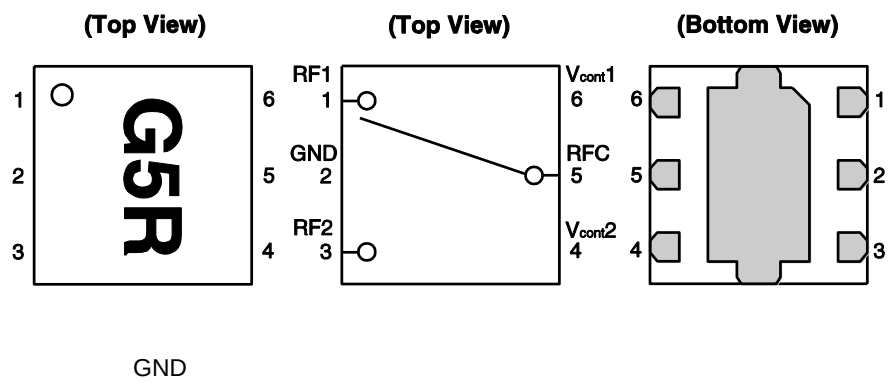

Pin No.	Pin Name
1	RF1
2	GND
3	RF2
4	Vcont2
5	RFC
6	Vcont1

Remark Exposed pad :

SW TRUTH TABLE

Vcont1	Vcont2	RFC-RF1	RFC-RF2
High	Low	ON	OFF
Low	High	OFF	ON

ABSOLUTE MAXIMUM RATINGS (TA = +25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Switch Control Voltage	Vcont	+6.0 ^{Note}	V
Input Power	P _{in}	+36	dBm
Operating Ambient Temperature	T _A	−45 to +85	°C
Storage Temperature	T _{stg}	−55 to +150	°C

Note |Vcont1 − Vcont2| ≤ 6.0 V

RECOMMENDED OPERATING RANGE (TA = +25°C, unless otherwise specified)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Operating Frequency	f	0.05	–	6.0	GHz
Switch Control Voltage (H)	Vcont (H)	2.7	3.0	3.3	V
Switch Control Voltage (L)	Vcont (L)	−0.2	0	0.2	V
Control Voltage Difference	$\Delta V_{cont (H), V_{cont (L)}}$ ^{Note}	−0.1	0	0.1	V

Note $\Delta V_{cont (H)} = V_{cont1 (H)} - V_{cont2 (H)}$
 $\Delta V_{cont (L)} = V_{cont1 (L)} - V_{cont2 (L)}$

ELECTRICAL CHARACTERISTICS

(T_A = +25°C, V_{cont} (H) = 3.0 V, V_{cont} (L) = 0 V, Z_o = 50 Ω , DC blocking capacitors = 8 pF, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Insertion Loss 1	L _{ins1}	f = 0.05 to 0.5 GHz ^{Note 1}	–	0.35	–	dB
Insertion Loss 2	L _{ins2}	f = 0.5 to 2.0 GHz ^{Note 2}	–	0.40	0.65	dB
Insertion Loss 3	L _{ins3}	f = 2.0 to 2.5 GHz	–	0.45	0.70	dB
Insertion Loss 4	L _{ins4}	f = 2.5 to 3.8 GHz	–	0.55	0.80	dB
Insertion Loss 5	L _{ins5}	f = 3.8 to 6.0 GHz	–	0.65	0.90	dB
Isolation 1	ISL1	f = 0.05 to 0.5 GHz ^{Note 1}	–	30	–	dB
Isolation 2	ISL2	f = 0.5 to 2.0 GHz ^{Note 2}	25	30	–	dB
Isolation 3	ISL3	f = 2.0 to 2.5 GHz	25	30	–	dB
Isolation 4	ISL4	f = 2.5 to 3.8 GHz	25	30	–	dB
Isolation 5	ISL5	f = 3.8 to 6.0 GHz	22	27	–	dB
Return Loss 1	RL1	f = 0.05 to 0.5 GHz ^{Note 1}	–	20	–	dB
Return Loss 2	RL2	f = 0.5 to 2.0 GHz ^{Note 2}	15	20	–	dB
Return Loss 3	RL3	f = 2.0 to 2.5 GHz	15	20	–	dB
Return Loss 4	RL4	f = 2.5 to 6.0 GHz	10	15	–	dB
0.1 dB Loss Compression Input Power ^{Note 3}	P _{in (0.1 dB)}	f = 0.5 to 6.0 GHz ^{Note 2}	–	+34.0	–	dBm
1 dB Loss Compression Input Power ^{Note 4}	P _{in (1 dB)}	f = 0.05 to 0.5 GHz ^{Note 1}	–	+36.0	–	dBm
		f = 0.5 to 6.0 GHz ^{Note 2}	+34.0	+36.0	–	dBm
2nd Harmonics	2f ₀	f = 2.5 GHz, P _{in} = +30 dBm	–	70	–	dBc
3rd Harmonics	3f ₀	f = 2.5 GHz, P _{in} = +30 dBm	–	70	–	dBc
Input 3rd Order Intercept Point	IIP ₃	f = 2.5 GHz	–	+60	–	dBm
Switch Control Current	I _{cont}	No RF input	–	0.1	10	μ A
Switch Control Speed	t _{sw}	50% CTL to 90/10% RF	–	100	250	ns

Notes 1. DC blocking capacitors = 1 000 pF at f = 0.05 to 0.5 GHz


2. DC blocking capacitors = 56 pF at f = 0.5 to 2.0 GHz

3. P_{in (0.1 dB)} is the measured input power level when the insertion loss increases 0.1 dB more than that of the linear range.

4. P_{in (1 dB)} is the measured input power level when the insertion loss increases 1 dB more than that of the linear range.

Caution It is necessary to use DC blocking capacitors with this device.


EVALUATION CIRCUIT

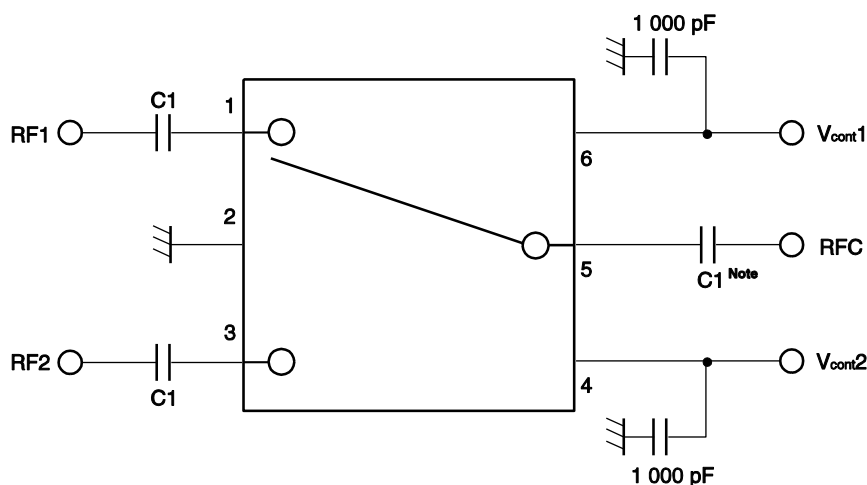

Note C1 : 0.05 to 0.5 GHz 1 000 pF
 : 0.5 to 2.0 GHz 56 pF
 : 2.0 to 6.0 GHz 8 pF

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.


APPLICATION INFORMATION

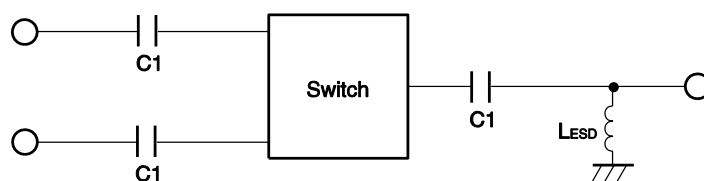


- C1 are DC blocking capacitors external to the device.
The value may be tailored to provide specific electrical responses.
- The RF ground connections should be kept as short as possible and connected directly to a good RF ground for best performance.
- L_{ESD} provides a means to increase the ESD protection on a specific RF port, typically the port attached to the antenna.

TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, DC blocking capacitors = 8 pF, unless otherwise specified)


RFC-RF1/RF2
INSERTION LOSS vs. FREQUENCY

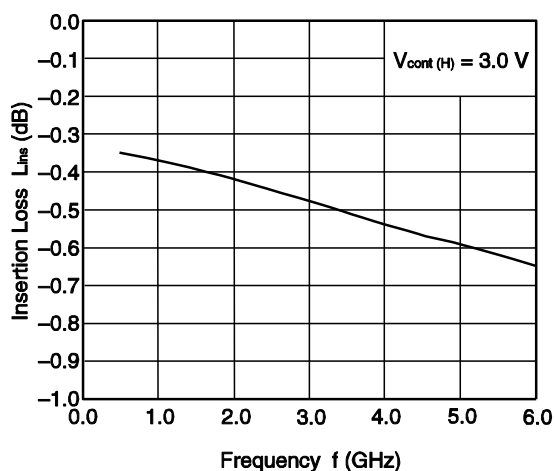


RFC-RF1/RF2
ISOLATION vs. FREQUENCY

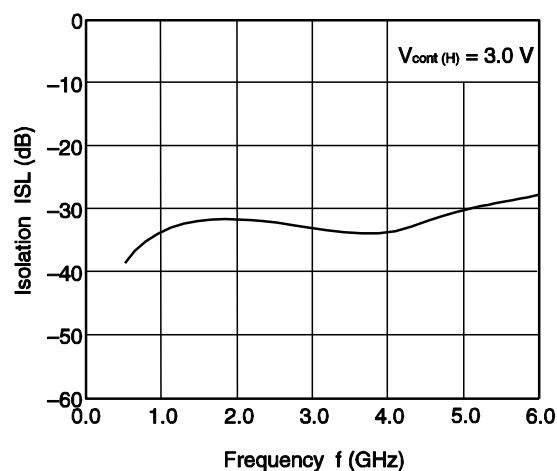


RFC RETURN LOSS vs. FREQUENCY

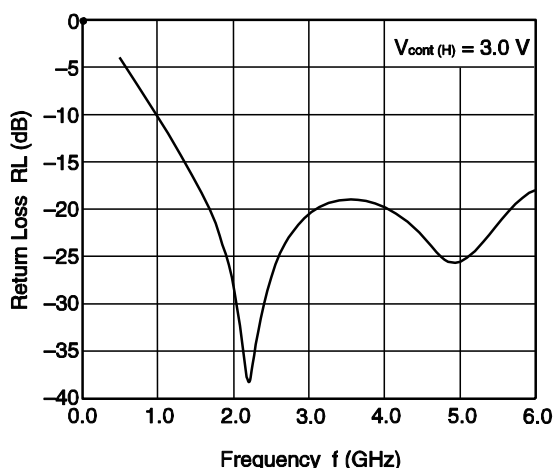


RF1/RF2 RETURN LOSS vs. FREQUENCY

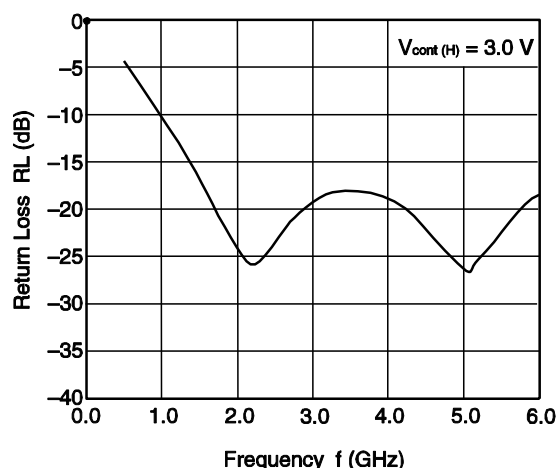







RFC-RF1/RF2 INSERTION LOSS,
 I_{cont} vs. SWITCH CONTROL VOLTAGE (H)

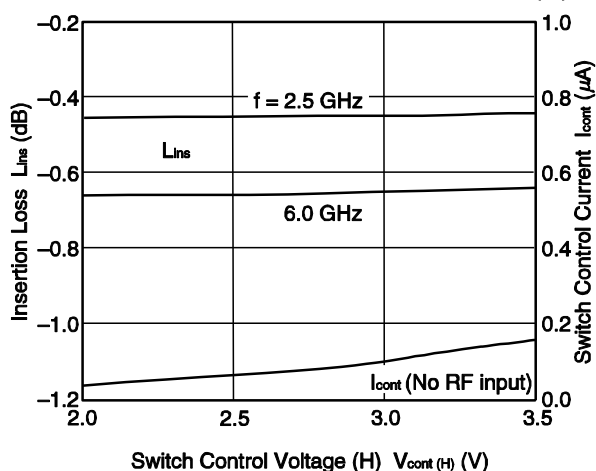

RFC-RF1/RF2 ISOLATION vs.
SWITCH CONTROL VOLTAGE (H)

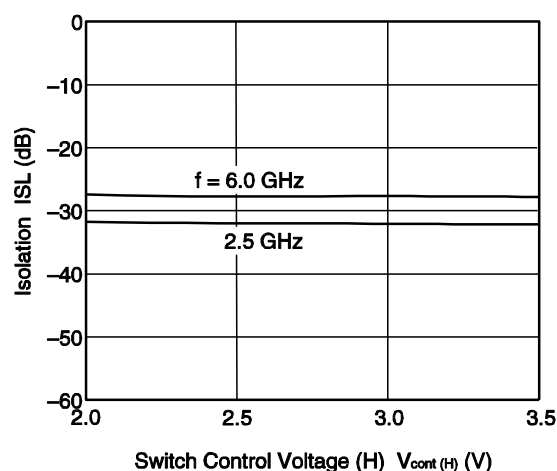

Remark The graphs indicate nominal characteristics.

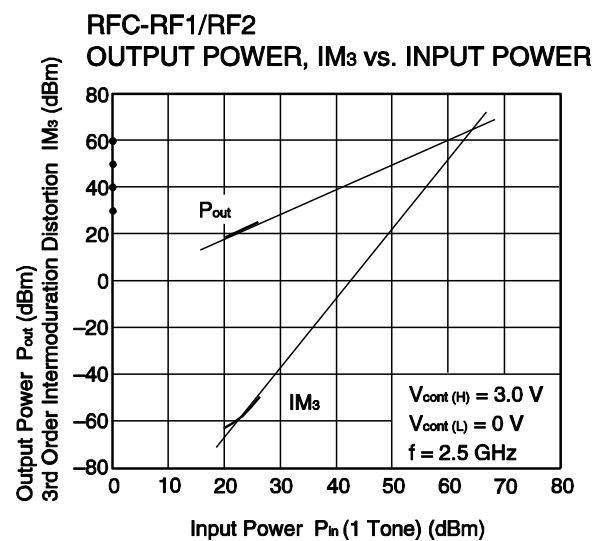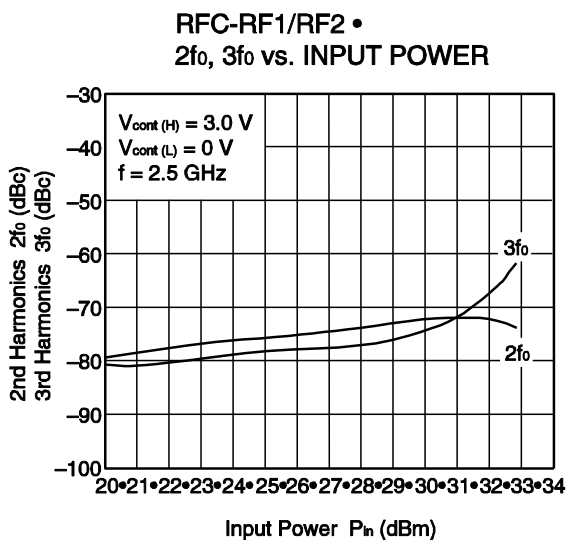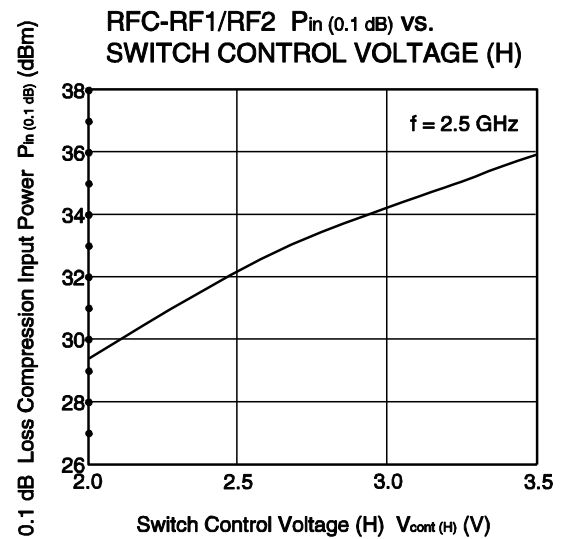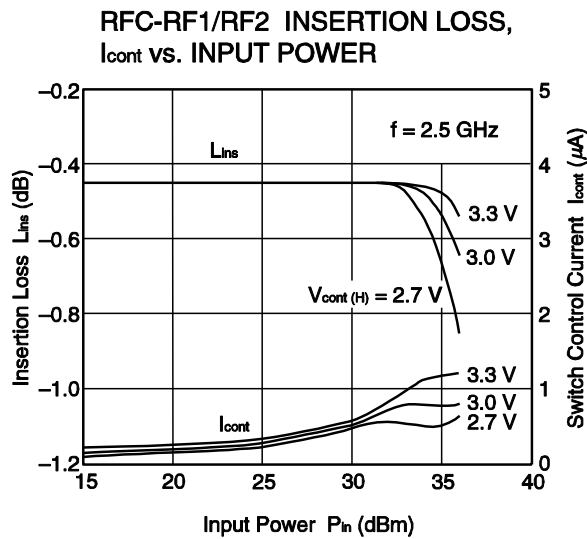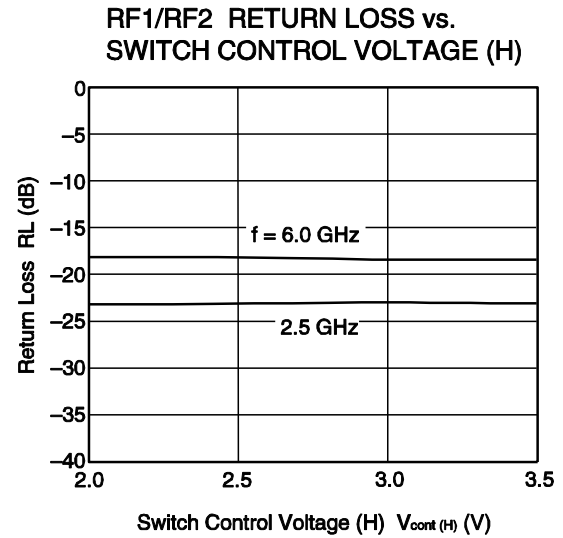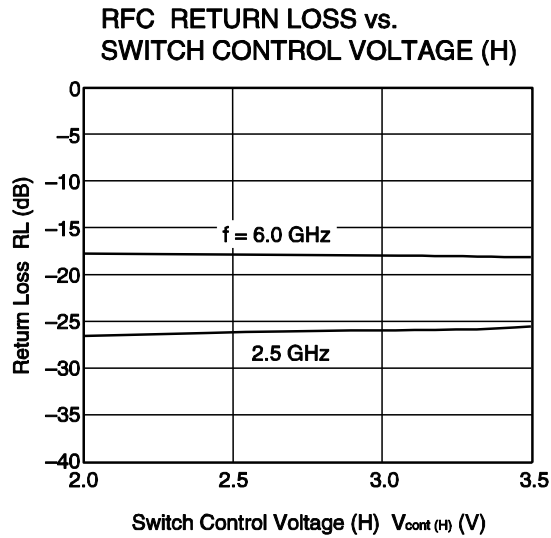


Remark The graphs indicate nominal characteristics.


MOUNTING PAD AND SOLDER MASK LAYOUT DIMENSIONS

6-PIN PLASTIC TSON (UNIT: mm)

MOUNTING PAD

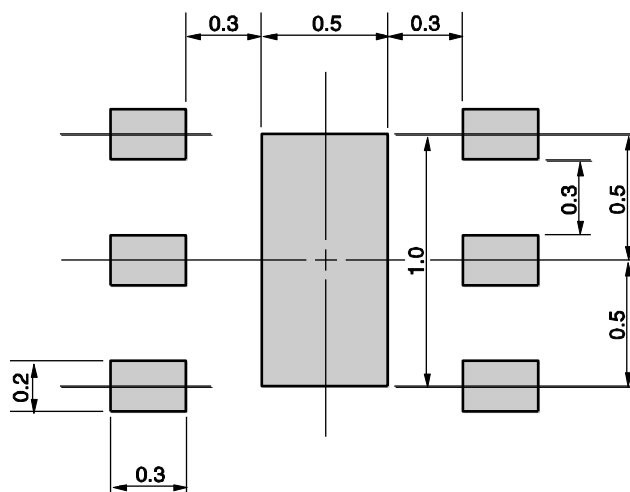

SOLDER MASK

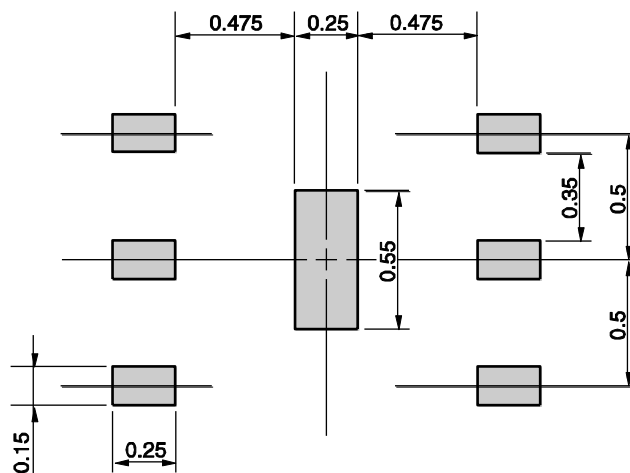


Solder thickness : 0.08 mm

Remark The mounting pad and solder mask layouts in this document is for reference only.
When designing PCB, please consider workability of mounting, solder joint reliability, prevention of solder bridge and so on, in order to optimize the design.

PACKAGE DIMENSIONS

6-PIN PLASTIC TSON (T6X) (UNIT: mm)

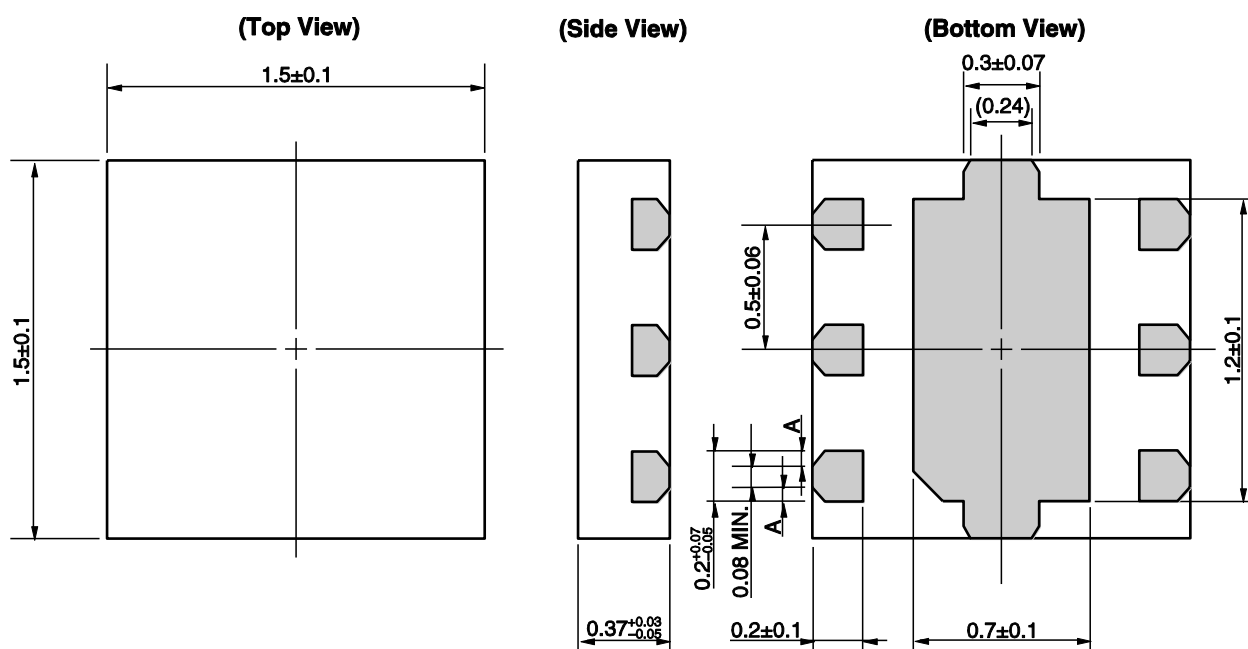

Remark A>0

() : Reference value

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	IR260
Partial Heating	Peak temperature (terminal temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	HS350

Caution Do not use different soldering methods together (except for partial heating).

Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
 1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or in any way allow it to enter the mouth.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.