

VOLTAGE DETECTOR

■ GENERAL DESCRIPTION

The NJU7706/07 is a high precision voltage detector with a built-in delay time generator of fixed time.

The detection voltage is fixed internally with an accuracy of 1.0%, and three delay times 50ms, 100ms and 200ms are available.

NJU7706 is Nch. Open Drain and NJU7707 of output form is a C-MOS output.

■ PACKAGE OUTLINE




NJU7706/07F

■ FEATURES

- | | |
|--|--|
| ● High Precision Detection Voltage | ±1.0% |
| ● Low Quiescent Current | 1.8μA typ. |
| ● Detection Voltage Range | 1.5 ~ 6.0V(0.1V step) |
| ● Delay Time(Built-in Fixed Type) | 50ms /100ms /200ms(Built-in Fixed Type) |
| ● ON/OFF switch of delay time (DS pin) | |
| ● Manual Reset | 2type: Active "H" / Active "L" |
| ● Output Circuit Form | NJU7706: Nch. Open Drain type
NJU7707: C-MOS Output |
| ● Package Outline | SOT-23-5 (MTP5) |


■ PIN CONFIGURATION



PIN FUNCTION

- 1.DS
- 2.V_{SS}
- 3.MR
- 4.V_{OUT}
- 5.V_{DD}

■ EQUIVALENT CIRCUIT

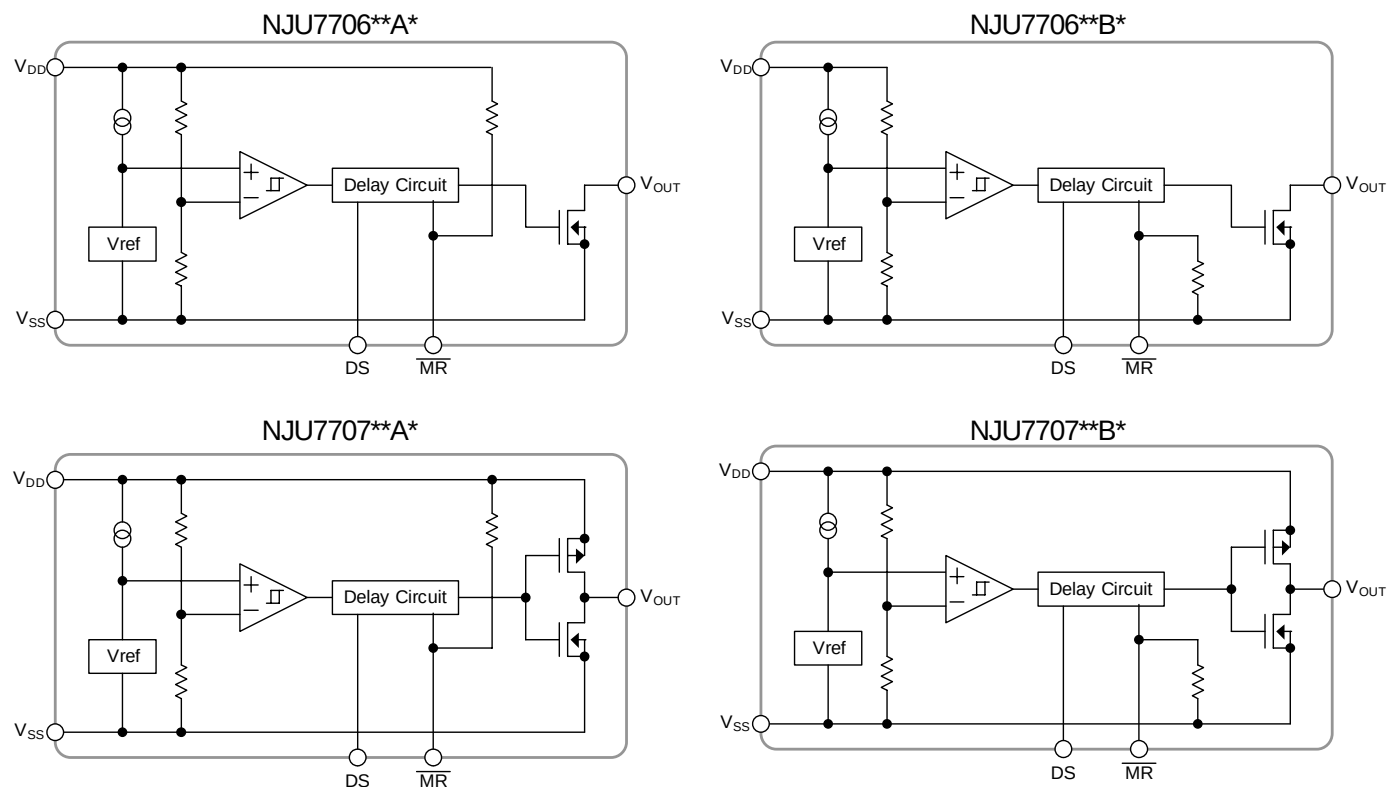

■ DETECTION VOLTAGE RANK LIST

Device Name	V_{DET}	MR Logic	Delay Time
NJU7706/07F39A1	3.9V	Active "L"	50mS
NJU7706/07F42A1	4.2V	Active "L"	50mS

Device Name	V_{DET}	MR Logic	Delay Time
NJU7706/07F15A1	1.5V	Active "L"	100mS
NJU7706/07F22A1	2.2V	Active "L"	100mS
NJU7706/07F27A1	2.7V	Active "L"	100mS
NJU7706/07F29A1	2.9V	Active "L"	100mS
NJU7706/07F42A1	4.2V	Active "L"	100mS
NJU7706/07F06A1	6.0V	Active "L"	100mS

Device Name	V_{DET}	MR Logic	Delay Time
NJU7706/07F39A1	3.9V	Active "L"	200mS
NJU7706/07F42A1	4.2V	Active "L"	200mS

Device Name	V_{DET}	MR Logic	Delay Time
NJU7706/07F27B1	2.7V	Active "H"	100mS

■ NJU7706

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{DD}	+10	V
Output Voltage	V_{OUT}	$V_{SS}-0.3 \sim +10$	V
Output Current	I_{OUT}	50	mA
Power Dissipation	P_D	200	mW
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET}			-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS}			70	90	130	mV
Quiescent Current	I _{SS}	V _{DD} =V _{DET} +1V	V _{DET} =1.5V ~ 1.9V Version	—	1.0	1.7	μA
			V _{DET} =2.0V ~ 6.0V Version	—	1.3	2.2	
Output Current	I _{OUT}	Nch, V _{DS} =0.5V	V _{DD} =1.2V	0.75	2.0	—	mA
			V _{DD} =2.4V (≥2.7V Version)	4.5	7.0	—	
Output Leak Current	I _{LEAK}	V _{DD} =V _{OUT} =9V		—	—	0.1	μA
Detection Voltage Temperature Coefficient	Δ V _{DET} /ΔTa	Ta=0 ~ +85°C		—	±100	—	ppm/°C
Delay Time 1	t _{d1}	V _{DD} =V _{DET} +1V, DS="L Level"	NJU7706F***1	42.5	50	57.5	mS
			NJU7706F***2	85	100	115	mS
			NJU7706F***3	170	200	230	mS
Delay Time 2	t _{d2}	V _{DD} =V _{DET} +1V, DS="H Level"		25	50	300	μS
Input Voltage of DS pin	V _{DS_H}			1.5	—	V _{DD}	V
	V _{DS_L}			0	—	0.3	V
Input Voltage of MR pin (Active "L")	V _{MR_H}			1.5	—	V _{DD}	V
	V _{MR_L}			0	—	0.3	V
Input Voltage of MR pin (Active "H")	V _{MR_H}			V _{DD} -0.3	—	V _{DD}	V
	V _{MR_L}			0	—	V _{DD} -1.5	V
Impedance of MR pin	R _{MR}			1.0	2.0	3.0	MΩ
Operating Voltage (*note 1)	V _{DD}	R _L =100kΩ		0.8	—	9	V


(*note 1): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


● Circuit Operating Current TEST CIRCUIT

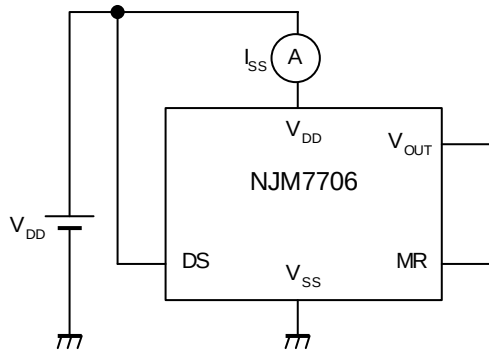


● Detection voltage/Minimum operating voltage TEST CIRCUIT

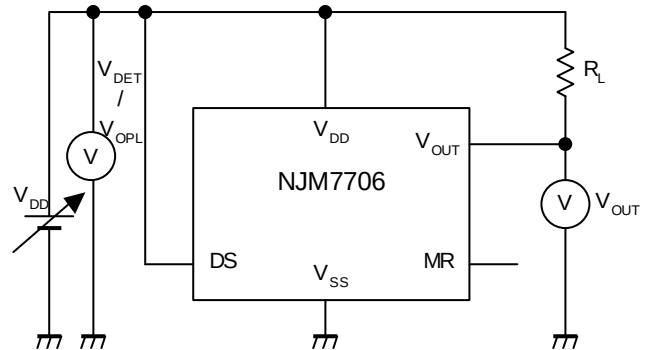


● MR pin Input voltage TEST CIRCUIT

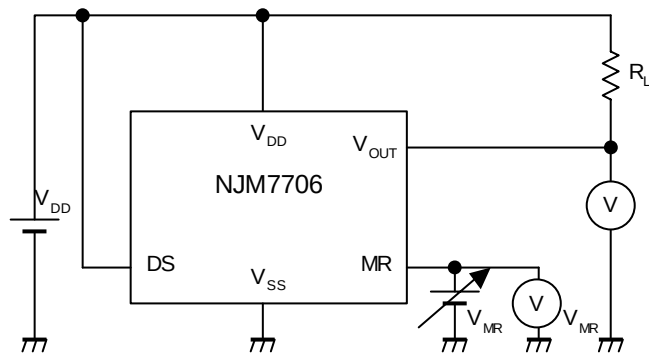


● Leak current / Output current TEST CIRCUIT

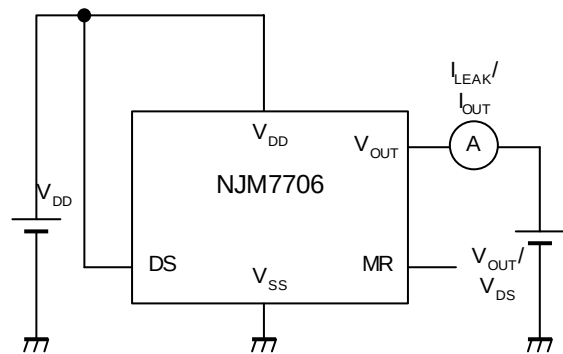

● Delay time1 TEST CIRCUIT

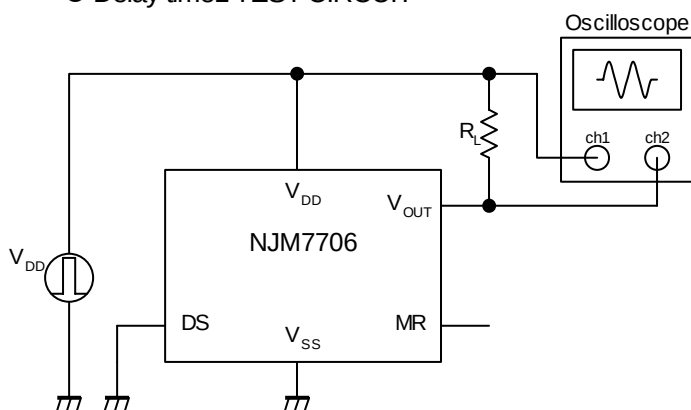


● Delay time2 TEST CIRCUIT

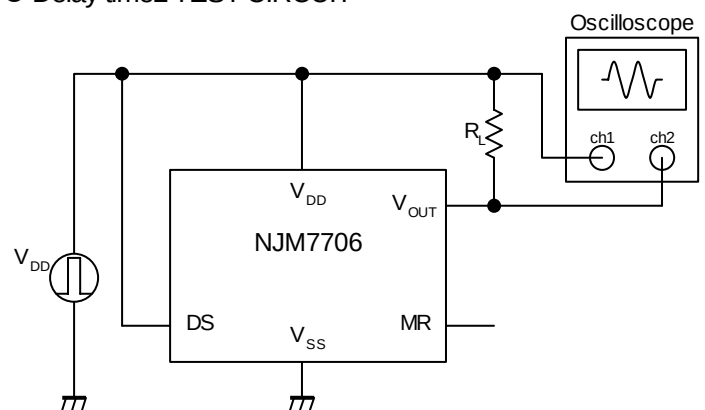


■ TYPICAL APPLICATION

① Power Supply Monitor Circuit

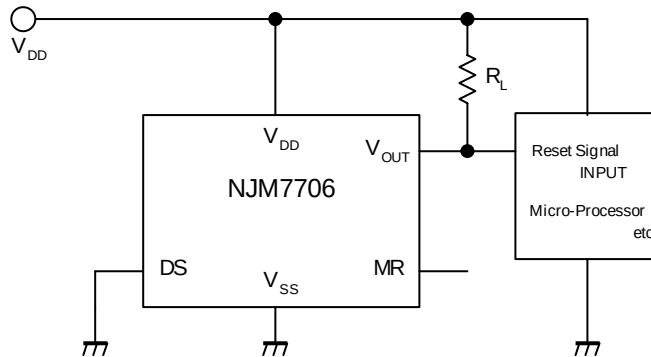

② Power Supply Monitor Circuit (V_{DD} line SEPARATE)

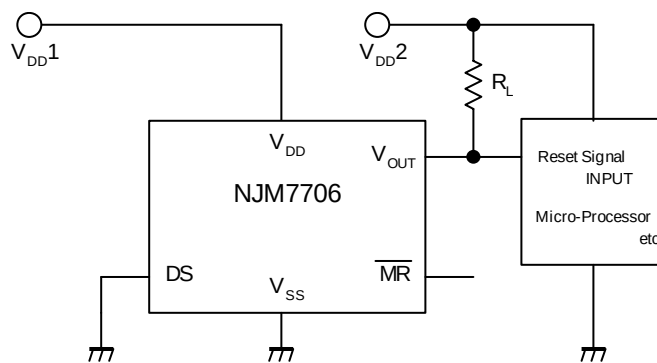

■ NJU7707

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{DD}	+10	V
Output Voltage	V_{OUT}	$V_{SS}-0.3 \sim V_{DD}+0.3$	V
Output Current	I_{OUT}	50	mA
Power Dissipation	P_D	200	mW
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +125	°C


■ ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V_{DET}		-1.0%	—	+1.0%	V
Hysteresis Voltage	V_{HYS}		70	90	130	mV
Quiescent Current	I_{SS}	$V_{DD}=V_{DET}+1V$				μA
		$V_{DET}=1.5V \sim 1.9V$ Version	—	1.0	1.7	
		$V_{DET}=2.0V \sim 6.0V$ Version	—	1.3	2.2	
Output Current	I_{OUT}	Nch, $V_{DS}=0.5V$				mA
		$V_{DD}=1.2V$	0.75	2.0	—	
		$V_{DD}=2.4V$ ($\geq 2.7V$ Version)	4.5	7.0	—	
		Pch, $V_{DS}=0.5V$				
		$V_{DD}=4.8V$ ($\leq 3.9V$ Version)	2.0	3.5	—	
		$V_{DD}=6.0V$ (4.0V ~ 5.6V Version)	2.5	4.0	—	
		$V_{DD}=8.4V$ ($\geq 5.7V$ Version)	3.0	5.0	—	
Detection Voltage Temperature Coefficient	$\Delta V_{DET} / \Delta T_a$	$T_a=0 \sim +85^\circ C$	—	± 100	—	ppm/°C
Delay Time 1	t_{d1}	$V_{DD}=V_{DET}+1V$, DS="L Level"				
		NJU7707F***1	42.5	50	57.5	mS
		NJU7707F***2	85	100	115	mS
		NJU7707F***3	170	200	230	mS
Delay Time 2	t_{d2}	$V_{DD}=V_{DET}+1V$, DS="H Level"	25	50	300	μS
Input Voltage of DS pin	V_{DS_H}		1.5	—	V_{DD}	V
	V_{DS_L}		0	—	0.3	V
Input Voltage of MR pin (Active "L")	V_{MR_H}		1.5	—	V_{DD}	V
	V_{MR_L}		0	—	0.3	V
Input Voltage of MR pin (Active "H")	V_{MR_H}		$V_{DD}-0.3$	—	V_{DD}	V
	V_{MR_L}		0	—	$V_{DD}-1.5$	V
Impedance of MR pin	R_{MR}		1.0	2.0	3.0	M Ω
Operating Voltage (*note 2)	V_{DD}	$R_L=100k\Omega$	0.8	—	9	V


(*note 2): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


● Circuit Operating Current TEST CIRCUIT

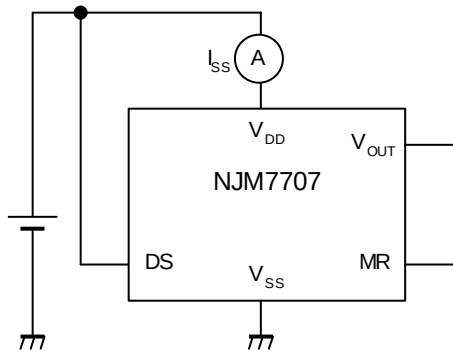


● Detection voltage TEST CIRCUIT

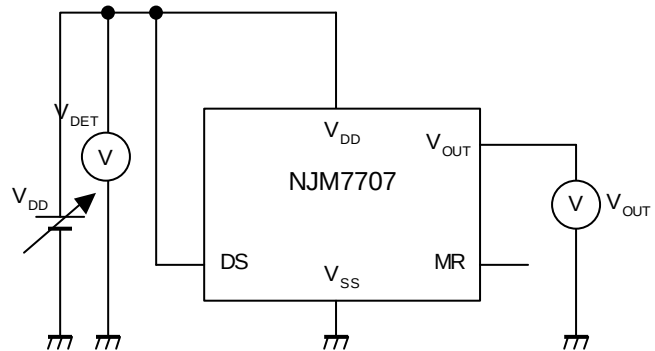


● MR pin Input voltage TEST CIRCUIT

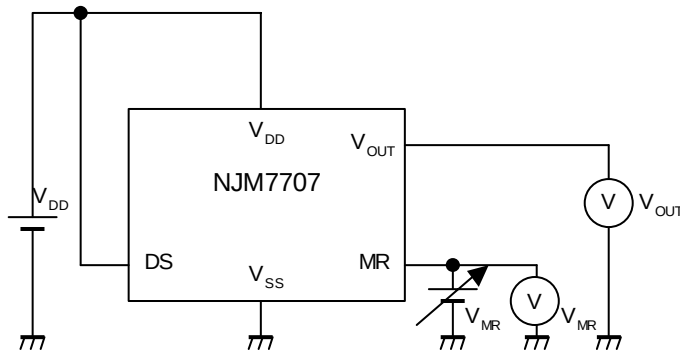


● Nch Output current TEST CIRCUIT

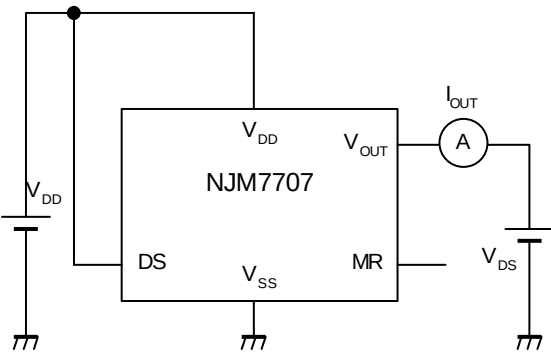


● Pch Output current TEST CIRCUIT

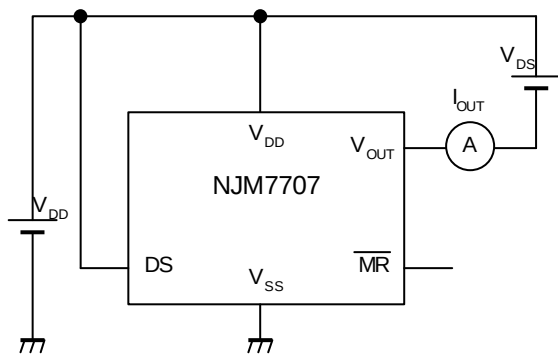


● Delay time1 TEST CIRCUIT

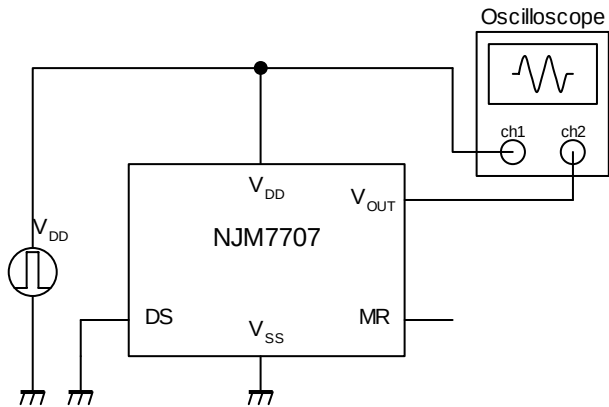

● Delay time2 TEST CIRCUIT

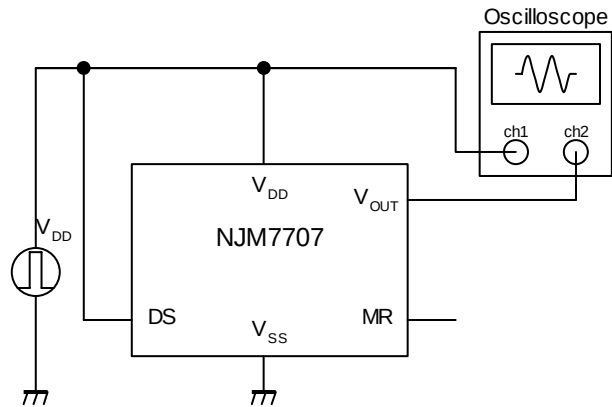


● Minimum operating voltage TEST CIRCUIT

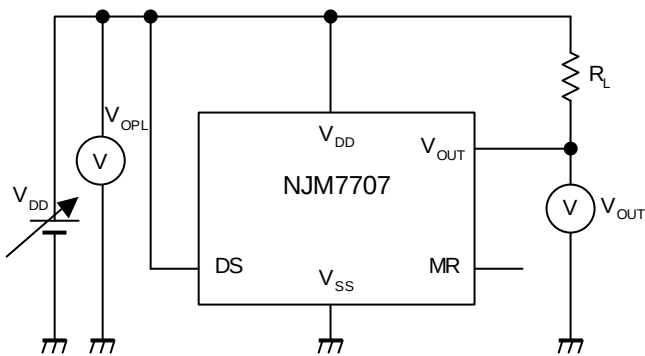

■ TYPICAL APPLICATION

① Power Supply Monitor Circuit (VDD line COMMON)

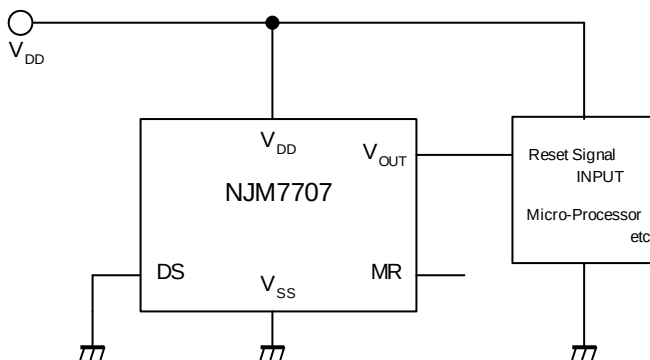

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.