

## FEATURES

- 0.2% Output Tolerance
- $0.5\Omega$  Shunt Impedance
- $600\mu\text{A}$  to  $10\text{mA}$  Operating Current
- Pin Compatible with LM136-5
- $20\text{ppm}/^\circ\text{C}$  Max. Drift
- Output Voltage Trim does not Affect Drift
- Can be Used as Positive or Negative Reference

## APPLICATIONS

- A-to-D and D-to-A Converters
- Precision Regulators
- Precision Current Sources
- V to F and F to V Converters

## DESCRIPTION


The LT1029 is a 5V bandgap reference intended for use in the shunt or "zener" mode, allowing it to be used as either a positive or negative reference. The output is pretrimmed to  $\pm 0.2\%$  accuracy with  $20\text{ppm}/^\circ\text{C}$  maximum temperature drift. A trim pin allows additional output adjustment for even more precise output voltage.

Operating current range for the LT1029 is  $600\mu\text{A}$  to  $10\text{mA}$ . Extremely low dynamic impedance allows excellent output regulation even with fluctuating operating current.


The LT1029 will replace an LM136-5 or LM336-5 and simplify circuits using the "minimum temperature coefficient" trim network. The LT1029 does not require this special network to meet its temperature drift specification and these application network components are simply removed. If output trimming is required for initial accuracy, the diodes in the trim network should be replaced with jumpers.

**3**

## TYPICAL APPLICATION

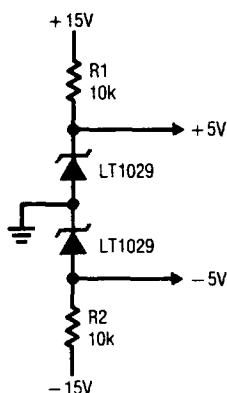



Output Voltage Drift

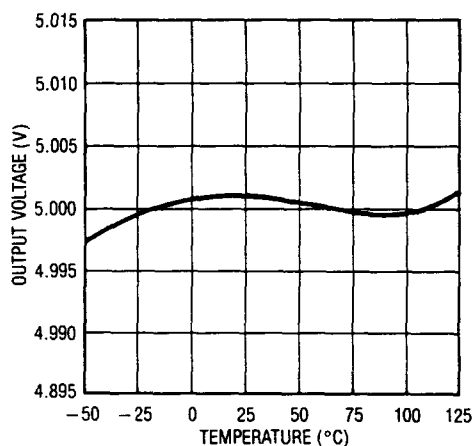

## ABSOLUTE MAXIMUM RATINGS

|                                       |                 |
|---------------------------------------|-----------------|
| Reverse Current                       | 15mA            |
| Forward Current                       | 10mA            |
| Operating Temperature Range           |                 |
| LT1029M/LT1029AM                      | −55°C to +125°C |
| LT1029C/LT1029AC                      | 0°C to +70°C    |
| Storage Temperature                   | −65°C to +150°C |
| Lead Temperature (Soldering, 10 sec.) | 300°C           |

## PACKAGE/ORDER INFORMATION


|                                                                                                                                         |                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
|  <p>H PACKAGE<br/>TO-46 METAL CAN<br/>BOTTOM VIEW</p> | ORDER PART NUMBER                              |
|                                                                                                                                         | LT1029AMH<br>LT1029MH<br>LT1029ACH<br>LT1029CH |
|  <p>Z PACKAGE<br/>TO-92 PLASTIC<br/>BOTTOM VIEW</p>   | LT1029ACZ<br>LT1029CZ                          |

## ELECTRICAL CHARACTERISTICS

| PARAMETER                             | CONDITIONS                                                    | MIN          | TYP               | MAX                 | UNITS                      |
|---------------------------------------|---------------------------------------------------------------|--------------|-------------------|---------------------|----------------------------|
| Reverse Breakdown Voltage             | $I_R = 1\text{mA}$ LT1029AM, LT1029AC<br>LT1029M, LT1029C     | 4.99<br>4.95 | 5.00<br>5.00      | 5.01<br>5.05        | V<br>V                     |
| Reverse Breakdown Change with Current | $600\mu\text{A} \leq I_R \leq 10\text{mA}$                    |              | 2<br>3            | 5<br>8              | mV<br>mV                   |
| Reverse Dynamic Impedance             | $I_R = 1\text{mA}$                                            |              | 0.2<br>0.3        | 0.6<br>1.0          | $\Omega$<br>$\Omega$       |
| Temperature Stability                 | $I_R = 1\text{mA}$ LT1029AC<br>LT1029C<br>LT1029AM<br>LT1029M |              | 3<br>5<br>7<br>10 | 7<br>12<br>18<br>36 | mV<br>mV<br>mV<br>mV       |
| Equivalent Temperature Drift          | LT1029AM, LT1029AC<br>LT1029C<br>LT1029M                      |              | 8<br>12<br>15     | 20<br>34<br>40      | ppm/°C<br>ppm/°C<br>ppm/°C |
| Long Term Stability                   |                                                               |              | 20                |                     | ppm/kHr                    |
| Trim Range                            |                                                               | ± 3          | + 5, − 13         |                     | %                          |

The ● denotes the specifications which apply over the full operating temperature range.

## TYPICAL PERFORMANCE CHARACTERISTICS

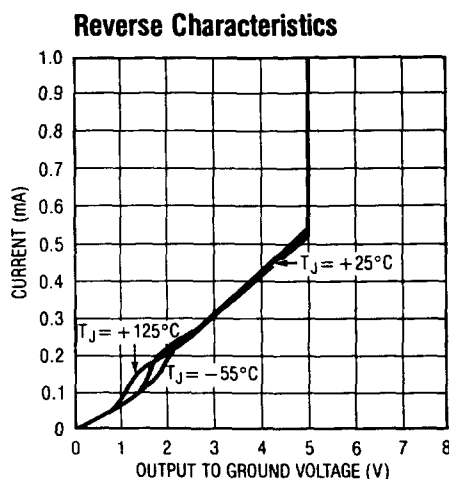

3


## APPLICATIONS INFORMATION

### Output Trimming


Output voltage trimming on the LT1029 is nominally accomplished with a potentiometer connected from output to ground with the wiper tied to the trim pin. The LT1029 was made compatible with existing references, so the trim range is large; +5%, -13%. This large trim range makes precision trimming rather difficult. One solution is to insert resistors in series with both ends of the potentiometer. This has the disadvantage of potentially poor tracking between the fixed resistors and the potentiometer. A second method of reducing trim range is to insert a resistor in series with the wiper of the potentiometer. This works well only for a very

small trim range because of the mismatch in TCs between the series resistor and the internal thin film resistors. These film resistors can have a TC as high as 500ppm/°C. That same TC is then transferred to the change in output voltage; a 1% shift in output voltage causes a (500ppm) (1%) = 5ppm/°C change in output voltage drift. The worst-case error in initial output voltage for the LT1029A is 0.2% and for the LT1029 is 1%, so a series resistor is satisfactory if the output is simply trimmed to nominal value. 1ppm/°C TC shift would be the maximum expected for the LT1029A and 5ppm/°C for the LT1029.

#### Wide Trim Range (+5%, -13%)



#### Narrow Trim Range



TRIM RANGE  
 0.4% — LT1029A,  $R1 = 750\text{k}$   
 1.2% — LT1029,  $R1 = 250\text{k}$


# APPLICATIONS INFORMATION

## Shunt Capacitance


The LT1029 is stable with all values of shunt capacitance, but values between 300pF and 0.01 $\mu$ F are not recommended because they cause longer settling following a

transient in operating current. A 1 $\mu$ F solid tantalum capacitor is suggested for most situations where bypassing is desirable.

Trimming Output to 5.120V

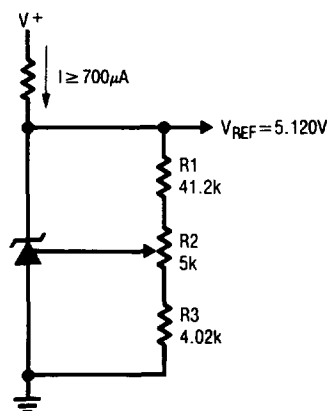


Split  $\pm 2.5V$  References

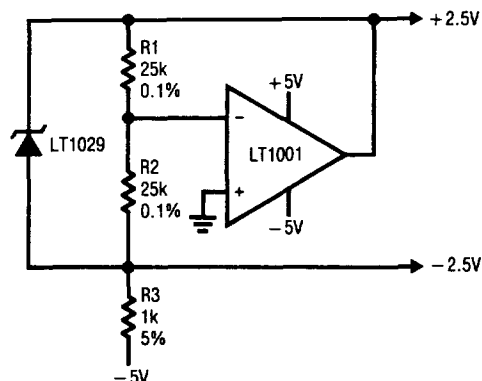

# PACKAGE DESCRIPTION


Dimensions in inches (millimeters) unless otherwise noted.

H Package  
TO-46 Metal Can

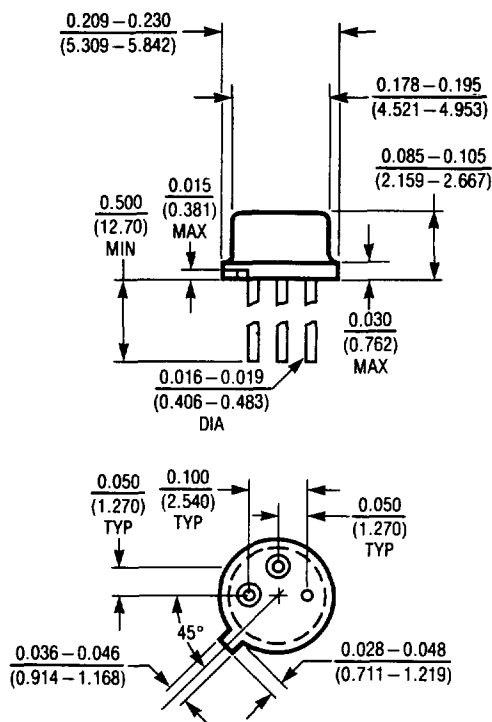

| $T_{jmax}$ | $\theta_{JA}$ | $\theta_{JC}$ |
|------------|---------------|---------------|
| 150°C      | 440°C/W       | 80°C/W        |

Z Package  
TO-92 Plastic

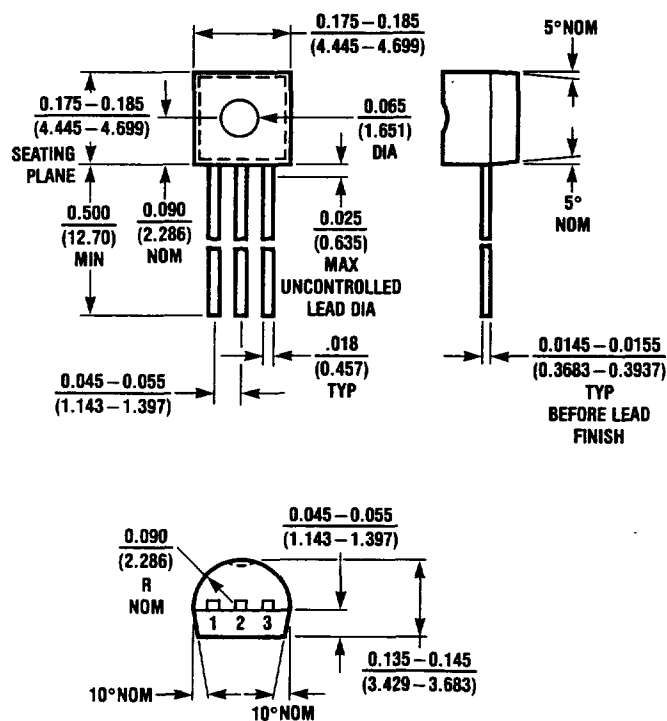

| $T_{jmax}$ | $\theta_{JA}$ |
|------------|---------------|
| 100°C      | 160°C/W       |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.